



FCIconnect.com





Copyright FCI.

1 | 2

3 |

4

PRODUCT NUMBER	PITCH
00xx71x000J0G	5.00 mm

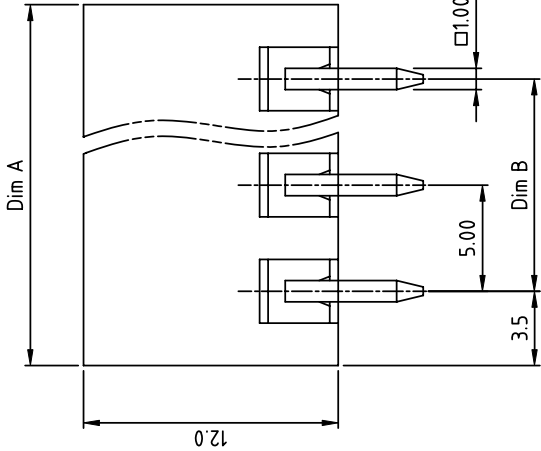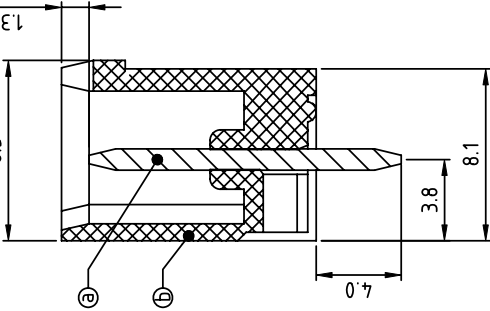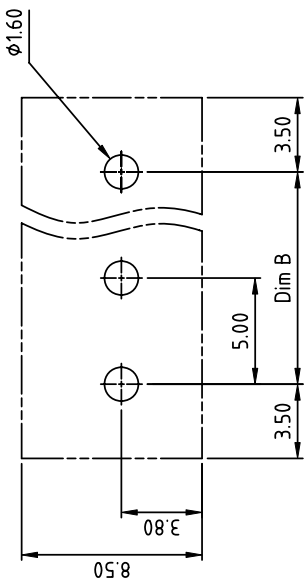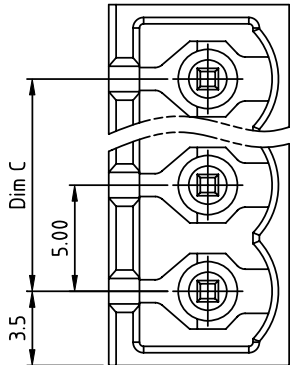

RECOMMENDED P.C.B LAYOUT
TOP VIEW

A

A

Material:

- Item A Male contact pin: Copper Tin plated
- Item B Terminal housing: Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

cULus /VDE /TUV

Dimension

Dim A	Nx5.0±2.0
Dim B&C	(N-1)x5.0

N = Number of poles

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

PART NO.: 00 XX 7 1 X 0 00J0 G

- No. of poles
 - 02 2 poles
 - 03 3 poles
 - ... 24 24 poles
- Body Color
 - 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL6018/T)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7035/D)
 - 9 White(RAL1102)
 - c Green(RAL6018/U)
- RoHS compliant (lead<4%) In copper Alloy

form: A4mmXLc

1 |

2

PDS: Rev :A 3

STATUS:Released

Printed: Jun 12,2014

B

B