


# PIC12F752/HV752

**TABLE 1: PIC12F752/HV752 FEATURE SUMMARY**

| Device     | Flash Program Memory (User) (words) | Self Read/Write Flash Memory | SRAM (bytes) | I/Os | 10-bit A/D (ch) | Comparators | Timers 8/16-bit | CCP | Complementary Output Generator (COG) | Shunt Regulator | XLP |
|------------|-------------------------------------|------------------------------|--------------|------|-----------------|-------------|-----------------|-----|--------------------------------------|-----------------|-----|
| PIC12F752  | 1024                                | Y                            | 64           | 6    | 4               | 2           | 3/1             | 1   | Y                                    | N               | Y   |
| PIC12HV752 | 1024                                | Y                            | 64           | 6    | 4               | 2           | 3/1             | 1   | Y                                    | Y               | Y   |

**FIGURE 1: 8-PIN PDIP, SOIC, DFN**

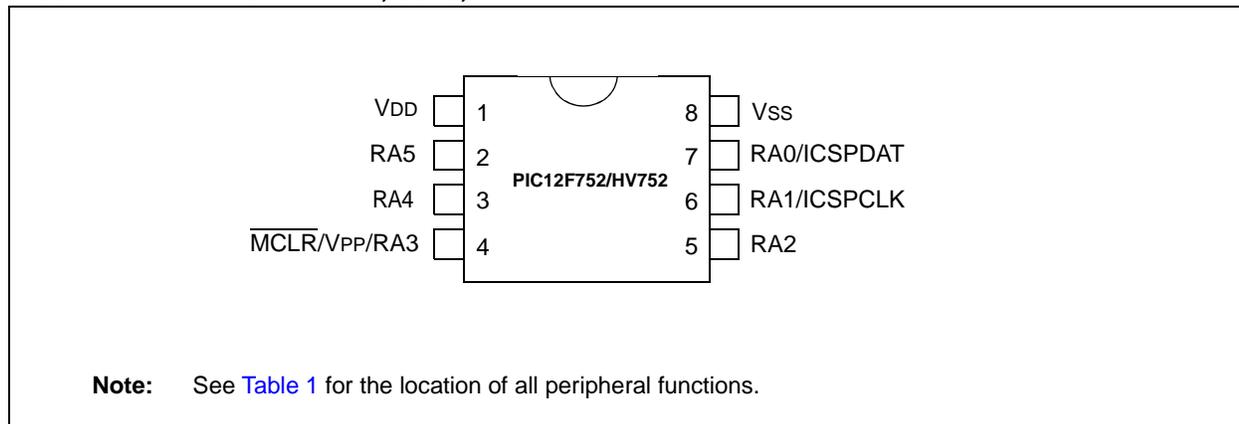

# PIC12F752/HV752

**TABLE 2: 8-PIN ALLOCATION TABLE (PIC12F752/HV752)**

| I/O                | 8-Pin PDIP/SOIC/DFN | ADC | Comparators      | Timers             | CCP  | Interrupts | Pull-up          | Complementary Output Generator (COG) | Voltage Reference | Basic    |
|--------------------|---------------------|-----|------------------|--------------------|------|------------|------------------|--------------------------------------|-------------------|----------|
| RA0 <sup>(4)</sup> | 7                   | AN0 | C1IN0+<br>C2IN0+ | —                  | —    | IOC        | Y                | COG1OUT1                             | DACOUT<br>REFOUT  | ICSPDAT  |
| RA1                | 6                   | AN1 | C1IN0-<br>C2IN0- | —                  | —    | IOC        | Y                | —                                    | VREF+             | ICSPCLK  |
| RA2 <sup>(4)</sup> | 5                   | AN2 | C1OUT<br>C2OUT   | T0CKI              | CCP1 | IOC<br>INT | Y                | COG1OUT0                             | —                 | —        |
| RA3 <sup>(1)</sup> | 4                   | —   | —                | T1G <sup>(2)</sup> | —    | IOC        | Y <sup>(3)</sup> | COG1FLT <sup>(2)</sup>               | —                 | MCLR/VPP |
| RA4                | 3                   | AN3 | C1IN1-           | T1G                | —    | IOC        | Y                | COG1FLT<br>COG1OUT1 <sup>(2)</sup>   | —                 | CLKOUT   |
| RA5                | 2                   | —   | C2IN1-           | T1CKI              | —    | IOC        | Y                | COG1OUT0 <sup>(2)</sup>              | —                 | CLKIN    |
| —                  | 1                   | —   | —                | —                  | —    | —          | —                | —                                    | —                 | VDD      |
| —                  | 8                   | —   | —                | —                  | —    | —          | —                | —                                    | —                 | VSS      |

**Note 1:** Input-only.

**2:** Alternate pin function via the APFCON register.

**3:** RA3 pull-up is enabled when pin is configured as MCLR in Configuration Word.

**4:** The port pins for the primary COG1OUTx pins have High-Power (HP) output drivers.

# PIC12F752/HV752

## Table of Contents

|      |   |     |
|------|---|-----|
| 1.0  | Device Overview .....                                   | 5   |
| 2.0  | Memory Organization .....                               | 7   |
| 3.0  | Flash Program Memory Self Read/Self Write Control ..... | 23  |
| 4.0  | Oscillator Module .....                                 | 32  |
| 5.0  | I/O Ports .....   | 37  |
| 6.0  | Timer0 Module .....                                     | 47  |
| 7.0  | Timer1 Module with Gate Control .....                   | 50  |
| 8.0  | Timer2 Module .....                                     | 61  |
| 9.0  | Hardware Limit Timer (HLT) Module .....                 | 63  |
| 10.0 | Capture/Compare/PWM Modules .....                       | 67  |
| 11.0 | Complementary Output Generator (COG) Module .....       | 74  |
| 12.0 | Analog-to-Digital Converter (ADC) Module .....          | 89  |
| 13.0 | Fixed Voltage Reference (FVR) .....                     | 100 |
| 14.0 | Digital-to-Analog Converter (DAC) Module .....          | 102 |
| 15.0 | Comparator Module .....                                 | 107 |
| 16.0 | Instruction Set Summary .....                           | 116 |
| 17.0 | Special Features of the CPU .....                       | 125 |
| 18.0 | Shunt Regulator (PIC12HV752 Only) .....                 | 145 |
| 19.0 | Development Support .....                               | 146 |
| 20.0 | Electrical Specifications .....                         | 150 |
| 21.0 | DC and AC Characteristics Graphs and Charts .....       | 172 |
| 22.0 | Packaging Information .....                             | 196 |
|      | Appendix A: Data Sheet Revision History .....           | 206 |
|      | Appendix B: Migrating from PIC12HV615 .....             | 206 |
|      | The Microchip Web Site .....                            | 207 |
|      | Customer Change Notification Service .....              | 207 |
|      | Customer Support .....                                  | 207 |
|      | Product Identification System .....                     | 208 |

## TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at [docerrors@microchip.com](mailto:docerrors@microchip.com). We welcome your feedback.

### Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

### Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include literature number) you are using.

### Customer Notification System

Register on our web site at [www.microchip.com](http://www.microchip.com) to receive the most current information on all of our products.


# PIC12F752/HV752

## 1.0 DEVICE OVERVIEW

Block Diagrams and pinout descriptions of the devices are in [Figure 1-1](#) and [Table 1-1](#).

The PIC12F752/HV752 devices are covered by this data sheet. They are available in 8-pin PDIP, SOIC and DFN packages.

**FIGURE 1-1: PIC12F752/HV752 BLOCK DIAGRAM**

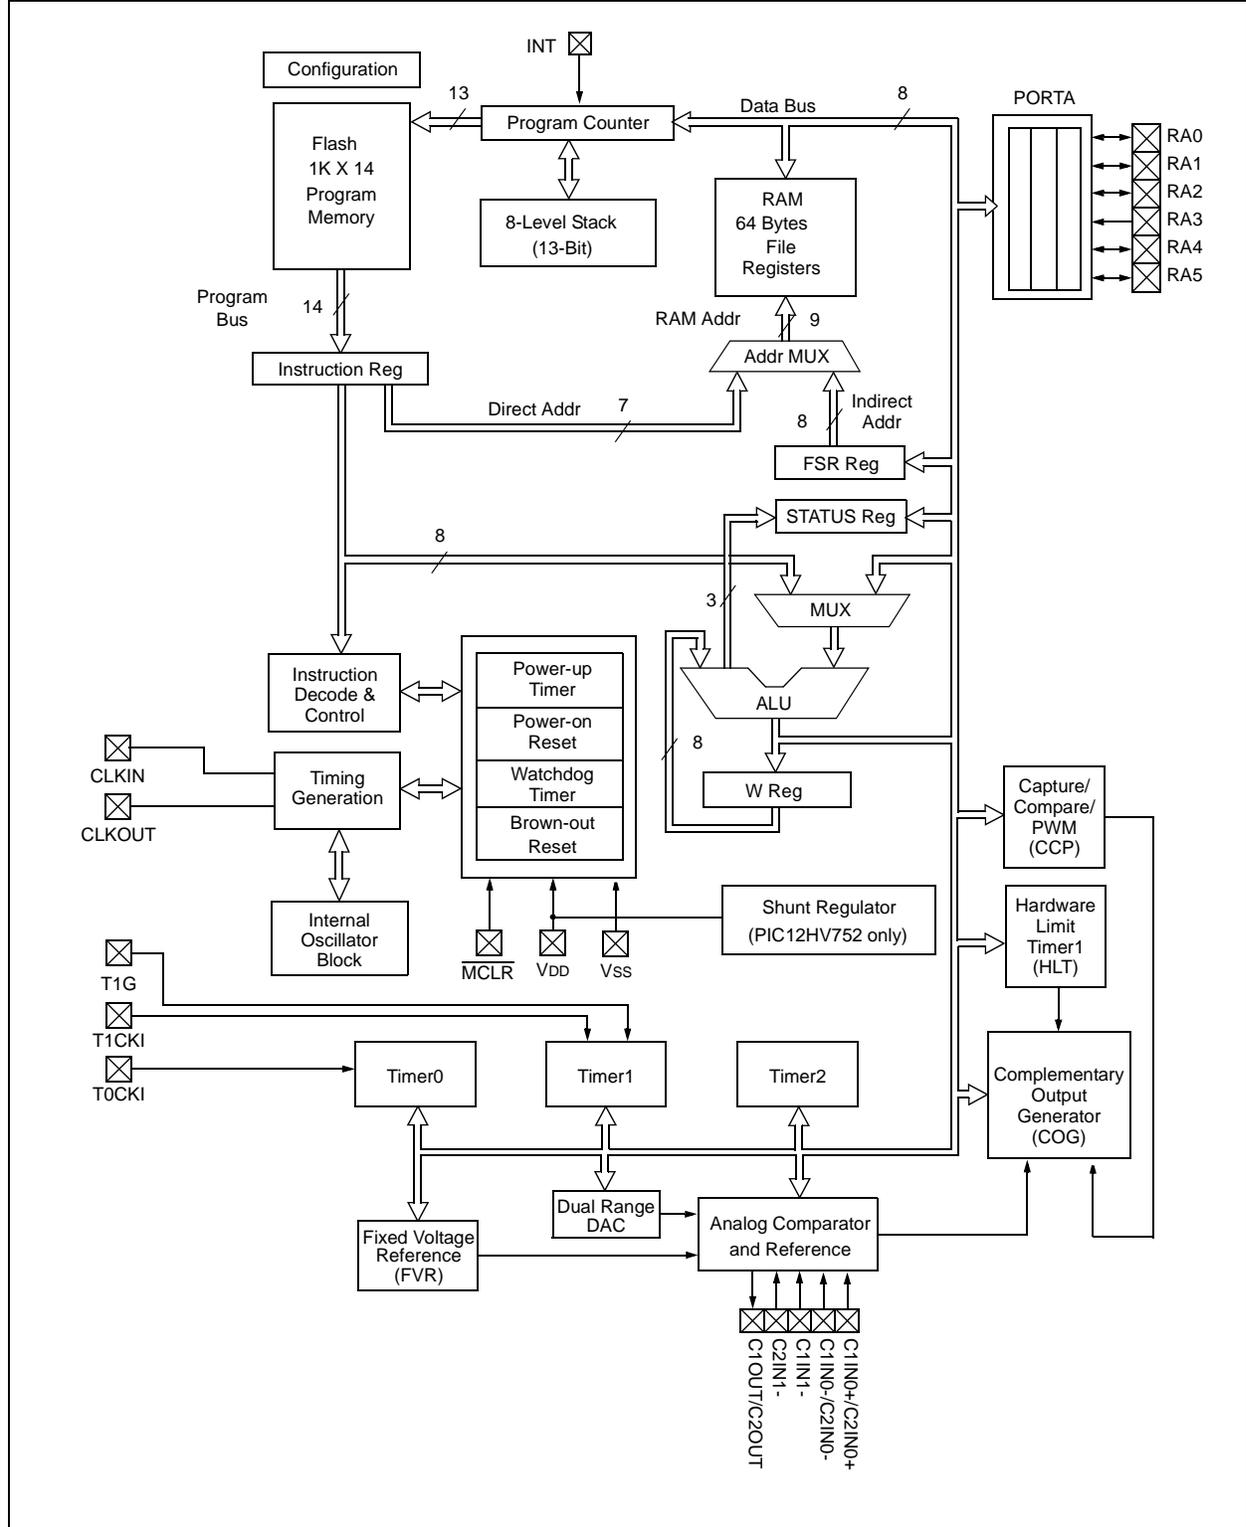

# PIC12F752/HV752

**TABLE 1-1: PIC12F752/HV752 PINOUT DESCRIPTION**

| Name   | Function | Input Type | Output Type                     | Description                                |
|--|----------|------------|---------------------------------|--|
| RA0/COG1OUT1 <sup>(2)</sup> /C1IN0+/<br>C2IN0+/AN0/DACOUT/<br>REFOUT/<br>ICSPDAT                   | RA0      | TTL        | HP                              | General purpose I/O with IOC and WPU.      |
|  | COG1OUT1 | —          | HP                              | COG output channel 1.                      |
|  | C1IN0+   | AN         | —                               | Comparator C1 positive input.              |
|  | C2IN0+   | AN         | —                               | Comparator C2 positive input.              |
|  | AN0      | AN         | —                               | A/D Channel 0 input.                       |
|  | DACOUT   | —          | AN                              | DAC unbuffered Voltage Reference output.   |
|  | REFOUT   | —          | AN                              | DAC/FVR buffered Voltage Reference output. |
| RA1/C1IN0-/C2IN0-/AN1/<br>VREF+/ICSPCLK  | RA1      | TTL        | CMOS                            | General purpose I/O with IOC and WPU.      |
|  | C1IN0-   | AN         | —                               | Comparator C1 negative input.              |
|  | C2IN0-   | AN         | —                               | Comparator C2 negative input.              |
|  | AN1      | AN         | —                               | A/D Channel 1 input.                       |
|  | VREF+    | AN         | —                               | A/D Positive Voltage Reference input.      |
|  | ICSPCLK  | ST         | —                               | Serial Programming Clock.                  |
| RA2/INT/CCP1/C2OUT/<br>C1OUT/T0CKI/<br>COG1OUT0 <sup>(2)</sup> /AN2                                | RA2      | ST         | HP                              | General purpose I/O with IOC and WPU.      |
|  | INT      | ST         | —                               | External interrupt.                        |
|  | CCP1     | ST         | HP                              | Capture/Compare/PWM 1.                     |
|  | C2OUT    | —          | HP                              | Comparator C2 output.                      |
|  | C1OUT    | —          | HP                              | Comparator C1 output.                      |
|  | T0CKI    | ST         | —                               | Timer0 clock input.                        |
|  | COG1OUT0 | —          | HP                              | COG output channel 0.                      |
|  | AN2      | AN         | —                               | A/D Channel 2 input.                       |
| RA3 <sup>(1)</sup> /T1G <sup>(3)</sup> /COG1FLT <sup>(3)</sup> /<br>VPP/MCLR <sup>(4)</sup>        | RA3      | TTL        | —                               | General purpose input with IOC and WPU.    |
|  | T1G      | ST         | —                               | Timer1 Gate input.                         |
|  | COG1FLT  | ST         | —                               | COG auto-shutdown fault input.             |
|  | VPP      | HV         | —                               | Programming voltage.                       |
|  | MCLR     | ST         | —                               | Master Clear w/internal pull-up.           |
| RA4/T1G <sup>(2)</sup> /COG1OUT1 <sup>(3)</sup> /<br>COG1FLT <sup>(2)</sup> /C1IN1-/AN3/<br>CLKOUT | RA4      | TTL        | CMOS                            | General purpose I/O with IOC and WPU.      |
|  | T1G      | ST         | —                               | Timer1 Gate input.                         |
|  | COG1OUT1 | —          | CMOS                            | COG output channel 1                       |
|  | COG1FLT  | ST         | —                               | COG auto-shutdown fault input.             |
|  | C1IN1-   | AN         | —                               | Comparator C1 negative input.              |
|  | AN3      | AN         | —                               | A/D Channel 3 input.                       |
|  | CLKOUT   | —          | CMOS                            | Fosc/4 output.                             |
| RA5/T1CKI/COG1OUT0 <sup>(3)</sup> /<br>C2IN1-/CLKIN  | RA5      | TTL        | CMOS                            | General purpose I/O with IOC and WPU.      |
|  | T1CKI    | ST         | —                               | Timer1 clock input.                        |
|  | COG1OUT0 | —          | CMOS                            | COG output channel 0.                      |
|  | C2IN1-   | AN         | —                               | Comparator C2 negative input.              |
| CLKIN  | ST       | —          | External Clock input (EC mode). |  |
| VDD  | VDD      | Power      | —                               | Positive supply.                           |
| VSS  | VSS      | Power      | —                               | Ground reference.                          |

**Legend:** AN = Analog input or output      CMOS = CMOS compatible input or output  
TTL = TTL compatible input      ST = Schmitt Trigger input with CMOS levels  
HP = High Power      HV = High Voltage


**Note** 1: Input-only.  
2: Default pin function via the APFCON register.  
3: Alternate pin function via the APFCON register.  
4: RA3 pull-up is enabled when pin is configured as MCLR in Configuration Word.

## 2.0 MEMORY ORGANIZATION

### 2.1 Program Memory Organization

The PIC12F752/HV752 has a 13-bit program counter capable of addressing an 8K x 14 program memory space. Only the first 1K x 14 (0000h-03FFh) is physically implemented. Accessing a location above these boundaries will cause a wrap-around within the first 1K x 14 space for PIC12F752/HV752. The Reset vector is at 0000h and the interrupt vector is at 0004h (see Figure 2-1).

**FIGURE 2-1: PROGRAM MEMORY MAP AND STACK FOR THE PIC12F752/HV752**

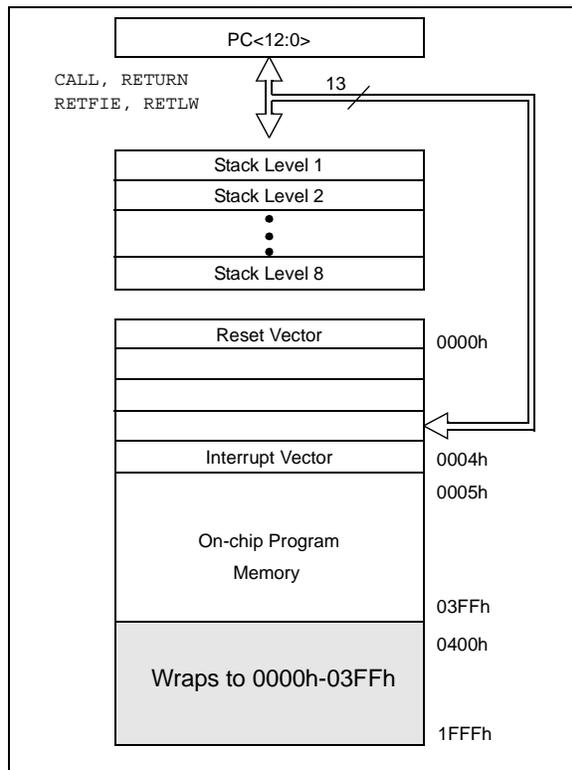

### 2.2 Data Memory Organization

The data memory (see Figure 2-1) is partitioned into four banks, which contain the General Purpose Registers (GPR) and the Special Function Registers (SFR). The Special Function Registers are located in the first 32 locations of each bank. Register locations 40h-6Fh in Bank 0 are General Purpose Registers, implemented as static RAM. Register locations 70h-7Fh in Bank 0 are Common RAM and shared as the last 16 addresses in all Banks. All other RAM is unimplemented and returns '0' when read. The RP<1:0> bits of the STATUS register are the bank select bits.

| RP1 | RP0 |                      |
|-----|-----|----------------------|
| 0   | 0   | → Bank 0 is selected |
| 0   | 1   | → Bank 1 is selected |
| 1   | 0   | → Bank 2 is selected |
| 1   | 1   | → Bank 3 is selected |

#### 2.2.1 GENERAL PURPOSE REGISTER FILE

The register file is organized as 64 x 8 in the PIC12F752/HV752. Each register is accessed, either directly or indirectly, through the File Select Register (FSR) (see Section 2.5 "Indirect Addressing, INDF and FSR Registers").

#### 2.2.2 SPECIAL FUNCTION REGISTERS

The Special Function Registers are registers used by the CPU and peripheral functions for controlling the desired operation of the device (see Table 2-1). These registers are static RAM.

The special registers can be classified into two sets: core and peripheral. The Special Function Registers associated with the "core" are described in this section. Those related to the operation of the peripheral features are described in the section of that peripheral feature.

# PIC12F752/HV752

**TABLE 2-1: DATA MEMORY MAP OF THE PIC12F752/HV752**

| BANK 0                   |     | BANK 1                        |     | BANK 2                        |      | BANK 3                        |      |
|--------------------------|-----|-------------------------------|-----|-------------------------------|------|-------------------------------|------|
| INDF                     | 00h | INDF                          | 80h | INDF                          | 100h | INDF                          | 180h |
| TMR0                     | 01h | OPTION_REG                    | 81h | TMR0                          | 101h | OPTION_REG                    | 181h |
| PCL                      | 02h | PCL                           | 82h | PCL                           | 102h | PCL                           | 182h |
| STATUS                   | 03h | STATUS                        | 83h | STATUS                        | 103h | STATUS                        | 183h |
| FSR                      | 04h | FSR                           | 84h | FSR                           | 104h | FSR                           | 184h |
| PORTA                    | 05h | TRISA                         | 85h | LATA                          | 105h | ANSELA                        | 185h |
| —                        | 06h | —                             | 86h | —                             | 106h | —                             | 186h |
| —                        | 07h | —                             | 87h | —                             | 107h | —                             | 187h |
| IOCAF                    | 08h | IOCAP                         | 88h | IOCAN                         | 108h | APFCON                        | 188h |
| —                        | 09h | —                             | 89h | —                             | 109h | OSCTUNE                       | 189h |
| PCLATH                   | 0Ah | PCLATH                        | 8Ah | PCLATH                        | 10Ah | PCLATH                        | 18Ah |
| INTCON                   | 0Bh | INTCON                        | 8Bh | INTCON                        | 10Bh | INTCON                        | 18Bh |
| PIR1                     | 0Ch | PIE1                          | 8Ch | WPUA                          | 10Ch | PMCON1                        | 18Ch |
| PIR2                     | 0Dh | PIE2                          | 8Dh | SLRCONA                       | 10Dh | PMCON2                        | 18Dh |
| —                        | 0Eh | —                             | 8Eh | —                             | 10Eh | PMADRL                        | 18Eh |
| TMR1L                    | 0Fh | OSCCON                        | 8Fh | PCON                          | 10Fh | PMADRH                        | 18Fh |
| TMR1H                    | 10h | FVRCON                        | 90h | TMR2                          | 110h | PMDATL                        | 190h |
| T1CON                    | 11h | DACCON0                       | 91h | PR2                           | 111h | PMDATH                        | 191h |
| T1GCON                   | 12h | DACCON1                       | 92h | T2CON                         | 112h | COG1PH                        | 192h |
| CCPR1L                   | 13h | —                             | 93h | HLTMR1                        | 113h | COG1BLK                       | 193h |
| CCPR1H                   | 14h | —                             | 94h | HLTPR1                        | 114h | COG1DB                        | 194h |
| CCP1CON                  | 15h | —                             | 95h | HLT1CON0                      | 115h | COG1CON0                      | 195h |
| —                        | 16h | —                             | 96h | HLT1CON1                      | 116h | COG1CON1                      | 196h |
| —                        | 17h | —                             | 97h | —                             | 117h | COG1ASD                       | 197h |
| —                        | 18h | —                             | 98h | —                             | 118h | —                             | 198h |
| —                        | 19h | —                             | 99h | —                             | 119h | —                             | 199h |
| —                        | 1Ah | —                             | 9Ah | —                             | 11Ah | —                             | 19Ah |
| —                        | 1Bh | CM2CON0                       | 9Bh | —                             | 11Bh | —                             | 19Bh |
| ADRESL                   | 1Ch | CM2CON1                       | 9Ch | —                             | 11Ch | —                             | 19Ch |
| ADRESH                   | 1Dh | CM1CON0                       | 9Dh | —                             | 11Dh | —                             | 19Dh |
| ADCON0                   | 1Eh | CM1CON1                       | 9Eh | —                             | 11Eh | —                             | 19Eh |
| ADCON1                   | 1Fh | CMOUT                         | 9Fh | —                             | 11Fh | —                             | 19Fh |
| Unimplemented            | 20h |                               | A0h |                               | 120h |                               | 1A0h |
| General Purpose Register | 3Fh | Unimplemented                 |     | Unimplemented                 |      | Unimplemented                 |      |
| 48 Bytes                 | 40h |                               | EFh |                               | 16Fh |                               | 1EFh |
| Common RAM               | 70h | Common RAM (Accesses 70h-7Fh) | F0h | Common RAM (Accesses 70h-7Fh) | 170h | Common RAM (Accesses 70h-7Fh) | 1F0h |
| 16 Bytes                 | 7Fh |                               | FFh |                               | 17Fh |                               | 1FFh |

**Legend:** ■ = Unimplemented data memory locations, read as '0'.

# PIC12F752/HV752

**TABLE 2-2: PIC12F752/HV752 SPECIAL REGISTERS SUMMARY BANK 0**

| Addr          | Name    | Bit 7  | Bit 6     | Bit 5       | Bit 4  | Bit 3           | Bit 2               | Bit 1      | Bit 0                | Value on POR/BOR Reset | Value on all other Resets <sup>(1)</sup> |      |
|---------------|---------|--|-----------|-------------|--|-----------------|---------------------|------------|----------------------|------------------------|--|------|
| <b>Bank 0</b> |         |  |           |             |  |                 |                     |            |                      |                        |  |      |
| 00h           | INDF    | Addressing this location uses contents of FSR to address data memory (not a physical register) |           |             |  |                 |                     |            |                      | xxxx xxxx              | xxxx xxxx                                |      |
| 01h           | TMR0    | Holding register for the 8-bit TMR0  |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 02h           | PCL     | Program Counter's (PC) Least Significant Byte  |           |             |  |                 |                     |            |                      | 0000 0000              | 0000 0000                                |      |
| 03h           | STATUS  | IRP  | RP1       | RP0         | $\overline{TO}$                                  | $\overline{PD}$ | Z                   | DC         | C                    | 0001 1xxx              | 000q quuu                                |      |
| 04h           | FSR     | Indirect Data Memory Address Pointer   |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 05h           | PORTA   | —  | —         | RA5         | RA4  | RA3             | RA2                 | RA1        | RA0                  | --xx xxxx              | --uu uuuu                                |      |
| 06h           | —       | Unimplemented  |           |             |  |                 |                     |            |                      | —                      | —  |      |
| 07h           | —       | Unimplemented  |           |             |  |                 |                     |            |                      | —                      | —  |      |
| 08h           | IOCAF   | —  | —         | IOCAF5      | IOCAF4   | IOCAF3          | IOCAF2              | IOCAF1     | IOCAF0               | --00 0000              | --00 0000                                |      |
| 09h           | —       | Unimplemented  |           |             |  |                 |                     |            |                      | —                      | —  |      |
| 0Ah           | PCLATH  | —  | —         | —           | Write buffer for upper 5 bits of program counter |                 |                     |            | ---                  | 0000                   | ---                                      | 0000 |
| 0Bh           | INTCON  | GIE  | PEIE      | T0IE        | INTE   | IOCIE           | T0IF                | INTF       | IOCIF <sup>(2)</sup> | 0000 0000              | 0000 0000                                |      |
| 0Ch           | PIR1    | TMR1GIF  | ADIF      | —           | —  | —               | HLTMR1IF            | TMR2IF     | TMR1IF               | 00---000               | 00---000                                 |      |
| 0Dh           | PIR2    | —  | —         | C2IF        | C1IF   | —               | COG1IF              | —          | CCP1IF               | --00 -0-0              | --00 -0-0                                |      |
| 0Eh           | —       | Unimplemented  |           |             |  |                 |                     |            |                      | —                      | —  |      |
| 0Fh           | TMR1L   | Holding register for the Least Significant Byte of the 16-bit TMR1                             |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 10h           | TMR1H   | Holding register for the Most Significant Byte of the 16-bit TMR1                              |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 11h           | T1CON   | TMR1CS<1:0>  |           | T1CKPS<1:0> |  | Reserved        | $\overline{T1SYNC}$ | —          | TMR1ON               | 0000 00-0              | uuuu uu-u                                |      |
| 12h           | T1GCON  | TMR1GE   | T1GPOL    | T1GTM       | T1GSPM   | T1GGO/DONE      | T1GVAL              | T1GSS<1:0> |                      | 0000 0x00              | uuuu uxuu                                |      |
| 13h           | CCPR1L  | Capture/Compare/PWM Register1 Low Byte   |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 14h           | CCPR1H  | Capture/Compare/PWM Register1 High Byte  |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 15h           | CCP1CON | —  | —         | DC1B<1:0>   |  | CCP1M<3:0>      |                     |            | —                    | --00 0000              | --00 0000                                |      |
| 16h to 1Bh    | —       | Unimplemented  |           |             |  |                 |                     |            |                      | —                      | —  |      |
| 1Ch           | ADRESL  | Least Significant 2 bits of the left shifted result or 8 bits of the right shifted result      |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 1Dh           | ADRESH  | Most Significant 8 bits of the left shifted A/D result or 2 bits of right shifted result       |           |             |  |                 |                     |            |                      | xxxx xxxx              | uuuu uuuu                                |      |
| 1Eh           | ADCON0  | ADFM   | VCFG      | CHS<3:0>    |  |                 | GO/DONE             | ADON       | —                    | 0000 0000              | 0000 0000                                |      |
| 1Fh           | ADCON1  | —  | ADCS<2:0> |             |  | —               | —                   | —          | —                    | -000 ----              | -000 ----                                |      |

**Legend:** — = Unimplemented locations read as '0', u = unchanged, x = unknown, q = value depends on condition shaded = unimplemented

**Note 1:** Other (non Power-up) Resets include MCLR Reset and Watchdog Timer Reset during normal operation.

**Note 2:** MCLR and WDT Reset does not affect the previous value data latch. The IOCIF bit will be cleared upon Reset but will set again if the mismatch exists.

# PIC12F752/HV752

**TABLE 2-3: PIC12F752/HV752 SPECIAL REGISTERS SUMMARY BANK 1**

| Addr          | Name       | Bit 7  | Bit 6  | Bit 5      | Bit 4  | Bit 3                 | Bit 2    | Bit 1  | Bit 0                | Value on POR/BOR Reset | Values on all other Resets <sup>(1)</sup> |      |
|---------------|------------|--|--------|------------|--|-----------------------|----------|--------|----------------------|------------------------|---|------|
| <b>Bank 1</b> |            |  |        |            |  |                       |          |        |                      |                        |   |      |
| 80h           | INDF       | Addressing this location uses contents of FSR to address data memory (not a physical register) |        |            |  |                       |          |        |                      | xxxx xxxx              | uuuu uuuu                                 |      |
| 81h           | OPTION_REG | RAPU   | INTEDG | T0CS       | T0SE   | PSA                   | PS<2:0>  |        |                      | 1111 1111              | 1111 1111                                 |      |
| 82h           | PCL        | Program Counter's (PC) Least Significant Byte  |        |            |  |                       |          |        |                      | 0000 0000              | 0000 0000                                 |      |
| 83h           | STATUS     | IRP  | RP1    | RP0        | $\overline{TO}$                                  | $\overline{PD}$       | Z        | DC     | C                    | 0001 1xxx              | 000q quuu                                 |      |
| 84h           | FSR        | Indirect Data Memory Address Pointer   |        |            |  |                       |          |        |                      | xxxx xxxx              | uuuu uuuu                                 |      |
| 85h           | TRISA      | —  | —      | TRISA5     | TRISA4   | TRISA3 <sup>(3)</sup> | TRISA2   | TRISA1 | TRISA0               | --11 1111              | --11 1111                                 |      |
| 86h           | —          | Unimplemented  |        |            |  |                       |          |        |                      | —                      | —   |      |
| 87h           | —          | Unimplemented  |        |            |  |                       |          |        |                      | —                      | —   |      |
| 88h           | IOCAP      | —  | —      | IOCAP5     | IOCAP4   | IOCAP3                | IOCAP2   | IOCAP1 | IOCAP0               | --00 0000              | --00 0000                                 |      |
| 89h           | —          | Unimplemented  |        |            |  |                       |          |        |                      | —                      | —   |      |
| 8Ah           | PCLATH     | —  | —      | —          | Write buffer for upper 5 bits of program counter |                       |          |        | ---                  | 0000                   | ---                                       | 0000 |
| 8Bh           | INTCON     | GIE  | PEIE   | T0IE       | INTE   | IOCIE                 | T0IF     | INTF   | IOCIF <sup>(2)</sup> | 0000 0000              | 0000 0000                                 |      |
| 8Ch           | PIE1       | TMR1GIE  | ADIE   | —          | —  | —                     | HLTMR1IE | TMR2IE | TMR1IE               | 00-- -000              | 00-- -000                                 |      |
| 8Dh           | PIE2       | —  | —      | C2IE       | C1IE   | —                     | COG1IE   | —      | CCP1IE               | --00 -0-0              | --00 -0-0                                 |      |
| 8Eh           | —          | Unimplemented  |        |            |  |                       |          |        |                      | —                      | —   |      |
| 8Fh           | OSCCON     | —  | —      | IRCF<1:0>  |  | —                     | HTS      | LTS    | —                    | --01 -00-              | --uu -uu-                                 |      |
| 90h           | FVRCON     | FVREN  | FVRRDY | FVRBUFEN   | FVRBUFSS   | —                     | —        | —      | —                    | 0000 ----              | 0000 ----                                 |      |
| 91h           | DACCON0    | DACEN  | DACRNG | DACOE      | —  | —                     | DACPSS0  | —      | —                    | 000- -0--              | 000- -0--                                 |      |
| 92h           | DACCON1    | —  | —      | —          | DACR<4:0>  |                       |          |        | ---                  | 0000                   | ---                                       | 0000 |
| 93h to 9Ah    | —          | Unimplemented  |        |            |  |                       |          |        |                      | —                      | —   |      |
| 9Bh           | CM2CON0    | C2ON   | C2OUT  | C2OE       | C2POL  | C2ZLF                 | C2SP     | C2HYS  | C2SYNC               | 0000 0100              | 0000 0100                                 |      |
| 9Ch           | CM2CON1    | C2INTP   | C2INTN | C2PCH<1:0> |  | —                     | —        | —      | C2NCH0               | 0000 ---0              | 0000 ---0                                 |      |
| 9Dh           | CM1CON0    | C1ON   | C1OUT  | C1OE       | C1POL  | C1ZLF                 | C1SP     | C1HYS  | C1SYNC               | 0000 0100              | 0000 0100                                 |      |
| 9Eh           | CM1CON1    | C1INTP   | C1INTN | C1PCH<1:0> |  | —                     | —        | —      | C1NCH0               | 0000 ---0              | 0000 ---0                                 |      |
| 9Fh           | CMOUT      | —  | —      | —          | —  | —                     | —        | MC2OUT | MC1OUT               | ---- --00              | ---- --00                                 |      |

**Legend:** — = Unimplemented locations read as '0', u = unchanged, x = unknown, q = value depends on condition shaded = unimplemented

- Note**
- 1: Other (non Power-up) Resets include MCLR Reset and Watchdog Timer Reset during normal operation.
  - 2: MCLR and WDT Reset does not affect the previous value data latch. The IOCIF bit will be cleared upon Reset but will set again if the mismatch exists.
  - 3: TRISA3 always reads '1'.

# PIC12F752/HV752

**TABLE 2-4: PIC12F752/HV752 SPECIAL REGISTERS SUMMARY BANK 2**

| Addr          | Name     | Bit 7  | Bit 6        | Bit 5  | Bit 4  | Bit 3           | Bit 2  | Bit 1            | Bit 0                | Value on POR/BOR Reset | Value on all other Resets <sup>(1)</sup> |           |
|---------------|----------|--|--------------|--------|--|-----------------|--------|------------------|----------------------|------------------------|--|-----------|
| <b>Bank 2</b> |          |  |              |        |  |                 |        |                  |                      |                        |  |           |
| 100h          | INDF     | Addressing this location uses contents of FSR to address data memory (not a physical register) |              |        |  |                 |        |                  |                      | xxxx xxxx              | xxxx xxxx                                |           |
| 101h          | TMR0     | Holding Register for the 8-bit Timer0 Register   |              |        |  |                 |        |                  |                      | xxxx xxxx              | uuuu uuuu                                |           |
| 102h          | PCL      | Program Counter's (PC) Least Significant Byte  |              |        |  |                 |        |                  |                      | 0000 0000              | 0000 0000                                |           |
| 103h          | STATUS   | IRP  | RP1          | RP0    | $\overline{TO}$                                  | $\overline{PD}$ | Z      | DC               | C                    | 0001 1xxx              | 000q quuu                                |           |
| 104h          | FSR      | Indirect Data Memory Address Pointer   |              |        |  |                 |        |                  |                      | xxxx xxxx              | uuuu uuuu                                |           |
| 105h          | LATA     | —  | —            | LATA5  | LATA4  | —               | LATA2  | LATA1            | LATA0                | --xx -xxx              | --uu -uuu                                |           |
| 106h          | —        | Unimplemented  |              |        |  |                 |        |                  |                      | —                      | —  |           |
| 107h          | —        | Unimplemented  |              |        |  |                 |        |                  |                      | —                      | —  |           |
| 108h          | IOCAN    | —  | —            | IOCAN5 | IOCAN4   | IOCAN3          | IOCAN2 | IOCAN1           | IOCAN0               | --00 0000              | --00 0000                                |           |
| 109h          | —        | Unimplemented  |              |        |  |                 |        |                  |                      | —                      | —  |           |
| 10Ah          | PCLATH   | —  | —            | —      | Write buffer for upper 5 bits of program counter |                 |        |                  | ---                  | 0 0000                 | ---                                      | 0 0000    |
| 10Bh          | INTCON   | GIE  | PEIE         | T0IE   | INTE   | IOCIE           | T0IF   | INTF             | IOCIF <sup>(2)</sup> | 0000 0000              | 0000 0000                                |           |
| 10Ch          | WPUA     | —  | —            | WPUA5  | WPUA4  | WPUA3           | WPUA2  | WPUA1            | WPUA0                | --00 0000              | --00 0000                                |           |
| 10Dh          | SLRCONA  | —  | —            | —      | —  | —               | SLRA2  | —                | SLRA0                | ---- -0-0              | ---- -0-0                                |           |
| 10Eh          | —        | Unimplemented  |              |        |  |                 |        |                  |                      | —                      | —  |           |
| 10Fh          | PCON     | —  | —            | —      | —  | —               | —      | $\overline{POR}$ | $\overline{BOR}$     | ---- --qq              | ---- --uu                                |           |
| 110h          | TMR2     | Holding Register for the 8-bit Timer2 Register   |              |        |  |                 |        |                  |                      | 0000 0000              | 0000 0000                                |           |
| 111h          | PR2      | Timer2 Period Register   |              |        |  |                 |        |                  |                      | 1111 1111              | 1111 1111                                |           |
| 112h          | T2CON    | —  | TOUTPS<3:0>  |        |  |                 | TMR2ON | T2CKPS<1:0>      |                      |                        | -000 0000                                | -000 0000 |
| 113h          | HLTMR1   | Holding Register for the 8-bit Hardware Limit Timer1 Register                                  |              |        |  |                 |        |                  |                      | 0000 0000              | 0000 0000                                |           |
| 114h          | HLTPR1   | Hardware Limit Timer1 Period Register  |              |        |  |                 |        |                  |                      | 1111 1111              | 1111 1111                                |           |
| 115h          | HLT1CON0 | —  | H1OUTPS<3:0> |        |  |                 | H1ON   | H1CKPS<1:0>      |                      |                        | -000 0000                                | -000 0000 |
| 116h          | HLT1CON1 | —  | —            | —      | H1ERS<2:0>                                       |                 |        | H1FEREN          | H1REREN              | ---0 0000              | ---0 0000                                |           |
| 117h to 11Fh  | —        | Unimplemented  |              |        |  |                 |        |                  |                      | —                      | —  |           |

**Legend:** — = Unimplemented locations read as '0', u = unchanged, x = unknown, q = value depends on condition shaded = unimplemented

**Note 1:** Other (non Power-up) Resets include MCLR Reset and Watchdog Timer Reset during normal operation.

**Note 2:** MCLR and WDT Reset does not affect the previous value data latch. The IOCIF bit will be cleared upon Reset but will set again if the mismatch exists.

# PIC12F752/HV752

**TABLE 2-5: PIC12F752/HV752 SPECIAL FUNCTION REGISTERS SUMMARY BANK 3**

| Addr          | Name       | Bit 7  | Bit 6   | Bit 5                                  | Bit 4  | Bit 3     | Bit 2     | Bit 1       | Bit 0                | Value on POR/BOR Reset | Values on all other Resets <sup>(1)</sup> |           |
|---------------|------------|--|---------|--|--|-----------|-----------|-------------|----------------------|------------------------|---|-----------|
| <b>Bank 3</b> |            |  |         |  |  |           |           |             |                      |                        |   |           |
| 180h          | INDF       | Addressing this location uses contents of FSR to address data memory (not a physical register) |         |  |  |           |           |             |                      | xxxx xxxx              | uuuu uuuu                                 |           |
| 181h          | OPTION_REG | RAPU   | INTEDG  | T0CS                                   | T0SE   | PSA       | PS<2:0>   |             |                      | 1111 1111              | 1111 1111                                 |           |
| 182h          | PCL        | Program Counter's (PC) Least Significant Byte  |         |  |  |           |           |             |                      | 0000 0000              | 0000 0000                                 |           |
| 183h          | STATUS     | IRP  | RP1     | RP0                                    | T0   | PD        | Z         | DC          | C                    | 0001 1xxx              | 000q quuu                                 |           |
| 184h          | FSR        | Indirect Data Memory Address Pointer   |         |  |  |           |           |             |                      | xxxx xxxx              | uuuu uuuu                                 |           |
| 185h          | ANSELA     | —  | —       | ANSA5                                  | ANSA4  | —         | ANSA2     | ANSA1       | ANSA0                | --11 -111              | --11 -111                                 |           |
| 186h          | —          | Unimplemented  |         |  |  |           |           |             |                      | —                      | —   |           |
| 187h          | —          | Unimplemented  |         |  |  |           |           |             |                      | —                      | —   |           |
| 188h          | APFCON     | —  | —       | —                                      | T1GSEL   | —         | COG1FSEL  | COG1O1SEL   | COG1O0SEL            | ---0 -000              | ---0 -000                                 |           |
| 189h          | OSCTUNE    | —  | —       | —                                      | TUN<4:0>   |           |           |             |                      | ---0 0000              | ---u uuuu                                 |           |
| 18Ah          | PCLATH     | —  | —       | —                                      | Write buffer for upper 5 bits of program counter |           |           |             |                      | ---0 0000              | ---0 0000                                 |           |
| 18Bh          | INTCON     | GIE  | PEIE    | TOIE                                   | INTE   | IOIE      | TOIF      | INTF        | IOCIF <sup>(2)</sup> | 0000 0000              | 0000 0000                                 |           |
| 18Ch          | PMCON1     | —  | —       | —                                      | —  | —         | WREN      | WR          | RD                   | ---- -000              | ---- -000                                 |           |
| 18Dh          | PMCON2     | Program Memory Control Register 2 (not a physical register)                                    |         |  |  |           |           |             |                      | ---- ----              | ---- ----                                 |           |
| 18Eh          | PMADRL     | Program Memory Address Register Low Byte   |         |  |  |           |           |             |                      | 0000 0000              | 0000 0000                                 |           |
| 18Fh          | PMADRH     | —  | —       | —                                      | —  | —         | —         | PMADRH<1:0> |                      | ---- --00              | ---- --00                                 |           |
| 190h          | PMDATL     | Program Memory Data Register Low Byte  |         |  |  |           |           |             |                      | 0000 0000              | 0000 0000                                 |           |
| 191h          | PMDATH     | —  | —       | Program Memory Data Register High Byte |  |           |           |             |                      | --00 0000              | --00 0000                                 |           |
| 192h          | COG1PH     | —  | —       | —                                      | —  | G1PH<3:0> |           |             | ---- xxxx            | ---- uuuu              |   |           |
| 193h          | COG1BLK    | G1BLKR<3:0>  |         |  | G1BLKF<3:0>                                      |           |           |             |                      | xxxx xxxx              | uuuu uuuu                                 |           |
| 194h          | COG1DB     | G1DBR<3:0>   |         |  | G1DBF<3:0>                                       |           |           |             |                      | xxxx xxxx              | uuuu uuuu                                 |           |
| 195h          | COG1CON0   | G1EN   | G1OE1   | G1OE0                                  | G1POL1   | G1POL0    | G1LD      | G1CS<1:0>   |                      | 0000 0000              | 0000 0000                                 |           |
| 196h          | COG1CON1   | G1FSIM   | G1RSIM  | G1FS<2:0>                              |  |           | G1RS<2:0> |             |                      |                        | 0000 0000                                 | 0000 0000 |
| 197h          | COG1ASD    | G1ASDE   | G1ARSEN | G1ASDL1                                | G1ASDL0  | G1ASDSHLT | G1ASDSC2  | G1ASDSC1    | G1ASDSFLT            | 0000 0000              | 0000 0000                                 |           |
| 198h to 19Fh  | —          | Unimplemented  |         |  |  |           |           |             |                      | —                      | —   |           |

**Legend:** — = Unimplemented locations read as '0', u = unchanged, x = unknown, q = value depends on condition shaded = unimplemented

**Note 1:** Other (non Power-up) Resets include MCLR Reset and Watchdog Timer Reset during normal operation.

**Note 2:** MCLR and WDT Reset does not affect the previous value data latch. The IOCIF bit will be cleared upon Reset but will set again if the mismatch exists.

## 2.3 Global SFRs

### 2.3.1 STATUS REGISTER

The STATUS register, shown in [Register 2-1](#), contains:

- The Arithmetic Status of the ALU
- The Reset Status
- The Bank Select Bits for Data Memory (RAM)

The STATUS register can be the destination for any instruction, like any other register. If the STATUS register is the destination for an instruction that affects the Z, DC or C bits, then the write to these three bits is disabled. These bits are set or cleared according to the device logic. Furthermore, the  $\overline{\text{TO}}$  and  $\overline{\text{PD}}$  bits are not

writable. Therefore, the result of an instruction with the STATUS register as destination may be different than intended.

For example, `CLRF STATUS`, will clear the upper three bits and set the Z bit. This leaves the STATUS register as '000u u1uu' (where u = unchanged).

It is recommended, therefore, that only `BCF`, `BSF`, `SWAPF` and `MOVWF` instructions are used to alter the STATUS register, because these instructions do not affect any Status bits. For other instructions not affecting any Status bits, see [Section 16.0 "Instruction Set Summary"](#).

#### REGISTER 2-1: STATUS: STATUS REGISTER

|       |       |       |                        |                        |       |                   |                  |
|-------|-------|-------|------------------------|------------------------|-------|-------------------|------------------|
| R/W-0 | R/W-0 | R/W-0 | R-1                    | R-1                    | R/W-x | R/W-x             | R/W-x            |
| IRP   | RP1   | RP0   | $\overline{\text{TO}}$ | $\overline{\text{PD}}$ | Z     | DC <sup>(1)</sup> | C <sup>(1)</sup> |
| bit 7 |       |       |                        |                        |       |                   | bit 0            |

#### Legend:

|                   |                  |                                    |
|-------------------|------------------|------------------------------------|
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               |
|                   |                  | x = Bit is unknown                 |

|       |   |
|-------|---|
| bit 7 | <b>IRP:</b> Register Bank Select bit (used for indirect addressing)<br>1 = Bank 2, 3 (100h-1FFh)<br>0 = Bank 0, 1 (00h-FFh)   |
| bit 6 | <b>RP1:</b> Register Bank Select bit (used for direct addressing)<br>00 = Bank 0 (00h-7Fh)<br>01 = Bank 1 (80h-FFh)<br>10 = Bank 2 (100h-17Fh)<br>11 = Bank 3 (180h-1FFh)   |
| bit 5 | <b>RP0:</b> Register Bank Select bit (used for direct addressing)<br>1 = Bank 1 (80h-FFh)<br>0 = Bank 0 (00h-7Fh)   |
| bit 4 | <b><math>\overline{\text{TO}}</math>:</b> Time-Out bit<br>1 = After power-up, <code>CLRWDT</code> instruction or <code>SLEEP</code> instruction<br>0 = A WDT time-out occurred  |
| bit 3 | <b><math>\overline{\text{PD}}</math>:</b> Power-Down bit<br>1 = After power-up or by the <code>CLRWDT</code> instruction<br>0 = By execution of the <code>SLEEP</code> instruction  |
| bit 2 | <b>Z:</b> Zero bit<br>1 = The result of an arithmetic or logic operation is zero<br>0 = The result of an arithmetic or logic operation is not zero  |
| bit 1 | <b>DC:</b> Digit Carry/ <u>Borrow</u> bit <sup>(2)</sup> ( <code>ADDWF</code> , <code>ADDLW</code> , <code>SUBLW</code> , <code>SUBWF</code> instructions), For <u>Borrow</u> , the polarity is reversed.<br>1 = A carry-out from the 4th low-order bit of the result occurred<br>0 = No carry-out from the 4th low-order bit of the result |
| bit 0 | <b>C:</b> Carry/ <u>Borrow</u> bit <sup>(2)</sup> ( <code>ADDWF</code> , <code>ADDLW</code> , <code>SUBLW</code> , <code>SUBWF</code> instructions)<br>1 = A carry-out from the Most Significant bit of the result occurred<br>0 = No carry-out from the Most Significant bit of the result occurred  |

- Note 1:** The C and DC bits operate as a Borrow and Digit Borrow out bit, respectively, in subtraction. See the `SUBLW` and `SUBWF` instructions for examples.
- Note 2:** For Borrow, the polarity is reversed. A subtraction is executed by adding the two's complement of the second operand. For rotate (`RRF`, `RLF`) instructions, this bit is loaded with either the high-order or low-order bit of the source register.

# PIC12F752/HV752

## 2.3.2 OPTION REGISTER

The OPTION register is a readable and writable register, which contains various control bits to configure:

- Timer0/WDT Prescaler
- External RA2/INT Interrupt
- Timer0
- Weak Pull-ups on PORTA

**Note:** To achieve a 1:1 prescaler assignment for Timer0, assign the prescaler to the WDT by setting PSA bit to '1' of the OPTION register. See [Section 6.1.3 “Software Programmable Prescaler”](#).

### REGISTER 2-2: OPTION\_REG: OPTION REGISTER

|       |        |       |       |       |         |       |       |
|-------|--------|-------|-------|-------|---------|-------|-------|
| R/W-1 | R/W-1  | R/W-1 | R/W-1 | R/W-1 | R/W-1   | R/W-1 | R/W-1 |
| RAPU  | INTEDG | T0CS  | T0SE  | PSA   | PS<2:0> |       |       |
| bit 7 |        |       |       |       |         |       | bit 0 |

**Legend:**

|                   |                  |  |
|-------------------|------------------|--|
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0'           |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared      x = Bit is unknown |

- bit 7      **RAPU:** PORTA Pull-up Enable bit  
 1 = PORTA pull-ups are disabled  
 0 = PORTA pull-ups are enabled by individual PORT latch values
- bit 6      **INTEDG:** Interrupt Edge Select bit  
 1 = Interrupt on rising edge of INT pin  
 0 = Interrupt on falling edge of INT pin
- bit 5      **T0CS:** Timer0 Clock Source Select bit  
 1 = Transition on T0CKI pin  
 0 = Internal instruction cycle clock (FOSC/4)
- bit 4      **T0SE:** Timer0 Source Edge Select bit  
 1 = Increment on high-to-low transition on T0CKI pin  
 0 = Increment on low-to-high transition on T0CKI pin
- bit 3      **PSA:** Prescaler Assignment bit  
 1 = Prescaler is assigned to the WDT  
 0 = Prescaler is assigned to the Timer0 module
- bit 2-0    **PS<2:0>:** Prescaler Rate Select bits

| BIT VALUE | TIMER0 RATE | WDT RATE |
|-----------|-------------|----------|
| 000       | 1 : 2       | 1 : 1    |
| 001       | 1 : 4       | 1 : 2    |
| 010       | 1 : 8       | 1 : 4    |
| 011       | 1 : 16      | 1 : 8    |
| 100       | 1 : 32      | 1 : 16   |
| 101       | 1 : 64      | 1 : 32   |
| 110       | 1 : 128     | 1 : 64   |
| 111       | 1 : 256     | 1 : 128  |

## 2.3.3 INTCON REGISTER

The INTCON register is a readable and writable register, which contains the various enable and flag bits for TMR0 register overflow, IOCIE change and external RA2/INT pin interrupts.

**Note:** Interrupt flag bits are set when an interrupt condition occurs, regardless of the state of its corresponding enable bit or the Global Enable bit, GIE of the INTCON register. User software should ensure the appropriate interrupt flag bits are clear prior to enabling an interrupt.

### REGISTER 2-3: INTCON: INTERRUPT CONTROL REGISTER

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0 |
| GIE   | PEIE  | TOIE  | INTE  | IOCIE | TOIF  | INTF  | IOCIF |
| bit 7 |       |       |       |       |       |       | bit 0 |

#### Legend:

|                   |                  |  |
|-------------------|------------------|--|
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0'           |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared      x = Bit is unknown |

- bit 7      **GIE:** Global Interrupt Enable bit  
1 = Enables all unmasked interrupts  
0 = Disables all interrupts
- bit 6      **PEIE:** Peripheral Interrupt Enable bit  
1 = Enables all unmasked peripheral interrupts  
0 = Disables all peripheral interrupts
- bit 5      **TOIE:** Timer0 Overflow Interrupt Enable bit  
1 = Enables the Timer0 interrupt  
0 = Disables the Timer0 interrupt
- bit 4      **INTE:** RA2/INT External Interrupt Enable bit  
1 = Enables the RA2/INT external interrupt  
0 = Disables the RA2/INT external interrupt
- bit 3      **IOCIE:** Interrupt-on-Change Interrupt Enable bit<sup>(1)</sup>  
1 = Enables the IOC change interrupt  
0 = Disables the IOC change interrupt
- bit 2      **TOIF:** Timer0 Overflow Interrupt Flag bit<sup>(2)</sup>  
1 = Timer0 register has overflowed (must be cleared in software)  
0 = Timer0 register did not overflow
- bit 1      **INTF:** RA2/INT External Interrupt Flag bit  
1 = The RA2/INT external interrupt occurred (must be cleared in software)  
0 = The RA2/INT external interrupt did not occur
- bit 0      **IOCIF:** Interrupt-on-Change Interrupt Flag bit  
1 = An IOC pin has changed state and generated an interrupt  
0 = No pin interrupts have been generated

- Note 1:** IOC register must also be enabled.  
**Note 2:** TOIF bit is set when TMR0 rolls over. TMR0 is unchanged on Reset and should be initialized before clearing TOIF bit.

# PIC12F752/HV752

## 2.3.4 PIE1 REGISTER

The PIE1 register contains the Peripheral Interrupt Enable bits, as shown in [Register 2-4](#).

**Note:** Bit PEIE of the INTCON register must be set to enable any peripheral interrupt.

### REGISTER 2-4: PIE1: PERIPHERAL INTERRUPT ENABLE REGISTER 1

|         |       |     |     |     |          |        |        |
|---------|-------|-----|-----|-----|----------|--------|--------|
| R/W-0   | R/W-0 | U-0 | U-0 | U-0 | R/W-0    | R/W-0  | R/W-0  |
| TMR1GIE | ADIE  | —   | —   | —   | HLTMR1IE | TMR2IE | TMR1IE |
| bit 7   |       |     |     |     |          |        | bit 0  |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 7      **TMR1GIE:** ADC Interrupt Enable bit  
1 = Enables the TMR1 gate interrupt  
0 = Disables the TMR1 gate interrupt
- bit 6      **ADIE:** ADC Interrupt Enable bit  
1 = Enables the ADC interrupt  
0 = Disables the ADC interrupt
- bit 5-3    **Unimplemented:** Read as '0'
- bit 2      **HLTMR1IE:** Hardware Limit Timer1 Interrupt Enable bit  
1 = Enables the HLTMR1 interrupt  
0 = Disables the HLTMR1 interrupt
- bit 1      **TMR2IE:** Timer2 Interrupt Enable bit  
1 = Enables the Timer2 interrupt  
0 = Disables the Timer2 interrupt
- bit 0      **TMR1IE:** Timer1 Interrupt Enable bit  
1 = Enables the Timer1 interrupt  
0 = Disables the Timer1 interrupt

## 2.3.5 PIE2 REGISTER

The PIE2 register contains the Peripheral Interrupt Enable bits, as shown in [Register 2-5](#).

**Note:** Bit PEIE of the INTCON register must be set to enable any peripheral interrupt.

**REGISTER 2-5: PIE2: PERIPHERAL INTERRUPT ENABLE REGISTER 1**

|       |     |       |       |     |        |     |        |
|-------|-----|-------|-------|-----|--------|-----|--------|
| U-0   | U-0 | R/W-0 | R/W-0 | U-0 | R/W-0  | U-0 | R/W-0  |
| —     | —   | C2IE  | C1IE  | —   | COG1IE | —   | CCP1IE |
| bit 7 |     |       |       |     |        |     | bit 0  |

**Legend:**

|                   |                  |                                    |
|-------------------|------------------|------------------------------------|
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               |
|                   |                  | x = Bit is unknown                 |

- bit 7-6      **Unimplemented:** Read as '0'
- bit 5      **C2IE:** Comparator 2 Interrupt Enable bit  
1 = Enables the Comparator 2 interrupt  
0 = Disables the Comparator 2 interrupt
- bit 4      **C1IE:** Comparator 1 Interrupt Enable bit  
1 = Enables the Comparator 1 interrupt  
0 = Disables the Comparator 1 interrupt
- bit 3      **Unimplemented:** Read as '0'
- bit 2      **COG1IE:** COG 1 Interrupt Flag bit  
1 = COG1 interrupt enabled  
0 = COG1 interrupt disabled
- bit 1      **Unimplemented:** Read as '0'
- bit 0      **CCP1IE:** CCP1 Interrupt Enable bit  
1 = Enables the CCP1 interrupt  
0 = Disables the CCP1 interrupt

# PIC12F752/HV752

## 2.3.6 PIR1 REGISTER

The PIR1 register contains the Peripheral Interrupt flag bits, as shown in [Register 2-6](#).

**Note:** Interrupt flag bits are set when an interrupt condition occurs, regardless of the state of its corresponding enable bit or the Global Enable bit, GIE of the INTCON register. User software should ensure the appropriate interrupt flag bits are clear prior to enabling an interrupt.

### REGISTER 2-6: PIR1: PERIPHERAL INTERRUPT REQUEST REGISTER 1

| R/W-0   | R/W-0 | U-0 | U-0 | U-0 | R/W-0    | R/W-0  | R/W-0  |
|---------|-------|-----|-----|-----|----------|--------|--------|
| TMR1GIF | ADIF  | —   | —   | —   | HLTMR1IF | TMR2IF | TMR1IF |
| bit 7   |       |     |     |     |          |        | bit 0  |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 7      **TMR1GIF:** TMR1 Gate Interrupt Flag bit  
1 = Timer1 gate interrupt is pending  
0 = Timer1 gate interrupt is not pending
- bit 6      **ADIF:** ADC Interrupt Flag bit  
1 = ADC conversion complete  
0 = ADC conversion has not completed or has not been started
- bit 5-3    **Unimplemented:** Read as '0'
- bit 2      **HLTMR1IF:** Hardware Limit Timer1 to HLTMR1 Match Interrupt Flag bit  
1 = HLTMR1 to HLTMR1 match occurred (must be cleared in software)  
0 = HLTMR1 to HLTMR1 match did not occur
- bit 1      **TMR2IF:** Timer2 to PR2 Match Interrupt Flag bit  
1 = Timer2 to PR2 match occurred (must be cleared in software)  
0 = Timer2 to PR2 match did not occur
- bit 0      **TMR1IF:** Timer1 Interrupt Flag bit  
1 = Timer1 rolled over (must be cleared in software)  
0 = Timer1 has not rolled over

## 2.3.7 PIR2 REGISTER

The PIR2 register contains the Peripheral Interrupt flag bits, as shown in [Register 2-7](#).

**Note:** Interrupt flag bits are set when an interrupt condition occurs, regardless of the state of its corresponding enable bit or the Global Enable bit, GIE of the INTCON register. User software should ensure the appropriate interrupt flag bits are clear prior to enabling an interrupt.

**REGISTER 2-7: PIR2: PERIPHERAL INTERRUPT REQUEST REGISTER 1**

|       |     |       |       |     |        |     |        |
|-------|-----|-------|-------|-----|--------|-----|--------|
| U-0   | U-0 | R/W-0 | R/W-0 | U-0 | R/W-0  | U-0 | R/W-0  |
| —     | —   | C2IF  | C1IF  |     | COG1IF | —   | CCP1IF |
| bit 7 |     |       |       |     |        |     | bit 0  |

**Legend:**

|                   |                  |                                    |
|-------------------|------------------|------------------------------------|
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               |
|                   |                  | x = Bit is unknown                 |

- bit 7-6      **Unimplemented:** Read as '0'
- bit 5      **C2IF:** Comparator 1 Interrupt Flag bit
  - 1 = Comparator output (C2OUT bit) has changed (must be cleared in software)
  - 0 = Comparator output (C2OUT bit) has not changed
- bit 4      **C1IF:** Comparator 1 Interrupt Flag bit
  - 1 = Comparator output (C1OUT bit) has changed (must be cleared in software)
  - 0 = Comparator output (C1OUT bit) has not changed
- bit 3      **Unimplemented:** Read as '0'
- bit 2      **COG1IF:** COG 1 Interrupt Flag bit
  - 1 = COG1 has generated an auto-shutdown interrupt
  - 0 = COG1 has NOT generated an auto-shutdown interrupt
- bit 1      **Unimplemented:** Read as '0'
- bit 0      **CCP1IF:** ECCP Interrupt Flag bit
  - Capture Mode
    - 1 = A TMR1 register capture occurred (must be cleared in software)
    - 0 = No TMR1 register capture occurred
  - Compare Mode
    - 1 = A TMR1 register compare match occurred (must be cleared in software)
    - 0 = No TMR1 register compare match occurred
  - PWM mode  
Unused in this mode

# PIC12F752/HV752

## 2.3.8 PCON REGISTER

The Power Control (PCON) register (see [Table 17-2](#)) contains flag bits to differentiate between:

- Power-on Reset ( $\overline{\text{POR}}$ )
- Brown-out Reset ( $\overline{\text{BOR}}$ )
- Watchdog Timer Reset (WDT)
- External MCLR Reset

The PCON register also controls the software enable of the  $\overline{\text{BOR}}$ .

The PCON register bits are shown in [Register 2-8](#).

### REGISTER 2-8: PCON: POWER CONTROL REGISTER

|       |     |     |     |     |     |                         |                         |
|-------|-----|-----|-----|-----|-----|-------------------------|-------------------------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-q/u                 | R/W-q/u                 |
| —     | —   | —   | —   | —   | —   | $\overline{\text{POR}}$ | $\overline{\text{BOR}}$ |
| bit 7 |     |     |     |     |     |                         | bit 0                   |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

q = Value depends on condition

bit 7-2

**Unimplemented:** Read as '0'

bit 1

**$\overline{\text{POR}}$ :** Power-on Reset Status bit

1 = No Power-on Reset occurred

0 = A Power-on Reset occurred (must be set in software after a Power-on Reset occurs)

bit 0

**$\overline{\text{BOR}}$ :** Brown-out Reset Status bit


1 = No Brown-out Reset occurred

0 = A Brown-out Reset occurred (must be set in software after a Brown-out Reset occurs)

## 2.4 PCL and PCLATH

The Program Counter (PC) is 13 bits wide. The low byte comes from the PCL register, which is a readable and writable register. The high byte (PC<12:8>) is not directly readable or writable and comes from PCLATH. On any Reset, the PC is cleared. [Figure 2-2](#) shows the two situations for the loading of the PC. The upper example in [Figure 2-2](#) shows how the PC is loaded on a write to PCL (PCLATH<4:0> → PCH). The lower example in [Figure 2-2](#) shows how the PC is loaded during a CALL or GOTO instruction (PCLATH<4:3> → PCH).

**FIGURE 2-2: LOADING OF PC IN DIFFERENT SITUATIONS**

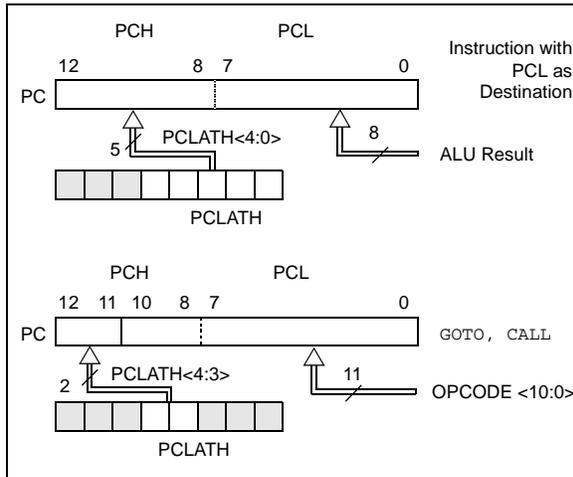

### 2.4.1 MODIFYING PCL

Executing any instruction with the PCL register as the destination simultaneously causes the Program Counter PC<12:8> bits (PCH) to be replaced by the contents of the PCLATH register. This allows the entire contents of the program counter to be changed by writing the desired upper five bits to the PCLATH register. When the lower eight bits are written to the PCL register, all 13 bits of the program counter will change to the values contained in the PCLATH register and those being written to the PCL register.

A computed GOTO is accomplished by adding an offset to the program counter (ADDWF PCL). Care should be exercised when jumping into a look-up table or program branch table (computed GOTO) by modifying the PCL register. Assuming that PCLATH is set to the table start address, if the table length is greater than 255 instructions or if the lower eight bits of the memory address rolls over from 0xFF to 0x00 in the middle of the table, then PCLATH must be incremented for each address rollover that occurs between the table beginning and the target location within the table.

For more information refer to Application Note AN556, "Implementing a Table Read" (DS00556).

### 2.4.2 STACK

The PIC12F752/HV752 Family has an 8-level x 13-bit wide hardware stack (see [Figure 2-1](#)). The stack space is not part of either program or data space and the Stack Pointer is not readable or writable. The PC is PUSHed onto the stack when a CALL instruction is executed or an interrupt causes a branch. The stack is POPed in the event of a RETURN, RETLW or a RETFIE instruction execution. PCLATH is not affected by a PUSH or POP operation.

The stack operates as a circular buffer. This means that after the stack has been PUSHed eight times, the ninth push overwrites the value that was stored from the first push. The tenth push overwrites the second push (and so on).

- Note 1:** There are no Status bits to indicate Stack Overflow or Stack Underflow conditions.
- 2:** There are no instructions/mnemonics called PUSH or POP. These are actions that occur from the execution of the CALL, RETURN, RETLW and RETFIE instructions or the vectoring to an interrupt address.

## 2.5 Indirect Addressing, INDF and FSR Registers

The INDF register is not a physical register. Addressing the INDF register will cause indirect addressing.

Indirect addressing is possible by using the INDF register. Any instruction using the INDF register actually accesses data pointed to by the File Select Register (FSR). Reading INDF itself indirectly will produce 00h. Writing to the INDF register indirectly results in a no operation (although Status bits may be affected). An effective 9-bit address is obtained by concatenating the 8-bit FSR and the IRP bit of the STATUS register, as shown in [Figure 2-3](#).

A simple program to clear RAM location 40h-7Fh using indirect addressing is shown in [Example 2-1](#).


### EXAMPLE 2-1: INDIRECT ADDRESSING

```

MOV LW 0x40 ;initialize pointer
MOV WF FSR ;to RAM
NEXT   CLRF INDF ;clear INDF register
       INCF FSR ;inc pointer
       BTFSS FSR,7 ;all done?
       GOTO NEXT ;no clear next
CONTINUE ;yes continue
    
```

# PIC12F752/HV752

**FIGURE 2-3: DIRECT/INDIRECT ADDRESSING PIC12F752/HV752**

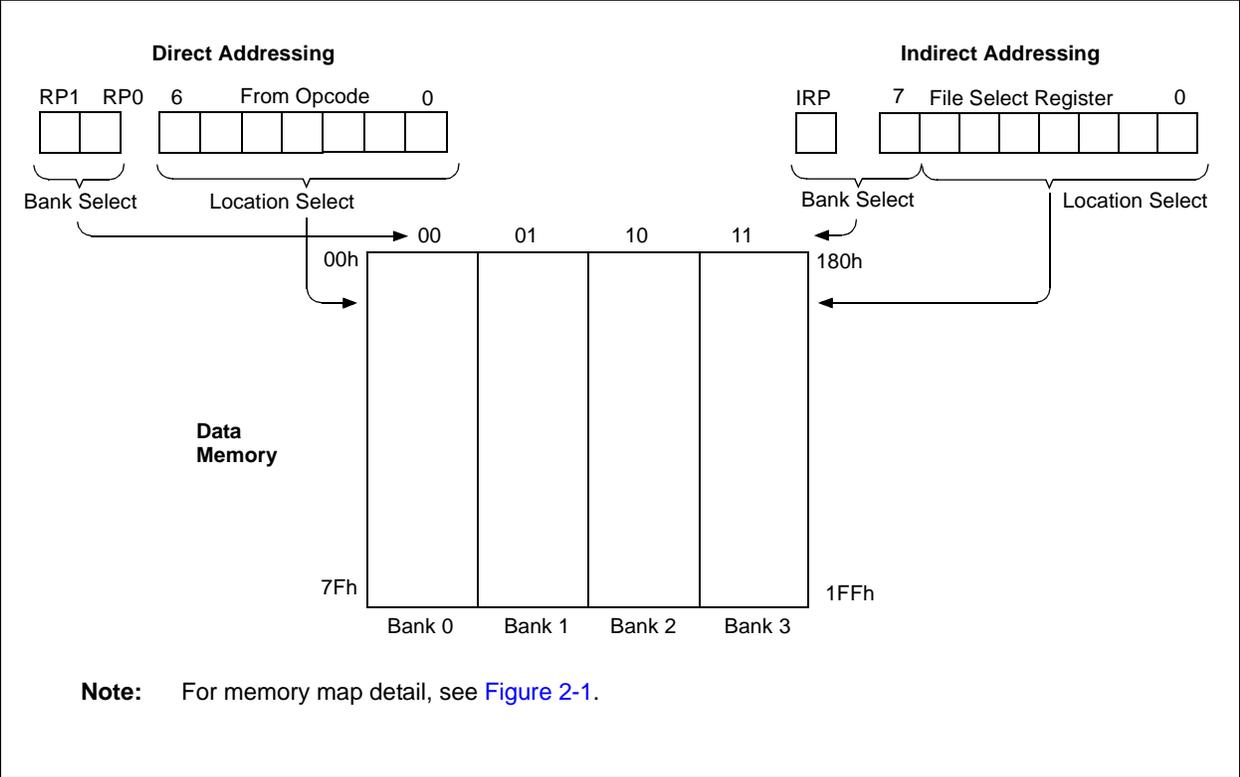

## 3.0 FLASH PROGRAM MEMORY SELF READ/SELF WRITE CONTROL

The Flash program memory is readable and writable during normal operation (full VDD range). This memory is not directly mapped in the register file space. Instead, it is indirectly addressed through the Special Function Registers (see Registers 3-1 to 3-5). There are six SFRs used to read and write this memory:

- PMCON1
- PMCON2
- PMDATL
- PMDATH
- PMADRL
- PMADRH

When interfacing the program memory block, the PMDATL and PMDATH registers form a 2-byte word which holds the 14-bit data for read/write, and the PMADRL and PMADRH registers form a 2-byte word which holds the 10-bit address of the Flash location being accessed. These devices have 1K words of program Flash with an address range from 0000h to 03FFh.

The program memory allows single word read and a by four word write. A four word write automatically erases the row of the location and writes the new data (erase before write).

The write time is controlled by an on-chip timer. The write/erase voltages are generated by an on-chip charge pump rated to operate over the voltage range of the device for byte or word operations.

When the device is code-protected, the CPU may continue to read and write the Flash program memory.

Depending on the settings of the Flash Program Memory Enable (WRT<1:0>) bits, the device may or may not be able to write certain blocks of the program memory, however, reads of the program memory are allowed.

When the Flash program memory Code Protection (CP) bit in the Configuration Word register is enabled, the program memory is code-protected, and the device programmer (ICSP™) cannot access data or program memory.

## 3.1 PMADRH and PMADRL Registers

The PMADRH and PMADRL registers can address up to a maximum of 1K words of program memory.

When selecting a program address value, the Most Significant Byte (MSB) of the address is written to the PMADRH register and the Least Significant Byte (LSB) is written to the PMADRL register.

## 3.2 PMCON1 and PMCON2 Registers

PMCON1 is the control register for the data program memory accesses.

Control bits RD and WR initiate read and write, respectively. These bits cannot be cleared, only set in software. They are cleared in hardware at completion of the read or write operation. The inability to clear the WR bit in software prevents the accidental premature termination of a write operation.

The WREN bit, when set, will allow a write operation. On power-up, the WREN bit is clear.

PMCON2 is not a physical register. Reading PMCON2 will read all '0's. The PMCON2 register is used exclusively in the Flash memory write sequence.

# PIC12F752/HV752

## 3.3 Flash Program Memory Control Registers

### REGISTER 3-1: PMDATL: PROGRAM MEMORY DATA LOW BYTE REGISTER

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PMDATL<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-0                      **PMDATL<7:0>**: Eight Least Significant Data bits to Write or Read from Program Memory

### REGISTER 3-2: PMADRL: PROGRAM MEMORY ADDRESS LOW BYTE REGISTER

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PMADRL<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-0                      **PMADRL<7:0>**: Eight Least Significant Address bits for Program Memory Read/Write Operation

### REGISTER 3-3: PMDATH: PROGRAM MEMORY DATA HIGH BYTE REGISTER

|       |     |             |       |       |       |       |       |
|-------|-----|-------------|-------|-------|-------|-------|-------|
| U-0   | U-0 | R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | —   | PMDATH<5:0> |       |       |       |       |       |
| bit 7 |     |             |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-6                      **Unimplemented:** Read as '0'

bit 5-0                      **PMDATH<5:0>**: Six Most Significant Data bits from Program Memory

### REGISTER 3-4: PMADRH: PROGRAM MEMORY ADDRESS HIGH BYTE REGISTER

|       |     |     |     |     |     |             |       |
|-------|-----|-----|-----|-----|-----|-------------|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0       | R/W-0 |
| —     | —   | —   | —   | —   | —   | PMADRH<1:0> |       |
| bit 7 |     |     |     |     |     |             | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-2                      **Unimplemented:** Read as '0'

bit 1-0                      **PMADRH<1:0>**: Specifies the two Most Significant Address bits or High bits for Program Memory Reads.

## REGISTER 3-5: PMCON1: PROGRAM MEMORY CONTROL 1 REGISTER

|       |     |     |     |     |         |            |            |
|-------|-----|-----|-----|-----|---------|------------|------------|
| U-0   | U-0 | U-0 | U-0 | U-0 | R/W-0/0 | R/S/HC-0/0 | R/S/HC-0/0 |
| —     | —   | —   | —   | —   | WREN    | WR         | RD         |
| bit 7 |     |     |     |     |         | bit 0      |            |

### Legend:

|                         |                      |   |
|-------------------------|----------------------|---|
| R = Readable bit        | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| S = Bit can only be set | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set        | '0' = Bit is cleared | HC = Bit is cleared by hardware                       |

bit 7-3      **Unimplemented:** Read as '0'

bit 2      **WREN:** Program/Erase Enable bit  
 1 = Allows program/erase cycles  
 0 = Inhibits programming/erasing of program Flash

bit 1      **WR:** Write Control bit  
 1 = Initiates a program Flash program/erase operation  
         The operation is self-timed and the bit is cleared by hardware once operation is complete.  
         The WR bit can only be set (not cleared) in software.  
 0 = Program/erase operation to the Flash is complete and inactive

bit 0      **RD:** Read Control bit  
 1 = Initiates a program Flash read. Read takes one cycle. RD is cleared in hardware. The RD bit can only be set (not cleared) in software.  
 0 = Does not initiate a program Flash read

**Note 1:** Unimplemented bit, read as '1'.

# PIC12F752/HV752

---

## 3.4 Reading the Flash Program Memory

To read a program memory location, the user must write two bytes of the address to the PMADRL and PMADRH registers, and then set control bit RD (PMCON1<0>). Once the read control bit is set, the program memory Flash controller will use the second instruction cycle after to read the data. This causes the second instruction immediately following the “BSF PMCON1, RD” instruction to be ignored. The data is available in the very next cycle in the PMDATL and PMDATH registers; it can be read as two bytes in the following instructions. PMDATL and PMDATH registers will hold this value until another read or until it is written to by the user (during a write operation).

### EXAMPLE 3-1: FLASH PROGRAM READ


```
BANKSEL  PM_ADR           ; Change STATUS bits RP1:0 to select bank with PMADRL
MOVLW    MS_PROG_PM_ADDR ;
MOVWF    PMADRH          ; MS Byte of Program Address to read
MOVLW    LS_PROG_PM_ADDR ;
MOVWF    PMADRL          ; LS Byte of Program Address to read
BANKSEL  PMCON1          ; Bank to containing PMCON1
BSF      PMCON1, RD      ; PM Read

NOP                                             ; First instruction after BSF PMCON1, RD executes normally

NOP                                             ; Any instructions here are ignored as program
                                             ; memory is read in second cycle after BSF PMCON1, RD
                                             ;

BANKSEL  PMDATL          ; Bank to containing PMADRL
MOVF     PMDATL, W       ; W = LS Byte of Program PMDATL
MOVF     PMDATH, W       ; W = MS Byte of Program PMDATL
```

**FIGURE 3-1: FLASH PROGRAM MEMORY READ CYCLE EXECUTION**

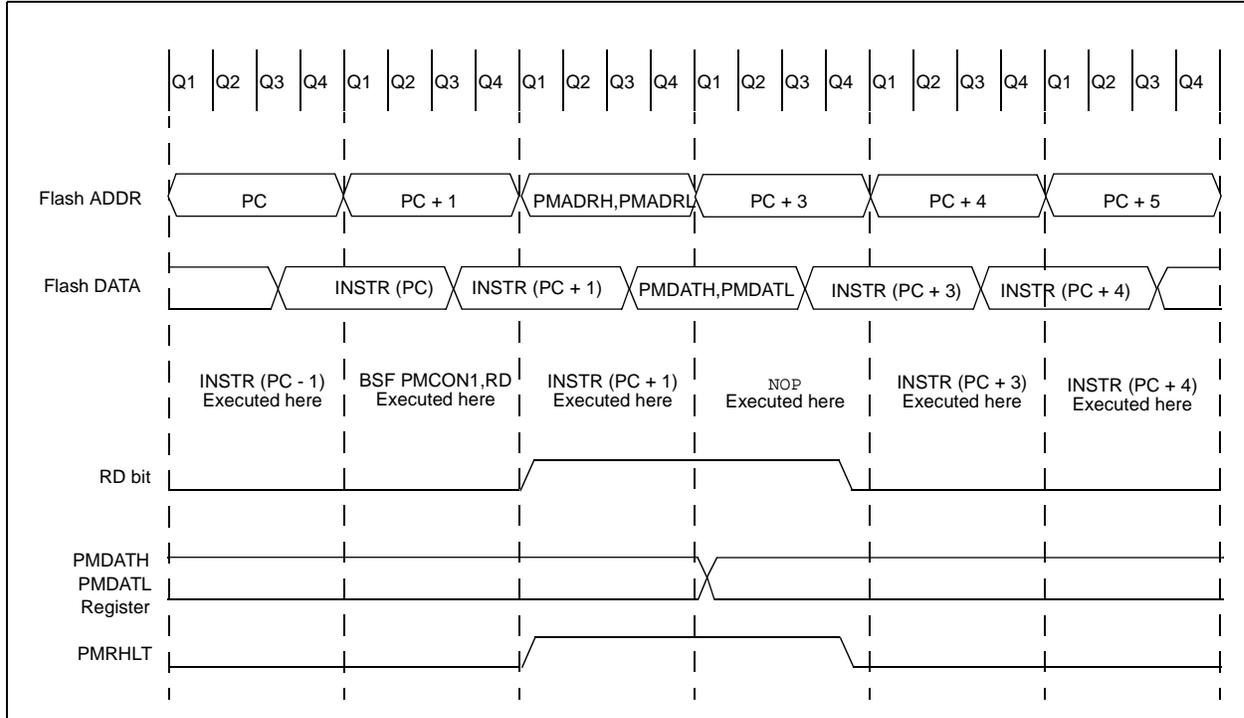

# PIC12F752/HV752

---

## 3.5 Writing the Flash Program Memory

A word of the Flash program memory may only be written to if the word is in an unprotected segment of memory.

Flash program memory must be written in four-word blocks. See [Figure 3-2](#) and [Figure 3-3](#) for more details. A block consists of four words with sequential addresses, with a lower boundary defined by an address, where  $PMADRL<1:0> = 00$ . All block writes to program memory are done as 16-word erase by four-word write operations. The write operation is edge-aligned and cannot occur across boundaries.

To write program data, it must first be loaded into the buffer registers (see [Figure 3-2](#)). This is accomplished by first writing the destination address to PMADRL and PMADRH and then writing the data to PMDATL and PMDATH. After the address and data have been set up, then the following sequence of events must be executed:

1. Write 55h, then AAh, to PMCON2 (Flash programming sequence).
2. Set the WR control bit of the PMCON1 register.

All four buffer register locations should be written to with correct data. If less than four words are being written to in the block of four words, then a read from the program memory location(s) not being written to must be performed. This takes the data from the program location(s) not being written and loads it into the PMDATL and PMDATH registers. Then the sequence of events to transfer data to the buffer registers must be executed.

To transfer data from the buffer registers to the program memory, the PMADRL and PMADRH must point to the last location in the four-word block ( $PMADRL<1:0> = 11$ ). Then the following sequence of events must be executed:

1. Write 55h, then AAh, to PMCON2 (Flash programming sequence).
2. Set control bit WR of the PMCON1 register to begin the write operation.

The user must follow the same specific sequence to initiate the write for each word in the program block, writing each program word in sequence (000, 001, 010, 011). When the write is performed on the last word ( $PMADRL<1:0> = 11$ ), a block of sixteen words is automatically erased and the content of the four-word buffer registers are written into the program memory.

After the “BSF PMCON1, WR” instruction, the processor requires two cycles to set up the erase/write operation. The user must place two NOP instructions after the WR bit is set. Since data is being written to buffer registers, the writing of the first three words of the block appears to occur immediately. The processor will halt internal operations for the typical 4 ms, only during the cycle in

which the erase takes place (i.e., the last word of the sixteen-word block erase). This is not Sleep mode as the clocks and peripherals will continue to run. After the four-word write cycle, the processor will resume operation with the third instruction after the PMCON1 write instruction. The above sequence must be repeated for the higher 12 words.

## 3.6 Protection Against Spurious Write

There are conditions when the device should not write to the program memory. To protect against spurious writes, various mechanisms have been built in. On power-up, WREN is cleared. Also, the Power-up Timer (64 ms duration) prevents program memory writes.

The write initiate sequence and the WREN bit help prevent an accidental write during brown-out, power glitch or software malfunction.


## 3.7 Operation During Code-Protect

When the device is code-protected, the CPU is able to read and write unscrambled data to the program memory.


## 3.8 Operation During Write Protect

When the program memory is write-protected, the CPU can read and execute from the program memory. The portions of program memory that are write protected can be modified by the CPU using the PMCON registers, but the protected program memory cannot be modified using ICSP mode.

**FIGURE 3-2: BLOCK WRITES TO 1K FLASH PROGRAM MEMORY**

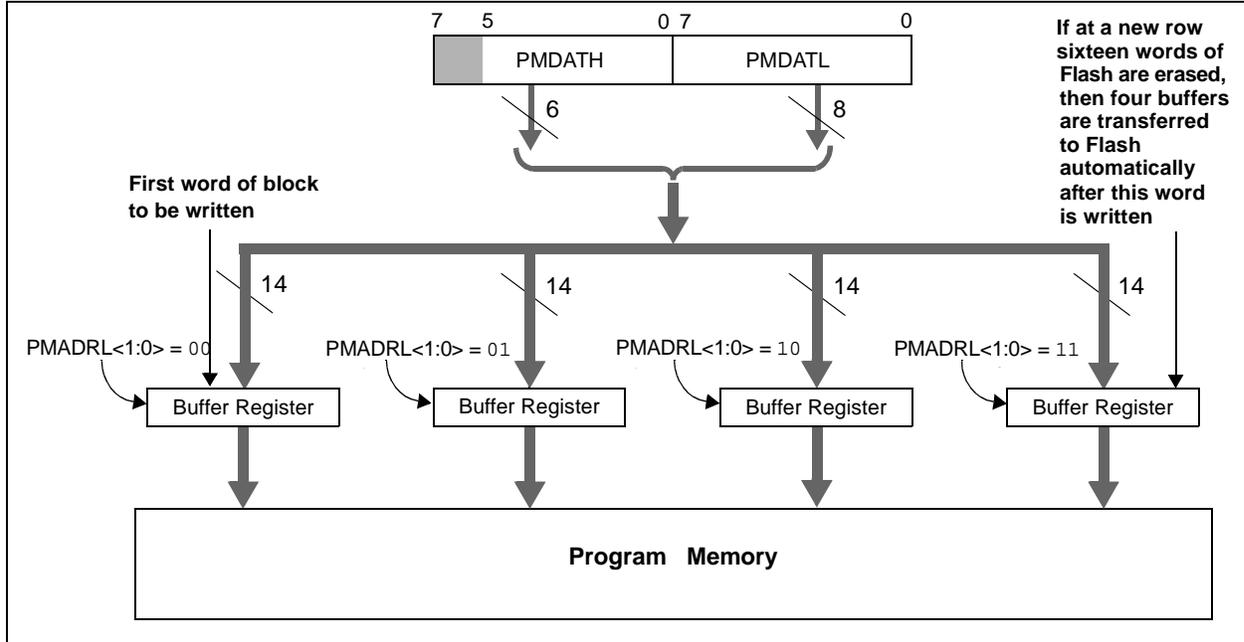

**FIGURE 3-3: FLASH PROGRAM MEMORY LONG WRITE CYCLE EXECUTION**

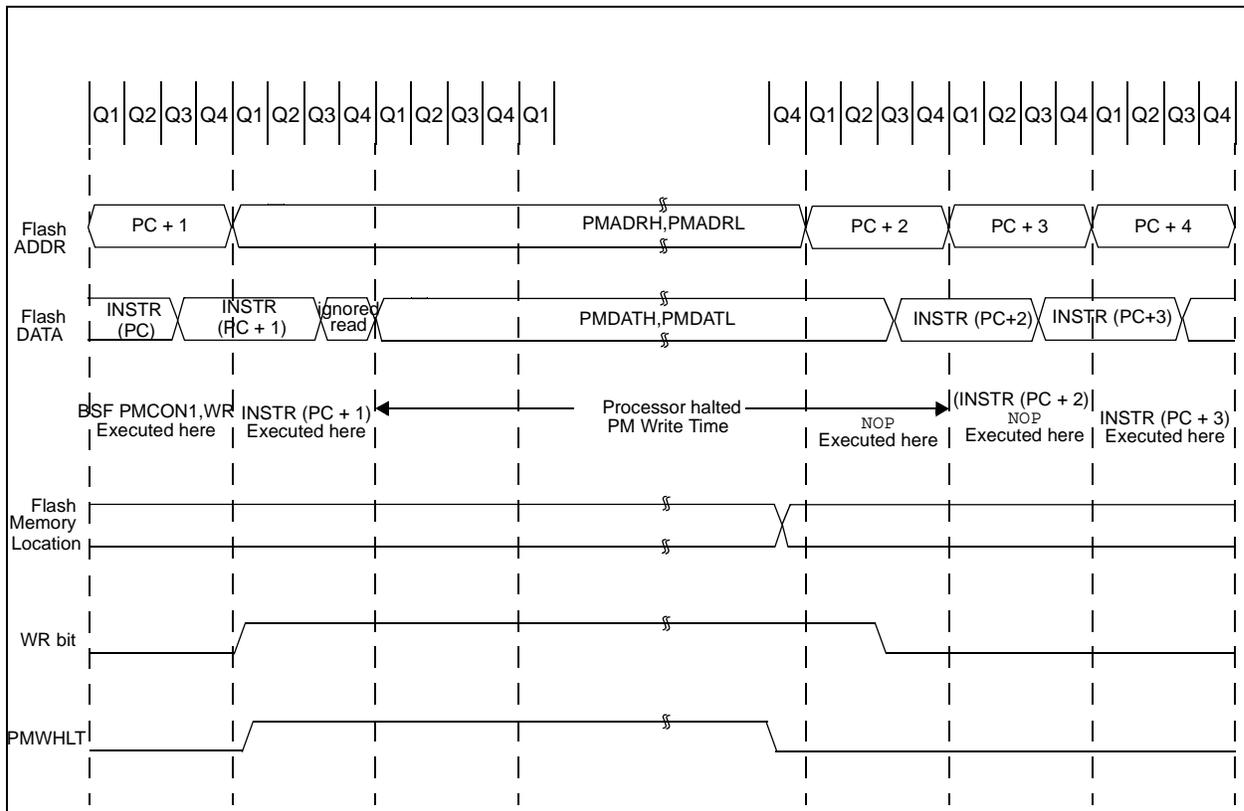



**TABLE 3-1: SUMMARY OF REGISTERS ASSOCIATED WITH FLASH PROGRAM MEMORY**

| Name   | Bit 7                             | Bit 6 | Bit 5       | Bit 4 | Bit 3 | Bit 2 | Bit 1       | Bit 0  | Register on Page |
|--------|-----------------------------------|-------|-------------|-------|-------|-------|-------------|--------|------------------|
| PMCON1 | —                                 | —     | —           | —     | —     | WREN  | WR          | RD     | 25               |
| PMCON2 | Program Memory Control Register 2 |       |             |       |       |       |             |        | 23*              |
| PMADRL | PMADRL<7:0>                       |       |             |       |       |       |             |        | 24               |
| PMADRH | —                                 | —     | —           | —     | —     | —     | PMADRH<1:0> |        | 24               |
| PMDATL | PMDATL<7:0>                       |       |             |       |       |       |             |        | 24               |
| PMDATH | —                                 | —     | PMDATH<5:0> |       |       |       |             |        | 24               |
| INTCON | GIE                               | PEIE  | TOIE        | INTE  | IOCFE | TOIF  | INTF        | IOCFIF | 15               |

**Legend:** — = unimplemented location, read as '0'. Shaded cells are not used by Flash program memory module.

\* Page provides register information.

**TABLE 3-2: SUMMARY OF CONFIGURATION WORD WITH FLASH PROGRAM MEMORY**

| Name   | Bits | Bit -/7 | Bit -/6 | Bit 13/5 | Bit 12/4 | Bit 11/3 | Bit 10/2 | Bit 9/1    | Bit 8/0 | Register on Page |
|--------|------|---------|---------|----------|----------|----------|----------|------------|---------|------------------|
| CONFIG | 13:8 | —       | —       | DEBUG    | CLKOUTEN | WRT<1:0> |          | BOREN<1:0> |         | 126              |
|        | 7:0  | —       | CP      | MCLRE    | PWRTE    | WDTE     | —        | —          | FOSC0   |                  |

**Legend:** — = unimplemented location, read as '1'. Shaded cells are not used by Flash program memory.

# PIC12F752/HV752

## 4.0 OSCILLATOR MODULE

### 4.1 Overview

The oscillator module has a variety of clock sources and selection features that allow it to be used in a wide range of applications while maximizing performance and minimizing power consumption. Figure 4-1 illustrates a block diagram of the oscillator module.

The oscillator module can be configured in one of two clock modes.


1. EC (External Clock)
2. INTOSC (Internal Oscillator)

Clock Source modes are configured by the FOSC bit in the Configuration Word register (CONFIG).


The internal oscillator module provides the following selectable System Clock modes:

- 8 MHz (HFINTOSC)
- 4 MHz (HFINTOSC Postscaler)
- 1 MHz (HFINTOSC Postscaler)
- 31 kHz (LFINTOSC)

**FIGURE 4-1: PIC® MCU CLOCK SOURCE BLOCK DIAGRAM**

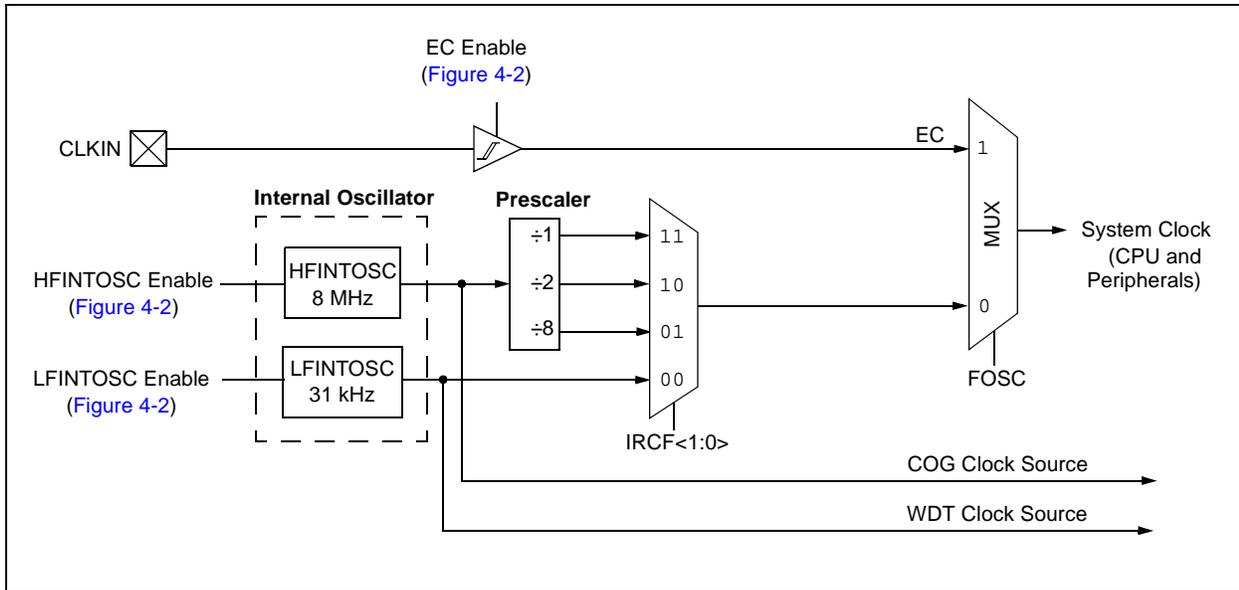

**FIGURE 4-2: OSCILLATOR ENABLE**

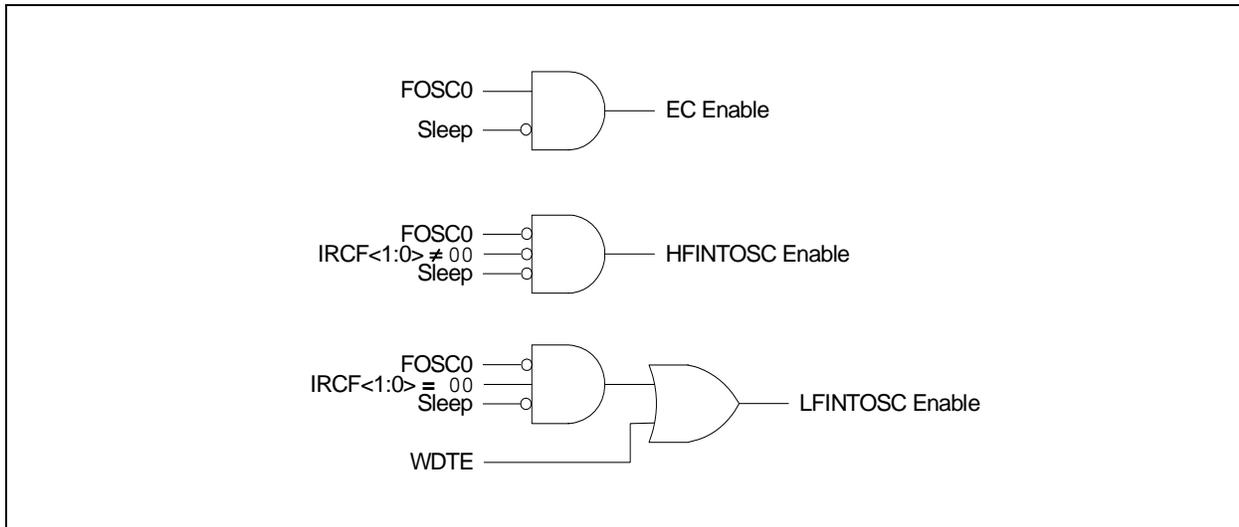

## 4.2 Clock Source Modes

Clock Source modes can be classified as external or internal:

- The External Clock mode relies on an external clock for the clock source, such as a clock module or clock output from another circuit.
- Internal clock sources are contained internally within the oscillator module. The oscillator module has four selectable clock frequencies:
  - 8 MHz
  - 4 MHz
  - 1 MHz
  - 31 kHz

The system clock can be selected between external or internal clock sources via the FOSC0 bit of the Configuration Word register (CONFIG).


### 4.2.1 EC MODE

The External Clock (EC) mode allows an externally generated logic as the system clock source. The EC clock mode is selected when the FOSC0 bit of the Configuration Word is set.

When operating in this mode, an external clock source must be connected to the CLKIN input. The CLKOUT is available for either general purpose I/O or system clock output. [Figure 4-3](#) shows the pin connections for EC mode.

Because the PIC® MCU design is fully static, stopping the external clock input will have the effect of halting the device while leaving all data intact. Upon restarting the external clock, the device will resume operation as if no time had elapsed.

**FIGURE 4-3: EXTERNAL CLOCK (EC) MODE OPERATION**

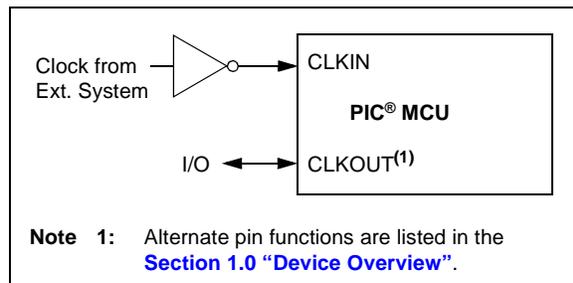


### 4.2.2 INTERNAL CLOCK MODE

Internal Clock mode configures the internal oscillators as the system clock source. The Internal Clock mode is selected when the FOSC0 bit of the Configuration Word is cleared. The source and frequency are selected with the IRCF<1:0> bits of the OSCCON register.

When one of the HFINTOSC frequencies is selected, the frequency of the internal oscillator can be trimmed by adjusting the TUN<4:0> bits of the OSTUNE register.

Operation after a Power-on Reset (POR) or wake-up from Sleep is delayed by the oscillator start-up time. Delays are typically longer for the LFINTOSC than HFINTOSC because of the very low-power operation and relatively narrow bandwidth of the LF internal oscillator. However, when another peripheral keeps the oscillator running during Sleep, the start-up time is delayed to allow the memory bias to stabilize.

**FIGURE 4-4: INTERNAL CLOCK MODE OPERATION**

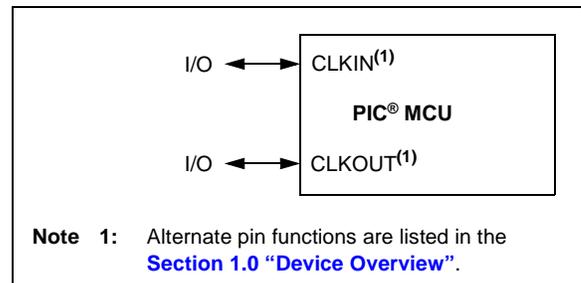

#### 4.2.2.1 Oscillator Ready Bits

The HTS and LTS bits of the OSCCON register indicate the status of the HFINTOSC and LFINTOSC, respectively. When either bit is set, it indicates that the corresponding oscillator is running and stable.

# PIC12F752/HV752

---

## 4.3 System Clock Output

The CLKOUT pin is available for general purpose I/O or system clock output. The  $\overline{\text{CLKOUTEN}}$  bit of the Configuration Word controls the function of the CLKOUT pin.

When the  $\overline{\text{CLKOUTEN}}$  bit is cleared, the CLKOUT pin is driven by the selected internal oscillator frequency divided by 4. The corresponding I/O pin always reads '0' in this configuration.

The CLKOUT signal may be used to provide a clock for external circuitry, synchronization, calibration, test or other application requirements.

When the  $\overline{\text{CLKOUTEN}}$  bit is set, the system clock out function is disabled and the CLKOUT pin is available for general purpose I/O.

## 4.4 Oscillator Delay upon Wake-Up, Power-Up, and Base Frequency Change

In applications where the OSCTUNE register is used to shift the HFINTOSC frequency, the application should not expect the frequency to stabilize immediately. In this case, the frequency may shift gradually toward the new value. The time for this frequency shift is less than eight cycles of the base frequency.

A short delay is invoked upon power-up and when waking from sleep to allow the memory bias circuitry to stabilize. [Table 4-1](#) shows examples where the oscillator delay is invoked.

**TABLE 4-1: OSCILLATOR DELAY EXAMPLES**

| Switch From | Switch To | Frequency       | Oscillator Delay   |
|-------------|-----------|-----------------|--|
| Sleep/POR   | INTOSC    | 31 kHz to 8 MHz | 10 $\mu\text{s}$ internal delay to allow memory bias to stabilize. |
| Sleep/POR   | EC        | DC – 20 MHz     |  |

## 4.5 Oscillator Control Registers

### REGISTER 4-1: OSCCON: OSCILLATOR CONTROL REGISTER

|       |     |           |         |       |       |       |     |
|-------|-----|-----------|---------|-------|-------|-------|-----|
| U-0   | U-0 | R/W-0/u   | R/W-1/u | U-0   | R-0/u | R-0/u | U-0 |
| —     | —   | IRCF<1:0> |         | —     | HTS   | LTS   | —   |
| bit 7 |     |           |         | bit 0 |       |       |     |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

u = Bit is unchanged

bit 7-6 **Unimplemented:** Read as '0'

bit 5-4 **IRCF<1:0>:** Internal Oscillator Frequency Select bits

11 = 8 MHz

10 = 4 MHz

01 = 1 MHz (Reset default)

00 = 31 kHz (LFINTOSC)

bit 3 **Unimplemented:** Read as '0'

bit 2 **HTS:** HFINTOSC Status bit

1 = HFINTOSC is stable

0 = HFINTOSC is not stable

bit 1 **LTS:** LFINTOSC Status bit

1 = LFINTOSC is stable

0 = LFINTOSC is not stable

bit 0 **Unimplemented:** Read as '0'

# PIC12F752/HV752

## 4.5.1 OSCTUNE REGISTER

The oscillator is factory-calibrated, but can be adjusted in software by writing to the OSCTUNE register (Register 4-2).

The default value of the OSCTUNE register is '0'. The value is a 5-bit two's complement number.

When the OSCTUNE register is modified, the frequency will begin shifting to the new frequency. Code execution continues during this shift. There is no indication that the shift has occurred.

**REGISTER 4-2: OSCTUNE: OSCILLATOR TUNING REGISTER**

|       |     |     |          |         |         |         |         |
|-------|-----|-----|----------|---------|---------|---------|---------|
| U-0   | U-0 | U-0 | R/W-0/u  | R/W-0/u | R/W-0/u | R/W-0/u | R/W-0/u |
| —     | —   | —   | TUN<4:0> |         |         |         |         |
| bit 7 |     |     |          |         |         |         | bit 0   |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-5                      **Unimplemented:** Read as '0'

bit 4-0                      **TUN<4:0>:** Frequency Tuning bits

- 01111 = Maximum frequency
- 01110 =
- 
- 
- 
- 00001 =
- 00000 = Oscillator module is running at the calibrated frequency.
- 11111 =
- 
- 
- 
- 10000 = Minimum frequency

**TABLE 4-2: SUMMARY OF REGISTERS ASSOCIATED WITH CLOCK SOURCES**

| Name    | Bit 7 | Bit 6 | Bit 5     | Bit 4    | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Register on Page |
|---------|-------|-------|-----------|----------|-------|-------|-------|-------|------------------|
| OSCCON  | —     | —     | IRCF<1:0> |          | —     | HTS   | LTS   | —     | 35               |
| OSCTUNE | —     | —     | —         | TUN<4:0> |       |       |       |       | 36               |

**Legend:** x = unknown, u = unchanged, - = unimplemented locations read as '0'. Shaded cells are not used by oscillators.

- Note 1:** Other (non Power-up) Resets include  $\overline{\text{MCLR}}$  Reset and Watchdog Timer Reset during normal operation.  
**Note 2:** See Configuration Word register (Register 17-1) for operation of all register bits.

**TABLE 4-3: SUMMARY OF CONFIGURATION WORD CLOCK SOURCES**

| Name   | Bits | Bit -/7 | Bit -/6                | Bit 13/5                  | Bit 12/4                     | Bit 11/3 | Bit 10/2 | Bit 9/1    | Bit 8/0 | Register on Page |
|--------|------|---------|------------------------|---------------------------|------------------------------|----------|----------|------------|---------|------------------|
| CONFIG | 13:8 | —       | —                      | $\overline{\text{DEBUG}}$ | $\overline{\text{CLKOUTEN}}$ | WRT<1:0> |          | BOREN<1:0> |         | 126              |
|        | 7:0  | —       | $\overline{\text{CP}}$ | $\overline{\text{MCLR}}$  | $\overline{\text{PWRTE}}$    | WDTE     | —        | —          | FOSC0   |                  |

**Legend:** — = unimplemented location, read as '1'. Shaded cells are not used by oscillator module.

## 5.0 I/O PORTS

For this device there is one port available, PORTA. In general, when a peripheral is enabled on a port pin, that pin cannot be used as a general purpose output. However, the pin can still be read.

PORTA has three standard registers for its operation. These registers are:

- TRISA Registers (data direction)
- PORTA Registers (read the levels on the pins of the device)
- LATA Registers (output latch)

Some ports may have one or more of the following additional registers. These registers are:

- ANSELA (Analog Select)
- WPUA (Weak Pull-up)

The Data Latch (LATA register) is useful for read-modify-write operations on the value that the I/O pins are driving.

A write operation to the LATA register has the same effect as a write to the corresponding PORTA register. A read of the LATA register reads the values held in the I/O PORT latches, while a read of the PORTA register reads the actual I/O pin value.

Ports that support analog inputs have an associated ANSEL register. When an ANSELA bit is set, the digital input buffer associated with that bit is disabled. Disabling the input buffer prevents analog signal levels on the pin between a logic high and low from causing excessive current in the logic input circuitry. A simplified model of a generic I/O port, without the interfaces to other peripherals, is shown in [Figure 5-1](#).


### EXAMPLE 5-1: INITIALIZING PORTA

```

; This code example illustrates
; initializing the PORTA register. The
; other ports are initialized in the same
; manner.

BANKSEL PORTA      ;
CLRF PORTA         ;Init PORTA
BANKSEL LATA       ;Data Latch
CLRF LATA          ;
BANKSEL ANSELA     ;
CLRF ANSELA        ;digital I/O
BANKSEL TRISA      ;
MOVLW B'00111000' ;Set RA<5:3> as inputs
MOVWF TRISA        ;and set RA<2:0> as
                  ;outputs
    
```

**FIGURE 5-1: GENERIC I/O PORTA OPERATION**

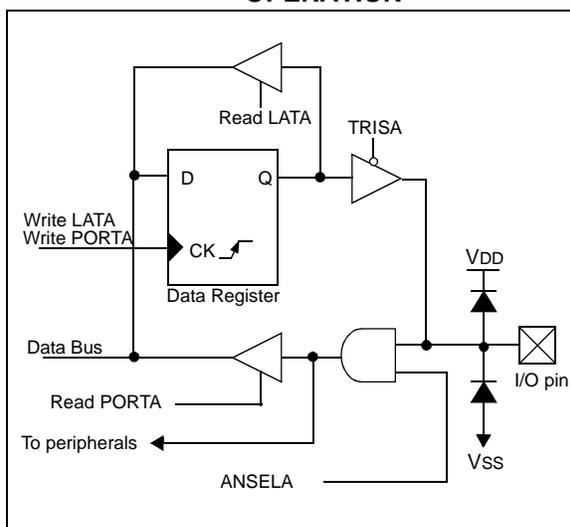

# PIC12F752/HV752

## 5.1 Alternate Pin Function

The Alternate Pin Function Control (APFCON) register is used to steer specific peripheral input and output functions between different pins. The APFCON register is shown in [Register 5-1](#). For this device family, the following functions can be moved between different pins:

- Timer1 Gate
- COG1

These bits have no effect on the values of any TRIS register. PORT and TRIS overrides will be routed to the correct pin. The unselected pin will be unaffected.

## 5.2 Alternate Pin Function Control Register

**REGISTER 5-1: APFCON: ALTERNATE PIN FUNCTION CONTROL REGISTER**

| U-0   | U-0 | U-0 | R/W-0/0 | R/W-0/0 | R/W-0/0  | R/W-0/0   | R/W-0/0   |
|-------|-----|-----|---------|---------|----------|-----------|-----------|
| —     | —   | —   | T1GSEL  | —       | COG1FSEL | COG1O1SEL | COG1O0SEL |
| bit 7 |     |     |         |         |          |           | bit 0     |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

- bit 7-5     **Unimplemented:** Read as '0'.
- bit 4     **T1GSEL:** Timer 1 Gate Input Pin Selection bit  
1 = T1G function is on RA3  
0 = T1G function is on RA4
- bit 3     **Unimplemented:** Read as '0'.
- bit 2     **COG1FSEL:** COG1 Fault Input Pin Selection bit  
1 = COG1FLT is on RA3  
0 = COG1FLT is on RA4
- bit 1     **COG1O1SEL:** COG1 Output 1 Pin Selection bit  
1 = COG1OUT1 is on RA4  
0 = COG1OUT1 is on RA0
- bit 0     **COG1O0SEL:** COG1 Output 0 Pin Selection bit  
1 = COG1OUT0 is on RA5  
0 = COG1OUT0 is on RA2

## 5.3 PORTA and TRISA Registers

PORTA is a 6-bit-wide port with five bidirectional pins and one input-only pin. The corresponding data direction register is TRISA (Register 5-2). Setting a TRISA bit (= 1) will make the corresponding PORTA pin an input (i.e., disable the output driver). Clearing a TRISA bit (= 0) will make the corresponding PORTA pin an output (i.e. it enables output driver and puts the contents of the output latch on the selected pin). The exception is RA3, which is input only and its TRIS bit will always read as '1'. Example 5-1 shows how to initialize PORTA.

Reading the PORTA register (Register 5-2) reads the status of the pins, whereas writing to it will write to the PORT latch. All write operations are read-modify-write operations. Therefore, a write to a port implies that the port pins are read, the read value is modified and then written to the PORT data latch. RA3 reads '0' when MCLRE = 1.

The TRISA register controls the direction of the PORTA pins, even when they are being used as analog inputs. The user must ensure the bits in the TRISA register are maintained set when using them as analog inputs. I/O pins configured as analog input always read '0'.

**Note:** The ANSEL register must be initialized to configure an analog channel as a digital input. Pins configured as analog inputs will read '0' and cannot generate an interrupt.

### 5.3.1 PORTA FUNCTIONS AND OUTPUT PRIORITIES

Each PORTA pin is multiplexed with other functions. The pins, their combined functions and their output priorities are shown in Table 5-1.

When multiple outputs are enabled, the actual pin control goes to the peripheral with the highest priority.

Analog input functions, such as comparator inputs, are not shown in the priority lists. These inputs are active when the peripheral is enabled and the input multiplexer for the pin is selected. The Analog mode, set with the ANSELA register, disables the digital input buffer thereby preventing excessive input current when the analog input voltage is between logic states. Digital output functions may control the pin when it is in Analog mode with the priority shown in Table 5-1.

**TABLE 5-1: PORTA OUTPUT PRIORITY**

| Pin Name | Function Priority <sup>(1)</sup>                              |
|----------|---|
| RA0      | ICSPDAT<br>REFOUT<br>DACOUT<br>COG1OUT1 <sup>(2)</sup><br>RA0 |
| RA1      | RA1   |
| RA2      | COG1OUT0 <sup>(2)</sup><br>C1OUT<br>C2OUT<br>CCP1<br>RA2      |
| RA3      | None  |
| RA4      | CLKOUT<br>COG1OUT1 <sup>(3)</sup><br>RA4                      |
| RA5      | COG1OUT0 <sup>(3)</sup><br>RA5                                |

- Note**
- 1: Priority listed from highest to lowest.
  - 2: Default function pin (see APFCON register).
  - 3: Alternate function pin (see APFCON register).

# PIC12F752/HV752

## 5.4 PORTA Control Registers

### REGISTER 5-2: PORTA: PORTA REGISTER

|       |     |         |         |       |         |         |         |
|-------|-----|---------|---------|-------|---------|---------|---------|
| U-0   | U-0 | R/W-x/u | R/W-x/u | R-x/x | R/W-x/u | R/W-x/u | R/W-x/u |
| —     | —   | RA5     | RA4     | RA3   | RA2     | RA1     | RA0     |
| bit 7 |     |         |         |       |         |         | bit 0   |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

bit 7-6                      **Unimplemented:** Read as '0'  
bit 5-0                      **RA<5:0>:** PORTA I/O Value bits<sup>(1)</sup>  
1 = Port pin is  $\geq V_{IH}$   
0 = Port pin is  $\leq V_{IL}$

**Note 1:** Writes to any PORTx register are written to the corresponding LATx register. Reads from any PORTx register, return the value present on that PORTx I/O pins.

### REGISTER 5-3: TRISA: PORTA TRI-STATE REGISTER

|       |     |         |         |                       |         |         |         |
|-------|-----|---------|---------|-----------------------|---------|---------|---------|
| U-0   | U-0 | R/W-1/1 | R/W-1/1 | R-1/1                 | R/W-1/1 | R/W-1/1 | R/W-1/1 |
| —     | —   | TRISA5  | TRISA4  | TRISA3 <sup>(1)</sup> | TRISA2  | TRISA1  | TRISA0  |
| bit 7 |     |         |         |                       |         |         | bit 0   |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

bit 7-6                      **Unimplemented:** Read as '0'  
bit 5-0                      **TRISA<5:0>:** PORTA Tri-State Control bits<sup>(1)</sup>  
1 = PORTA pin configured as an input (tri-stated)  
0 = PORTA pin configured as an output

**Note 1:** TRISA3 always reads '1'.

### REGISTER 5-4: LATA: PORTA DATA LATCH REGISTER

|       |     |         |         |     |         |         |         |
|-------|-----|---------|---------|-----|---------|---------|---------|
| U-0   | U-0 | R/W-x/u | R/W-x/u | U-0 | R/W-x/u | R/W-x/u | R/W-x/u |
| —     | —   | LATA5   | LATA4   | —   | LATA2   | LATA1   | LATA0   |
| bit 7 |     |         |         |     |         |         | bit 0   |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

bit 7-6                      **Unimplemented:** Read as '0'  
bit 5-4                      **LATA<5:4>:** PORTA Output Latch Value bits<sup>(1)</sup>  
bit 3                              **Unimplemented:** Read as '0'  
bit 2-0                      **LATA<2:0>:** PORTA Output Latch Value bits<sup>(1)</sup>

**Note 1:** Writes to any PORTx register are written to the corresponding LATx register. Reads from any PORTx register, return the value present on that PORTx I/O pins.

## 5.5 Additional Pin Functions

Every PORTA pin on the PIC12F752 has an interrupt-on-change option and a weak pull-up option. The next three sections describe these functions.

### 5.5.1 ANSELA REGISTER

The ANSELA register ([Register 5-8](#)) is used to configure the Input mode of an I/O pin to analog. Setting the appropriate ANSELA bit high will cause all digital reads on the pin to be read as '0' and allow analog functions on the pin to operate correctly.

The state of the ANSELA bits has no effect on digital output functions. A pin with TRIS clear and ANSEL set will still operate as a digital output, but the Input mode will be analog. This can cause unexpected behavior when executing read-modify-write instructions on the affected port.

**Note:** The ANSELA bits default to the Analog mode after Reset. To use any pins as digital general purpose or peripheral inputs, the corresponding ANSEL bits must be initialized to '0' by user software.

**REGISTER 5-5: ANSELA: PORTA ANALOG SELECT REGISTER**

|       |     |       |       |     |       |       |       |
|-------|-----|-------|-------|-----|-------|-------|-------|
| U-0   | U-0 | R/W-1 | R/W-1 | U-0 | R/W-1 | R/W-1 | R/W-1 |
| —     | —   | ANSA5 | ANSA4 | —   | ANSA2 | ANSA1 | ANSA0 |
| bit 7 |     |       |       |     |       |       | bit 0 |

**Legend:**

|                   |                  |  |
|-------------------|------------------|--|
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0'           |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared      x = Bit is unknown |

- bit 7-6      **Unimplemented:** Read as '0'
- bit 5-4      **ANSA<5:4>:** Analog Select Between Analog or Digital Function on Pin RA<5:4> bits  
                  1 = Analog input. Pin is assigned as analog input<sup>(1)</sup>.  
                  0 = Digital I/O. Pin is assigned to port or special function.
- bit 3        **Unimplemented:** Read as '0'
- bit 2-0      **ANSA<2:0>:** Analog Select Between Analog or Digital Function on Pin RA<2:0> bits  
                  1 = Analog input. Pin is assigned as analog input.<sup>(1)</sup>  
                  0 = Digital I/O. Pin is assigned to port or special function.

**Note 1:** Setting a pin to an analog input automatically disables the digital input circuitry, weak pull-ups, and interrupt-on-change if available. The corresponding TRIS bit must be set to Input mode in order to allow external control of the voltage on the pin.

# PIC12F752/HV752

## 5.5.2 WEAK PULL-UPS

Each of the PORTA pins, except RA3, has an individually configurable internal weak pull-up. Control bits WPUx enable or disable each pull-up. Refer to [Register 5-9](#). Each weak pull-up is automatically turned off when the port pin is configured as an output. The

pull-ups are disabled on a Power-on Reset by the RAPU bit of the OPTION\_REG register). A weak pull-up is automatically enabled for RA3 when configured as MCLR and disabled when RA3 is an I/O. There is no software control of the MCLR pull-up.

### REGISTER 5-6: WPUA: WEAK PULL-UP PORTA REGISTER (1,2)

|       |     |       |       |                     |       |       |       |
|-------|-----|-------|-------|---------------------|-------|-------|-------|
| U-0   | U-0 | R/W-1 | R/W-1 | R/W-1               | R/W-1 | R/W-1 | R/W-1 |
| —     | —   | WPU5  | WPU4  | WPU3 <sup>(3)</sup> | WPU2  | WPU1  | WPU0  |
| bit 7 |     |       |       |                     |       |       | bit 0 |

#### Legend:

R = Readable bit  
-n = Value at POR

W = Writable bit  
'1' = Bit is set

U = Unimplemented bit, read as '0'  
'0' = Bit is cleared  
x = Bit is unknown

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **WPU<5:0>:** Weak Pull-up Control bits  
1 = Pull-up enabled  
0 = Pull-up disabled

- Note 1:** Global  $\overline{\text{RAPU}}$  must be enabled for individual pull-ups to be enabled.  
**Note 2:** The weak pull-up device is automatically disabled if the pin is in Output mode (TRISA = 0).  
**Note 3:** The RA3 pull-up is enabled when configured as MCLR in the Configuration Word, otherwise it is disabled as an input and reads as '0'.

## 5.5.3 SLEW RATE CONTROL

Two of the PORTA pins (RA0 and RA2) are equipped with high current driver circuitry. The SLRCONA register provides reduced slew rate control to mitigate possible EMI radiation from these pins.

### REGISTER 5-7: SLRCONA: SLEW RATE CONTROL REGISTER

|       |     |     |     |     |       |     |       |
|-------|-----|-----|-----|-----|-------|-----|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | R/W-0 | U-0 | R/W-0 |
| —     | —   | —   | —   | —   | SLRA2 | —   | SLRA0 |
| bit 7 |     |     |     |     |       |     | bit 0 |

#### Legend:

R = Readable bit  
-n = Value at POR

W = Writable bit  
'1' = Bit is set

U = Unimplemented bit, read as '0'  
'0' = Bit is cleared  
x = Bit is unknown

bit 7-3 **Unimplemented:** Read as '0'

bit 2 **SLRA2:** Slew Rate Control bit  
1 = Pin voltage slews at limited rate  
0 = Pin voltage slews at maximum rate

bit 1 **Unimplemented:** Read as '0'

bit 0 **SLRA0:** Slew Rate Control bit  
1 = Pin voltage slews at limited rate  
0 = Pin voltage slews at maximum rate

## 5.5.4 INTERRUPT-ON-CHANGE

All pins on all ports can be configured to operate as Interrupt-on-Change (IOC) pins. An interrupt can be generated by detecting a signal that has either a rising edge or a falling edge. Any individual pin or combination of pins can be configured to generate an interrupt. The interrupt-on-change module has the following features:

- Interrupt-on-Change Enable (Master Switch)
- Individual Pin Configuration
- Rising and Falling Edge Detection
- Individual Pin Interrupt Flags

Figure 14-1 is a block diagram of the IOC module.

### 5.5.4.1 Enabling the Module

To allow individual pins to generate an interrupt, the IOCIE bit of the INTCON register must be set. If the IOCIE bit is disabled, the edge detection on the pin will still occur, but an interrupt will not be generated.

### 5.5.4.2 Individual Pin Configuration

For each pin, a rising edge detector and a falling edge detector are present. To enable a pin to detect a rising edge, the associated bit of the IOCAP register is set. To enable a pin to detect a falling edge, the associated bit of the IOCAN register is set.

A pin can be configured to detect rising and falling edges simultaneously by setting the associated bits in both of the IOCAP and IOCAN registers.

### 5.5.4.3 Interrupt Flags

The bits located in the IOCAF registers are status flags that correspond to the interrupt-on-change pins of each port. If an expected edge is detected on an appropriately enabled pin, then the status flag for that pin will be set, and an interrupt will be generated if the IOCIE bit is set. The IOCIF bit of the INTCON register reflects the status of all IOCAF bits.

### 5.5.4.4 Clearing Interrupt Flags

The individual status flags (IOCAF register bits) can be cleared by resetting them to zero. If another edge is detected during this clearing operation, the associated status flag will be set at the end of the sequence, regardless of the value actually being written.

In order to ensure that no detected edge is lost while clearing flags, only AND operations masking out known changed bits should be performed. The following sequence is an example of what should be performed.

#### **EXAMPLE 5-2: CLEARING INTERRUPT FLAGS (PORTA EXAMPLE)**

```
MOVLW 0xff
XORWF IOCAF, W
ANDWF IOCAF, F
```


### 5.5.4.5 Operation in Sleep

The interrupt-on-change interrupt will wake the device from Sleep mode, if the IOCIE bit is set.

If an edge is detected while in Sleep mode, the affected IOCAF register will be updated prior to the first instruction executed out of Sleep.

# PIC12F752/HV752

**FIGURE 5-2: INTERRUPT-ON-CHANGE BLOCK DIAGRAM**

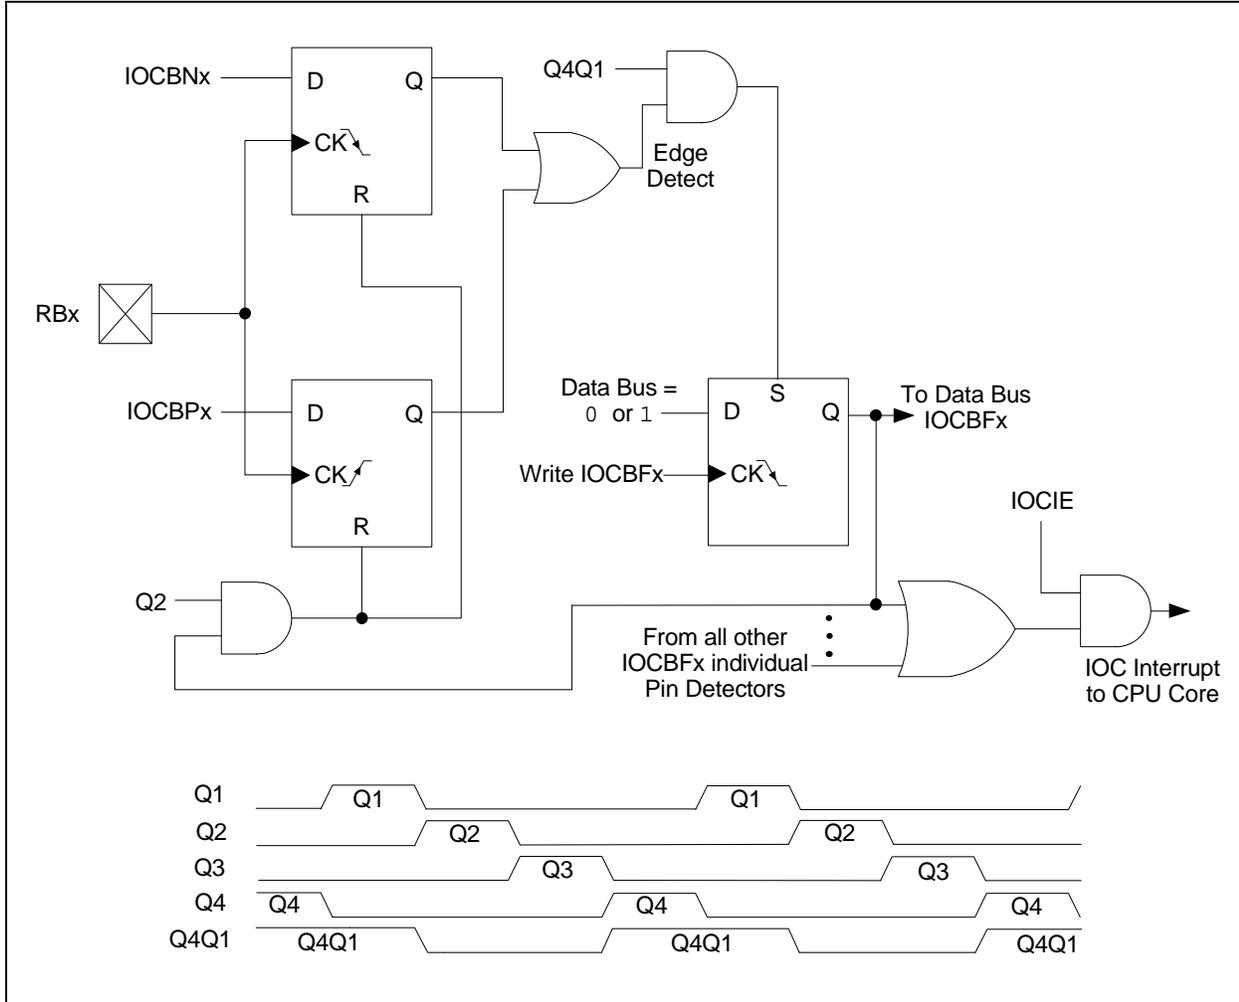

## REGISTER 5-8: IOCAP: INTERRUPT-ON-CHANGE POSITIVE EDGE REGISTER

| U-0   | U-0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 |
|-------|-----|---------|---------|---------|---------|---------|---------|
| —     | —   | IOCAP5  | IOCAP4  | IOCAP3  | IOCAP2  | IOCAP1  | IOCAP0  |
| bit 7 |     |         |         |         |         |         | bit 0   |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

bit 7-6                      **Unimplemented:** Read as '0'

bit 5-0                      **IOCAP<5:0>:** Interrupt-on-Change Positive Edge Enable bits

- 1 = Interrupt-on-Change enabled on the pin for a positive going edge. Associated Status bit and interrupt flag will be set upon detecting an edge.
- 0 = Interrupt-on-Change disabled for the associated pin.

## REGISTER 5-9: IOCAN: INTERRUPT-ON-CHANGE NEGATIVE EDGE REGISTER

| U-0   | U-0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 |
|-------|-----|---------|---------|---------|---------|---------|---------|
| —     | —   | IOCAN5  | IOCAN4  | IOCAN3  | IOCAN2  | IOCAN1  | IOCAN0  |
| bit 7 |     |         |         |         |         |         | bit 0   |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

bit 7-6                      **Unimplemented:** Read as '0'

bit 5-0                      **IOCAN<5:0>:** Interrupt-on-Change Negative Edge Enable bits

- 1 = Interrupt-on-Change enabled on the pin for a negative going edge. Associated Status bit and interrupt flag will be set upon detecting an edge.
- 0 = Interrupt-on-Change disabled for the associated pin.

## REGISTER 5-10: IOCAF: INTERRUPT-ON-CHANGE FLAG REGISTER

| U-0   | U-0 | R/W/HS-0/0 | R/W/HS-0/0 | R/W/HS-0/0 | R/W/HS-0/0 | R/W/HS-0/0 | R/W/HS-0/0 |
|-------|-----|------------|------------|------------|------------|------------|------------|
| —     | —   | IOCAF5     | IOCAF4     | IOCAF3     | IOCAF2     | IOCAF1     | IOCAF0     |
| bit 7 |     |            |            |            |            |            | bit 0      |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared                      HS - Bit is set in hardware

bit 7-6                      **Unimplemented:** Read as '0'

bit 5-0                      **IOCAF<5:0>:** Interrupt-on-Change Flag bits

- 1 = An enabled change was detected on the associated pin.  
Set when IOCAPx = 1 and a rising edge was detected on RBx, or when IOCANx = 1 and a falling edge was detected on RAx.
- 0 = No change was detected, or the user cleared the detected change.

# PIC12F752/HV752

**TABLE 5-2: SUMMARY OF REGISTERS ASSOCIATED WITH PORTA**

| Name       | Bit 7  | Bit 6     | Bit 5      | Bit 4  | Bit 3                 | Bit 2    | Bit 1     | Bit 0     | Register on Page |
|------------|--------|-----------|------------|--------|-----------------------|----------|-----------|-----------|------------------|
| ADCON0     | ADFM   | VCFG      | CHS<3:0>   |        |                       |          | GO/DONE   | ADON      | 94               |
| ADCON1     | —      | ADCS<2:0> |            |        | —                     | —        | —         | —         | 94               |
| ANSELA     | —      | —         | ANSA5      | ANSA4  | —                     | ANSA2    | ANSA1     | ANSA0     | 41               |
| APFCON     | —      | —         | —          | T1GSEL | —                     | COG1FSEL | COG1O1SEL | COG1O0SEL | 38               |
| CM1CON0    | C1ON   | C1OUT     | C1OE       | C1POL  | C1ZLF                 | C1SP     | C1HYS     | C1SYNC    | 113              |
| CM2CON0    | C2ON   | C2OUT     | C2OE       | C2POL  | C2ZLF                 | C2SP     | C2HYS     | C2SYNC    | 113              |
| CM1CON1    | C1INTP | C1INTN    | C1PCH<1:0> |        | —                     | —        | —         | C1NCH0    | 114              |
| CM2CON1    | C2NTP  | C2INTN    | C2PCH<1:0> |        | —                     | —        | —         | C2NCH0    | 114              |
| DACCON0    | DACEN  | DACRNG    | DACOE      | —      | —                     | DACPSS0  | —         | —         | 105              |
| IOCAF      | —      | —         | IOCAF5     | IOCAF4 | IOCAF3                | IOCAF2   | IOCAF1    | IOCAF0    | 45               |
| IOCAN      | —      | —         | IOCAN5     | IOCAN4 | IOCAN3                | IOCAN2   | IOCAN1    | IOCAN0    | 45               |
| IOCAP      | —      | —         | IOCAP5     | IOCAP4 | IOCAP3                | IOCAP2   | IOCAP1    | IOCAP0    | 45               |
| LATA       | —      | —         | LATA5      | LATA4  | —                     | LATA2    | LATA1     | LATA0     | 40               |
| OPTION_REG | RAPU   | INTEDG    | T0CS       | T0SE   | PSA                   | PS<2:0>  |           |           | 14               |
| PORTA      | —      | —         | RA5        | RA4    | RA3                   | RA2      | RA1       | RA0       | 40               |
| SLRCONA    | —      | —         | —          | —      | —                     | SLRA2    | —         | SLRA0     | 42               |
| TRISA      | —      | —         | TRISA5     | TRISA4 | TRISA3 <sup>(1)</sup> | TRISA2   | TRISA1    | TRISA0    | 40               |

**Legend:** x = unknown, u = unchanged, — = unimplemented locations read as '0'. Shaded cells are not used by PORTA.

**Note 1:** TRISA3 always reads '1'.

## 6.0 TIMER0 MODULE

The Timer0 module is an 8-bit timer/counter with the following features:

- 8-Bit Timer/Counter Register (TMR0)
- 8-Bit Prescaler (shared with Watchdog Timer)
- Programmable Internal or External Clock Source
- Programmable External Clock Edge Selection
- Interrupt-on-Overflow

Figure 6-1 is a block diagram of the Timer0 module.

## 6.1 Timer0 Operation

When used as a timer, the Timer0 module can be used as either an 8-bit timer or an 8-bit counter.

### 6.1.1 8-BIT TIMER MODE

When used as a timer, the Timer0 module will increment every instruction cycle (without prescaler). Timer mode is selected by clearing the T0CS bit of the OPTION register to '0'.


When TMR0 is written, the increment is inhibited for two instruction cycles immediately following the write.

**Note:** The value written to the TMR0 register can be adjusted, in order to account for the two instruction-cycle delay when TMR0 is written.

### 6.1.2 8-BIT COUNTER MODE

When used as a counter, the Timer0 module will increment on every rising or falling edge of the T0CKI pin. The incrementing edge is determined by the T0SE bit of the OPTION\_REG register. Counter mode is selected by setting the T0CS bit of the OPTION register to '1'.

**FIGURE 6-1: TIMER0 WITH SHARED PRESCALE BLOCK DIAGRAM**

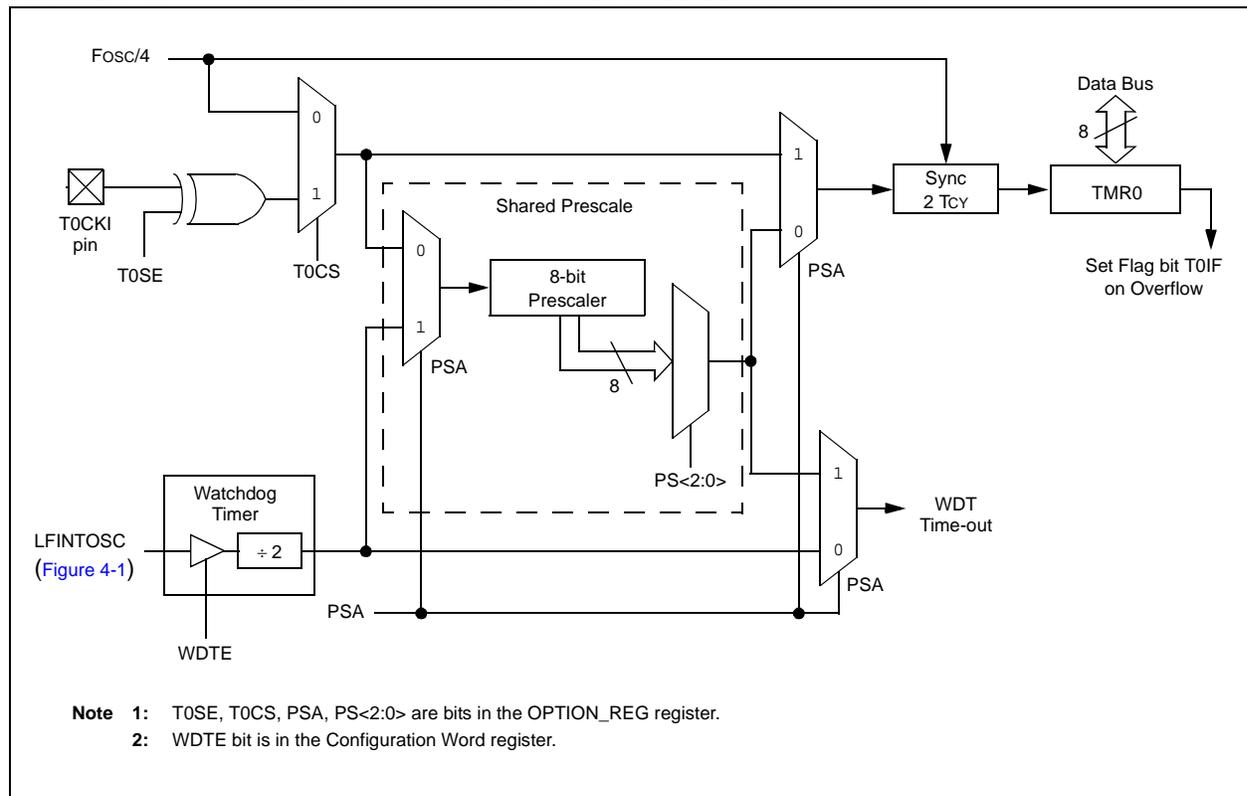

# PIC12F752/HV752

## 6.1.3 SOFTWARE PROGRAMMABLE PRESCALER

A single software programmable prescaler is available for use with either Timer0 or the Watchdog Timer (WDT), but not both simultaneously. The prescaler assignment is controlled by the PSA bit of the OPTION register. To assign the prescaler to Timer0, the PSA bit must be cleared to a '0'.

There are eight prescaler options for the Timer0 module ranging from 1:2 to 1:256. The prescale values are selectable via the PS<2:0> bits of the OPTION register. In order to have a 1:1 prescaler value for the Timer0 module, the prescaler must be assigned to the WDT module.

The prescaler is not readable or writable. When assigned to the Timer0 module, all instructions writing to the TMR0 register will clear the prescaler.

When the prescaler is assigned to WDT (PSA = 1) a CLRWDT instruction will clear the prescaler along with the WDT.

### 6.1.3.1 Switching Prescaler Between Timer0 and WDT Modules

As a result of having the prescaler assigned to either Timer0 or the WDT, it is possible to generate an unintended device Reset when switching prescaler values. When changing the prescaler assignment from Timer0 to the WDT module, the instruction sequence shown in [Example 6-1](#), must be executed.

#### EXAMPLE 6-1: CHANGING PRESCALER (TIMER0 → WDT)

```
BANKSEL TMR0          ;
CLRWDT                ;Clear WDT
CLRFB  TMR0           ;Clear TMR0 and
                    ;prescaler
BANKSEL OPTION_REG   ;
BSF  OPTION_REG,PSA  ;Select WDT
CLRWDT                ;
                    ;
MOVLW  b'11111000'   ;Mask prescaler
ANDWF  OPTION_REG,W  ;bits
IORLW  b'00000101'   ;Set WDT prescaler
MOVWF  OPTION_REG    ;to 1:32
```

When changing the prescaler assignment from the WDT to the Timer0 module, the following instruction sequence must be executed (see [Example 6-2](#)).

#### EXAMPLE 6-2: CHANGING PRESCALER (WDT → TIMER0)

```
CLRWDT                ;Clear WDT and
                    ;prescaler
BANKSEL OPTION_REG   ;
MOVLW  b'11110000'   ;Mask TMR0 select and
ANDWF  OPTION_REG,W  ;prescaler bits
IORLW  b'00000011'   ;Set prescale to 1:16
MOVWF  OPTION_REG    ;
```

## 6.1.4 TIMER0 INTERRUPT

Timer0 will generate an interrupt when the TMR0 register overflows from FFh to 00h. The T0IF interrupt flag bit of the INTCON register is set every time the TMR0 register overflows, regardless of whether or not the Timer0 interrupt is enabled. The T0IF bit must be cleared in software. The Timer0 interrupt enable is the T0IE bit of the INTCON register.

**Note:** The Timer0 interrupt cannot wake the processor from Sleep, since the timer is frozen during Sleep.

## 6.1.5 USING TIMER0 WITH AN EXTERNAL CLOCK

When Timer0 is in Counter mode, the synchronization of the T0CKI input and the Timer0 register is accomplished by sampling the prescaler output on the Q2 and Q4 cycles of the internal phase clocks. Therefore, the high and low periods of the external clock source must meet the timing requirements as shown in [Section 20.0 "Electrical Specifications"](#).

## 6.2 Option and Timer0 Control Register

**REGISTER 6-1: OPTION\_REG: OPTION REGISTER**

|                          |        |       |       |       |         |       |       |
|--------------------------|--------|-------|-------|-------|---------|-------|-------|
| R/W-1                    | R/W-1  | R/W-1 | R/W-1 | R/W-1 | R/W-1   | R/W-1 | R/W-1 |
| $\overline{\text{RAPU}}$ | INTEDG | T0CS  | T0SE  | PSA   | PS<2:0> |       | bit 0 |
| bit 7                    |        |       |       |       |         |       | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 7                       **$\overline{\text{RAPU}}$** : PORTA Pull-up Enable bit  
 1 = PORTA pull-ups are disabled  
 0 = PORTA pull-ups are enabled by individual PORT latch values in WPU register
- bit 6                      **INTEDG**: Interrupt Edge Select bit  
 1 = Interrupt on rising edge of INT pin  
 0 = Interrupt on falling edge of INT pin
- bit 5                      **T0CS**: TMR0 Clock Source Select bit  
 1 = Transition on T0CKI pin  
 0 = Internal instruction cycle clock (Fosc/4)
- bit 4                      **T0SE**: TMR0 Source Edge Select bit  
 1 = Increment on high-to-low transition on T0CKI pin  
 0 = Increment on low-to-high transition on T0CKI pin
- bit 3                      **PSA**: Prescaler Assignment bit  
 1 = Prescaler is assigned to the WDT  
 0 = Prescaler is assigned to the Timer0 module
- bit 2-0                      **PS<2:0>**: Prescaler Rate Select bits

| Bit Value | TMR0 Rate | WDT Rate |
|-----------|-----------|----------|
| 000       | 1 : 2     | 1 : 1    |
| 001       | 1 : 4     | 1 : 2    |
| 010       | 1 : 8     | 1 : 4    |
| 011       | 1 : 16    | 1 : 8    |
| 100       | 1 : 32    | 1 : 16   |
| 101       | 1 : 64    | 1 : 32   |
| 110       | 1 : 128   | 1 : 64   |
| 111       | 1 : 256   | 1 : 128  |

**TABLE 6-1: SUMMARY OF REGISTERS ASSOCIATED WITH TIMER0**

| Name       | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3                 | Bit 2   | Bit 1  | Bit 0  | Register on Page |
|------------|--|--------|--------|--------|-----------------------|---------|--------|--------|------------------|
| TMR0       | Holding Register for the 8-bit Timer0 Register |        |        |        |                       |         |        |        | 47*              |
| INTCON     | GIE  | PEIE   | T0IE   | INTE   | IOCF                  | T0IF    | INTF   | IOCF   | 15               |
| OPTION_REG | $\overline{\text{RAPU}}$                       | INTEDG | T0CS   | T0SE   | PSA                   | PS<2:0> |        |        | 14               |
| TRISA      | —  | —      | TRISA5 | TRISA4 | TRISA3 <sup>(1)</sup> | TRISA2  | TRISA1 | TRISA0 | 40               |

**Legend:** — Unimplemented locations, read as '0', u = unchanged, x = unknown. Shaded cells are not used by the Timer0 module.

\* Page provides register information.

**Note 1:** TRISA3 always reads '1'.

# PIC12F752/HV752

## 7.0 TIMER1 MODULE WITH GATE CONTROL


The Timer1 module is a 16-bit timer/counter with the following features:

- 16-Bit Timer/Counter Register Pair (TMR1H:TMR1L)
- Selectable Internal or External Clock Sources
- 2-Bit Prescaler
- Synchronous or Asynchronous Operation
- Multiple Timer1 Gate (Count Enable) Sources
- Interrupt-on-Overflow

- Wake-up on Overflow (External Clock, Asynchronous mode only)
- Time Base for the Capture/Compare Function
- Special Event Trigger (with CCP)
- Selectable Gate Source Polarity
- Gate Toggle mode
- Gate Single-Pulse mode
- Gate Value Status
- Gate Event Interrupt

Figure 7-1 is a block diagram of the Timer1 module.

**FIGURE 7-1: TIMER1 BLOCK DIAGRAM**

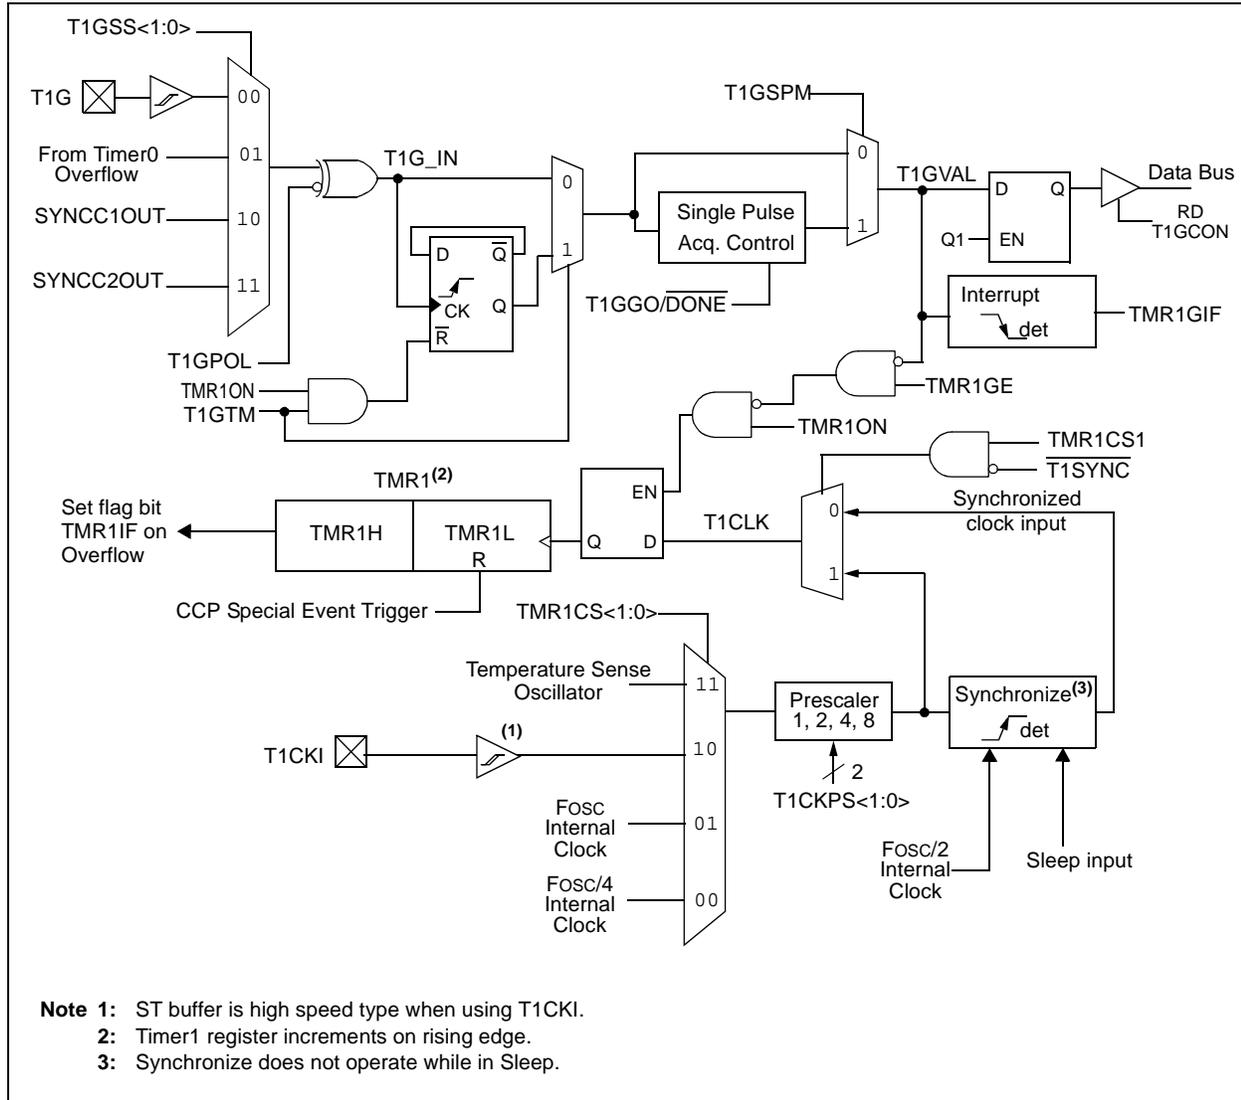

## 7.1 Timer1 Operation

The Timer1 module is a 16-bit incrementing counter which is accessed through the TMR1H:TMR1L register pair. Writes to TMR1H or TMR1L directly update the counter.

When used with an internal clock source, the module is a timer and increments on every instruction cycle. When used with an external clock source, the module can be used as either a timer or counter and increments on every selected edge of the external source.

Timer1 is enabled by configuring the TMR1ON and TMR1GE bits in the T1CON and T1GCON registers, respectively. [Table 7-1](#) displays the Timer1 enable selections.

**TABLE 7-1: TIMER1 ENABLE SELECTIONS**

| TMR1ON | TMR1GE | Timer1 Operation |
|--------|--------|------------------|
| 0      | 0      | Off              |
| 0      | 1      | Off              |
| 1      | 0      | Always On        |
| 1      | 1      | Count Enabled    |

## 7.2 Clock Source Selection

The TMR1CS<1:0> bits of the T1CON register are used to select the clock source for Timer1. [Table 7-2](#) displays the clock source selections.

**TABLE 7-2: CLOCK SOURCE SELECTIONS**

| TMR1CS<1:0> | Clock Source                   |
|-------------|--------------------------------|
| 11          | Temperature Sense Oscillator   |
| 10          | External Clocking on T1CKI Pin |
| 01          | System Clock (Fosc)            |
| 00          | Instruction Clock (Fosc/4)     |

### 7.2.1 INTERNAL CLOCK SOURCE

When the internal clock source is selected, the TMR1H:TMR1L register pair will increment on multiples of Fosc or Fosc/4 as determined by the Timer1 prescaler.

### 7.2.2 EXTERNAL CLOCK SOURCE

When the external clock source is selected, the Timer1 module may work as a timer or a counter. When enabled to count, Timer1 is incremented on the rising edge of the external clock input T1CKI.

**Note:** In Counter mode, a falling edge must be registered by the counter prior to the first incrementing rising edge (see [Figure 7-2](#)) after any one or more of the following conditions:

- Timer1 enabled after POR Reset
- Write to TMR1H or TMR1L
- Timer1 is disabled
- Timer1 is disabled (TMR1ON = 0) when T1CKI is high; then Timer1 is enabled (TMR1ON=1) when T1CKI is low.

### 7.2.3 TEMPERATURE SENSE OSCILLATOR

When the Temperature Sense Oscillator source is selected, the TMR1H:TMR1L register pair will increment on multiples of the Temperature Sense Oscillator as determined by the Timer1 prescaler. The Temperature Sense Oscillator operates at 16 kHz typical.

# PIC12F752/HV752

## 7.3 Timer1 Prescaler

Timer1 has four prescaler options allowing 1, 2, 4 or 8 divisions of the clock input. The T1CKPS bits of the T1CON register control the prescale counter. The prescale counter is not directly readable or writable; however, the prescaler counter is cleared upon a write to TMR1H or TMR1L.

## 7.4 Timer1 Operation in Asynchronous Counter Mode

If control bit  $\overline{T1SYNC}$  of the T1CON register is set, the external clock input is not synchronized. The timer increments asynchronously to the internal phase clocks. If external clock source is selected, then the timer will continue to run during Sleep and can generate an interrupt on overflow, which will wake-up the processor. However, special precautions in software are needed to read/write the timer (see [Section 7.4.1 “Reading and Writing Timer1 in Asynchronous Counter Mode”](#)).

**Note:** When switching from synchronous to asynchronous operation, it is possible to skip an increment. When switching from asynchronous to synchronous operation, it is possible to produce an additional increment.

### 7.4.1 READING AND WRITING TIMER1 IN ASYNCHRONOUS COUNTER MODE

Reading TMR1H or TMR1L while the timer is running from an external asynchronous clock will ensure a valid read, which is taken care of in hardware. However, the user should keep in mind that reading the 16-bit timer in two 8-bit values poses certain problems, since the timer may overflow between the reads.

For writes, it is recommended that the user simply stop the timer and write the desired values. A write contention may occur by writing to the timer registers, while the register is incrementing. This may produce an unpredictable value in the TMR1H:TMR1L register pair.

## 7.5 Timer1 Gate

Timer1 can be configured to count freely or the count can be enabled and disabled using Timer1 gate circuitry. This is also referred to as Timer1 gate count enable.

Timer1 gate can also be driven by multiple selectable sources.

### 7.5.1 TIMER1 GATE COUNT ENABLE

The Timer1 gate is enabled by setting the TMR1GE bit of the T1GCON register. The polarity of the Timer1 gate is configured using the T1GPOL bit of the T1GCON register.

When Timer1 Gate (T1G) input is active, Timer1 will increment on the rising edge of the Timer1 clock source. When Timer1 gate input is inactive, no incrementing will occur and Timer1 will hold the current count. See [Figure 7-3](#) for timing details.

**TABLE 7-3: TIMER1 GATE ENABLE SELECTIONS**

| T1CLK | T1GPOL | T1G | Timer1 Operation |
|-------|--------|-----|------------------|
| ↑     | 0      | 0   | Counts           |
| ↑     | 0      | 1   | Holds Count      |
| ↑     | 1      | 0   | Holds Count      |
| ↑     | 1      | 1   | Counts           |

## 7.5.2 TIMER1 GATE SOURCE SELECTION

The Timer1 gate source can be selected from one of four different sources. Source selection is controlled by the T1GSS bits of the T1GCON register. The polarity for each available source is also selectable. Polarity selection is controlled by the T1GPOL bit of the T1GCON register.

**TABLE 7-4: TIMER1 GATE SOURCES**

| T1GSS | Timer1 Gate Source                                      |
|-------|---|
| 11    | SYNCC2OUT   |
| 10    | SYNCC1OUT   |
| 01    | Overflow of Timer0<br>(TMR0 increments from FFh to 00h) |
| 00    | Timer1 Gate Pin   |

### 7.5.2.1 T1G Pin Gate Operation

The T1G pin is one source for Timer1 gate control. It can be used to supply an external source to the Timer1 gate circuitry.

### 7.5.2.2 Timer0 Overflow Gate Operation

When Timer0 increments from FFh to 00h, a low-to-high pulse will automatically be generated and internally supplied to the Timer1 gate circuitry.

### 7.5.2.3 C1OUT/C2OUT Gate Operation

The outputs from the Comparator C1 and C2 modules can be used as gate sources for the Timer1 module.

## 7.5.3 TIMER1 GATE TOGGLE MODE

When Timer1 Gate Toggle mode is enabled, it is possible to measure the full-cycle length of a Timer1 gate signal, as opposed to the duration of a single level pulse.

The Timer1 gate source is routed through a flip-flop that changes state on every incrementing edge of the signal. See [Figure 7-4](#) for timing details.

Timer1 Gate Toggle mode is enabled by setting the T1GTM bit of the T1GCON register. When the T1GTM bit is cleared, the flip-flop is cleared and held clear. This is necessary in order to control which edge is measured.

**Note:** Enabling Toggle mode at the same time as changing the gate polarity may result in indeterminate operation.

## 7.5.4 TIMER1 GATE SINGLE-PULSE MODE

When Timer1 Gate Single-Pulse mode is enabled, it is possible to capture a single pulse gate event. Timer1 Gate Single-Pulse mode is first enabled by setting the T1GSPM bit in the T1GCON register. Next, the T1GGO/DONE bit in the T1GCON register must be set. The Timer1 will be fully enabled on the next incrementing edge. On the next trailing edge of the pulse, the T1GGO/DONE bit will automatically be cleared. No other gate events will be allowed to increment Timer1 until the T1GGO/DONE bit is once again set in software.

Clearing the T1GSPM bit of the T1GCON register will also clear the T1GGO/DONE bit. See [Figure 7-5](#) for timing details.

Enabling the Toggle mode and the Single-Pulse mode simultaneously will permit both sections to work together. This allows the cycle times on the Timer1 gate source to be measured. See [Figure 7-6](#) for timing details.

## 7.5.5 TIMER1 GATE VALUE STATUS

When Timer1 gate value status is utilized, it is possible to read the most current level of the gate control value. The value is stored in the T1GVAL bit in the T1GCON register. The T1GVAL bit is valid even when the Timer1 gate is not enabled (TMR1GE bit is cleared).

## 7.5.6 TIMER1 GATE EVENT INTERRUPT

When Timer1 gate event interrupt is enabled, it is possible to generate an interrupt upon the completion of a gate event. When the falling edge of T1GVAL occurs, the TMR1GIF flag bit in the PIR1 register will be set. If the TMR1GIE bit in the PIE1 register is set, then an interrupt will be recognized.

The TMR1GIF flag bit operates even when the Timer1 gate is not enabled (TMR1GE bit is cleared).

# PIC12F752/HV752

## 7.6 Timer1 Interrupt

The Timer1 register pair (TMR1H:TMR1L) increments to FFFFh and rolls over to 0000h. When Timer1 rolls over, the Timer1 interrupt flag bit of the PIR1 register is set. To enable the Interrupt-on-Rollover, you must set these bits:

- TMR1ON bit of the T1CON register
- TMR1IE bit of the PIE1 register
- PEIE bit of the INTCON register
- GIE bit of the INTCON register

The interrupt is cleared by clearing the TMR1IF bit in the Interrupt Service Routine.

**Note:** The TMR1H:TMR1L register pair and the TMR1IF bit should be cleared before enabling interrupts.

## 7.7 Timer1 Operation During Sleep

Timer1 can only operate during Sleep when setup in Asynchronous Counter mode. In this mode, the clock source can be used to increment the counter. To set up the timer to wake the device:

- TMR1ON bit of the T1CON register must be set
- TMR1IE bit of the PIE1 register must be set
- PEIE bit of the INTCON register must be set
- T1SYNC bit of the T1CON register must be set
- TMR1CS bits of the T1CON register must be configured
- TMR1GE bit of the T1GCON register must be configured

The device will wake-up on an overflow and execute the next instructions. If the GIE bit of the INTCON register is set, the device will call the Interrupt Service Routine (0004h).

## 7.8 CCP Capture/Compare Time Base

The CCP module uses the TMR1H:TMR1L register pair as the time base when operating in Capture or Compare mode.

In Capture mode, the value in the TMR1H:TMR1L register pair is copied into the CCPR1H:CCPR1L register pair on a configured event.

In Compare mode, an event is triggered when the value CCPR1H:CCPR1L register pair matches the value in the TMR1H:TMR1L register pair. This event can be a Special Event Trigger.

For more information, see [Section 10.0 “Capture/Compare/PWM Modules”](#).

## 7.9 CCP Special Event Trigger

When the CCP is configured to trigger a special event, the trigger will clear the TMR1H:TMR1L register pair. This special event does not cause a Timer1 interrupt. The CCP module may still be configured to generate a CCP interrupt.


In this mode of operation, the CCPR1H:CCPR1L register pair becomes the period register for Timer1.

Timer1 should be synchronized to the FOSC/4 to utilize the Special Event Trigger. Asynchronous operation of Timer1 can cause a Special Event Trigger to be missed.


In the event that a write to TMR1H or TMR1L coincides with a Special Event Trigger from the CCP, the write will take precedence.

For more information, see [Section 12.2.5 “Special Event Trigger”](#).


**FIGURE 7-2: TIMER1 INCREMENTING EDGE**

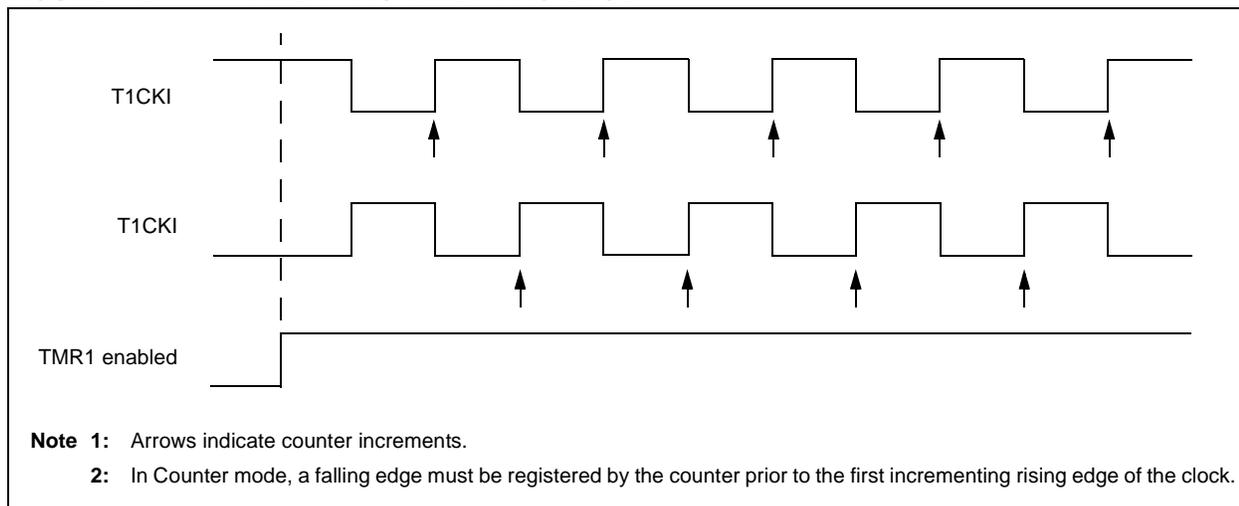

**FIGURE 7-3: TIMER1 GATE COUNT ENABLE MODE**

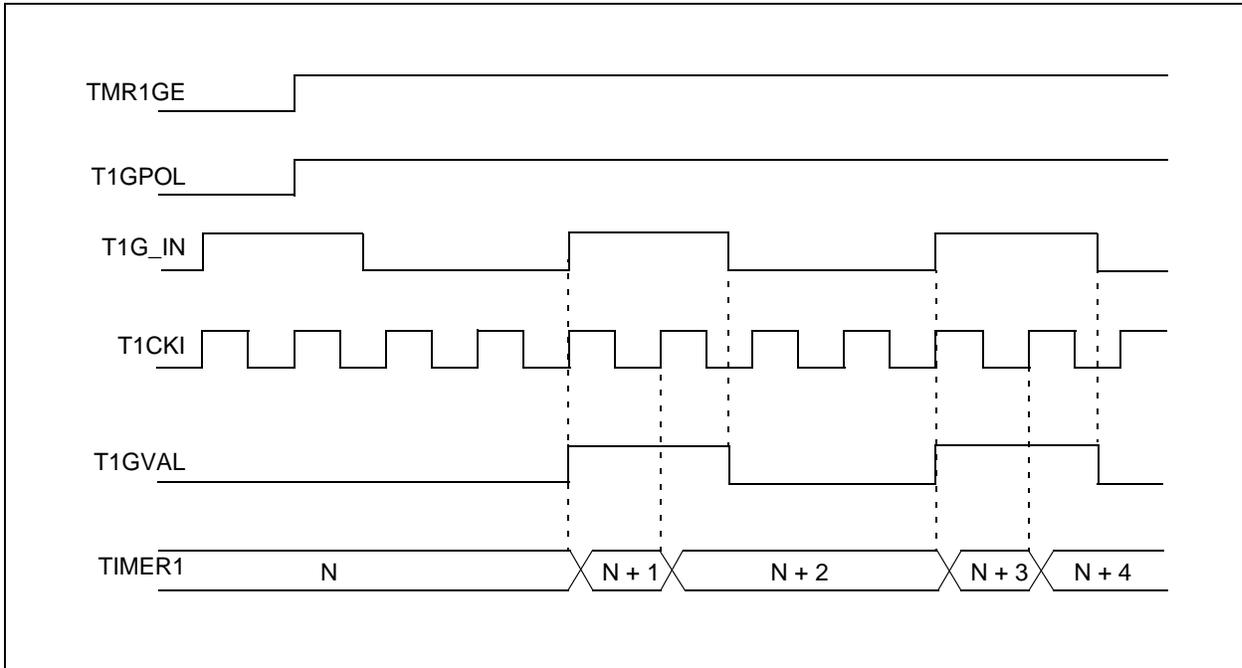


**FIGURE 7-4: TIMER1 GATE TOGGLE MODE**

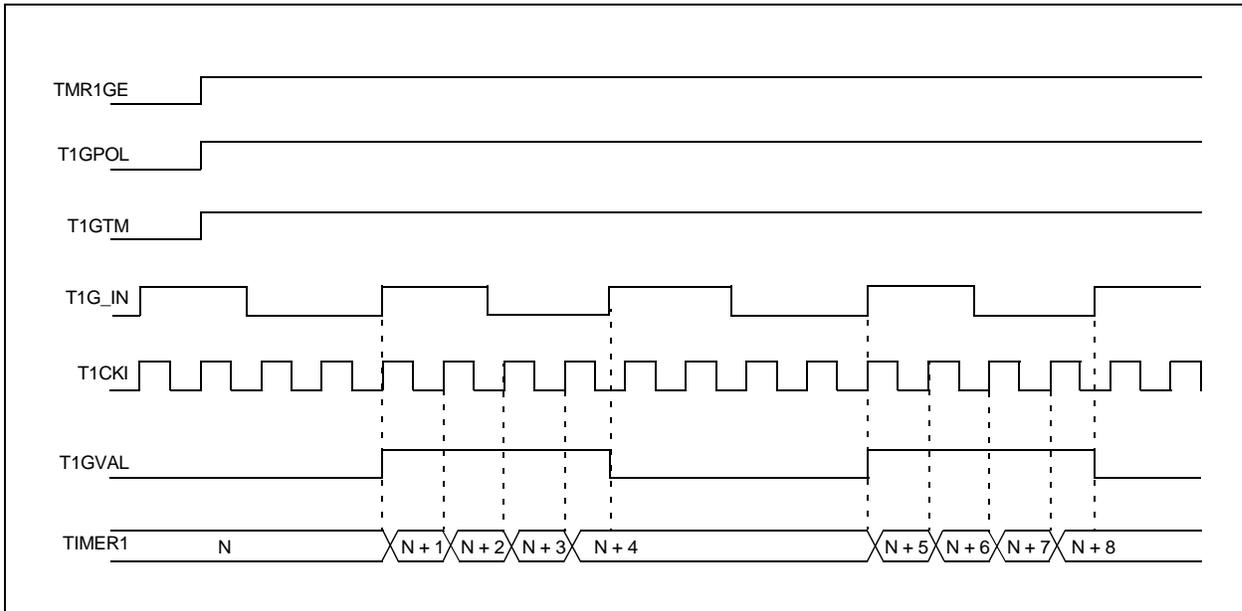


# PIC12F752/HV752

FIGURE 7-5: TIMER1 GATE SINGLE-PULSE MODE

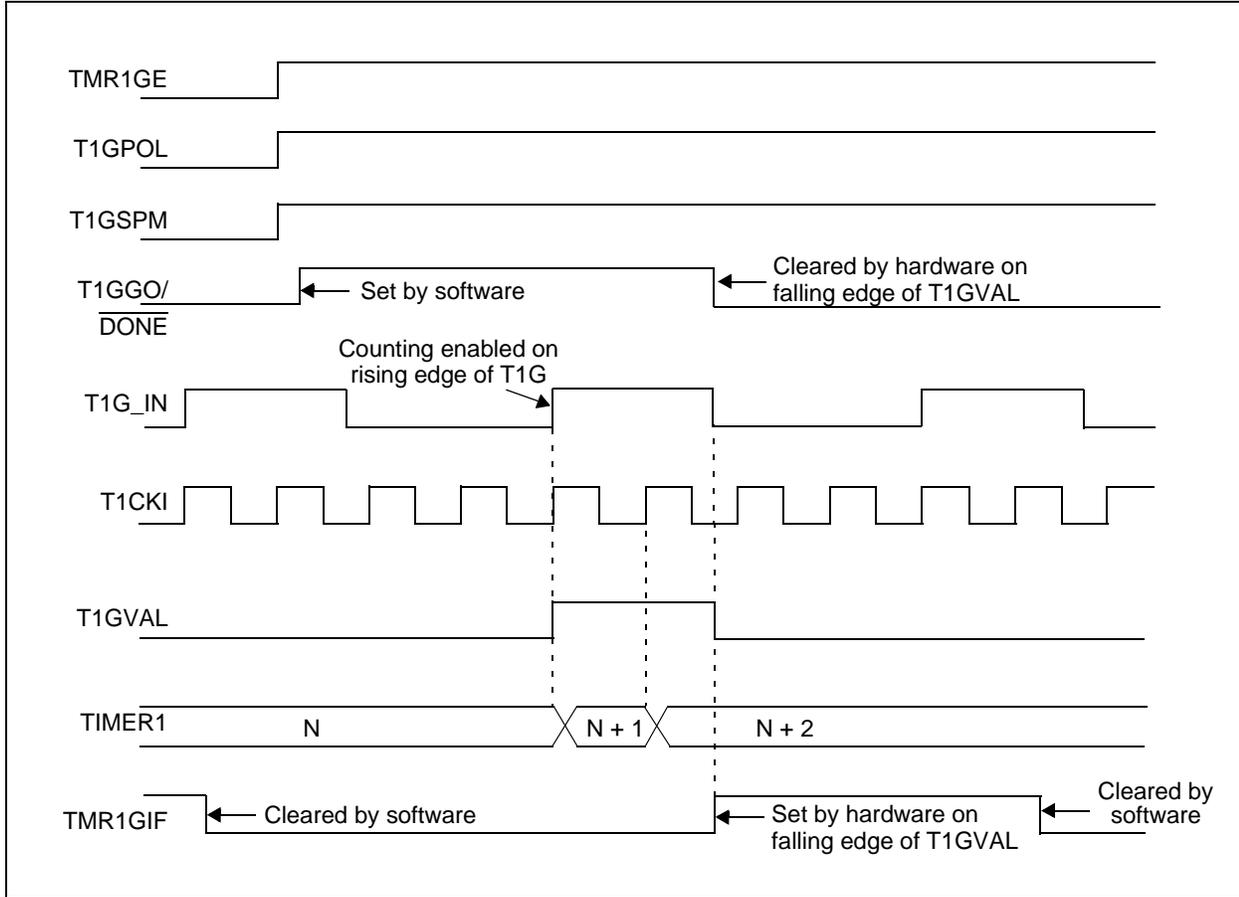

**FIGURE 7-6: TIMER1 GATE SINGLE-PULSE AND TOGGLE COMBINED MODE**

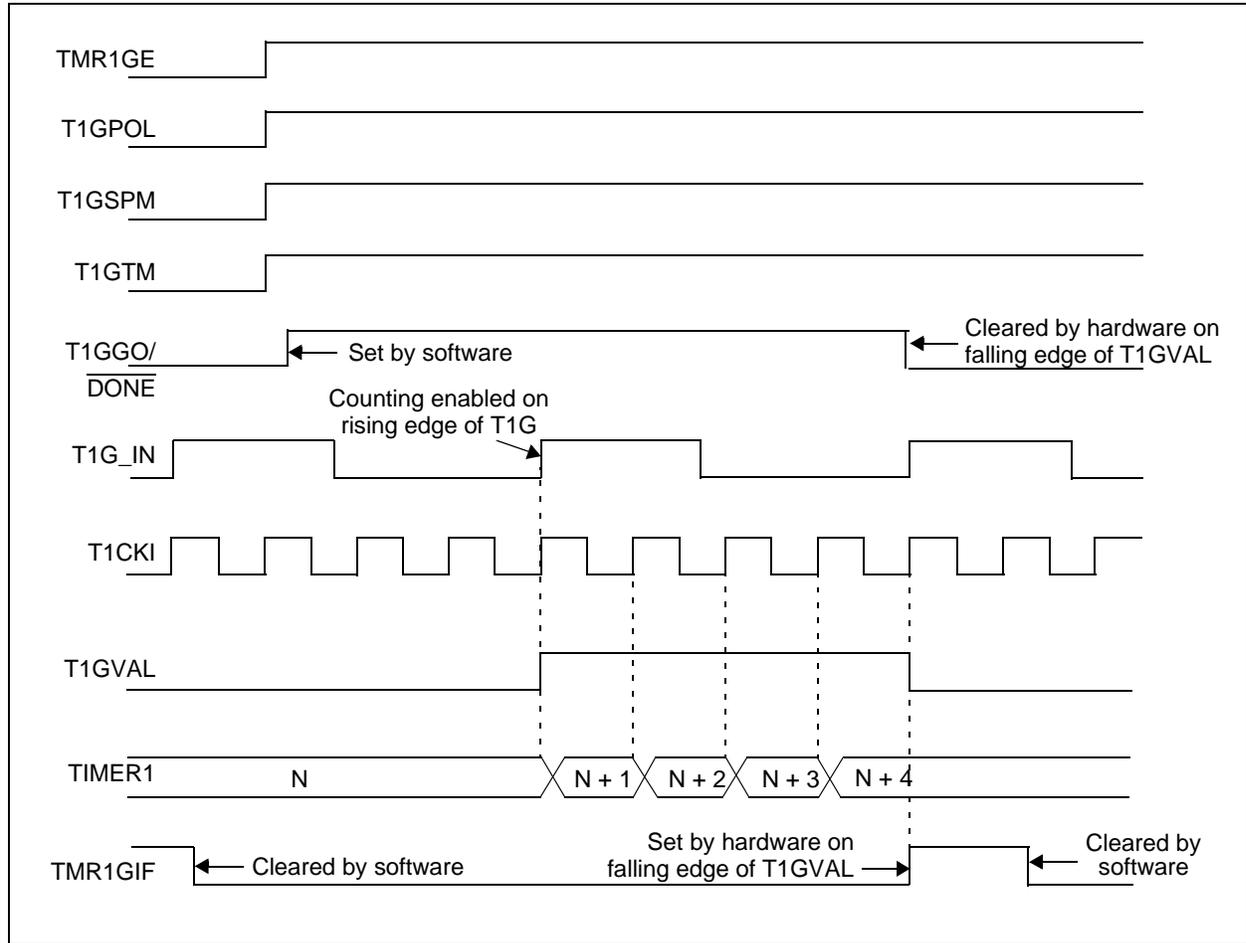

# PIC12F752/HV752

## 7.10 Timer1 Control Registers

### REGISTER 7-1: T1CON: TIMER1 CONTROL REGISTER

|             |             |          |        |       |        |       |       |
|-------------|-------------|----------|--------|-------|--------|-------|-------|
| R/W-0       | R/W-0       | R/W-0    | R/W-0  | R/W-0 | R/W-0  | U-0   | R/W-0 |
| TMR1CS<1:0> | T1CKPS<1:0> | Reserved | T1SYNC | —     | TMR1ON |       |       |
| bit 7       |             |          |        |       |        | bit 0 |       |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 7-6 **TMR1CS<1:0>**: Timer1 Clock Source Select bits

11 = Temperature Sense Oscillator

10 = External clock from T1CKI pin (on the rising edge)

01 = Timer1 clock source is system clock (FOSC)

00 = Timer1 clock source is instruction clock (FOSC/4)

bit 5-4 **T1CKPS<1:0>**: Timer1 Input Clock Prescale Select bits

11 = 1:8 Prescale value

10 = 1:4 Prescale value

01 = 1:2 Prescale value

00 = 1:1 Prescale value

bit 3 **Reserved**: Do not use.

bit 2 **T1SYNC**: Timer1 External Clock Input Synchronization Control bit

TMR1CS<1:0> = 1X

1 = Do not synchronize external clock input

0 = Synchronize external clock input with system clock (Fosc)

TMR1CS<1:0> = 0X

This bit is ignored. Timer1 uses the internal clock when TMR1CS<1:0> = 1X.

bit 1 **Unimplemented**: Read as '0'

bit 0 **TMR1ON**: Timer1 On bit

1 = Enables Timer1

0 = Stops Timer1

Clears Timer1 gate flip-flop

## REGISTER 7-2: T1GCON: TIMER1 GATE CONTROL REGISTER

|        |        |       |        |                |        |            |       |
|--------|--------|-------|--------|----------------|--------|------------|-------|
| R/W-0  | R/W-0  | R/W-0 | R/W-0  | R/W-0          | R-x    | R/W-0      | R/W-0 |
| TMR1GE | T1GPOL | T1GTM | T1GSPM | T1GGO/<br>DONE | T1GVAL | T1GSS<1:0> |       |
| bit 7  |        |       |        |                |        | bit 0      |       |

### Legend:

|                   |                  |                                    |
|-------------------|------------------|------------------------------------|
| R = Readable bit  | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared               |
|                   |                  | x = Bit is unknown                 |

- bit 7      **TMR1GE:** Timer1 Gate Enable bit  
If TMR1ON = 0:  
This bit is ignored  
If TMR1ON = 1:  
1 = Timer1 counting is controlled by the Timer1 gate function  
0 = Timer1 counts regardless of Timer1 gate function
- bit 6      **T1GPOL:** Timer1 Gate Polarity bit  
1 = Timer1 gate is active-high (Timer1 counts when gate is high)  
0 = Timer1 gate is active-low (Timer1 counts when gate is low)
- bit 5      **T1GTM:** Timer1 Gate Toggle mode bit  
1 = Timer1 Gate Toggle mode is enabled.  
0 = Timer1 Gate Toggle mode is disabled and toggle flip-flop is cleared  
Timer1 gate flip-flop toggles on every rising edge.
- bit 4      **T1GSPM:** Timer1 Gate Single Pulse mode bit  
1 = Timer1 Gate Single-Pulse mode is enabled and is controlling Timer1 gate  
0 = Timer1 Gate Single-Pulse mode is disabled
- bit 3      **T1GGO/DONE:** Timer1 Gate Single-Pulse Acquisition Status bit  
1 = Timer1 gate single-pulse acquisition is ready, waiting for an edge  
0 = Timer1 gate single-pulse acquisition has completed or has not been started  
This bit is automatically cleared when T1GSPM is cleared.
- bit 2      **T1GVAL:** Timer1 Gate Current State bit  
Indicates the current state of the Timer1 gate that could be provided to TMR1H:TMR1L.  
Unaffected by Timer1 Gate Enable (TMR1GE).
- bit 1-0    **T1GSS<1:0>:** Timer1 Gate Source Select bits  
11 = SYNCC2OUT  
10 = SYNCC1OUT  
01 = Timer0 overflow output  
00 = Timer1 gate pin

# PIC12F752/HV752

**TABLE 7-5: SUMMARY OF REGISTERS ASSOCIATED WITH TIMER1**

| Name    | Bit 7   | Bit 6  | Bit 5       | Bit 4  | Bit 3                   | Bit 2               | Bit 1      | Bit 0     | Register on Page |
|---------|---|--------|-------------|--------|-------------------------|---------------------|------------|-----------|------------------|
| ANSELA  | —   | —      | ANSA5       | ANSA4  | —                       | ANSA2               | ANSA1      | ANSA0     | 41               |
| APFCON  | —   | —      | —           | T1GSEL | —                       | COG1SEL             | COG1O1SEL  | COG1O0SEL | 38               |
| CCP1CON | —   | —      | DC1B<1:0>   |        | CCP1M<3:0>              |                     |            |           | 73               |
| INTCON  | GIE   | PEIE   | T0IE        | INTE   | IOCIE                   | T0IF                | INTF       | IOCIF     | 15               |
| PIE1    | TMR1GIE   | ADIE   | —           | —      | —                       | HLTMR1IE            | TMR2IE     | TMR1IE    | 16               |
| PIR1    | TMR1GIF   | ADIF   | —           | —      | —                       | HLTMR1IF            | TMR2IF     | TMR1IF    | 18               |
| PORTA   | —   | —      | RA5         | RA4    | RA3                     | RA2                 | RA1        | RA0       | 40               |
| TMR1H   | Holding Register for the Most Significant Byte of the 16-bit TMR1 Register  |        |             |        |                         |                     |            |           | 50*              |
| TMR1L   | Holding Register for the Least Significant Byte of the 16-bit TMR1 Register |        |             |        |                         |                     |            |           | 50*              |
| TRISA   | —   | —      | TRISA5      | TRISA4 | TRISA3                  | TRISA2              | TRISA1     | TRISA0    | 40               |
| T1CON   | TMR1CS<1:0>   |        | T1CKPS<1:0> |        | Reserved                | $\overline{T1SYNC}$ | —          | TMR1ON    | 58               |
| T1GCON  | TMR1GE  | T1GPOL | T1GTM       | T1GSPM | $\overline{T1GGO/DONE}$ | $\overline{T1GVAL}$ | T1GSS<1:0> |           | 59               |

**Legend:** x = unknown, u = unchanged, - = unimplemented, read as '0'. Shaded cells are not used by the Timer1 module.  
 \* Page provides register information.

## 8.0 TIMER2 MODULE

The Timer2 module is an 8-bit timer with the following features:

- 8-Bit Timer Register (TMR2)
- 8-Bit Period Register (PR2)
- Interrupt on TMR2 Match with PR2
- Software Programmable Prescaler (1:1, 1:4, 1:16)
- Software Programmable Postscaler (1:1 to 1:16)

See [Figure 8-1](#) for a block diagram of Timer2.

### 8.1 Timer2 Operation

The clock input to the Timer2 module is the system instruction clock ( $F_{osc}/4$ ). The clock is fed into the Timer2 prescaler, which has prescale options of 1:1, 1:4 or 1:16. The output of the prescaler is then used to increment the TMR2 register.

The values of TMR2 and PR2 are constantly compared to determine when they match. TMR2 will increment from 00h until it matches the value in PR2. When a match occurs, two things happen:

- TMR2 is reset to 00h on the next increment cycle
- The Timer2 postscaler is incremented

The match output of the Timer2/PR2 comparator is then fed into the Timer2 postscaler. The postscaler has postscale options of 1:1 to 1:16 inclusive. The output of the Timer2 postscaler is used to set the TMR2IF interrupt flag bit in the PIR1 register.

The TMR2 and PR2 registers are both fully readable and writable. On any Reset, the TMR2 register is set to 00h and the PR2 register is set to FFh.


Timer2 is turned on by setting the TMR2ON bit in the T2CON register to a '1'. Timer2 is turned off by clearing the TMR2ON bit to a '0'.

The Timer2 prescaler is controlled by the T2CKPS bits in the T2CON register. The Timer2 postscaler is controlled by the TOUTPS bits in the T2CON register. The prescaler and postscaler counters are cleared when:

- A write to TMR2 occurs
- A write to T2CON occurs
- Any device Reset occurs (Power-on Reset,  $\overline{MCLR}$  Reset, Watchdog Timer Reset, or Brown-out Reset)

**Note:** TMR2 is not cleared when T2CON is written.

**FIGURE 8-1: TIMER2 BLOCK DIAGRAM**

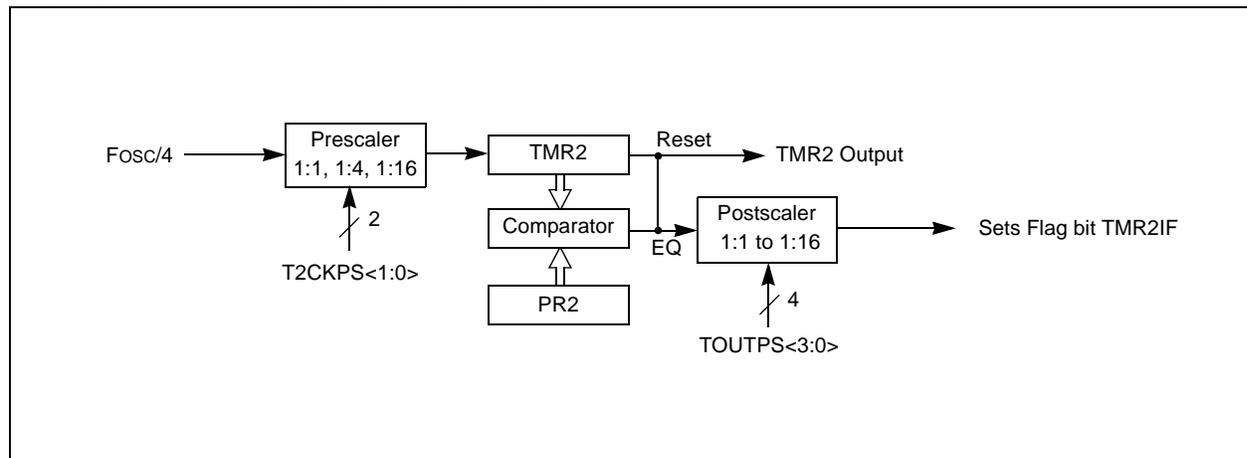

# PIC12F752/HV752

## 8.2 Timer2 Control Registers

**REGISTER 8-1: T2CON: TIMER 2 CONTROL REGISTER**

|       |             |       |       |       |        |             |       |
|-------|-------------|-------|-------|-------|--------|-------------|-------|
| U-0   | R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0  | R/W-0       | R/W-0 |
| —     | TOUTPS<3:0> |       |       |       | TMR2ON | T2CKPS<1:0> |       |
| bit 7 |             |       |       |       |        |             | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 7                      **Unimplemented:** Read as '0'
- bit 6-3                      **TOUTPS<3:0>:** Timer2 Output Postscaler Select bits
  - 0000 = 1:1 Postscaler
  - 0001 = 1:2 Postscaler
  - 0010 = 1:3 Postscaler
  - 0011 = 1:4 Postscaler
  - 0100 = 1:5 Postscaler
  - 0101 = 1:6 Postscaler
  - 0110 = 1:7 Postscaler
  - 0111 = 1:8 Postscaler
  - 1000 = 1:9 Postscaler
  - 1001 = 1:10 Postscaler
  - 1010 = 1:11 Postscaler
  - 1011 = 1:12 Postscaler
  - 1100 = 1:13 Postscaler
  - 1101 = 1:14 Postscaler
  - 1110 = 1:15 Postscaler
  - 1111 = 1:16 Postscaler
- bit 2                      **TMR2ON:** Timer2 On bit
  - 1 = Timer2 is on
  - 0 = Timer2 is off
- bit 1-0                      **T2CKPS<1:0>:** Timer2 Clock Prescale Select bits
  - 00 = Prescaler is 1
  - 01 = Prescaler is 4
  - 1x = Prescaler is 16

**TABLE 8-1: SUMMARY OF REGISTERS ASSOCIATED WITH TIMER2**

| Name   | Bit 7  | Bit 6       | Bit 5 | Bit 4 | Bit 3 | Bit 2    | Bit 1       | Bit 0  | Register on Page |
|--------|--|-------------|-------|-------|-------|----------|-------------|--------|------------------|
| INTCON | GIE  | PEIE        | TOIE  | INTE  | IOCFE | TOIF     | INTF        | IOCF   | 15               |
| PIE1   | TMR1GIE                                      | ADIE        | —     | —     | —     | HLTMR1IE | TMR2IE      | TMR1IE | 16               |
| PIR1   | TMR1GIF                                      | ADIF        | —     | —     | —     | HLTMR1IF | TMR2IF      | TMR1IF | 18               |
| PR2    | Timer2 Module Period Register                |             |       |       |       |          |             |        | 61*              |
| TMR2   | Holding Register for the 8-bit TMR2 Register |             |       |       |       |          |             |        | 61*              |
| T2CON  | —  | TOUTPS<3:0> |       |       |       | TMR2ON   | T2CKPS<1:0> |        | 62               |

**Legend:** x = unknown, u = unchanged, - = unimplemented read as '0'. Shaded cells are not used for Timer2 module.  
 \* Page provides register information.

## 9.0 HARDWARE LIMIT TIMER (HLT) MODULE

The Hardware Limit Timer (HLT) module is a version of the Timer2-type modules. In addition to all the Timer2-type features, the HLT can be reset on rising and falling events from selected peripheral outputs.

The HLT primary purpose is to act as a timed hardware limit to be used in conjunction with asynchronous analog feedback applications. The external reset source synchronizes the HLTMR1 to an analog application.

In normal operation, the external reset source from the analog application should occur before the HLTMR1 matches the HLTMR1. This resets HLTMR1 for the next period and prevents the HLTMR1 Output from going active.


When the external reset source fails to generate a signal within the expected time, allowing the HLTMR1 to match the HLTMR1, then the HLTMR1 Output becomes active.

The HLT module incorporates the following features:

- 8-Bit Read-Write Timer Register (HLTMR1)
- 8-Bit Read-Write Period Register (HLTPR1)
- Software Programmable Prescaler
  - 1:1
  - 1:4
  - 1:16
- Software Programmable Postscaler:
  - 1:1 to 1:16, inclusive
- Interrupt on HLTMR1 Match with HLTPR1
- Eight Selectable Timer Reset Inputs (five reserved)
- Reset on Rising and Falling Event

Refer to [Figure 9-1](#) for a block diagram of the HLT.

**FIGURE 9-1: HLTMR1 BLOCK DIAGRAM**

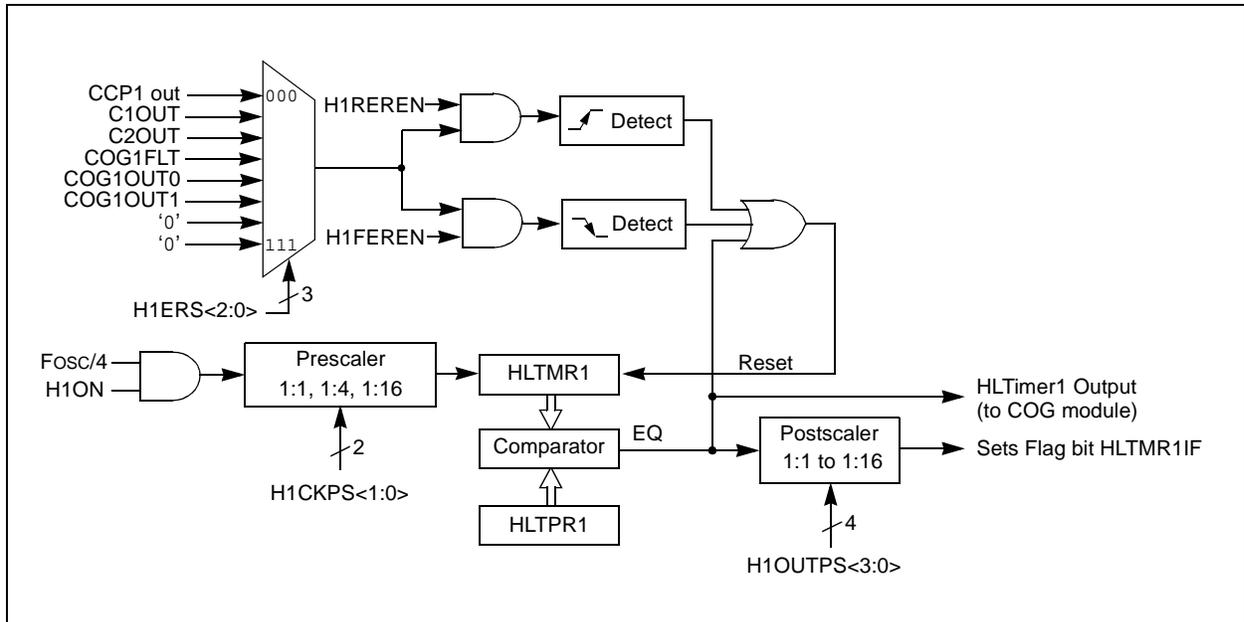

# PIC12F752/HV752

## 9.1 HLT Operation

The clock input to the HLT module is the system instruction clock ( $F_{osc}/4$ ). HLTMR1 increments on each rising clock edge.

A 4-bit counter/prescaler on the clock input provides the following prescale options:

- Direct Input
- Divide-by-4
- Divide-by-16

The prescale options are selected by the prescaler control bits, H1CKPS<1:0> of the HLT1CON0 register.

The value of HLTMR1 is compared to that of the Period register, HLTMR1, on each clock cycle. When the two values match, then the comparator generates a match signal as the HLTMR1 output. This signal also resets the value of HLTMR1 to 00h on the next clock rising edge and drives the output counter/postscaler (see [Section 9.2 “HLT Interrupt”](#)).

The time from HLT reset to the HLT output pulse is calculated as shown in [Equation 9-1](#) below.

### EQUATION 9-1: HLT OUTPUT

$$HLT\ Time = (HLTMR1 + 2) \cdot 4 / F_{osc}$$

Unexpected operation may occur for HLT periods less than half the period of the expected external HLT Reset input.

The HLTMR1 and HLTMR1 registers are both directly readable and writable. The HLTMR1 register is cleared on any device Reset, whereas the HLTMR1 register initializes to FFh. Both the prescaler and postscaler counters are cleared on any of the following events:

- A Write to the HLTMR1 Register
- A Write to the HLT1CON0 Register
- Power-on Reset (POR)
- Brown-out Reset (BOR)
- MCLR Reset
- Watchdog Timer (WDT) Reset
- Stack Overflow Reset
- Stack Underflow Reset
- RESET Instruction.

**Note:** HLTMR1 is not cleared when HLT1CON0 is written.

## 9.2 HLT Interrupt

The HLT can also generate an optional device interrupt. The HLTMR1 output signal (HLTMR1-to-HLTMR1 match) provides the input for the 4-bit counter/postscaler. The overflow output of the postscaler sets the HLTMR1IF bit of the PIR1 register. The interrupt is enabled by setting the HLTMR1 Match Interrupt Enable bit, HLTMR1IE of the PIE1 register.

A range of 16 postscale options (from 1:1 through 1:16 inclusive) can be selected with the postscaler control bits, H1OUTPS<3:0>, of the HLT1CON0 register.

## 9.3 Peripheral Resets

Resets driven from the selected peripheral output prevents the HLTMR1 from matching the HLTMR1 register and generating an output. In this manner, the HLT can be used as a hardware time limit to other peripherals.

In this device, the primary purpose of the HLT is to limit the COG PWM duty cycle. Normally, the COG operation uses analog feedback to determine the PWM duty cycle. The same feedback signal is used as an HLT Reset input. The HLTMR1 register is set to occur at the maximum allowed duty cycle. If the analog feedback to the COG exceeds the maximum time, then an HLTMR1-to-HLTMR1 match will occur and generate the output needed to limit the COG drive output.

The HLTMR1 can be reset by one of several selectable peripheral sources. Reset inputs include:

- CCP1 Output
- Comparator 1 Output
- Comparator 2 Output

The Reset input is selected with the H1ERS<2:0> bits of the HLT1CON1 register.

HLTMR1 Resets are synchronous with the HLT clock, i.e. HLTMR1 is cleared on the rising edge of the HLT clock after the enabled Reset event occurs.

The Reset can be enabled to occur on the rising and falling input event. Rising and falling event enables are selected with the respective H1REREN and H1FEREN bits of the HLT1CON1 register. External Resets do not cause an HLTMR1 output event.

## 9.4 HLTMR1 Output

The unscaled output of HLTMR1 is available only to the COG module, where it is used as a selectable limit to the maximum COG period.

## 9.5 HLT Operation During Sleep

The HLT cannot be operated while the processor is in Sleep mode. The contents of the HLTMR1 register will remain unchanged while the processor is in Sleep mode.

## 9.6 HLT Control Registers

### REGISTER 9-1: HLT1CON0: HLT1 CONTROL REGISTER 0

|       |              |         |         |         |             |         |         |
|-------|--------------|---------|---------|---------|-------------|---------|---------|
| U-0   | R/W-0/0      | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0     | R/W-0/0 | R/W-0/0 |
| —     | H1OUTPS<3:0> |         |         | H1ON    | H1CKPS<1:0> |         |         |
| bit 7 |              |         |         |         |             |         | bit 0   |

**Legend:**

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared |   |

bit 7      **Unimplemented:** Read as '0'

bit 6-3      **H1OUTPS<3:0>:** Hardware Limit Timer 1 Output Postscaler Select bits

- 0000 = 1:1 Postscaler
- 0001 = 1:2 Postscaler
- 0010 = 1:3 Postscaler
- 0011 = 1:4 Postscaler
- 0100 = 1:5 Postscaler
- 0101 = 1:6 Postscaler
- 0110 = 1:7 Postscaler
- 0111 = 1:8 Postscaler
- 1000 = 1:9 Postscaler
- 1001 = 1:10 Postscaler
- 1010 = 1:11 Postscaler
- 1011 = 1:12 Postscaler
- 1100 = 1:13 Postscaler
- 1101 = 1:14 Postscaler
- 1110 = 1:15 Postscaler
- 1111 = 1:16 Postscaler

bit 2      **H1ON:** Hardware Limit Timer 1 On bit

- 1 = Timer is on
- 0 = Timer is off

bit 1-0      **H1CKPS<1:0>:** Hardware Limit Timer 1 Clock Prescale Select bits

- 00 = Prescaler is 1
- 01 = Prescaler is 4
- 1x = Prescaler is 16

# PIC12F752/HV752

**REGISTER 9-2: HLT1CON1: HLT1 CONTROL REGISTER 1**

|       |     |     |            |         |         |         |         |
|-------|-----|-----|------------|---------|---------|---------|---------|
| U-0   | U-0 | U-0 | R/W-0/0    | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 |
| —     | —   | —   | H1ERS<2:0> |         |         | H1FEREN | H1REREN |
| bit 7 |     |     |            |         |         |         | bit 0   |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                  x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

- bit 7-5            **Unimplemented:** Read as '0'
- bit 4-2            **H1ERS<2:0>:** Hardware Limit Timer 1 Peripheral Reset Select bits
  - 000 = CCP1 Out
  - 001 = C1OUT
  - 010 = C2OUT
  - 011 = COG1FLT
  - 100 = COG1OUT0
  - 101 = COG1OUT1
  - 110 = Reserved - '0' input
  - 111 = Reserved - '0' input
- bit 1              **H1FEREN:** Hardware Limit Timer 1 Falling Edge Reset Enable bit
  - 1 = HLTMR1 will reset on the first clock after a falling edge of selected Reset source
  - 0 = Falling edges of selected source have no effect
- bit 0              **H1REREN:** Hardware Limit Timer 1 Rising Edge Reset Enable bit
  - 1 = HLTMR1 will reset on the first clock after a rising edge of selected Reset source
  - 0 = Rising edges of selected source have no effect

**TABLE 9-1: SUMMARY OF REGISTERS ASSOCIATED WITH HLT**

| Name     | Bit 7   | Bit 6        | Bit 5      | Bit 4      | Bit 3      | Bit 2    | Bit 1       | Bit 0   | Register on Page |
|----------|---|--------------|------------|------------|------------|----------|-------------|---------|------------------|
| CCP1CON  | —   | —            | DC1B<1:0>  |            | CCP1M<3:0> |          |             |         | 73               |
| CM1CON0  | C1ON  | C1OUT        | C1OE       | C1POL      | C1ZLF      | C1SP     | C1HYS       | C1SYNC  | 113              |
| CM1CON1  | C1INTP  | C1INTN       | C1PCH<1:0> |            | —          | —        | —           | C1NCH0  | 114              |
| CM2CON0  | C2ON  | C2OUT        | C2OE       | C2POL      | C2ZLF      | C2SP     | C2HYS       | C2SYNC  | 113              |
| CM2CON1  | C2INTP  | C2INTN       | C2PCH<1:0> |            | —          | —        | —           | C2NCH0  | 114              |
| INTCON   | GIE   | PEIE         | T0IE       | INTE       | IOCIE      | T0IF     | INTF        | IOCIF   | 15               |
| PIE1     | TMR1GIE   | ADIE         | —          | —          | —          | HLTMR1IE | TMR2IE      | TMR1IE  | 16               |
| PIR1     | TMR1GIF   | ADIF         | —          | —          | —          | HLTMR1IF | TMR2IF      | TMR1IF  | 18               |
| HLTMR1   | Holding Register for the 8-bit Hardware Limit Timer1 Register |              |            |            |            |          |             |         | 63*              |
| HLTPR1   | HLTMR1 Module Period Register                                 |              |            |            |            |          |             |         | 63*              |
| HLT1CON0 | —   | H1OUTPS<3:0> |            |            |            | H1ON     | H1CKPS<1:0> |         | 65               |
| HLT1CON1 | —   | —            | —          | H1ERS<2:0> |            |          | H1FEREN     | H1REREN | 66               |

**Legend:** — = unimplemented location, read as '0'. Shaded cells do not affect the HLT module operation.  
\* Page provides register information.

## 10.0 CAPTURE/COMPARE/PWM MODULES

The Capture/Compare/PWM modules is a peripheral which allows the user to time and control different events, and to generate Pulse-Width Modulation (PWM) signals. In Capture mode, the peripheral allows the timing of the duration of an event. The Compare mode allows the user to trigger an external event when a predetermined amount of time has expired. The PWM mode can generate Pulse-Width Modulated signals of varying frequency and duty cycle.

### 10.1 Capture Mode

Capture mode makes use of the 16-bit Timer1 resource. When an event occurs on the CCP1 pin, the 16-bit CCPR1H:CCPR1L register pair captures and stores the 16-bit value of the TMR1H:TMR1L register pair, respectively. An event is defined as one of the following and is configured by the CCP1M<3:0> bits of the CCP1CON register:

- Every Falling Edge
- Every Rising Edge
- Every 4th Rising Edge
- Every 16th Rising Edge

When a capture is made, the Interrupt Request Flag bit CCP1IF of the PIR2 register is set. The interrupt flag must be cleared in software. If another capture occurs before the value in the CCPR1H, CCPR1L register pair is read, the old captured value is overwritten by the new captured value.


Figure 10-1 shows a simplified diagram of the Capture operation.

#### 10.1.1 CCP1 PIN CONFIGURATION

In Capture mode, the CCP1 pin should be configured as an input by setting the associated TRIS control bit.

**Note:** If the CCP1 pin is configured as an output, a write to the port can cause a capture condition.

**FIGURE 10-1: CAPTURE MODE OPERATION BLOCK DIAGRAM**

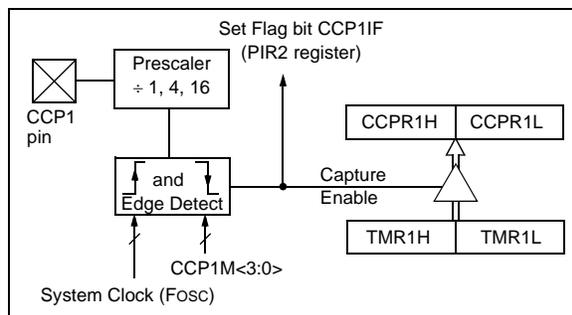

#### 10.1.2 TIMER1 MODE RESOURCE

Timer1 must be running in Timer mode or Synchronized Counter mode for the CCP1 module to use the capture feature. In Asynchronous Counter mode, the capture operation may not work.

See Section 7.0 “Timer1 Module with Gate Control” for more information on configuring Timer1.

#### 10.1.3 SOFTWARE INTERRUPT MODE

When the Capture mode is changed, a false capture interrupt may be generated. The user should keep the CCP1IE interrupt enable bit of the PIE2 register clear to avoid false interrupts. Additionally, the user should clear the CCP1IF interrupt flag bit of the PIR2 register following any change in Operating mode.

**Note:** Clocking Timer1 from the system clock (Fosc) should not be used in Capture mode. In order for Capture mode to recognize the trigger event on the CCP1 pin, Timer1 must be clocked from the instruction clock (Fosc/4) or from an external clock source.

#### 10.1.4 CCP1 PRESCALER

There are four prescaler settings specified by the CCP1M<3:0> bits of the CCP1CON register. Whenever the CCP1 module is turned off or the CCP1 module is not in Capture mode, the prescaler counter is cleared. Any Reset will clear the prescaler counter.

Switching from one capture prescaler to another does not clear the prescaler and may generate a false interrupt. To avoid this unexpected operation, turn the module off by clearing the CCP1CON register before changing the prescaler. Example 10-1 demonstrates the code to perform this function.

#### EXAMPLE 10-1: CHANGING BETWEEN CAPTURE PRESCALERS

```
BANKSEL CCP1CON    ;Set Bank bits to point
                   ;to CCP1CON
CLRF    CCP1CON    ;Turn CCP1 module off
MOVLW  NEW_CAPT_PS;Load the W reg with
                   ;the new prescaler
MOVWF  CCP1CON    ;move value and CCP1 ON
                   ;Load CCP1CON with this
                   ;value
```

# PIC12F752/HV752

## 10.1.5 CAPTURE DURING SLEEP

Capture mode depends upon the Timer1 module for proper operation. If the Timer1 clock input source is a clock that is not disabled during Sleep, Timer1 will continue to operate and Capture mode will operate during Sleep to wake the device. The T1CKI is an example of a clock source that will operate during Sleep.

When the input source to Timer1 is disabled during Sleep, such as the HFINTOSC, Timer1 will not increment during Sleep. When the device wakes from Sleep, Timer1 will continue from its previous state.

**TABLE 10-1: SUMMARY OF REGISTERS ASSOCIATED WITH CAPTURE**

| Name    | Bit 7   | Bit 6  | Bit 5       | Bit 4  | Bit 3                   | Bit 2               | Bit 1      | Bit 0  | Register on Page |
|---------|---|--------|-------------|--------|-------------------------|---------------------|------------|--------|------------------|
| CCP1CON | —   | —      | DC1B<1:0>   |        | CCP1M<3:0>              |                     |            |        | 73               |
| CCPR1L  | Capture/Compare/PWM Register x Low Byte (LSB)                               |        |             |        |                         |                     |            |        | 67*              |
| CCPR1H  | Capture/Compare/PWM Register x High Byte (MSB)                              |        |             |        |                         |                     |            |        | 67*              |
| INTCON  | GIE   | PEIE   | T0IE        | INTE   | IOCIE                   | T0IF                | INTF       | IOCIF  | 15               |
| PIE1    | TMR1GIE   | ADIE   | —           | —      | —                       | HLTMR1IE            | TMR2IE     | TMR1IE | 16               |
| PIE2    | —   | —      | C2IE        | C1IE   | —                       | COG1IE              | —          | CCP1IE | 17               |
| PIR1    | TMR1GIF   | ADIF   | —           | —      | —                       | HLTMR1IF            | TMR2IF     | TMR1IF | 18               |
| PIR2    | —   | —      | C2IF        | C1IF   | —                       | COG1IF              | —          | CCP1IF | 19               |
| T1CON   | TMR1CS<1:0>   |        | T1CKPS<1:0> |        | Reserved                | $\overline{T1SYNC}$ | —          | TMR1ON | 58               |
| T1GCON  | TMR1GE  | T1GPOL | T1GTM       | T1GSPM | $\overline{T1GGO/DONE}$ | $\overline{T1GVAL}$ | T1GSS<1:0> |        | 59               |
| TMR1H   | Holding Register for the Most Significant Byte of the 16-bit TMR1 Register  |        |             |        |                         |                     |            |        | 50*              |
| TMR1L   | Holding Register for the Least Significant Byte of the 16-bit TMR1 Register |        |             |        |                         |                     |            |        | 50*              |
| TRISA   | —   | —      | TRISA5      | TRISA4 | TRISA3 <sup>(1)</sup>   | TRISA2              | TRISA1     | TRISA0 | 40               |

**Legend:** — = Unimplemented location, read as '0'. Shaded cells are not used by Capture mode.

\* Page provides register information.

**Note 1:** TRISA3 always reads '1'.

## 10.2 Compare Mode

Compare mode makes use of the 16-bit Timer1 resource. The 16-bit value of the CCPR1H:CCPR1L register pair is constantly compared against the 16-bit value of the TMR1H:TMR1L register pair. When a match occurs, one of the following events can occur:


- Toggle the CCP1 Output
- Set the CCP1 Output
- Clear the CCP1 Output
- Generate a Special Event Trigger
- Generate a Software Interrupt

The action on the pin is based on the value of the CCP1M<3:0> control bits of the CCP1CON register. At the same time, the interrupt flag CCP1IF bit is set.

All Compare modes can generate an interrupt.

Figure 10-2 shows a simplified diagram of the Compare operation.

**FIGURE 10-2: COMPARE MODE OPERATION BLOCK DIAGRAM**

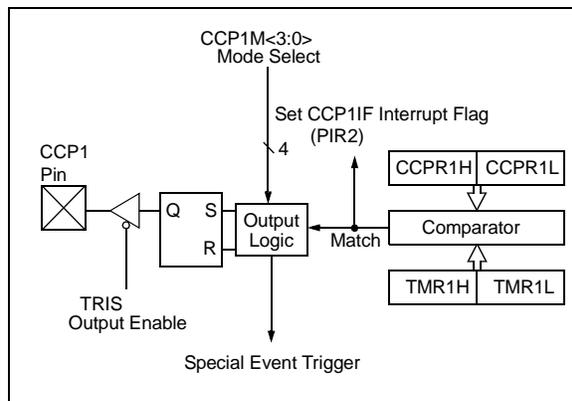

### 10.2.1 CCP1 PIN CONFIGURATION

The user must configure the CCP1 pin as an output by clearing the associated TRIS bit.

**Note:** Clearing the CCP1CON register will force the CCP1 compare output latch to the default low level. This is not the PORT I/O data latch.

### 10.2.2 TIMER1 MODE RESOURCE

In Compare mode, Timer1 must be running in either Timer mode or Synchronized Counter mode. The compare operation may not work in Asynchronous Counter mode.

See Section 7.0 “Timer1 Module with Gate Control” for more information on configuring Timer1.

**Note:** Clocking Timer1 from the system clock (FOSC) should not be used in Compare mode. In order for Compare mode to recognize the trigger event on the CCP1 pin, Timer1 must be clocked from the instruction clock (FOSC/4) or from an external clock source.

### 10.2.3 SOFTWARE INTERRUPT MODE

When Generate Software Interrupt mode is chosen (CCP1M<3:0> = 1010), the CCP1 module does not assert control of the CCP1 pin (see the CCP1CON register).

### 10.2.4 SPECIAL EVENT TRIGGER

When Special Event Trigger mode is chosen (CCP1M<3:0> = 1011), the CCP1 module does the following:

- It resets Timer1
- It starts an ADC conversion if ADC is enabled

The CCP1 module does not assert control of the CCP1 pin in this mode.

The Special Event Trigger output of the CCP1 occurs immediately upon a match between the TMR1H, TMR1L register pair and the CCPR1H, CCPR1L register pair. The TMR1H, TMR1L register pair is not reset until the next rising edge of the Timer1 clock. The Special Event Trigger output starts an A/D conversion (if the A/D module is enabled). This allows the CCPR1H, CCPR1L register pair to effectively provide a 16-bit programmable period register for Timer1.

**TABLE 10-2: SPECIAL EVENT TRIGGER**

| Device     | CCP1 |
|------------|------|
| PIC12F752  | CCP1 |
| PIC12HV752 |      |

Refer to Section 12.0 “Analog-to-Digital Converter (ADC) Module” for more information.

- Note 1:** The Special Event Trigger from the CCP module does not set interrupt flag bit TMR1IF of the PIR1 register.
- 2:** Removing the match condition by changing the contents of the CCPR1H and CCPR1L register pair, between the clock edge that generates the Special Event Trigger and the clock edge that generates the Timer1 Reset, will preclude the Reset from occurring.

# PIC12F752/HV752

## 10.2.5 COMPARE DURING SLEEP

The Compare mode is dependent upon the system clock (Fosc) for proper operation. Since Fosc is shut down during Sleep mode, the Compare mode will not function properly during Sleep.

**TABLE 10-3: SUMMARY OF REGISTERS ASSOCIATED WITH COMPARE**

| Name    | Bit 7   | Bit 6  | Bit 5       | Bit 4  | Bit 3                 | Bit 2    | Bit 1      | Bit 0  | Register on Page |
|---------|---|--------|-------------|--------|-----------------------|----------|------------|--------|------------------|
| CCP1CON | —   | —      | DC1B<1:0>   |        | CCP1M<3:0>            |          |            |        | 73               |
| CCPR1L  | Capture/Compare/PWM Register 1 Low Byte (LSB)                               |        |             |        |                       |          |            |        | 67*              |
| CCPR1H  | Capture/Compare/PWM Register 1 High Byte (MSB)                              |        |             |        |                       |          |            |        | 67*              |
| INTCON  | GIE   | PEIE   | T0IE        | INTE   | IOCIE                 | T0IF     | INTF       | IOCIF  | 15               |
| PIE1    | TMR1GIE   | ADIE   | —           | —      | —                     | HLTMR1IE | TMR2IE     | TMR1IE | 16               |
| PIE2    | —   | —      | C2IE        | C1IE   | —                     | COG1IE   | —          | CCP1IE | 17               |
| PIR1    | TMR1GIF   | ADIF   | —           | —      | —                     | HLTMR1IF | TMR2IF     | TMR1IF | 18               |
| PIR2    | —   | —      | C2IF        | C1IF   | —                     | COG1IF   | —          | CCP1IF | 19               |
| T1CON   | TMR1CS<1:0>   |        | T1CKPS<1:0> |        | Reserved              | T1SYNC   | —          | TMR1ON | 58               |
| T1GCON  | TMR1GE  | T1GPOL | T1GTM       | T1GSPM | T1GGO/DONE            | T1GVAL   | T1GSS<1:0> |        | 59               |
| TMR1H   | Holding Register for the Most Significant Byte of the 16-bit TMR1 Register  |        |             |        |                       |          |            |        | 50*              |
| TMR1L   | Holding Register for the Least Significant Byte of the 16-bit TMR1 Register |        |             |        |                       |          |            |        | 50*              |
| TRISA   | —   | —      | TRISA5      | TRISA4 | TRISA3 <sup>(1)</sup> | TRISA2   | TRISA1     | TRISA0 | 40               |

**Legend:** — = Unimplemented location, read as '0'. Shaded cells are not used by Compare mode.

\* Page provides register information.

**Note 1:** TRISA3 always reads '1'.

## 10.3 PWM Overview

Pulse-Width Modulation (PWM) is a scheme that provides power to a load by switching quickly between fully-on and fully-off states. The PWM signal resembles a square wave where the high portion of the signal is considered the on state and the low portion of the signal is considered the off state. The high portion, also known as the pulse width, can vary in time and is defined in steps. A larger number of steps applied, which lengthens the pulse width, also supplies more power to the load. Lowering the number of steps applied, which shortens the pulse width, supplies less power. The PWM period is defined as the duration of one complete cycle or the total amount of on and off time combined.

PWM resolution defines the maximum number of steps that can be present in a single PWM period. A higher resolution allows for more precise control of the pulse width time and in turn the power that is applied to the load.

The term duty cycle describes the proportion of the on time to the off time and is expressed in percentages, where 0% is fully off and 100% is fully on. A lower duty cycle corresponds to less power applied and a higher duty cycle corresponds to more power applied.

Figure 10-3 shows a typical waveform of the PWM signal.

### 10.3.1 STANDARD PWM OPERATION


The standard PWM mode generates a Pulse-Width modulation (PWM) signal on the CCP1 pin with up to ten bits of resolution. The period, duty cycle and resolution are controlled by the following registers:

- PR2 Registers
- T2CON Registers
- CCPR1L Registers
- CCP1CON Registers


Figure 10-4 shows a simplified block diagram of PWM operation.

- Note 1:** The corresponding TRIS bit must be cleared to enable the PWM output on the CCP1 pin.
- 2:** Clearing the CCP1CON register will relinquish control of the CCP1 pin.

**FIGURE 10-3: CCP1 PWM OUTPUT SIGNAL**

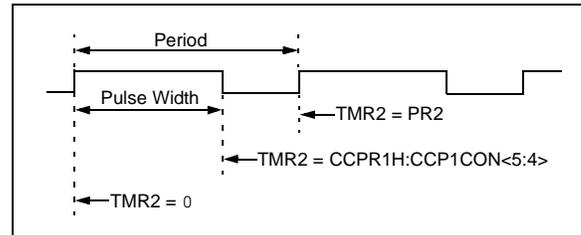

**FIGURE 10-4: SIMPLIFIED PWM BLOCK DIAGRAM**

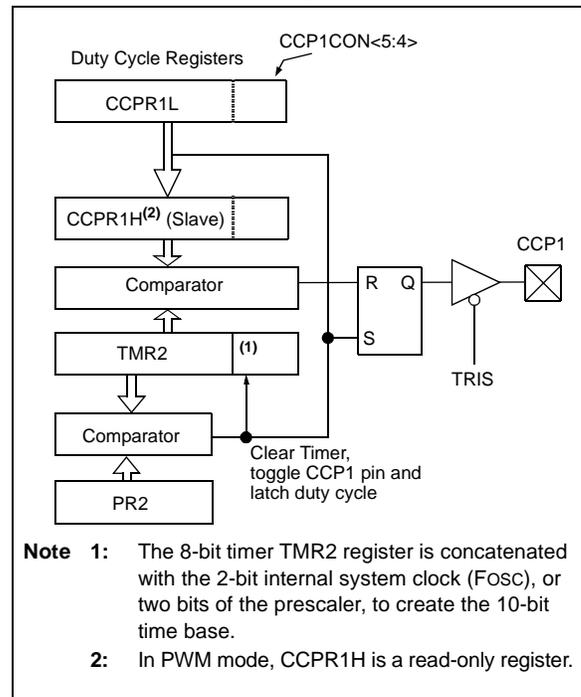

# PIC12F752/HV752

## 10.3.2 SETUP FOR PWM OPERATION

The following steps should be taken when configuring the CCP1 module for standard PWM operation:

1. Disable the CCP1 pin output driver by setting the associated TRIS bit
2. Load the PR2 register with the PWM period value
3. Configure the CCP1 module for the PWM mode by loading the CCP1CON register with the appropriate values
4. Load the CCPR1L register and the DC1B<1:0> bits of the CCP1CON register, with the PWM duty cycle value
5. Configure and start Timer2:
  - Clear the TMR2IF interrupt flag bit of the PIR1 register (see Note below)
  - Configure the T2CKPS bits of the T2CON register with the Timer prescale value
  - Enable the Timer by setting the TMR2ON bit of the T2CON register
6. Enable PWM output pin:
  - Wait until the Timer overflows and the TMR2IF bit of the PIR1 register is set. See Note below
  - Enable the CCP1 pin output driver by clearing the associated TRIS bit

**Note:** In order to send a complete duty cycle and period on the first PWM output, the above steps must be included in the setup sequence. If it is not critical to start with a complete PWM signal on the first output, then step 6 may be ignored.

## 10.3.3 PWM PERIOD

The PWM period is specified by the PR2 register of Timer2. The PWM period can be calculated using the formula of [Equation 10-1](#).

### EQUATION 10-1: PWM PERIOD

$$PWM\ Period = [(PR2) + 1] \cdot 4 \cdot T_{OSC} \cdot (TMR2\ Prescale\ Value)$$

**Note 1:**  $T_{OSC} = 1/F_{OSC}$

When TMR2 is equal to PR2, the following three events occur on the next increment cycle:

- TMR2 is cleared
- The CCP1 pin is set (exception: If the PWM duty cycle = 0%, the pin will not be set)
- The PWM duty cycle is latched from CCPR1L into CCPR1H

**Note:** The Timer postscaler (see [Section 8.1 "Timer2 Operation"](#)) is not used in the determination of the PWM frequency.

## 10.3.4 PWM DUTY CYCLE

The PWM duty cycle is specified by writing a 10-bit value to multiple registers: CCPR1L register and DC1B<1:0> bits of the CCP1CON register. The CCPR1L contains the eight MSBs and the DC1B<1:0> bits of the CCP1CON register contain the two LSbs. CCPR1L and DC1B<1:0> bits of the CCP1CON register can be written to at any time. The duty cycle value is not latched into CCPR1H until after the period completes (i.e. a match between PR2 and TMR2 registers occurs). While using the PWM, the CCPR1H register is read-only.

[Equation 10-2](#) is used to calculate the PWM pulse width.

[Equation 10-3](#) is used to calculate the PWM duty cycle ratio.

### EQUATION 10-2: PULSE WIDTH

$$Pulse\ Width = (CCPR1L:CCP1CON<5:4>) \cdot T_{OSC} \cdot (TMR2\ Prescale\ Value)$$

### EQUATION 10-3: DUTY CYCLE RATIO

$$Duty\ Cycle\ Ratio = \frac{(CCPRxL:CCPxCON<5:4>)}{4(PR_x + 1)}$$

The CCPR1H register and a 2-bit internal latch are used to double buffer the PWM duty cycle. This double buffering is essential for glitchless PWM operation.

The 8-bit timer TMR2 register is concatenated with either the 2-bit internal system clock ( $F_{OSC}$ ), or two bits of the prescaler, to create the 10-bit time base. The system clock is used if the Timer2 prescaler is set to 1:1.

When the 10-bit time base matches the CCPR1H and 2-bit latch, then the CCP1 pin is cleared (see [Figure 10-4](#)).

## 10.4 CCP Control Registers

**REGISTER 10-1: CCP1CON: CCP1 CONTROL REGISTER**

|       |     |           |         |            |         |         |         |       |
|-------|-----|-----------|---------|------------|---------|---------|---------|-------|
| U-0   | U-0 | R/W-0/0   | R/W-0/0 | R/W-0/0    | R/W-0/0 | R/W-0/0 | R/W-0/0 |       |
| —     | —   | DC1B<1:0> |         | CCP1M<3:0> |         |         |         |       |
| bit 7 |     |           |         |            |         |         |         | bit 0 |

**Legend:**

|                      |                      |  |
|----------------------|----------------------|--|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                   |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Reset |
| '1' = Bit is set     | '0' = Bit is cleared |  |

bit 7-6      **Unimplemented:** Read as '0'

bit 5-4      **DC1B<1:0>:** PWM Duty Cycle Least Significant bits

Capture mode:

Unused

Compare mode:

Unused

PWM mode:

These bits are the two LSbs of the PWM duty cycle. The eight MSbs are found in CCPR1L.

bit 3-0      **CCP1M<3:0>:** CCP1 Mode Select bits

0000 = Capture/Compare/PWM off (resets CCP1 module)

0001 = Reserved

0010 = Compare mode: toggle output on match

0011 = Reserved

0100 = Capture mode: every falling edge

0101 = Capture mode: every rising edge

0110 = Capture mode: every 4th rising edge

0111 = Capture mode: every 16th rising edge

1000 = Compare mode: initialize CCP1 pin low; set output on compare match (set CCP1IF)

1001 = Compare mode: initialize CCP1 pin high; clear output on compare match (set CCP1IF)

1010 = Compare mode: generate software interrupt only; CCP1 pin reverts to I/O state

1011 = Compare mode: Special Event Trigger (CCP1 resets Timer, sets CCP1IF bit, and starts A/D conversion if A/D module is enabled)

11xx = PWM mode

## 11.0 COMPLEMENTARY OUTPUT GENERATOR (COG) MODULE

The primary purpose of the Complementary Output Generator (COG) is to convert a single output PWM signal into a two output complementary PWM signal. The COG can also convert two separate input events into a single or complementary PWM output.

The COG PWM frequency and duty cycle are determined by a rising event input and a falling event input. The rising event and falling event may be the same source. Sources may be synchronous or asynchronous to the COG\_clock.

The rate at which the rising event occurs determines the PWM frequency. The time from the rising event input to the falling event input determines the duty cycle.

A selectable clock input is used to generate the phase delay, blanking and dead-band times.

A simplified block diagram of the COG is shown in [Figure 11-1](#).

The COG module has the following features:

- Selectable clock source
- Selectable rising event source
- Selectable falling event source
- Selectable edge or level event sensitivity
- Independent output enables
- Independent output polarity selection
- Phase delay
- Dead-band control with independent rising and falling event dead-band times
- Blanking control with independent rising and falling event blanking times
- Auto-shutdown control with:
  - Selectable shutdown sources
  - Auto-restart enable
  - Auto-shutdown pin override control

## 11.1 Fundamental Operation

The COG generates a two output complementary PWM waveform from rising and falling event sources. In the simplest configuration, the rising and falling event sources are the same signal, which is a PWM signal with the desired period and duty cycle. The COG converts this single PWM input into a dual complementary PWM output. The frequency and duty cycle of the dual PWM output match those of the single input PWM signal. The off-to-on transition of each output can be delayed from the on-to-off transition of the other output, thereby, creating a time immediately after the PWM transition where neither output is driven. This is referred to as dead time and is covered in [Section 11.5 “Dead-Band Control”](#).

A typical operating waveform, with dead band, generated from a single CCP1 input is shown in [Figure 11-2](#).

The COG can also generate a PWM waveform from a periodic rising event and a separate falling event. In this case, the falling event is usually derived from analog feedback within the external PWM driver circuit. In this configuration, high-power switching transients may trigger a false falling event that needs to be blanked out. The COG can be configured to blank falling (and rising) event inputs for a period of time immediately following the rising (and falling) event drive output. This is referred to as input blanking and is covered in [Section 11.6 “Blanking Control”](#).


It may be necessary to guard against the possibility of circuit faults. In this case, the active drive must be terminated before the Fault condition causes damage. This is referred to as auto-shutdown and is covered in [Section 11.8 “Auto-Shutdown Control”](#).

A feedback falling event arriving too late or not at all can be terminated with auto-shutdown or by using one of the event inputs that is logically or'd with the hardware limit timer (HLT). See [Section 9.0 “Hardware Limit Timer \(HLT\) Module”](#) for more information about the HLT.

The COG can be configured to operate in phase delayed conjunction with another PWM. The active drive cycle is delayed from the rising event by a phase delay timer. Phase delay is covered in more detail in [Section 11.7 “Phase Delay”](#).

A typical operating waveform, with phase delay and dead band, generated from a single CCP1 input is shown in [Figure 11-3](#).

**FIGURE 11-1: SIMPLIFIED COG BLOCK DIAGRAM**

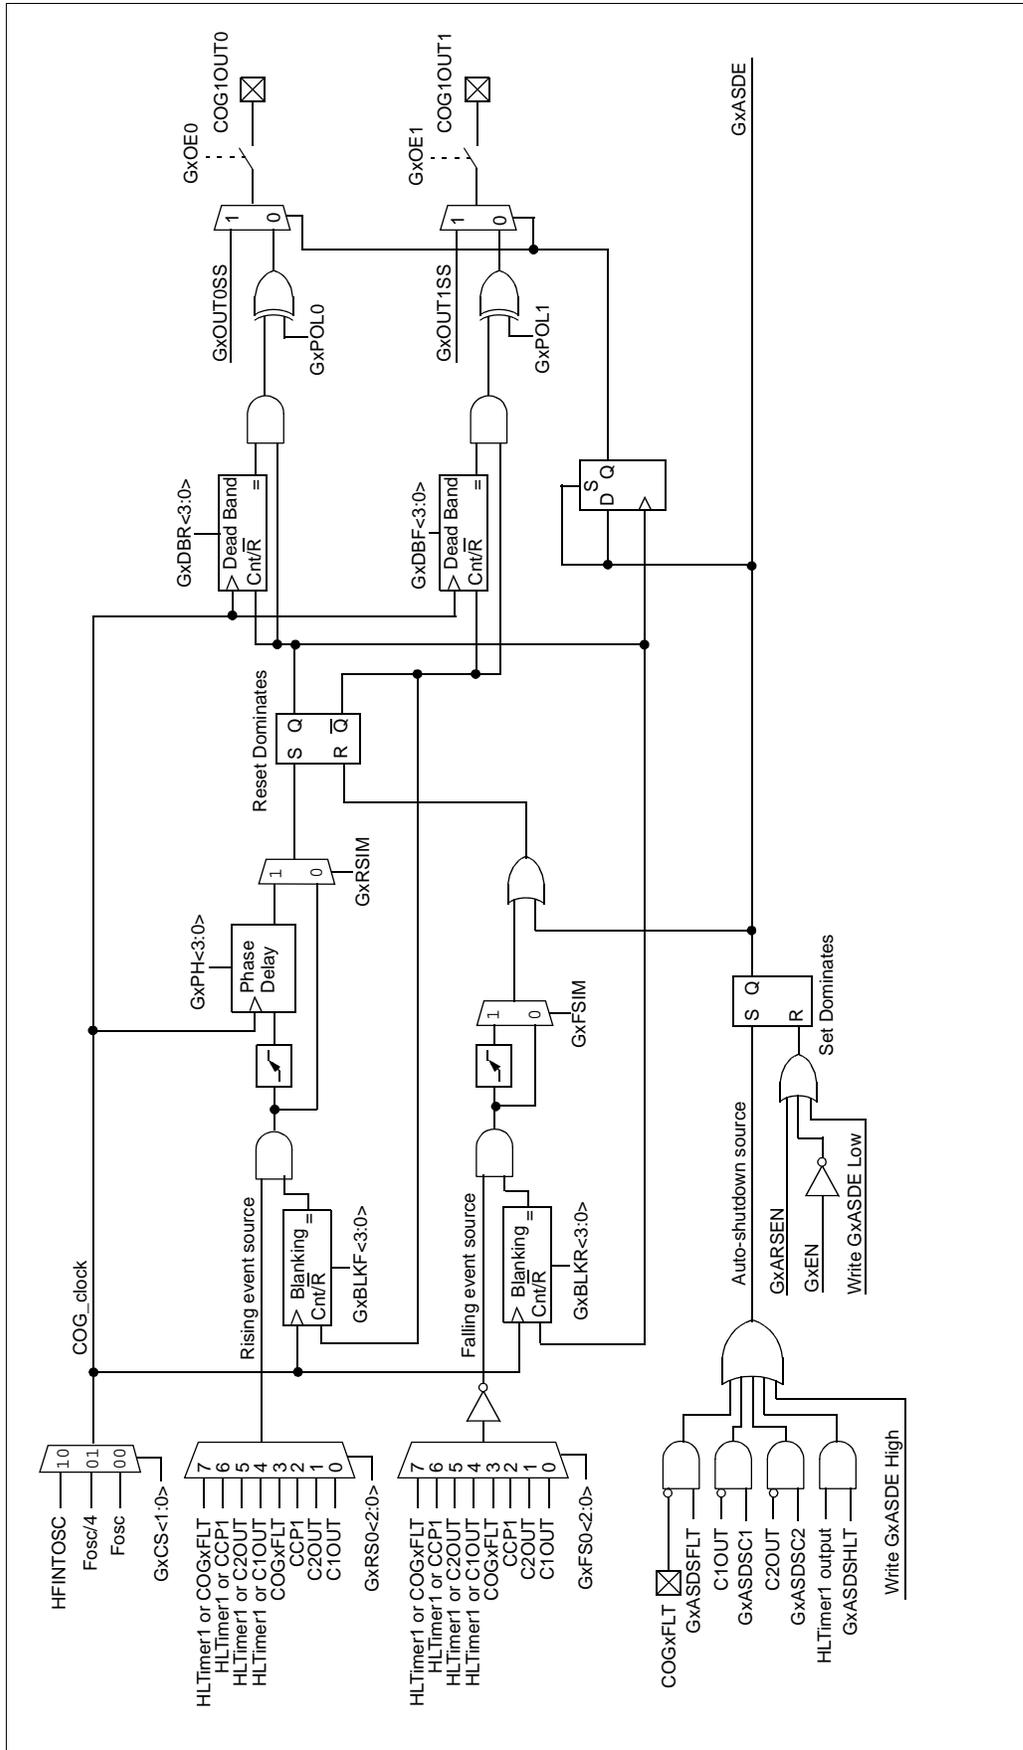

# PIC12F752/HV752

FIGURE 11-2: TYPICAL COG OPERATION WITH CCP1


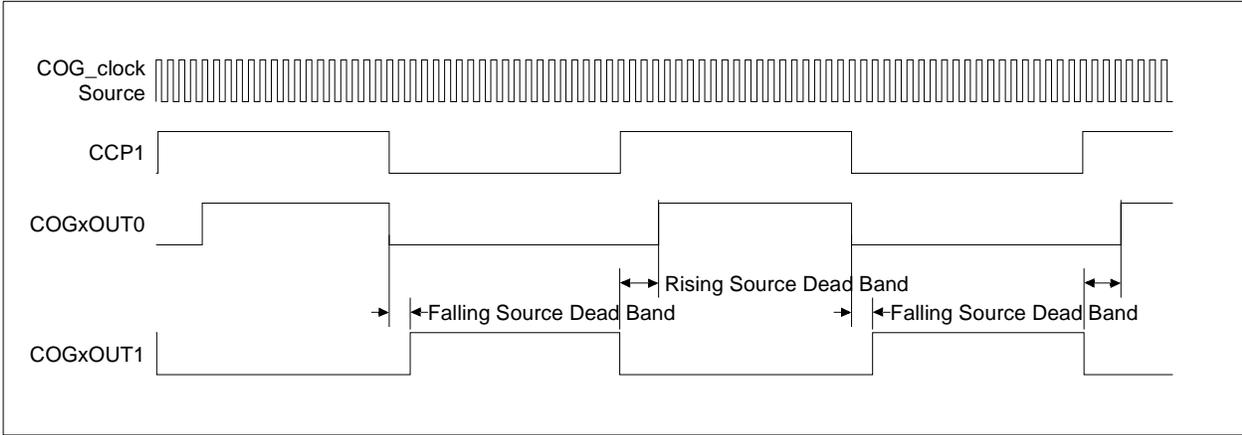


FIGURE 11-3: COG OPERATION WITH CCP1 AND PHASE DELAY

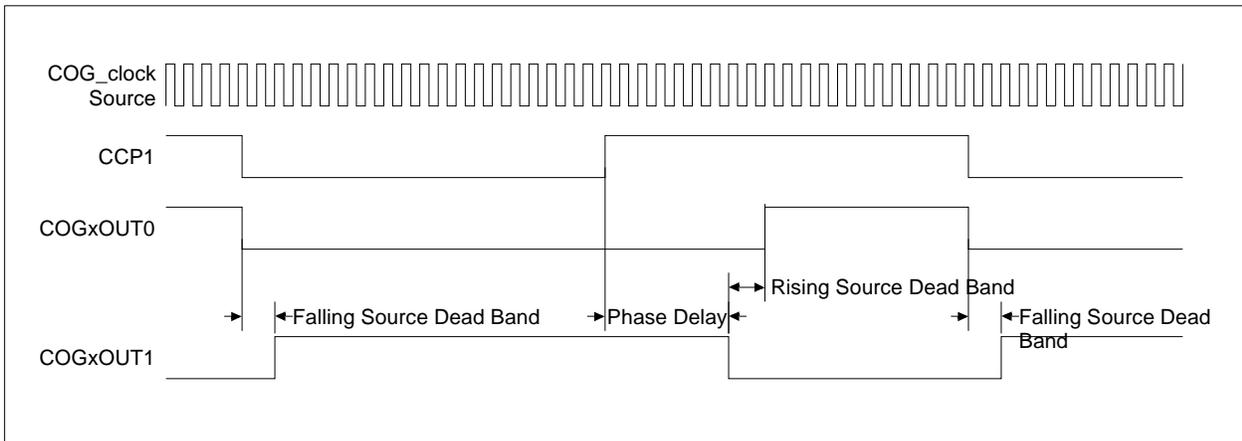

## 11.2 Clock Sources

The COG\_clock is used as the reference clock to the various timers in the peripheral. Timers that use the COG\_clock include:

- Rising and falling dead-band time
- Rising and falling blanking time
- Rising event phase delay

Clock sources available for selection include:

- 8 MHz HFINTOSC
- Instruction clock (Fosc/4)
- System clock (Fosc)

The clock source is selected with the GxCS<1:0> bits of the COGxCON0 register ([Register 11-1](#)).

## 11.3 Selectable Event Sources

The COG uses two independently selectable event sources to generate the complementary waveform:

- Rising event source
- Falling event source

Level or edge sensitive modes are available for each event input.

The rising event source is selected with the GxRS<2:0> bits and the mode is controlled with the GxRSIM bit. The falling event source is selected with the GxFS<2:0> bits and the mode is controlled with the GxFSIM bit. Selection and mode control bits for both sources are located in the COGxCON1 register ([Register 11-2](#)).

## 11.3.1 EDGE VS. LEVEL SENSING

Event input detection may be selected as level or edge sensitive. In general, events that are driven from a periodic source should be edge detected and events that are derived from voltage thresholds at the target circuit should be level sensitive. Consider the following two examples:

1. The first example is an application in which the period is determined by a 50% duty cycle clock and the COG output duty cycle is determined by a voltage level fed back through a comparator. If the clock input is level sensitive, then duty cycles less than 50% will exhibit erratic operation.

2. The second example is similar to the first except that the duty cycle is close to 100%. The feedback comparator high-to-low transition trips the COG drive off but almost immediately the period source turns the drive back on. If the off cycle is short enough then the comparator input may not reach the low side of the hysteresis band precluding an output change. The comparator output stays low and without a high-to-low transition to trigger the edge sense then the drive of the COG output will be stuck in a constant drive-on condition. See [Figure 11-4](#)

## 11.3.2 RISING EVENT

The rising event starts the PWM output active duty cycle period. The rising event is the low-to-high transition of the selected rising event source. When the phase delay and rising event dead-band time values are zero, the COGxOUT0 output starts immediately. Otherwise, the COGxOUT0 output is delayed. The rising event causes all the following actions:


- Start rising event phase delay counter (if enabled)
- Clear COGxOUT1 after phase delay
- Start falling event input blanking (if enabled)
- Start dead-band counter (if enabled)
- Set COGxOUT0 output after dead-band counter expires

## 11.3.3 FALLING EVENT

The falling event terminates the PWM output active duty cycle period. The falling event is the high-to-low transition of the selected falling event source. When the falling event dead-band time value is zero, the COGxOUT1 output starts immediately. Otherwise, the COGxOUT1 output is delayed. The falling event causes all the following actions:

- Clear COGxOUT0
- Start rising event input blanking (if enabled)
- Start falling event dead-band counter (if enabled)
- Set COGxOUT1 output after dead-band counter expires

**FIGURE 11-4: EDGE VS LEVEL SENSE**

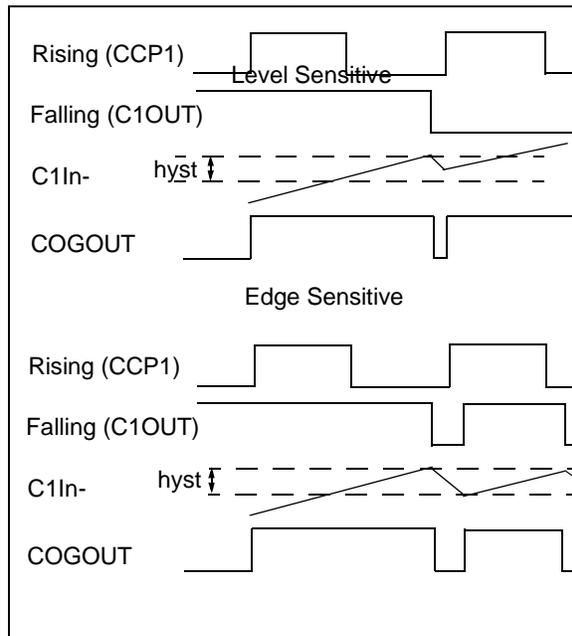

# PIC12F752/HV752

---

## 11.4 Output Control

Immediately after the COG module is enabled, the complementary drive is configured with COGxOUT0 drive cleared and COGxOUT1 drive active.

### 11.4.1 OUTPUT ENABLES

Each COG output pin has individual output enable controls. Output enables are selected with the GxOE0 and GxOE1 bits of the COGxCON0 register. When an output enable control is cleared, the module asserts no control over the pin. When an output enable is set, the override value or active PWM waveform is applied to the pin per the port priority selection.

The output pin enables are independent of the module enable bit, GxEN. When GxEN is cleared, the shutdown override levels are present on the COG output pins for which the output enables are active.

### 11.4.2 POLARITY CONTROL

The polarity of each COG output can be selected independently. When the output polarity bit is set, the corresponding output is active low. Clearing the output polarity bit configures the corresponding output as active high. However, polarity does not affect the override levels.

Output polarity is selected with the GxPOL0 and GxPOL1 bits of the COGxCON0 register.

## 11.5 Dead-Band Control

The dead-band control provides for non-overlapping PWM output signals to prevent shoot through current in the external power switches.

The COG contains two 4-bit dead-band counters. One dead-band counter is used for rising event dead-band control. The other is used for falling event dead-band control.

Dead band is timed by counting COG\_clock periods from zero up to the value in the dead-band count register. Use [Equation 11-1](#) to calculate dead-band times.

### 11.5.1 RISING EVENT DEAD BAND

Rising event dead band delays the turn-on of COGxOUT0 from when COGxOUT1 is turned off. The rising event dead-band time starts when the rising event output goes true.

The rising event output into the dead-band counter may be delayed by the phase delay. When the phase delay time is zero, the rising event output goes true coincident with the unblanked rising input event. When the phase delay time is not zero, the rising event output goes true at the completion of the phase delay time.

The rising event dead-band time is set by the value contained in the GxDBR<3:0> bits of the COGxDB register. When the value is zero, rising event dead band is disabled.

### 11.5.2 FALLING EVENT DEAD BAND

Falling event dead band delays the turn-on of COGxOUT1 from when COGxOUT0 is turned off. The falling event dead-band time starts when the falling event output goes true. The falling event output goes true coincident with the unblanked falling input event.

The falling event dead-band time is set by the value contained in the GxDBF<3:0> bits of the COGxDB register. When the value is zero, falling event dead band is disabled.

### 11.5.3 DEAD-BAND TIME UNCERTAINTY

When the rising and falling events that trigger the dead-band counters come from asynchronous inputs, it creates uncertainty in the dead-band time. The maximum uncertainty is equal to one COG\_clock period. Refer to [Equation 11-1](#) for more detail.

## 11.5.4 DEAD-BAND OVERLAP

There are two cases of dead-band overlap:

- Rising-to-falling
- Falling-to-rising

### 11.5.4.1 Rising-to-Falling Overlap

In this case, the falling event occurs while the rising event dead-band counter is still counting. When this happens, the COGxOUT0 drive is suppressed and the dead band extends by the falling event dead-band time. At the termination of the extended dead-band time, the COGxOUT1 drive goes true.

### 11.5.4.2 Falling-to-Rising Overlap

In this case, the rising event occurs while the falling event dead-band counter is still counting. When this happens, the COGxOUT1 drive is suppressed and the dead band extends by the rising event dead-band time. At the termination of the extended dead-band time, the COGxOUT0 drive goes true.

## 11.6 Blanking Control

Input blanking is a function whereby the event inputs can be masked or blanked for a short period of time. This is to prevent electrical transients caused by the turn-on/off of power components from generating a false input event.

The COG contains two 4-bit blanking counters. The counters are cross coupled with the events they are blanking. The falling event blanking counter is used to blank rising input events and the rising event blanking counter is used to blank falling input events. Once started, blanking extends for the time specified by the corresponding blanking counter.

Blanking is timed by counting COG\_clock periods from zero up to the value in the blanking count register. Use [Equation 11-1](#) to calculate blanking times.

### 11.6.1 RISING EVENT INPUT BLANKING

The falling event blanking counter inhibits the rising input from triggering a rising event. The falling event blanking time starts when the rising event output drive goes false.

The falling event blanking time is set by the value contained in the GxBLKF<3:0> bits of the COGxBLK register. Blanking times are calculated using the formula shown in [Equation 11-1](#).

When the GxBLKF<3:0> value is '0', falling event blanking is disabled and the blanking counter output is true, thereby, allowing the event signal to pass straight through to the event trigger circuit.

### 11.6.2 FALLING EVENT INPUT BLANKING

The rising event blanking counter inhibits the falling input from triggering a falling event. The rising event blanking time starts when the falling event output drive goes false.

The rising event blanking time is set by the value contained in the GxBLKR<3:0> bits of the COGxBLK register.

When the GxBLKR<3:0> value is '0', rising event blanking is disabled and the blanking counter output is true, thereby, allowing the event signal to pass straight through to the event trigger circuit.

### 11.6.3 BLANKING TIME UNCERTAINTY

When the rising and falling events that trigger the blanking counters are asynchronous to the COG\_clock, it creates uncertainty in the blanking time. The maximum uncertainty is equal to one COG\_clock period. Refer to [Equation 11-1](#) and [Example 11-1](#) for more detail.

# PIC12F752/HV752

## 11.7 Phase Delay

It is possible to delay the assertion of the rising event. This is accomplished by placing a non-zero value in COGxPH register. Refer to [Register 11-6](#) and [Figure 11-3](#) for COG operation with CCP1 and phase delay. The delay from the input rising event signal switching to the actual assertion of the events is calculated the same as the dead-band and blanking delays. Please see [Equation 11-1](#).

When the COGxPH value is '0', phase delay is disabled and the phase delay counter output is true, thereby, allowing the event signal to pass straight through to complementary output driver flop.

### 11.7.1 CUMULATIVE UNCERTAINTY

It is not possible to create more than one COG\_clock of uncertainty by successive stages. Consider that the phase delay stage comes after the blanking stage, the dead-band stage comes after either the blanking or phase delay stages, and the blanking stage comes after the dead-band stage. When the preceding stage is enabled, the output of that stage is necessarily synchronous with the COG\_clock, which removes any possibility of uncertainty in the succeeding stage.

#### EQUATION 11-1: PHASE, DEAD-BAND, AND BLANKING TIME CALCULATION

$$T_{\min} = \frac{\text{Count}}{F_{\text{COG\_clock}}}$$

$$T_{\max} = \frac{\text{Count} + 1}{F_{\text{COG\_clock}}}$$

$$T_{\text{uncertainty}} = T_{\max} - T_{\min}$$

Also:

$$T_{\text{uncertainty}} = \frac{1}{F_{\text{COG\_clock}}}$$

Where:

| T                      | Count       |
|------------------------|-------------|
| Phase Delay            | GxPH<3:0>   |
| Rising Dead Band       | GxDBR<3:0>  |
| Falling Dead Band      | GxDBF<3:0>  |
| Rising Event Blanking  | GxBLKR<3:0> |
| Falling Event Blanking | GxBLKF<3:0> |

#### EXAMPLE 11-1: TIMER UNCERTAINTY

Given:

$$\begin{aligned} \text{Count} &= Ah = 10d \\ F_{\text{COG\_Clock}} &= 8\text{MHz} \end{aligned}$$

Therefore:

$$\begin{aligned} T_{\text{uncertainty}} &= \frac{1}{F_{\text{COG\_clock}}} \\ &= \frac{1}{8\text{MHz}} = 125\text{ns} \end{aligned}$$

Proof:

$$\begin{aligned} T_{\min} &= \frac{\text{Count}}{F_{\text{COG\_clock}}} \\ &= 125\text{ns} \cdot 10d = 1.25\mu\text{s} \\ T_{\max} &= \frac{\text{Count} + 1}{F_{\text{COG\_clock}}} \\ &= 125\text{ns} \cdot (10d + 1) \\ &= 1.375\mu\text{s} \end{aligned}$$

Therefore:

$$\begin{aligned} T_{\text{uncertainty}} &= T_{\max} - T_{\min} \\ &= 1.375\mu\text{s} - 1.25\mu\text{s} \\ &= 125\text{ns} \end{aligned}$$

## 11.8 Auto-Shutdown Control

Auto-shutdown is a method to immediately override the COG output levels with specific overrides that allow for safe shutdown of the circuit.

The shutdown state can be either cleared automatically or held until cleared by software.

### 11.8.1 SHUTDOWN

The shutdown state can be entered by either of the following two mechanisms:

- Software generated
- External Input

#### 11.8.1.1 Software Generated Shutdown

Setting the GxASDE bit of the COGxASD register will force the COG into the shutdown state.

When auto-restart is disabled, the shutdown state will persist as long as the GxASDE bit is set.

When auto-restart is enabled, the GxASDE bit will clear automatically and resume operation on the next rising event. See [Figure 11-5](#).

#### 11.8.1.2 External Shutdown Source

External shutdown inputs provide the fastest way to safely suspend COG operation in the event of a fault condition. When any of the selected shutdown inputs goes true, the output drive latches are reset and the COG outputs will immediately go to the selected override levels without software delay.

Any combination of four input sources can be selected to cause a shutdown condition. The four sources include:

- HLTimer1 output
- C2OUT (low true)
- C1OUT (low true)
- COG1FLT pin (low true)

Shutdown inputs are selected independently with bits <3:0> of the COGxASD register ([Register 11-3](#)).

**Note:** Shutdown inputs are level sensitive, not edge sensitive. The shutdown state cannot be cleared as long as the shutdown input level persists, except by disabling auto-shutdown,

### 11.8.2 PIN OVERRIDE LEVELS

The levels driven to the output pins, while the shutdown input is true, are controlled by the GxASDL0 and GxASDL1 bits of the COGxASD register ([Register 11-3](#)). GxASDL0 controls the GxOUT0 override level and GxASDL1 controls the GxOUT1 override level. The control bit logic level corresponds to the output logic drive level while in the shutdown state.

**Note:** The polarity control does not apply to the override level.

### 11.8.3 AUTO-SHUTDOWN RESTART

After an auto-shutdown event has occurred, there are two ways to have the module resume operation:

- Software controlled
- Auto-restart

The restart method is selected with the GxARSEN bit of the COGxASD register. Waveforms of a software controlled automatic restart are shown in [Figure 11-5](#).

#### 11.8.3.1 Software Controlled Restart

When the GxARSEN bit of the COGxASD register is cleared, the COG must be restarted after an auto-shutdown event by software.

The COG will resume operation on the first rising event after the GxASDE bit is cleared. Clearing the shutdown state requires all selected shutdown inputs to be false, otherwise, the GxASDE bit will remain set.


#### 11.8.3.2 Auto-Restart

When the GxARSEN bit of the COGxASD register is set, then the COG will restart from the auto-shutdown state automatically.

The GxASDE bit will clear automatically and the COG will resume operation on the first rising event after all selected shutdown inputs go false.

# PIC12F752/HV752

FIGURE 11-5: AUTO-SHUTDOWN WAVEFORM – CCP1 AS RISING AND FALLING EVENT INPUT SOURCE

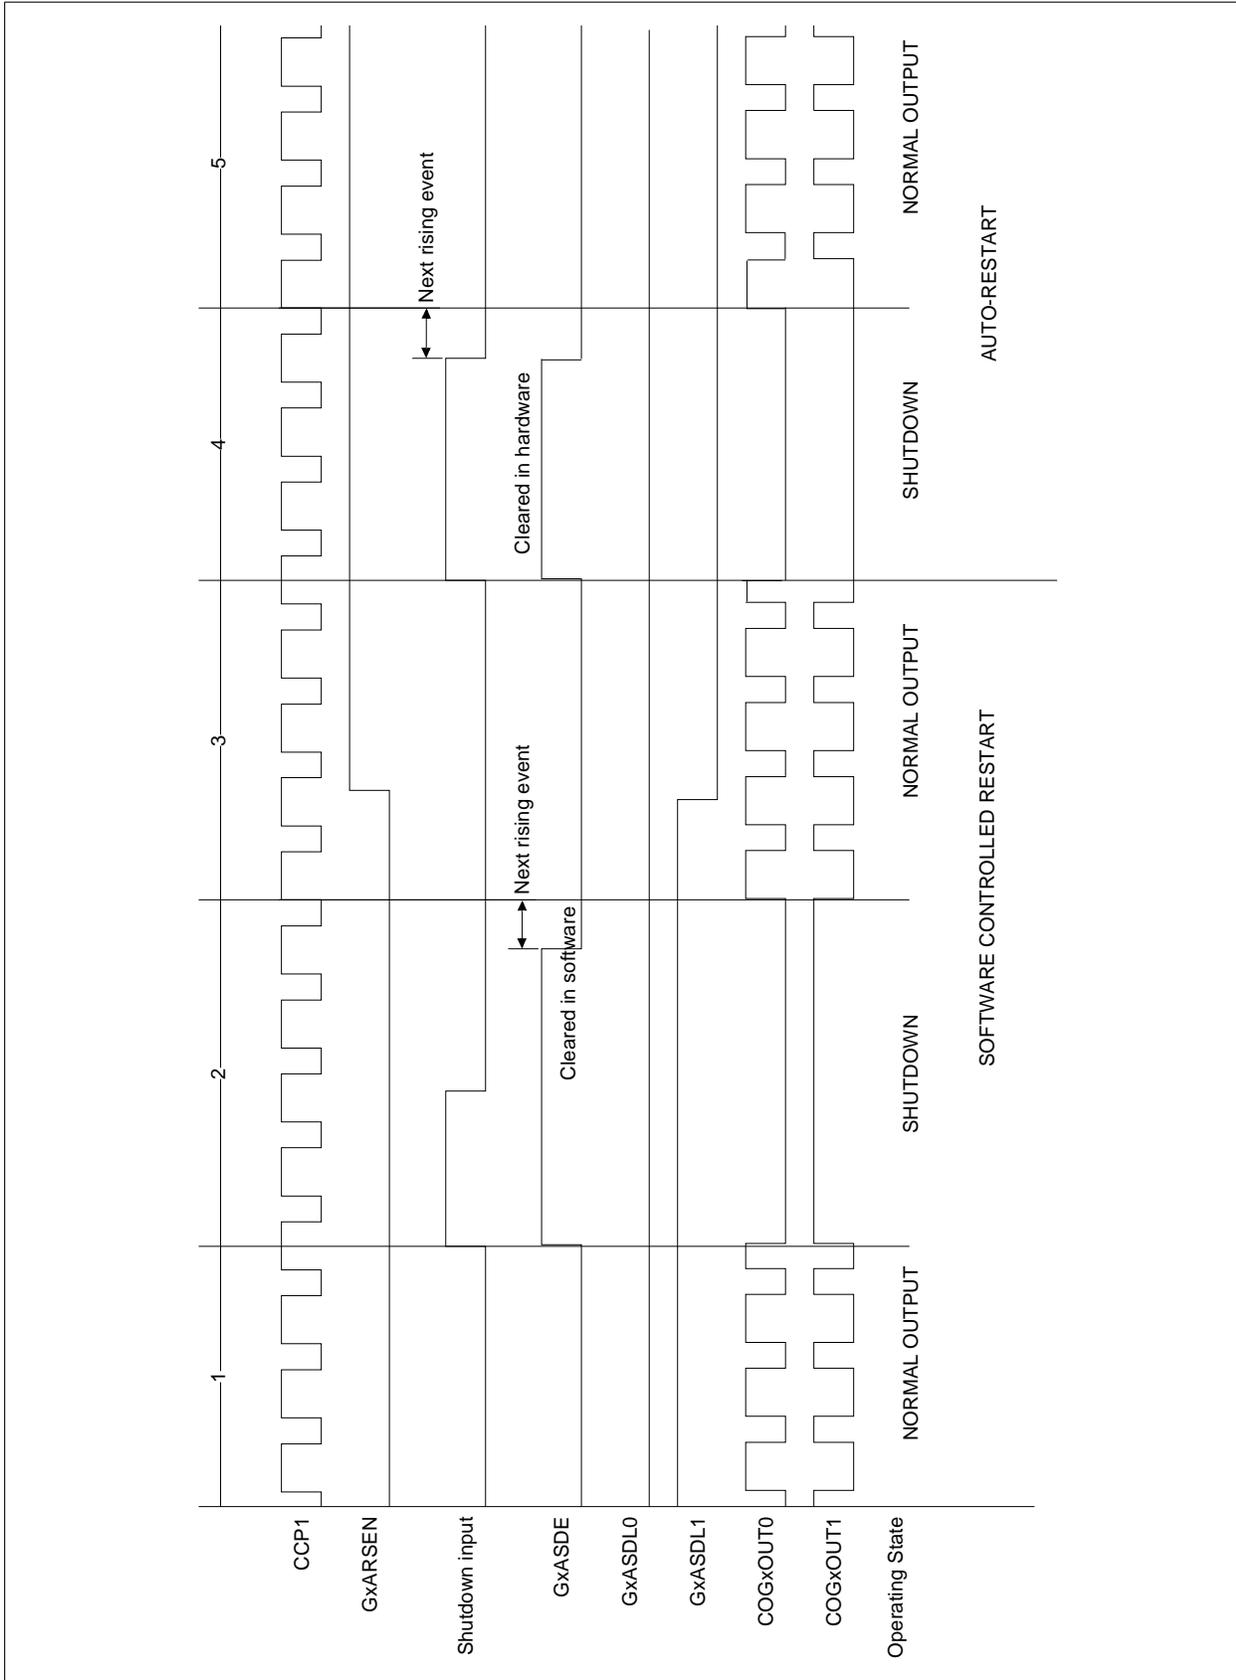

## 11.9 Buffer Updates

Changes to the phase, dead band, and blanking count registers need to occur simultaneously during COG operation to avoid unintended operation that may occur as a result of delays between each register write. This is accomplished with the GxLD bit of the COGxCON0 register and double buffering of the phase, blanking, and dead-band count registers.

Before the COG module is enabled, writing the count registers loads the count buffers without need of the GxLD bit. However, when the COG is enabled, the count buffers updates are suspended after writing the count registers until after the GxLD bit is set. When the GxLD bit is set, the phase, dead band and blanking register values are transferred to the corresponding buffers synchronous with COG operation. The GxLD bit is cleared by hardware to indicate that the transfer is complete.

## 11.10 Alternate Pin Selection

The COGxOUT0, COGxOUT1 and COGxFLT functions can be directed to alternate pins with control bits of the APFCON register. Refer to [Register 5-1](#).

**Note:** The default COG outputs have high drive strength capability, whereas the alternate outputs do not.

## 11.11 Operation During Sleep

The COG continues to operate in Sleep provided that the COG\_clock, rising event and falling event sources remain active.

The HFINTSOC remains active during Sleep when the COG is enabled and the HFINTOSC is selected as the COG\_clock source.

## 11.12 Configuring the COG

The following steps illustrate how to properly configure the COG to ensure a synchronous start with the rising event input:

1. Configure the desired COGxFLT input, COGxOUT0 and COGxOUT1 pins with the corresponding bits in the APFCON register.
2. Clear all ANSELA register bits associated with pins that are used for COG functions.
3. Ensure that the TRIS control bits corresponding to COGxOUT0 and COGxOUT1 are set so that both are configured as inputs. These will be set as outputs later.
4. Clear the GxEN bit, if not already cleared.
5. Set desired dead-band times with the COGxDB register.
6. Set desired blanking times with the COGxBLK register.
7. Set desired phase delay with the COGxPH register.
8. Setup the following controls in COGxASD auto-shutdown register:
  - Select desired shutdown sources.
  - Select both output overrides to the desired levels (this is necessary, even if not using auto-shutdown because start-up will be from a shutdown state).
  - Set the GxASDE bit and clear the GxARSEN bit.
9. Select the desired rising and falling event sources and input modes with the COGxCON1 register.
10. Configure the following controls in COGxCON0 register:
  - Select the desired clock source
  - Select the desired output polarities
  - Set the output enables of the outputs to be used.
11. Set the GxEN bit.
12. Clear TRIS control bits corresponding to COGxOUT0 and COGxOUT1 to be used thereby configuring those pins as outputs.
13. If auto-restart is to be used, set the GxARSEN bit and the GxASDE will be cleared automatically. Otherwise, clear the GxASDE bit to start the COG.

# PIC12F752/HV752

## 11.13 COG Control Registers

### REGISTER 11-1: COGxCON0: COG CONTROL REGISTER 0

|         |         |         |         |         |         |           |         |
|---------|---------|---------|---------|---------|---------|-----------|---------|
| R/W-0/0   | R/W-0/0 |
| GxEN    | GxOE1   | GxOE0   | GxPOL1  | GxPOL0  | GxLD    | GxCS<1:0> |         |
| bit 7   |         |         |         |         |         |           | bit 0   |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

q = Value depends on condition

|         |  |
|---------|--|
| bit 7   | <b>GxEN:</b> COGx Enable bit<br>1 = Module is enabled<br>0 = Module is disabled  |
| bit 6   | <b>GxOE1:</b> COGxOUT1 Output Enable bit<br>1 = COGxOUT1 is available on associated I/O pin<br>0 = COGxOUT1 is not available on associated I/O pin                                     |
| bit 5   | <b>GxOE0:</b> COGxOUT0 Output Enable bit<br>1 = COGxOUT0 is available on associated I/O pin<br>0 = COGxOUT0 is not available on associated I/O pin                                     |
| bit 4   | <b>GxPOL1:</b> COGxOUT1 Output Polarity bit<br>1 = Output is inverted polarity<br>0 = Output is normal polarity  |
| bit 3   | <b>GxPOL0:</b> COGxOUT0 Output Polarity bit<br>1 = Output is inverted polarity<br>0 = Output is normal polarity  |
| bit 2   | <b>GxLD:</b> COGx Load Buffers bit<br>1 = Phase, blanking, and dead-band buffers to be loaded with register values on next input events<br>0 = Register to buffer transfer is complete |
| bit 1-0 | <b>GxCS&lt;1:0&gt;:</b> COGx Clock Source Select bits<br>11 = Reserved<br>10 = 8 MHz HFINTOSC clock<br>01 = Instruction clock (Fosc/4)<br>00 = System clock (Fosc)                     |

## REGISTER 11-2: COGxCON1: COG CONTROL REGISTER 1

|         |         |           |         |         |           |         |         |
|---------|---------|-----------|---------|---------|-----------|---------|---------|
| R/W-0/0 | R/W-0/0 | R/W-0/0   | R/W-0/0 | R/W-0/0 | R/W-0/0   | R/W-0/0 | R/W-0/0 |
| GxFSIM  | GxRSIM  | GxFS<2:0> |         |         | GxRS<2:0> |         |         |
| bit 7   |         |           |         |         |           |         | bit 0   |

### Legend:

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared | q = Value depends on condition                        |

- bit 7      **GxFSIM:** COGx Falling Source Input Mode bit  
 1 = Input is edge sensitive  
 0 = Input is level sensitive
- bit 6      **GxRSIM:** COGx Rising Source Input Mode bit  
 1 = Input is edge sensitive  
 0 = Input is level sensitive
- bit 5-3    **GxFS<2:0>:** COGx Falling Source Select bits  
 111 = COGxFLT or HLTimer1  
 110 = CCP1 or HLTimer1  
 101 = C2OUT or HLTimer1  
 100 = C1OUT or HLTimer1  
 011 = COGxFLT  
 010 = CCP1  
 001 = C2OUT  
 000 = C1OUT
- bit 2-0    **GxRS<2:0>:** COGx Rising Source Select bits  
 111 = COGxFLT or HLTimer1  
 110 = CCP1 or HLTimer1  
 101 = C2OUT or HLTimer1  
 100 = C1OUT or HLTimer1  
 011 = COGxFLT  
 010 = CCP1  
 001 = C2OUT  
 000 = C1OUT

# PIC12F752/HV752

## REGISTER 11-3: COGxASD: COG AUTO-SHUTDOWN CONTROL REGISTER

| R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0   | R/W-0/0  | R/W-0/0  | R/W-0/0   |
|---------|---------|---------|---------|-----------|----------|----------|-----------|
| GxASDE  | GxARSEN | GxASDL1 | GxASDL0 | GxASDSHLT | GxASDSC2 | GxASDSC1 | GxASDSFLT |
| bit 7   |         |         |         |           |          |          | bit 0     |

### Legend:

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared | q = Value depends on condition                        |

- bit 7      **GxASDE:** Auto-Shutdown Event Status bit  
1 = COG is in the shutdown state  
0 = COG is not in the shutdown state
- bit 6      **GxARSEN:** Auto-Restart Enable bit  
1 = Auto-restart is enabled  
0 = Auto-restart is disabled
- bit 5      **GxASDL1:** COGxOUT1 Auto-shutdown Override Level bit  
1 = A logic '1' is placed on COGxOUT1 when a shutdown input is true  
0 = A logic '0' is placed on COGxOUT1 when a shutdown input is true
- bit 4      **GxASDL0:** COGxOUT0 Auto-shutdown Override Level bit  
1 = A logic '1' is placed on COGxOUT0 when a shutdown input is true  
0 = A logic '0' is placed on COGxOUT0 when a shutdown input is true
- bit 3      **GxASDSHLT:** COG Auto-shutdown Source Enable bit 3  
1 = COG is shutdown when HLTMR equals HLTPR is low  
0 = HLTimer1 pin has no effect on shutdown
- bit 2      **GxASDSC2:** COG Auto-shutdown Source Enable bit 2  
1 = COG is shutdown when C2OUT is low  
0 = C2OUT pin has no effect on shutdown
- bit 1      **GxASDSC1:** COG Auto-shutdown Source Enable bit 1  
1 = COG is shutdown when C1OUT is low  
0 = C1OUT pin has no effect on shutdown
- bit 0      **GxASDSFLT:** COG Auto-shutdown Source Enable bit 0  
1 = COG is shutdown when COGxFLT pin is low  
0 = COGxFLT pin has no effect on shutdown

## REGISTER 11-4: COGxDB: COG DEAD-BAND COUNT REGISTER

|            |         |         |         |            |         |         |         |
|------------|---------|---------|---------|------------|---------|---------|---------|
| R/W-x/u    | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u    | R/W-x/u | R/W-x/u | R/W-x/u |
| GxDBR<3:0> |         |         |         | GxDBF<3:0> |         |         |         |
| bit 7      |         |         |         | bit 0      |         |         |         |

### Legend:

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared | q = Value depends on condition                        |

bit 7-4      **GxDBR<3:0>**: Rising Event Dead-band Count Value bits  
 Number of COG clock periods to delay primary output after rising event input

bit 3-0      **GxDBF<3:0>**: Falling Event Dead-band Count Value bits  
 Number of COG clock periods to delay complementary output after falling event input

## REGISTER 11-5: COGxBLK: COG BLANKING COUNT REGISTER

|             |         |         |         |             |         |         |         |
|-------------|---------|---------|---------|-------------|---------|---------|---------|
| R/W-x/u     | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u     | R/W-x/u | R/W-x/u | R/W-x/u |
| GxBLKR<3:0> |         |         |         | GxBLKF<3:0> |         |         |         |
| bit 7       |         |         |         | bit 0       |         |         |         |

### Legend:

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared | q = Value depends on condition                        |

bit 7-4      **GxBLKR<3:0>**: Rising Event Blanking Count Value bits  
 Number of COGx clock periods to inhibit falling event input

bit 3-0      **GxBLKF<3:0>**: Falling Event Blanking Count Value bits  
 Number of COGx clock periods to inhibit rising event input

## REGISTER 11-6: COGxPH: COG PHASE COUNT REGISTER

|       |     |     |     |           |         |         |         |
|-------|-----|-----|-----|-----------|---------|---------|---------|
| U-0   | U-0 | U-0 | U-0 | R/W-x/u   | R/W-x/u | R/W-x/u | R/W-x/u |
| —     | —   | —   | —   | GxPH<3:0> |         |         |         |
| bit 7 |     |     |     | bit 0     |         |         |         |

### Legend:

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared | q = Value depends on condition                        |

bit 7-4      **Unimplemented**: Read as '0'

bit 3-0      **GxPH<3:0>**: Rising Event Phase Delay Count Value bits  
 Number of COG clock periods to delay rising edge event

# PIC12F752/HV752

**TABLE 11-1: SUMMARY OF REGISTERS ASSOCIATED WITH COG**

| Name     | Bit 7       | Bit 6   | Bit 5     | Bit 4       | Bit 3     | Bit 2     | Bit 1     | Bit 0     | Register on Page |    |
|----------|-------------|---------|-----------|-------------|-----------|-----------|-----------|-----------|------------------|----|
| ANSELA   | —           | —       | ANSA5     | ANSA4       | —         | ANSA2     | ANSA1     | ANSA0     | 41               |    |
| APFCON   | —           | —       | —         | T1GSEL      | —         | COG1FSEL  | COG1O1SEL | COG1O0SEL | 38               |    |
| COG1PH   | —           | —       | —         | —           | G1PH<3:0> |           |           |           | 87               |    |
| COG1BLK  | G1BLKR<3:0> |         |           | G1BLKF<3:0> |           |           |           |           |                  | 87 |
| COG1DB   | G1DBR<3:0>  |         |           | G1DBF<3:0>  |           |           |           |           |                  | 87 |
| COG1CON0 | G1EN        | G1OE1   | G1OE0     | G1POL1      | G1POL0    | G1LD      | G1CS1     | G1CS0     | 84               |    |
| COG1CON1 | G1FSIM      | G1RSIM  | G1FS<2:0> |             |           | G1RS<2:0> |           |           |                  | 85 |
| COG1ASD  | G1ASDE      | G1ARSEN | G1ASDL1   | G1ASDL0     | G1ASDShLT | G1ASDSC2  | G1ASDSC1  | G1ASDSFLT | 86               |    |
| INTCON   | GIE         | PEIE    | T0IE      | INTE        | IOCIE     | T0IF      | INTF      | IOCIF     | 15               |    |
| LATA     | —           | —       | LATA5     | LATA4       | —         | LATA2     | LATA1     | LATA0     | 40               |    |
| PIE2     | —           | —       | C2IE      | C1IE        | —         | COG1IE    | —         | CCP1IE    | 17               |    |
| PIR2     | —           | —       | C2IF      | C1IF        | —         | COG1IF    | —         | CCP1IF    | 19               |    |
| TRISA    | —           | —       | TRISA5    | TRISA4      | TRISA3    | TRISA2    | TRISA1    | TRISA0    | 40               |    |

**Legend:** x = unknown, u = unchanged, - = unimplemented locations read as '0'. Shaded cells are not used by COG.

**Note 1:** Other (non Power-up) Resets include MCLR Reset and Watchdog Timer Reset during normal operation.

**2:** See Configuration Word register ([Register 17-1](#)) for operation of all register bits.

## 12.0 ANALOG-TO-DIGITAL CONVERTER (ADC) MODULE

The Analog-to-Digital Converter (ADC) allows conversion of an analog input signal to a 10-bit binary representation of that signal. This device uses analog inputs, which are multiplexed into a single sample and hold circuit. The output of the sample and hold is connected to the input of the converter. The converter generates a 10-bit binary result via successive approximation and stores the conversion result into the ADC result registers (ADRESL and ADRESH).


The ADC voltage reference is software selectable to either VDD or a voltage applied to the external reference pins.

The ADC can generate an interrupt upon completion of a conversion. This interrupt can be used to wake-up the device from Sleep.

Figure 12-1 shows the block diagram of the ADC.

**Note:** The ADRESL and ADRESH registers are read-only.

**FIGURE 12-1: ADC BLOCK DIAGRAM**

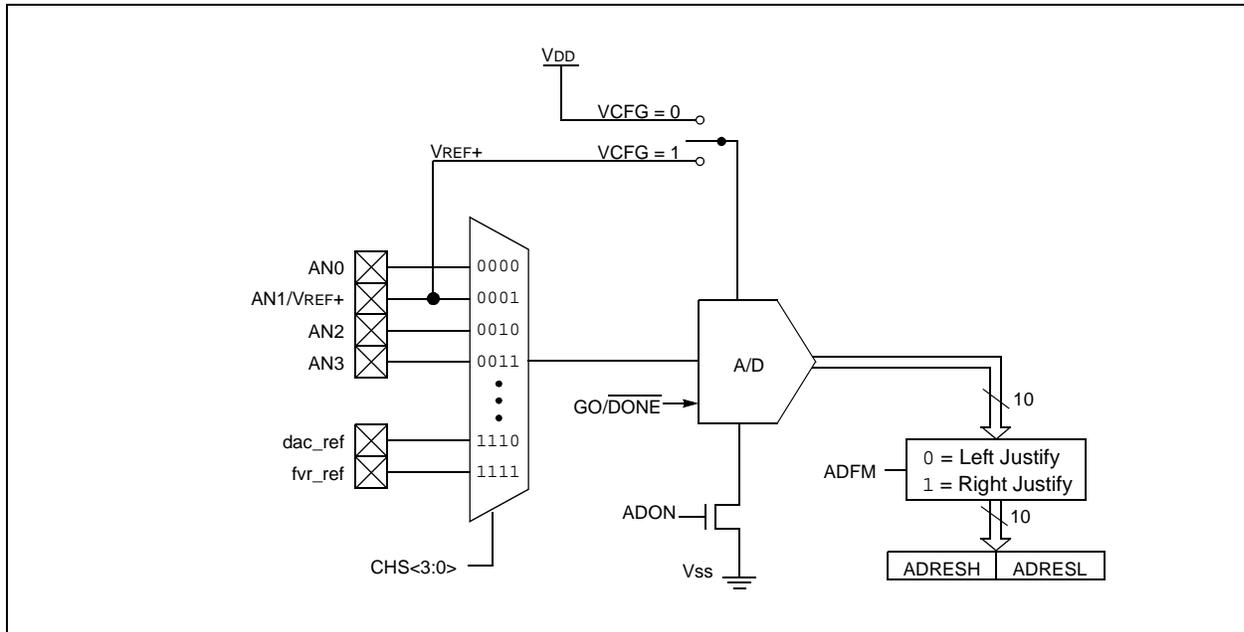

# PIC12F752/HV752

---

## 12.1 ADC Configuration

When configuring and using the ADC the following functions must be considered:

- Port configuration
- Channel selection
- ADC voltage reference selection
- ADC conversion clock source
- Interrupt control
- Results formatting

### 12.1.1 PORT CONFIGURATION

The ADC can be used to convert both analog and digital signals. When converting analog signals, the I/O pin should be configured for analog by setting the associated TRIS and ANSEL bits. See the corresponding port section for more information.

**Note:** Analog voltages on any pin that is defined as a digital input may cause the input buffer to conduct excess current.

### 12.1.2 CHANNEL SELECTION

The CHS bits of the ADCON0 register determine which channel is connected to the sample and hold circuit.

When changing channels, a delay is required before starting the next conversion. Refer to [Section 12.2 “ADC Operation”](#) for more information.

### 12.1.3 ADC VOLTAGE REFERENCE

The VCFG bit of the ADCON0 register provides control of the positive voltage reference. The positive voltage reference can be either VDD or an external voltage source. The negative voltage reference is always connected to the ground reference.

### 12.1.4 CONVERSION CLOCK

The source of the conversion clock is software selectable via the ADCS bits of the ADCON1 register. There are seven possible clock options:

- FOSC/2
- FOSC/4
- FOSC/8
- FOSC/16
- FOSC/32
- FOSC/64
- FRC (dedicated internal oscillator)

The time to complete one bit conversion is defined as TAD. One full 10-bit conversion requires 11 TAD periods as shown in [Figure 12-2](#).

For correct conversion, the appropriate TAD specification must be met. See A/D conversion requirements in [Section 20.0 “Electrical Specifications”](#) for more information. [Table 12-1](#) gives examples of appropriate ADC clock selections.

**Note:** Unless using the FRC, any changes in the system clock frequency will change the ADC clock frequency, which may adversely affect the ADC result.

**TABLE 12-1: ADC CLOCK PERIOD (T<sub>AD</sub>) VS. DEVICE OPERATING FREQUENCIES (V<sub>DD</sub> > 3.0V)**

| ADC Clock Period (T <sub>AD</sub> ) |           | Device Frequency (F <sub>osc</sub> ) |                         |                         |                         |
|-------------------------------------|-----------|--------------------------------------|-------------------------|-------------------------|-------------------------|
| ADC Clock Source                    | ADCS<2:0> | 20 MHz                               | 8 MHz                   | 4 MHz                   | 1 MHz                   |
| Fosc/2                              | 000       | 100 ns <sup>(2)</sup>                | 250 ns <sup>(2)</sup>   | 500 ns <sup>(2)</sup>   | 2.0 μs                  |
| Fosc/4                              | 100       | 200 ns <sup>(2)</sup>                | 500 ns <sup>(2)</sup>   | 1.0 μs <sup>(2)</sup>   | 4.0 μs                  |
| Fosc/8                              | 001       | 400 ns <sup>(2)</sup>                | 1.0 μs <sup>(2)</sup>   | 2.0 μs                  | 8.0 μs <sup>(3)</sup>   |
| Fosc/16                             | 101       | 800 ns <sup>(2)</sup>                | 2.0 μs                  | 4.0 μs                  | 16.0 μs <sup>(3)</sup>  |
| Fosc/32                             | 010       | 1.6 μs                               | 4.0 μs                  | 8.0 μs <sup>(3)</sup>   | 32.0 μs <sup>(3)</sup>  |
| Fosc/64                             | 110       | 3.2 μs                               | 8.0 μs <sup>(3)</sup>   | 16.0 μs <sup>(3)</sup>  | 64.0 μs <sup>(3)</sup>  |
| FRC                                 | x11       | 2-6 μs <sup>(1,4)</sup>              | 2-6 μs <sup>(1,4)</sup> | 2-6 μs <sup>(1,4)</sup> | 2-6 μs <sup>(1,4)</sup> |

**Legend:** Shaded cells are outside of recommended range.


**Note 1:** The FRC source has a typical T<sub>AD</sub> time of 4 μs for V<sub>DD</sub> > 3.0V.

**2:** These values violate the minimum required T<sub>AD</sub> time.

**3:** For faster conversion times, the selection of another clock source is recommended.

**4:** When the device frequency is greater than 1 MHz, the FRC clock source is only recommended if the conversion will be performed during Sleep.

**FIGURE 12-2: ANALOG-TO-DIGITAL CONVERSION T<sub>AD</sub> CYCLES**

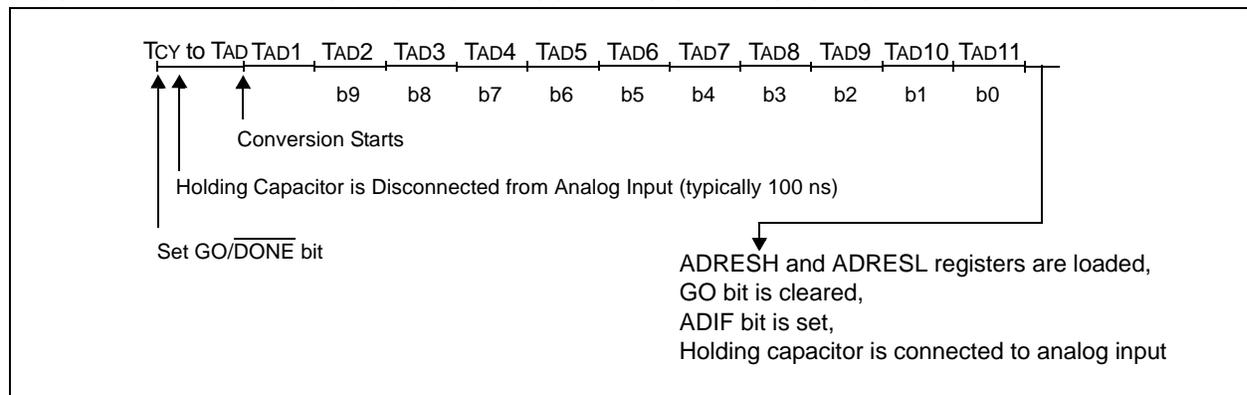

## 12.1.5 INTERRUPTS

The ADC module allows for the ability to generate an interrupt upon completion of an Analog-to-Digital conversion. The ADC interrupt flag is the ADIF bit in the PIR1 register. The ADC interrupt enable is the ADIE bit in the PIE1 register. The ADIF bit must be cleared in software.

**Note:** The ADIF bit is set at the completion of every conversion, regardless of whether or not the ADC interrupt is enabled.

This interrupt can be generated while the device is operating or while in Sleep. If the device is in Sleep, the interrupt will wake-up the device. Upon waking from Sleep, the next instruction following the SLEEP instruction is always executed. If the user is attempting to wake-up from Sleep and resume in-line code execution, the global interrupt must be disabled. If the global interrupt is enabled, execution will switch to the Interrupt Service Routine.


# PIC12F752/HV752

## 12.1.6 RESULT FORMATTING

The 10-bit A/D conversion result can be supplied in two formats, left justified or right justified. The ADFM bit of the ADCON0 register controls the output format.

Figure 12-4 shows the two output formats.

**FIGURE 12-3: 10-BIT A/D CONVERSION RESULT FORMAT**

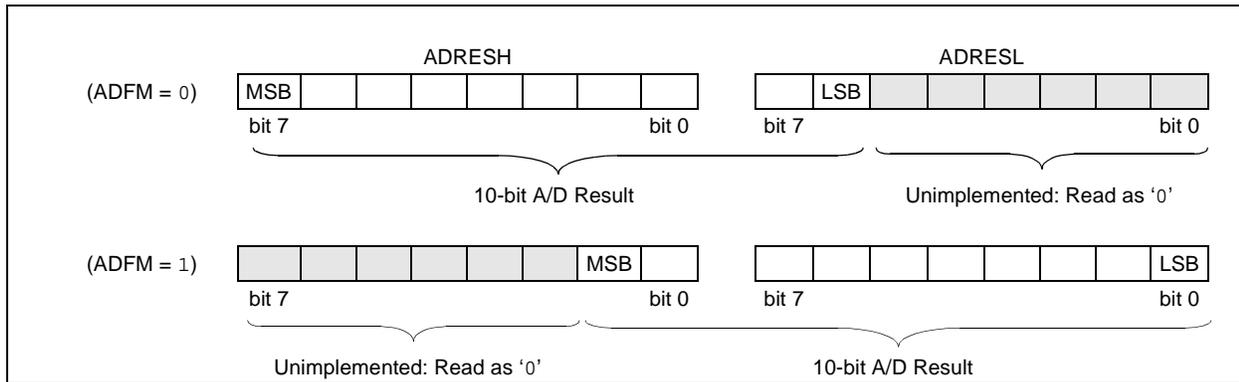

## 12.2 ADC Operation

### 12.2.1 STARTING A CONVERSION

To enable the ADC module, the ADON bit of the ADCON0 register must be set to a '1'. Setting the GO/DONE bit of the ADCON0 register to a '1' will start the Analog-to-Digital conversion.

**Note:** The GO/DONE bit should not be set in the same instruction that turns on the ADC. Refer to [Section 12.2.6 "A/D Conversion Procedure"](#).

### 12.2.2 COMPLETION OF A CONVERSION

When the conversion is complete, the ADC module will:

- Clear the GO/DONE bit
- Set the ADIF flag bit
- Update the ADRESH:ADRESL registers with new conversion result

### 12.2.3 TERMINATING A CONVERSION

If a conversion must be terminated before completion, the GO/DONE bit can be cleared in software. The ADRESH:ADRESL registers will not be updated with the partially complete Analog-to-Digital conversion sample. Instead, the ADRESH:ADRESL register pair will retain the value of the previous conversion. Additionally, a 2 TAD delay is required before another acquisition can be initiated. Following this delay, an input acquisition is automatically started on the selected channel.

**Note:** A device Reset forces all registers to their Reset state. Thus, the ADC module is turned off and any pending conversion is terminated.

### 12.2.4 ADC OPERATION DURING SLEEP

The ADC module can operate during Sleep. This requires the ADC clock source to be set to the FRC option. When the FRC clock source is selected, the ADC waits one additional instruction before starting the conversion. This allows the SLEEP instruction to be executed, which can reduce system noise during the conversion. If the ADC interrupt is enabled, the device will wake-up from Sleep when the conversion completes. If the ADC interrupt is disabled, the ADC module is turned off after the conversion completes, although the ADON bit remains set.

When the ADC clock source is something other than FRC, a SLEEP instruction causes the present conversion to be aborted and the ADC module is turned off, although the ADON bit remains set.

### 12.2.5 SPECIAL EVENT TRIGGER

The CCP Special Event Trigger allows periodic ADC measurements without software intervention. When this trigger occurs, the GO/DONE bit is set by hardware and the Timer1 counter resets to zero.

Using the Special Event Trigger does not assure proper ADC timing. It is the user's responsibility to ensure that the ADC timing requirements are met.

See [Section 10.0 "Capture/Compare/PWM Modules"](#) for more information.

## 12.2.6 A/D CONVERSION PROCEDURE

This is an example procedure for using the ADC to perform an Analog-to-Digital conversion:

1. Configure Port:
  - Disable pin output driver (See TRIS register)
  - Configure pin as analog
2. Configure the ADC module:
  - Select ADC conversion clock
  - Configure voltage reference
  - Select ADC input channel
  - Select result format
  - Turn on ADC module
3. Configure ADC interrupt (optional):
  - Clear ADC interrupt flag
  - Enable ADC interrupt
  - Enable peripheral interrupt
  - Enable global interrupt<sup>(1)</sup>
4. Wait the required acquisition time<sup>(2)</sup>
5. Start conversion by setting the  $\overline{\text{GO/DONE}}$  bit
6. Wait for ADC conversion to complete by one of the following:
  - Polling the  $\overline{\text{GO/DONE}}$  bit
  - Waiting for the ADC interrupt (interrupts enabled)
7. Read ADC Result
8. Clear the ADC interrupt flag (required if interrupt is enabled)

**Note 1:** The global interrupt can be disabled if the user is attempting to wake-up from Sleep and resume in-line code execution.

**2:** See [Section 12.4 “A/D Acquisition Requirements”](#).

## EXAMPLE 12-1: A/D CONVERSION

```

;This code block configures the ADC
;for polling, Vdd reference, Frc clock
;and RA0 input.
;
;Conversion start & polling for completion
; are included.
;
BANKSEL TRISA      ;
BSF      TRISA,0    ;Set RA0 to input
BANKSEL ADCON1     ;
MOVLW   B'01110000' ;ADC Frc clock,
IORWF   ADCON1     ; and RA0 as analog
BANKSEL ADCON0     ;
MOVLW   B'10000001' ;Right justify,
MOVWF   ADCON0     ;Vdd Vref, AN0, On
CALL    SampleTime ;Acquisiton delay
BSF     ADCON0,GO  ;Start conversion
TEST AGAIN
BTFSC   ADCON0,GO  ;Is conversion done?
GOTO    TEST AGAIN ;No, test again
BANKSEL ADRESH     ;
MOVF    ADRESH,W   ;Read upper 2 bits
MOVWF   RESULTHI   ;Store in GPR space
BANKSEL ADRESL     ;
MOVF    ADRESL,W   ;Read lower 8 bits
MOVWF   RESULTLO   ;Store in GPR space
    
```

# PIC12F752/HV752

## 12.3 ADC Control Registers

### REGISTER 12-1: ADCON0: A/D CONTROL REGISTER 0

|       |       |          |       |       |         |       |       |
|-------|-------|----------|-------|-------|---------|-------|-------|
| R/W-0 | R/W-0 | R/W-0    | R/W-0 | R/W-0 | R/W-0   | R/W-0 | R/W-0 |
| ADFM  | VCFG  | CHS<3:0> |       |       | GO/DONE | ADON  |       |
| bit 7 |       |          |       |       |         | bit 0 |       |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 7      **ADFM:** A/D Conversion Result Format Select bit

1 = Right justified

0 = Left justified

bit 6      **VCFG:** Voltage Reference bit

1 = VREF pin

0 = VDD

bit 5-2    **CHS<3:0>:** Analog Channel Select bits

0000 = Channel 00 (AN0)

0001 = Channel 01 (AN1)

0010 = Channel 02 (AN2)

0011 = Channel 03 (AN3)

0100 = Reserved. Do not use.

•

•

•

1101 = Reserved. Do not use.

1110 = Digital-to-Analog Converter (DAC output)

1111 = Fixed Voltage Reference (FVR)

bit 1      **GO/DONE:** A/D Conversion Status bit

1 = A/D conversion cycle in progress. Setting this bit starts an A/D conversion cycle.

This bit is automatically cleared by hardware when the A/D conversion has completed.

0 = A/D conversion completed/not in progress

bit 0      **ADON:** ADC Enable bit

1 = ADC is enabled

0 = ADC is disabled and consumes no operating current

## REGISTER 12-2: ADCON1: A/D CONTROL REGISTER 1

|       |           |         |         |     |     |     |       |
|-------|-----------|---------|---------|-----|-----|-----|-------|
| U-0   | R/W-0/0   | R/W-0/0 | R/W-0/0 | U-0 | U-0 | U-0 | U-0   |
| —     | ADCS<2:0> |         |         | —   | —   | —   | —     |
| bit 7 |           |         |         |     |     |     | bit 0 |

### Legend:

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared |   |

bit 7      **Unimplemented:** Read as '0'

bit 6-4      **ADCS<2:0>:** A/D Conversion Clock Select bits

000 = FOSC/2

001 = FOSC/8

010 = FOSC/32

011 = FRC (clock supplied from an internal oscillator with a divisor of 16)

100 = FOSC/4

101 = FOSC/16

110 = FOSC/64

bit 3-0      **Unimplemented:** Read as '0'

# PIC12F752/HV752

## REGISTER 12-3: ADRESH: ADC RESULT REGISTER HIGH (ADRESH) ADFM = 0 (READ-ONLY)

|            |     |     |     |     |     |     |       |
|------------|-----|-----|-----|-----|-----|-----|-------|
| R-x        | R-x | R-x | R-x | R-x | R-x | R-x | R-x   |
| ADRES<9:2> |     |     |     |     |     |     |       |
| bit 7      |     |     |     |     |     |     | bit 0 |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-0                      **ADRES<9:2>**: ADC Result Register bits  
 Upper eight bits of 10-bit conversion result

## REGISTER 12-4: ADRESL: ADC RESULT REGISTER LOW (ADRESL) ADFM = 0 (READ-ONLY)

|            |     |     |     |     |     |     |       |
|------------|-----|-----|-----|-----|-----|-----|-------|
| R-x        | R-x | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| ADRES<1:0> |     |     |     |     |     |     |       |
| bit 7      |     |     |     |     |     |     | bit 0 |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-6                      **ADRES<1:0>**: ADC Result Register bits  
 Lower two bits of 10-bit conversion result

bit 5-0                      **Unimplemented**: Read as '0'

## REGISTER 12-5: ADRESH: ADC RESULT REGISTER HIGH (ADRESH) ADFM = 1 (READ-ONLY)

|       |     |     |     |     |     |            |       |
|-------|-----|-----|-----|-----|-----|------------|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | R-x        | R-x   |
| —     |     |     |     |     |     | ADRES<9:8> |       |
| bit 7 |     |     |     |     |     |            | bit 0 |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-2                      **Unimplemented**: Read as '0'

bit 1-0                      **ADRES<9:8>**: ADC Result Register bits  
 Upper two bits of 10-bit conversion result

## REGISTER 12-6: ADRESL: ADC RESULT REGISTER LOW (ADRESL) ADFM = 1 (READ-ONLY)

|            |     |     |     |     |     |     |       |
|------------|-----|-----|-----|-----|-----|-----|-------|
| R-x        | R-x | R-x | R-x | R-x | R-x | R-x | R-x   |
| ADRES<7:0> |     |     |     |     |     |     |       |
| bit 7      |     |     |     |     |     |     | bit 0 |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 7-0                      **ADRES<7:0>**: ADC Result Register bits  
 Lower eight bits of 10-bit conversion result

## 12.4 A/D Acquisition Requirements

For the ADC to meet its specified accuracy, the charge holding capacitor (CHOLD) must be allowed to fully charge to the input channel voltage level. The Analog Input model is shown in [Figure 12-4](#). The source impedance (RS) and the internal sampling switch (RSS) impedance directly affect the time required to charge the capacitor CHOLD. The sampling switch (RSS) impedance varies over the device voltage (VDD), see [Figure 12-4](#). **The maximum recommended impedance for analog sources is 10 kΩ.** As the source impedance is decreased, the acquisition time may be decreased.

After the analog input channel is selected (or changed), an A/D acquisition must be done before the conversion can be started. To calculate the minimum acquisition time, [Equation 12-1](#) may be used. This equation assumes that 1/2 LSB error is used (1024 steps for the ADC). The 1/2 LSB error is the maximum error allowed for the ADC to meet its specified resolution.

### EQUATION 12-1: ACQUISITION TIME EXAMPLE

*Assumptions: Temperature = 50°C and external impedance of 10kΩ 5.0V VDD*

$$\begin{aligned} T_{ACQ} &= \text{Amplifier Settling Time} + \text{Hold Capacitor Charging Time} + \text{Temperature Coefficient} \\ &= T_{AMP} + T_C + T_{COFF} \\ &= 2\mu s + T_C + [(Temperature - 25^\circ C)(0.05\mu s/^\circ C)] \end{aligned}$$

*The value for TC can be approximated with the following equations:*

$$V_{APPLIED} \left( 1 - \frac{1}{2047} \right) = V_{CHOLD} \quad ;[1] \text{ } V_{CHOLD} \text{ charged to within } 1/2 \text{ lsb}$$

$$V_{APPLIED} \left( 1 - e^{-\frac{T_C}{RC}} \right) = V_{CHOLD} \quad ;[2] \text{ } V_{CHOLD} \text{ charge response to } V_{APPLIED}$$

$$V_{APPLIED} \left( 1 - e^{-\frac{T_C}{RC}} \right) = V_{APPLIED} \left( 1 - \frac{1}{2047} \right) \quad ;\text{combining [1] and [2]}$$

*Solving for TC:*

$$\begin{aligned} T_C &= -CHOLD(RIC + RSS + RS) \ln(1/2047) \\ &= -10pF(1k\Omega + 7k\Omega + 10k\Omega) \ln(0.0004885) \\ &= 1.37\mu s \end{aligned}$$

*Therefore:*

$$\begin{aligned} T_{ACQ} &= 2\mu s + 1.37\mu s + [(50^\circ C - 25^\circ C)(0.05\mu s/^\circ C)] \\ &= 4.67\mu s \end{aligned}$$


**Note 1:** The reference voltage (VREF) has no effect on the equation, since it cancels itself out.

**2:** The charge holding capacitor (CHOLD) is not discharged after each conversion.


**3:** The maximum recommended impedance for analog sources is 10 kΩ. This is required to meet the pin leakage specification.

# PIC12F752/HV752

**FIGURE 12-4: ANALOG INPUT MODEL**

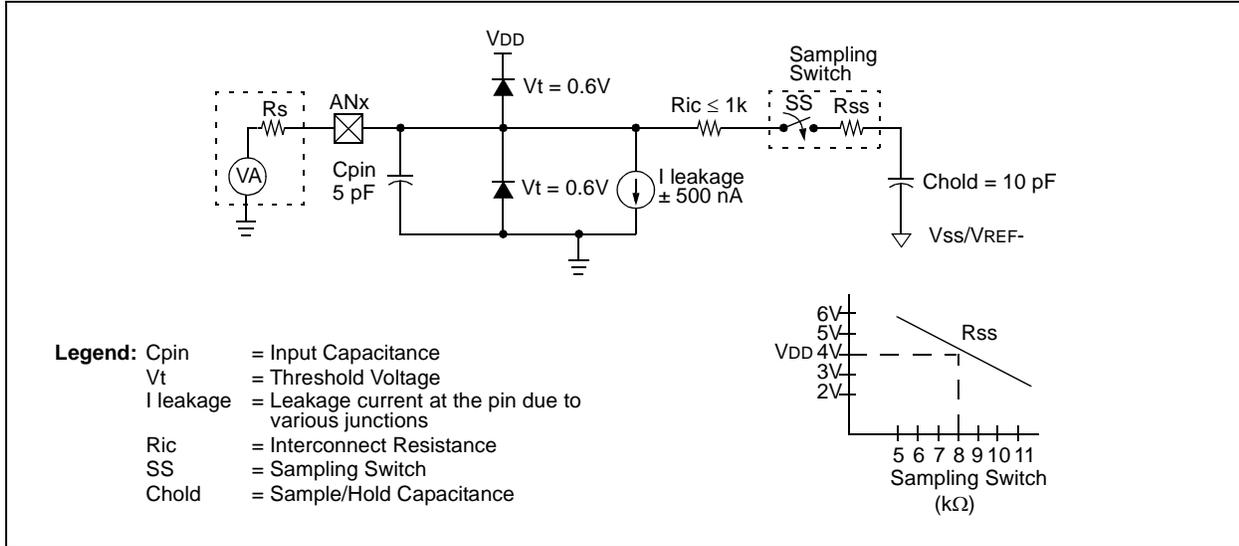

**FIGURE 12-5: ADC TRANSFER FUNCTION**

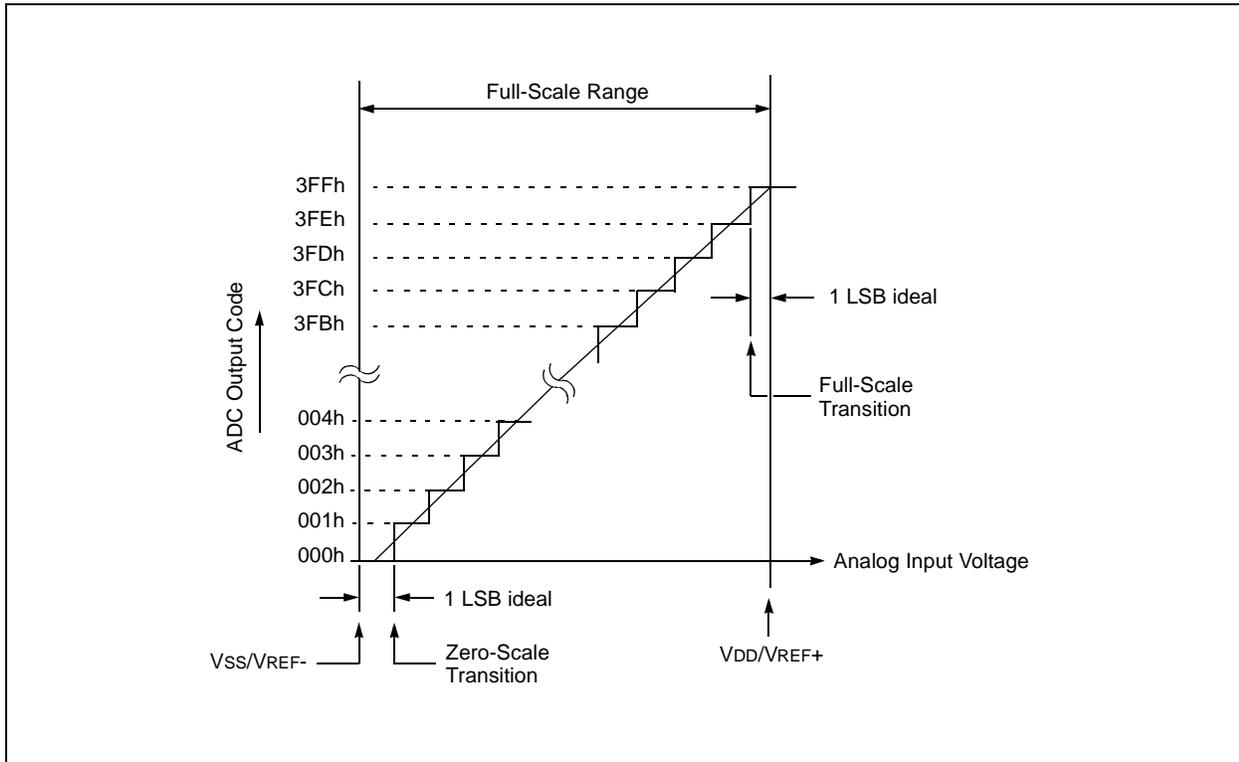

**TABLE 12-2: SUMMARY OF ASSOCIATED ADC REGISTERS**

| Name                  | Bit 7                         | Bit 6     | Bit 5    | Bit 4  | Bit 3                 | Bit 2    | Bit 1   | Bit 0  | Register on Page |
|-----------------------|-------------------------------|-----------|----------|--------|-----------------------|----------|---------|--------|------------------|
| ADCON0                | ADFM                          | VCFG      | CHS<3:0> |        |                       |          | GO/DONE | ADON   | 94               |
| ADCON1                | —                             | ADCS<2:0> |          |        | —                     | —        | —       | —      | 94               |
| ANSELA                | —                             | —         | ANSA5    | ANSA4  | —                     | ANSA2    | ANSA1   | ANSA0  | 41               |
| ADRESH <sup>(2)</sup> | A/D Result Register High Byte |           |          |        |                       |          |         |        | 96*              |
| ADRESL <sup>(2)</sup> | A/D Result Register Low Byte  |           |          |        |                       |          |         |        | 94*              |
| PORTA                 | —                             | —         | RA5      | RA4    | RA3                   | RA2      | RA1     | RA0    | 40               |
| INTCON                | GIE                           | PEIE      | T0IE     | INTE   | IOCIE                 | T0IF     | INTF    | IOCIF  | 15               |
| PIE1                  | TMR1GIE                       | ADIE      | —        | —      | —                     | HLTMR1IE | TMR2IE  | TMR1IE | 16               |
| PIR1                  | TMR1GIF                       | ADIF      | —        | —      | —                     | HLTMR1IF | TMR2IF  | TMR1IF | 18               |
| TRISA                 | —                             | —         | TRISA5   | TRISA4 | TRISA3 <sup>(1)</sup> | TRISA2   | TRISA1  | TRISA0 | 40               |

**Legend:** x = unknown, u = unchanged, — = unimplemented read as '0'. Shaded cells are not used for ADC module.

\* Page provides register information.

- Note 1:** TRISA3 always reads '1'.  
**Note 2:** Read-only register.

# PIC12F752/HV752

## 13.0 FIXED VOLTAGE REFERENCE (FVR)

The Fixed Voltage Reference (FVR) is a stable voltage reference, independent of  $V_{DD}$ , with 1.2V output level. The output of the FVR can be configured to supply a reference voltage to the following:

- ADC input channel
- Comparator 1 positive input (C1VP)
- Comparator 2 positive input (C2VP)
- REFOUT pin

On the PIC12F752, the FVR is enabled by setting the FVREN bit of the FVRCON register. The FVR is always enabled on the PIC12HV752 device.

### 13.1 Fixed Voltage Reference Output

The FVR output can be applied to the REFOUT pin by setting the FVRBUFSS and FVRBUFEN bits of the FVRCON register. The FVRBUFSS bit selects either the FVR or DAC output reference to the REFOUT pin buffer. The FVRBUFEN bit enables the output buffer to the REFOUT pin.

Enabling the REFOUT pin automatically overrides any digital input or output functions of the pin. Reading the REFOUT pin when it has been configured for a reference voltage output will always return a '0'.

### 13.2 FVR Stabilization Period

When the Fixed Voltage Reference module is enabled, it requires time for the reference circuit to stabilize. Once the circuit stabilizes and is ready for use, the FVRRDY bit of the FVRCON register will be set. See [Section 20.0 "Electrical Specifications"](#) for the minimum delay requirement.

### 13.3 Operation During Sleep


When the device wakes up from Sleep through an interrupt or a Watchdog Timer time-out, the contents of the FVRCON register are not affected. To minimize current consumption in Sleep mode, FVR the voltage reference should be disabled.

### 13.4 Effects of a Reset

A device Reset clears the FVRCON register. As a result:

- The FVR module is disabled
- The FVR voltage output is disabled on the REFOUT pin

FIGURE 13-1: VOLTAGE REFERENCE BLOCK DIAGRAM

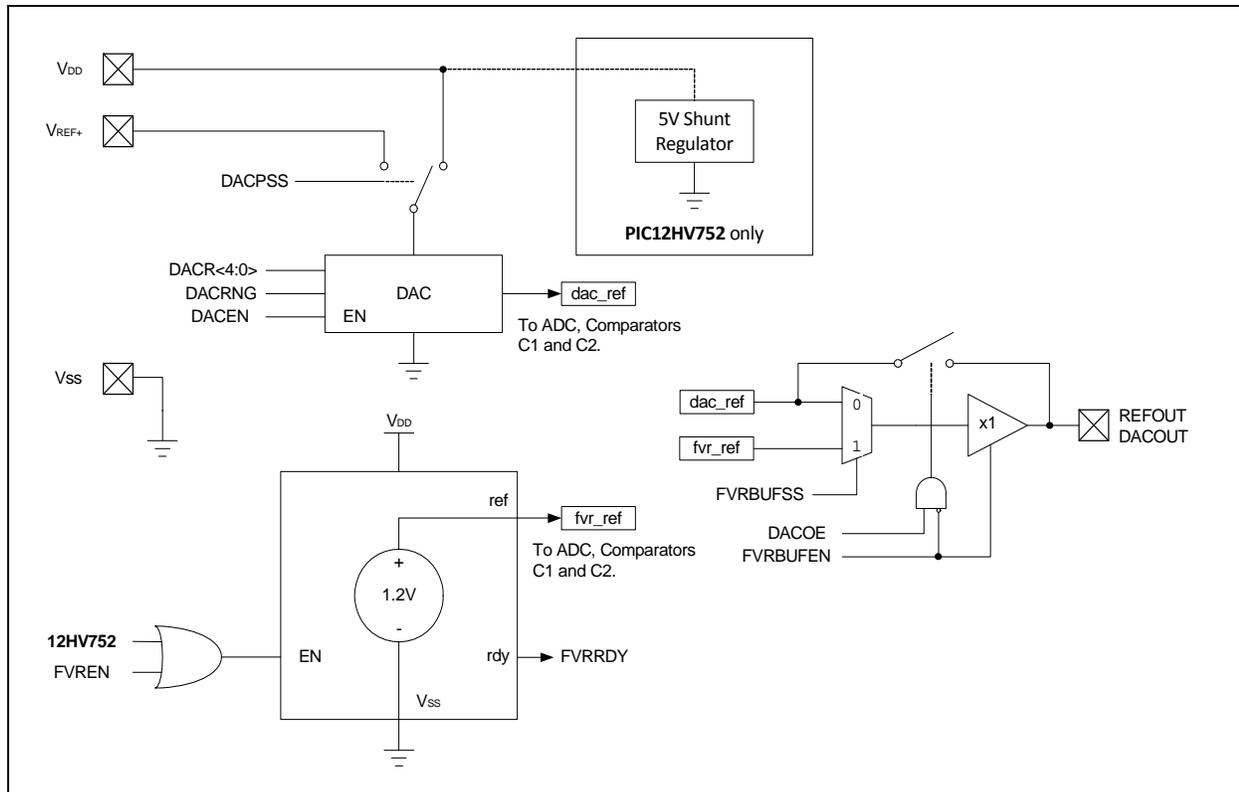

## 13.5 FVR Control Registers

**REGISTER 13-1: FVRCON: FIXED VOLTAGE REFERENCE CONTROL REGISTER**

|         |        |          |          |     |     |     |       |
|---------|--------|----------|----------|-----|-----|-----|-------|
| R/W-0/0 | R-q/q  | R/W-0/0  | R/W-0/0  | U-0 | U-0 | U-0 | U-0   |
| FVREN   | FVRRDY | FVRBUFEN | FVRBUFSS | —   | —   | —   | —     |
| bit 7   |        |          |          |     |     |     | bit 0 |

**Legend:**

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared | q = Value depends on condition                        |

- bit 7      **FVREN:** Fixed Voltage Reference Enable bit  
0 = Fixed Voltage Reference is disabled  
1 = Fixed Voltage Reference is enabled
- bit 6      **FVRRDY:** Fixed Voltage Reference Ready Flag bit  
0 = Fixed Voltage Reference output is not ready or not enabled bit  
1 = Fixed Voltage Reference output is ready for use
- bit 5      **FVRBUFEN:** Voltage Reference Output Pin Buffer Enable  
0 = Output buffer is disabled  
1 = Output buffer is enabled
- bit 4      **FVRBUFSS:** Voltage Reference Pin Buffer Source Select bit  
0 = Bandgap (1.2V) is the input to the output voltage buffer  
1 = dac\_out is the input to the output voltage buffer
- bit 3-0    **Unimplemented:** Read as '0'

**TABLE 13-1: SUMMARY OF REGISTERS ASSOCIATED WITH FIXED VOLTAGE REFERENCE**

| Name   | Bit 7 | Bit 6  | Bit 5    | Bit 4    | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Register on page |
|--------|-------|--------|----------|----------|-------|-------|-------|-------|------------------|
| FVRCON | FVREN | FVRRDY | FVRBUFEN | FVRBUFSS | —     | —     | —     | —     | 101              |

**Legend:** Shaded cells are not used with the Fixed Voltage Reference.

# PIC12F752/HV752

## 14.0 DIGITAL-TO-ANALOG CONVERTER (DAC) MODULE

The 5-bit, dual range Digital-to-Analog Converter (DAC) module supplies a variable voltage reference, with 64 selectable output levels of which three levels are duplicated. The output is ratiometric with respect to the input source, VSRC+. See Figure 14-1 for a block diagram of the DAC module.

The input of the DAC can be connected to two external voltage connections:


- VDD pin
- VREF+ pin

The output of the DAC module provides a reference voltage to the following:

- Comparator positive input
- ADC input channel
- FVR input reference
- DACOUT pin

The DAC is enabled by setting the DACEN bit of the DACCON0 register.

FIGURE 14-1: DIGITAL-TO-ANALOG CONVERTER BLOCK DIAGRAM

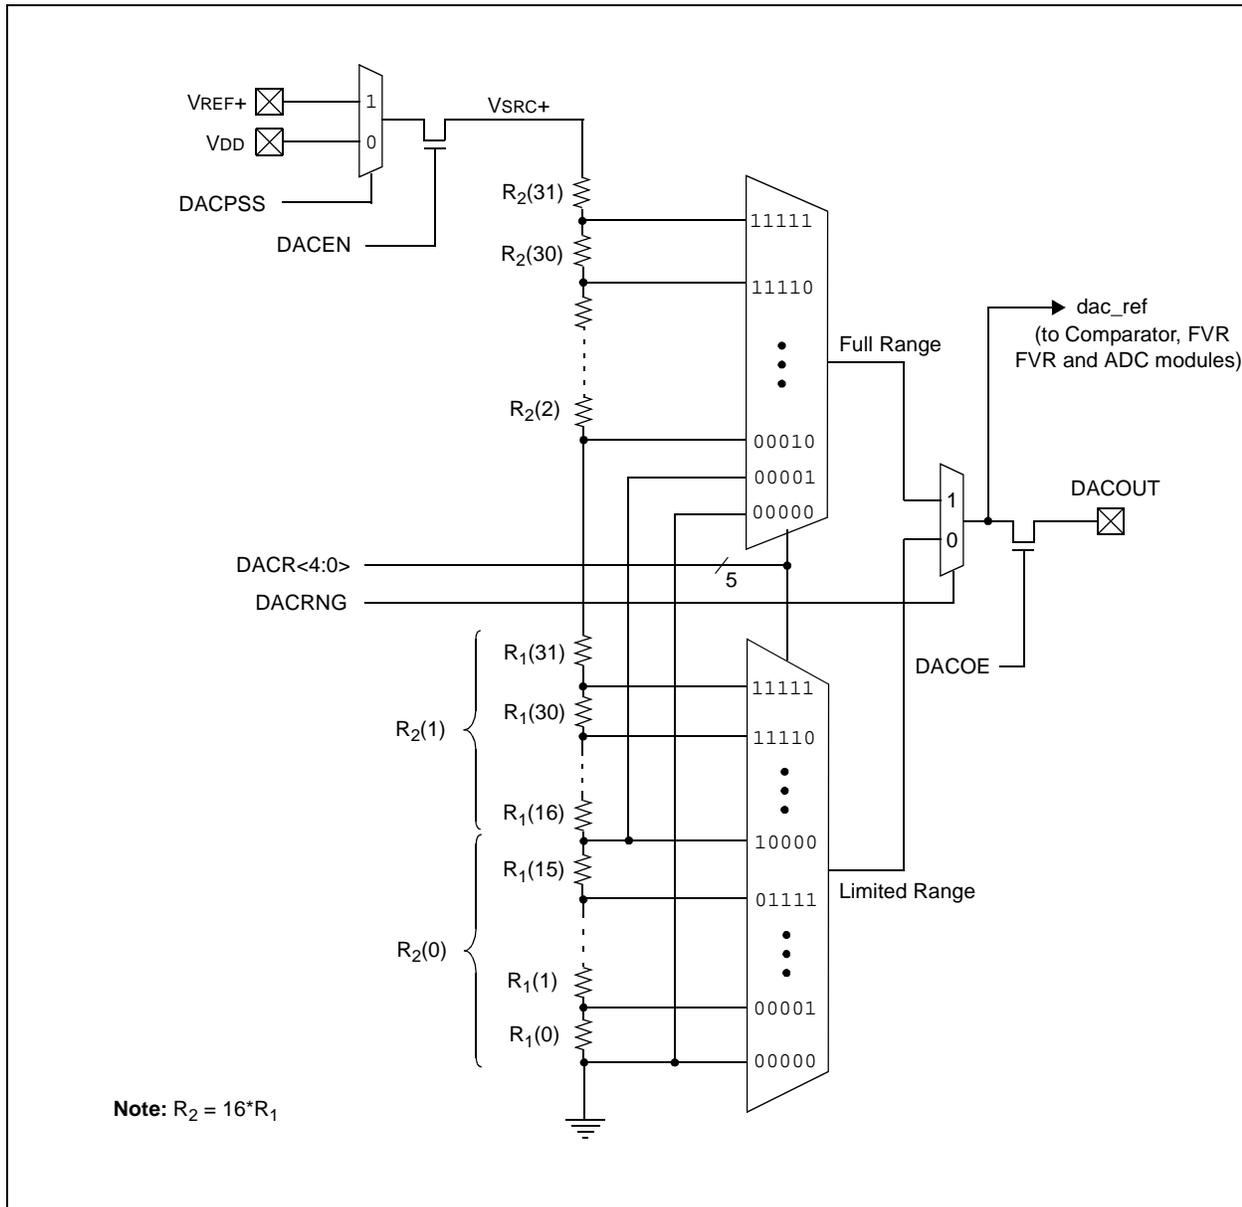

## 14.1 DAC Positive Voltage Source

The DACPSS bit of the DACCON0 register selects the positive voltage source, VSRC+. The following voltage sources are available:

- VDD pin (default)
- VREF+ pin

DAC module can select the positive voltage source using the DACPSS bit of the DACCON0 register. The default source, DACPSS = 0, connects VDD to the positive voltage source (VSRC+). VSRC+ can be changed to the VREF+ pin by setting DACPSS = 1.

## 14.2 DAC Range Selection

The DACRNG bit of the DACCON0 register selects between full-range or limited-range DAC output voltage.

Each range selects the output in 32 equal steps.

In Full-Range mode, the output is (31/32)\*VSRC+. In Limited-Range mode, the maximum VOUT is limited to 6% of VSRC+, (31/512) \* VSRC+.

## 14.3 Ratiometric Output Level

The DAC output value is derived using a resistor ladder with one end of the ladder tied to the positive voltage reference and the other end tied to VSS. If the voltage of the input source fluctuates, a similar fluctuation will result in the DAC output value.

The resistor values within the ladder can be found in [Section 20.0 “Electrical Specifications”](#).

## 14.4 DAC Output Voltage

The DAC output voltage level of the DAC is determined by the DACRNG and the DACR<4:0> bits of the DACCON0 and DACCON1 registers, respectively.

Use [Equation 14-1](#) to determine the value of the DAC output voltage. [Example 14-1](#) illustrates the calculations of the minimum, maximum and increment size of the DAC output voltage in Full Range mode. [Example 14-2](#) illustrates the Limited Range mode of the DAC output voltage values.

### EQUATION 14-1: DAC OUTPUT VOLTAGE

$$V_{OUT} = \left( (VSRC+) \left( \frac{DACR\langle 4:0 \rangle}{2^n} \right) \right)$$

**Note:** The value of 'n' is determined by the DACRNG bit.  
 When: DACRNG = 0 (Limited Range mode); n = 9;  
 DACRNG = 1 (Full Range mode); n = 5.

### EXAMPLE 14-1: FULL RANGE MODE

Given: VSRC = VDD = 5V, DACRNG = 1

$$V_{OUT} = [VSRC+ * (DACR\langle 4:0 \rangle / 2^5)]$$

**Minimum Vout Calculation:**

DACR<4:0> = 0 0000b, (0d);

$$V_{OUT} = [5V * (0/32)] = 0V;$$

**Maximum Vout Calculation:**

DACR<4:0> = 1 1111b, (31d);

$$V_{OUT} = [5V * (31/32)] = 4.84V;$$

**Step Increment Calculation:**

DACR<4:0> = 0 0001b, (1d);

$$V_{OUT} = [5V * (1/32)] = 156 \text{ mV}$$

**Full Range Mode Operation:**

0V ≤ VOUT ≤ 4.84V, with 32-step increments of 156 mV.

### EXAMPLE 14-2: LIMITED RANGE MODE

Given: VSRC = VDD = 5V, DACRNG = 0

$$V_{OUT} = [VSRC+ * (DACR\langle 4:0 \rangle / 2^9)]$$

**Minimum Vout Calculation:**

DACR<4:0> = 0 0000b, (0d);

$$V_{OUT} = [5V * (0/512)] = 0V;$$

**Maximum Vout Calculation:**

DACR<4:0> = 1 1111b, (31d);

$$V_{OUT} = [5V * (31/512)] = 303 \text{ mV};$$

**Step Increment Calculation:**

DACR<4:0> = 0 0001b, (1d);


$$V_{OUT} = [5V * (1/512)] = 9.8 \text{ mV}$$

**Limited Range Mode Operation:**

0V ≤ VOUT ≤ 303 mV, with 32-step increments of 9.8 mV.

# PIC12F752/HV752

FIGURE 14-2: VOLTAGE REFERENCE OUTPUT BUFFER EXAMPLE

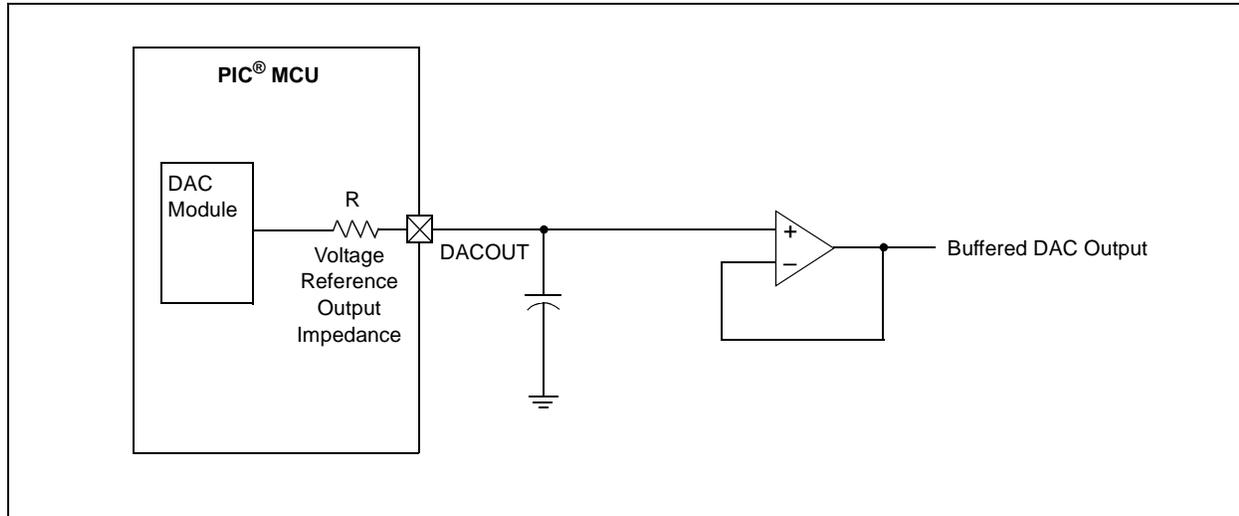

## 14.5 DAC Voltage Reference Output

The DAC output (dac\_ref) can be applied to the DACOUT pin as an unbuffered signal by:

- Setting the DACOE bit of the DACCON0 register
- Clearing the FVRBUFSS bit of the FVRCON register
- Clearing the FVRBUFEN bit of the FVRCON register

Figure 14-3 shows a block diagram pin configuration for the dac\_ref and fvr\_ref signals. This unbuffered DACOUT pin has limited current drive capability. When a higher drive current is required, an external buffer can be used on the DACOUT pin. Figure 14-2 shows an example of buffering technique.

The DAC output can also be configured to use an internal buffer by:

- Setting the FVRBUFEN bit of the FVRCON register changing the pin configuration to be the REFOUT pin

Enabling the DACOUT pin automatically overrides any digital input or output functions of the pin. Reading the DACOUT pin when it has been configured for DAC reference voltage output will always return a '0'.

## 14.6 Operation During Sleep


When the device wakes up from Sleep through an interrupt or a Watchdog Timer time-out, the contents of the DACCON0 register are not affected. To minimize current consumption in Sleep mode, the voltage reference should be disabled.

## 14.7 Effects of a Reset

A device Reset clears the DACCON0 and DACCON1 registers. As a result:

- The DAC module is disabled
- The DAC voltage output is disabled on the DACOUT pin

FIGURE 14-3: DAC/FVR OUTPUT PIN

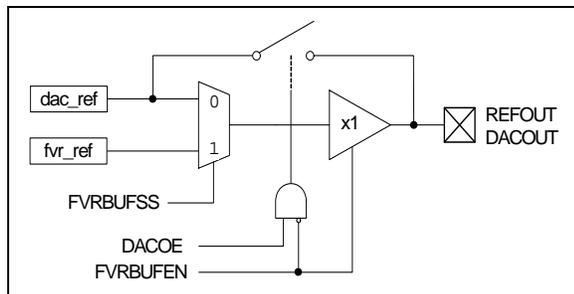

## 14.8 DAC Control Registers

**REGISTER 14-1: DACCON0: VOLTAGE REFERENCE CONTROL REGISTER 0**

|         |         |         |     |     |         |     |       |
|---------|---------|---------|-----|-----|---------|-----|-------|
| R/W-0/0 | R/W-0/0 | R/W-0/0 | U-0 | U-0 | R/W-0/0 | U-0 | U-0   |
| DACEN   | DACRNG  | DACOE   | —   | —   | DACPSS  | —   | —     |
| bit 7   |         |         |     |     |         |     | bit 0 |

**Legend:**

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared |   |

- bit 7      **DACEN:** DAC Enable bit  
1 = DAC is enabled  
0 = DAC is disabled
- bit 6      **DACRNG:** DAC Range Selection bit<sup>(1)</sup>  
1 = DAC is operating in Full Range mode  
0 = DAC is operating in Limited Range mode
- bit 5      **DACOE:** DAC Voltage Output Enable bit  
1 = DAC reference output is enabled to the DACOUT pin<sup>(2)</sup>  
0 = DAC reference output is disabled
- bit 4-3    **Unimplemented:** Read as '0'
- bit 2      **DACPSS:** DAC Positive Source Select bits  
0 = VDD  
1 = VREF+ pin
- bit 1-0    **Unimplemented:** Read as '0'

**Note 1:** Refer to [Equation 14-1](#).

**2:** The DACOUT pin configuration requires additional control bits in the FVRCON register (see [Figure 14-3](#)).

**REGISTER 14-2: DACCON1: VOLTAGE REFERENCE CONTROL REGISTER 1**

|       |     |     |           |         |         |         |         |
|-------|-----|-----|-----------|---------|---------|---------|---------|
| U-0   | U-0 | U-0 | R/W-0/0   | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 |
| —     | —   | —   | DACR<4:0> |         |         |         |         |
| bit 7 |     |     |           |         |         |         | bit 0   |

**Legend:**

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared |   |

- bit 7-5    **Unimplemented:** Read as '0'
- bit 4-0    **DACR<4:0>:** DAC Voltage Output Select bits  
1 1111 = DAC Voltage Maximum Output  
•  
•  
•  
0 0000 = DAC Voltage Minimum Output

**Note 1:** Refer to [Equation 14-1](#) to calculate the value of the DAC Voltage Output.

# PIC12F752/HV752

---

**TABLE 14-1: SUMMARY OF REGISTERS ASSOCIATED WITH THE DAC MODULE**

| Name    | Bit 7 | Bit 6  | Bit 5    | Bit 4     | Bit 3 | Bit 2  | Bit 1 | Bit 0 | Register on page |
|---------|-------|--------|----------|-----------|-------|--------|-------|-------|------------------|
| DACCON0 | DACEN | DACRNG | DACOE    | —         | —     | DACPSS | —     | —     | 105              |
| DACCON1 | —     | —      | —        | DACR<4:0> |       |        |       |       | 105              |
| FVRCON  | FVREN | FVRRDY | FVRBUFEN | FVRBUFSS  | —     | —      | —     | —     | 101              |

**Legend:** — = unimplemented, read as '0'. Shaded cells are unused by the DAC module.

## 15.0 COMPARATOR MODULE


Comparators are used to interface analog circuits to a digital circuit by comparing two analog voltages and providing a digital indication of their relative magnitudes. Comparators are very useful mixed signal building blocks because they provide analog functionality independent of program execution. The analog comparator module includes the following features:

- Independent comparator control
- Programmable input selection
- Comparator output is available internally/externally
- Programmable output polarity
- Interrupt-on-change
- Wake-up from Sleep
- Programmable Speed/Power optimization
- PWM shutdown
- Programmable and fixed voltage reference

### 15.1 Comparator Overview


A single comparator is shown in [Figure 15-1](#) along with the relationship between the analog input levels and the digital output. When the analog voltage at  $V_{IN+}$  is less than the analog voltage at  $V_{IN-}$ , the output of the comparator is a digital low level. When the analog voltage at  $V_{IN+}$  is greater than the analog voltage at  $V_{IN-}$ , the output of the comparator is a digital high level.

FIGURE 15-1: SINGLE COMPARATOR

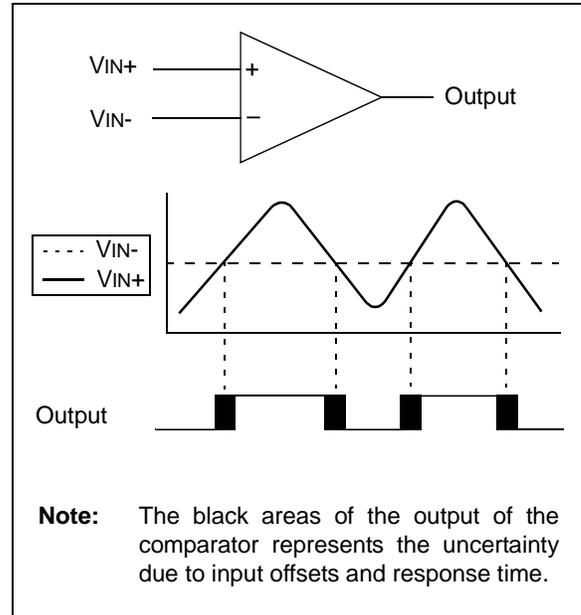

# PIC12F752/HV752

**FIGURE 15-2: COMPARATOR MODULE SIMPLIFIED BLOCK DIAGRAM**

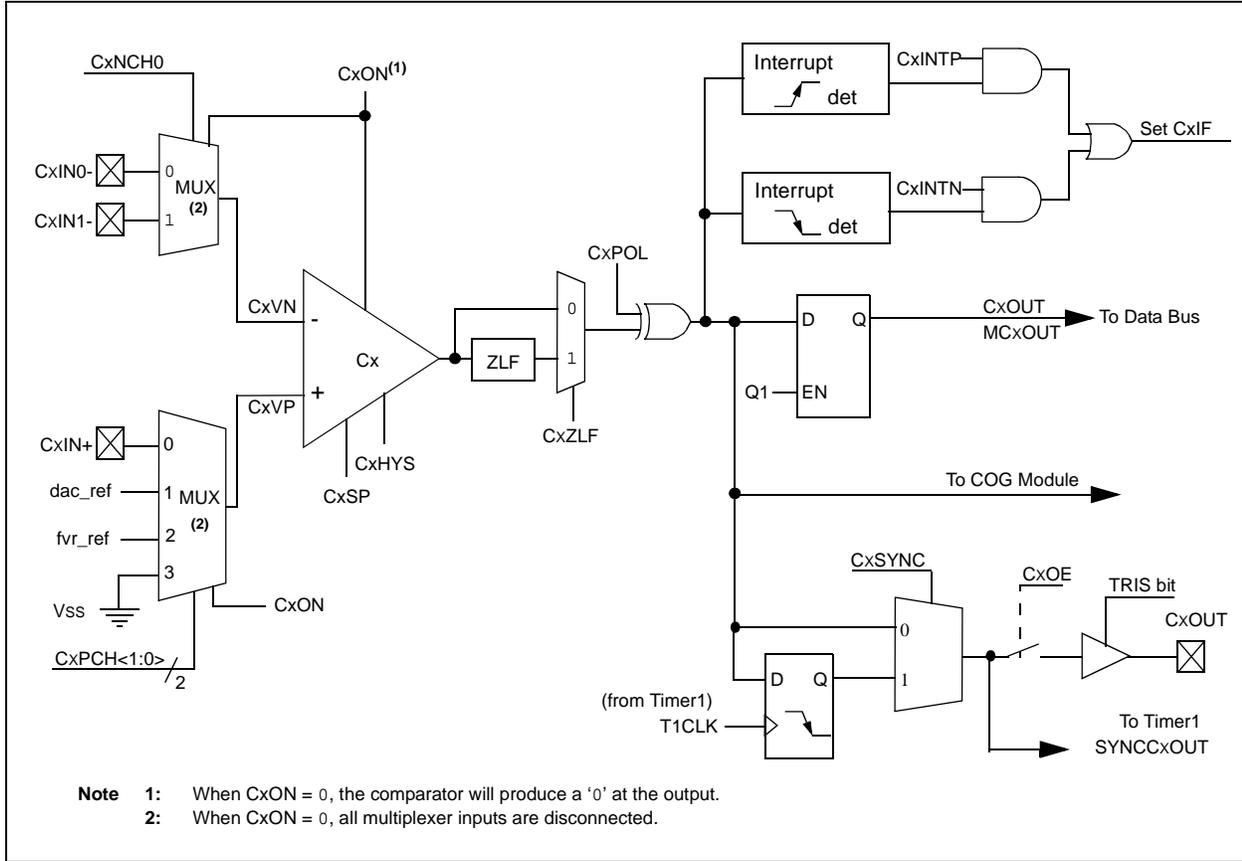

## 15.2 Comparator Control

Each comparator has two control registers: CMxCON0 and CMxCON1.

The CMxCON0 registers (see [Register 15-1](#)) contain Control and Status bits for the following:

- Enable
- Output selection
- Output pin enable
- Output polarity
- Speed/Power selection
- Hysteresis enable
- Output synchronization

The CMxCON1 registers (see [Register 15-2](#)) contain Control bits for the following:

- Interrupt edge polarity (rising and/or falling)
- Positive input channel selection
- Negative input channel selection

### 15.2.1 COMPARATOR ENABLE

Setting the CxON bit of the CMxCON0 register enables the comparator for operation. Clearing the CxON bit disables the comparator resulting in minimum current consumption.

### 15.2.2 COMPARATOR OUTPUT SELECTION

The output of the comparator can be monitored by reading either the CxOUT bit of the CMxCON0 register or the MCxOUT bit of the CMOUT register. In order to make the output available for an external connection, the following conditions must be true:

- CxOE bit of the CMxCON0 register must be set
- Corresponding TRIS bit must be cleared
- CxON bit of the CMxCON0 register must be set

**Note 1:** The CxOE bit of the CMxCON0 register overrides the PORT data latch. Setting the CxON bit of the CMxCON0 register has no impact on the port override.

**2:** The internal output of the comparator is latched with each instruction cycle. Unless otherwise specified, external outputs are not latched.

### 15.2.3 COMPARATOR OUTPUT POLARITY

Inverting the output of the comparator is functionally equivalent to swapping the comparator inputs. The polarity of the comparator output can be inverted by setting the CxPOL bit of the CMxCON0 register. Clearing the CxPOL bit results in a non-inverted output.

[Table 15-1](#) shows the output state versus input conditions, including polarity control.

**TABLE 15-1: COMPARATOR OUTPUT STATE VS. INPUT CONDITIONS**

| Input Condition | CxPOL | CxOUT |
|-----------------|-------|-------|
| $CxVN > CxVP$   | 0     | 0     |
| $CxVN < CxVP$   | 0     | 1     |
| $CxVN > CxVP$   | 1     | 1     |
| $CxVN < CxVP$   | 1     | 0     |

### 15.2.4 COMPARATOR SPEED/POWER SELECTION

The trade-off between speed or power can be optimized during program execution with the CxSP control bit. The default state for this bit is '1' which selects the normal speed mode. Device power consumption can be optimized at the cost of slower comparator propagation delay by clearing the CxSP bit to '0'.

## 15.3 Comparator Hysteresis

A selectable amount of separation voltage can be added to the input pins of each comparator to provide a hysteresis function to the overall operation. Hysteresis is enabled by setting the CxHYS bit of the CMxCON0 register.

See [Section 20.0 "Electrical Specifications"](#) for more information.

## 15.4 Timer1 Gate Operation

The output resulting from a comparator operation can be used as a source for gate control of Timer1. See [Section 7.5 "Timer1 Gate"](#) for more information. This feature is useful for timing the duration or interval of an analog event.

It is recommended that the comparator output be synchronized to Timer1. This ensures that Timer1 does not increment while a change in the comparator is occurring.

# PIC12F752/HV752

## 15.4.1 COMPARATOR OUTPUT SYNCHRONIZATION

The output from either comparator, C1 or C2, can be synchronized with Timer1 by setting the CxSYNC bit of the CMxCON0 register.

Once enabled, the comparator output is latched on the falling edge of the Timer1 source clock. If a prescaler is used with Timer1, the comparator output is latched after the prescaling function. To prevent a race condition, the comparator output is latched on the falling edge of the Timer1 clock source and Timer1 increments on the rising edge of its clock source. See the Comparator Block Diagram (Figure 15-2) and the Timer1 Block Diagram (Figure 7-1) for more information.

## 15.5 Comparator Interrupt

An interrupt can be generated upon a change in the output value of the comparator for each comparator, a rising edge detector and a Falling edge detector are present.

When either edge detector is triggered and its associated enable bit is set (CxINTP and/or CxINTN bits of the CMxCON1 register), the Corresponding Interrupt Flag bit (CxIF bit of the PIR2 register) will be set.

To enable the interrupt, you must set the following bits:

- CxON, CxPOL and CxSP bits of the CMxCON0 register
- CxIE bit of the PIE2 register
- CxINTP bit of the CMxCON1 register (for a rising edge detection)
- CxINTN bit of the CMxCON1 register (for a falling edge detection)
- PEIE and GIE bits of the INTCON register

The associated interrupt flag bit, CxIF bit of the PIR2 register, must be cleared in software. If another edge is detected while this flag is being cleared, the flag will still be set at the end of the sequence.

**Note:** Although a comparator is disabled, an interrupt can be generated by changing the output polarity with the CxPOL bit of the CMxCON0 register, or by switching the comparator on or off with the CxON bit of the CMxCON0 register.

## 15.6 Comparator Positive Input Selection

Configuring the CxPCH<1:0> bits of the CMxCON1 register directs an internal voltage reference or an analog pin to the non-inverting input of the comparator:

- CxIN0+ analog pin
- DAC Reference Voltage (dac\_ref)
- FVR Reference Voltage (fvr\_ref)
- VSS (Ground)

See [Section 13.0 “Fixed Voltage Reference \(FVR\)”](#) for more information on the Fixed Voltage Reference module.

See [Section 14.0 “Digital-to-Analog Converter \(DAC\) Module”](#) for more information on the DAC input signal.

Any time the comparator is disabled (CxON = 0), all comparator inputs are disabled.

## 15.7 Comparator Negative Input Selection

The CxNCH0 bit of the CMxCON0 register selects the analog input pin to the comparator inverting input.

**Note:** To use CxIN0+ and CxIN1x- pins as analog input, the appropriate bits must be set in the ANSEL register and the corresponding TRIS bits must also be set to disable the output drivers.

## 15.8 Comparator Response Time

The comparator output is indeterminate for a period of time after the change of an input source or the selection of a new reference voltage. This period is referred to as the response time. The response time of the comparator differs from the settling time of the voltage reference. Therefore, both of these times must be considered when determining the total response time to a comparator input change. See the Comparator and Voltage Reference Specifications in [Section 20.0 “Electrical Specifications”](#) for more details.


## 15.9 Interaction with the COG Module

The comparator outputs can be brought to the COG module in order to facilitate auto-shutdown. If auto-restart is also enabled, the comparators can be configured as a closed loop analog feedback to the COG, thereby creating an analog controlled PWM.

## 15.10 Zero Latency Filter

In high-speed operation, and under proper circuit conditions, it is possible for the comparator output to oscillate. This oscillation can have adverse effects on the hardware and software relying on this signal. Therefore, a digital filter has been added to the comparator output to suppress the comparator output oscillation. Once the comparator output changes, the output is prevented from reversing the change for a nominal time of 20 ns. This allows the comparator output to stabilize without affecting other dependent devices. Refer to [Figure 15-3](#).

**FIGURE 15-3: COMPARATOR ZERO LATENCY FILTER OPERATION**

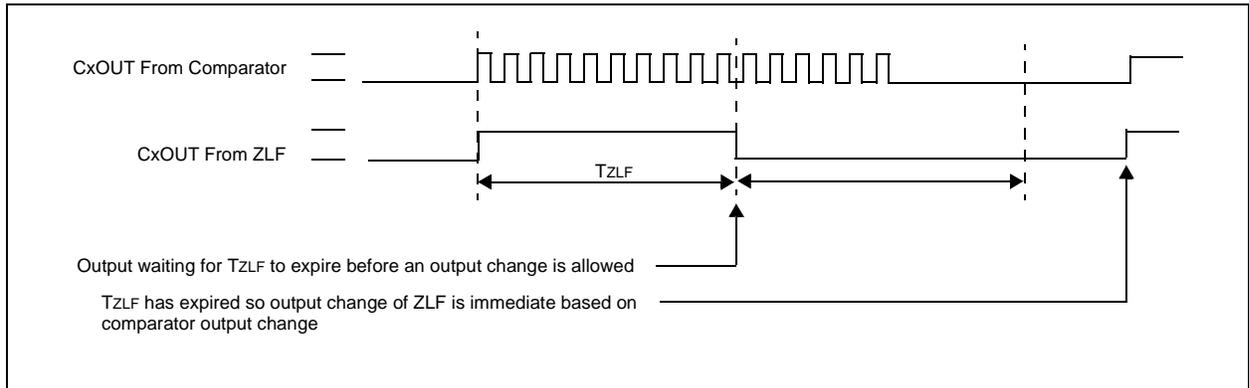

# PIC12F752/HV752

## 15.11 Analog Input Connection Considerations


A simplified circuit for an analog input is shown in Figure 15-4. Since the analog input pins share their connection with a digital input, they have reverse biased ESD protection diodes to  $V_{DD}$  and  $V_{SS}$ . The analog input, therefore, must be between  $V_{SS}$  and  $V_{DD}$ . If the input voltage deviates from this range by more than 0.6V in either direction, one of the diodes is forward biased and a latch-up may occur.

A maximum source impedance of 10 k $\Omega$  is recommended for the analog sources. Also, any external component connected to an analog input pin, such as a capacitor or a Zener diode, should have very little leakage current to minimize inaccuracies introduced.

**Note 1:** When reading a PORT register, all pins configured as analog inputs will read as a '0'. Pins configured as digital inputs will convert as an analog input, according to the input specification.

**2:** Analog levels on any pin defined as a digital input, may cause the input buffer to consume more current than is specified.

**FIGURE 15-4: ANALOG INPUT MODEL**

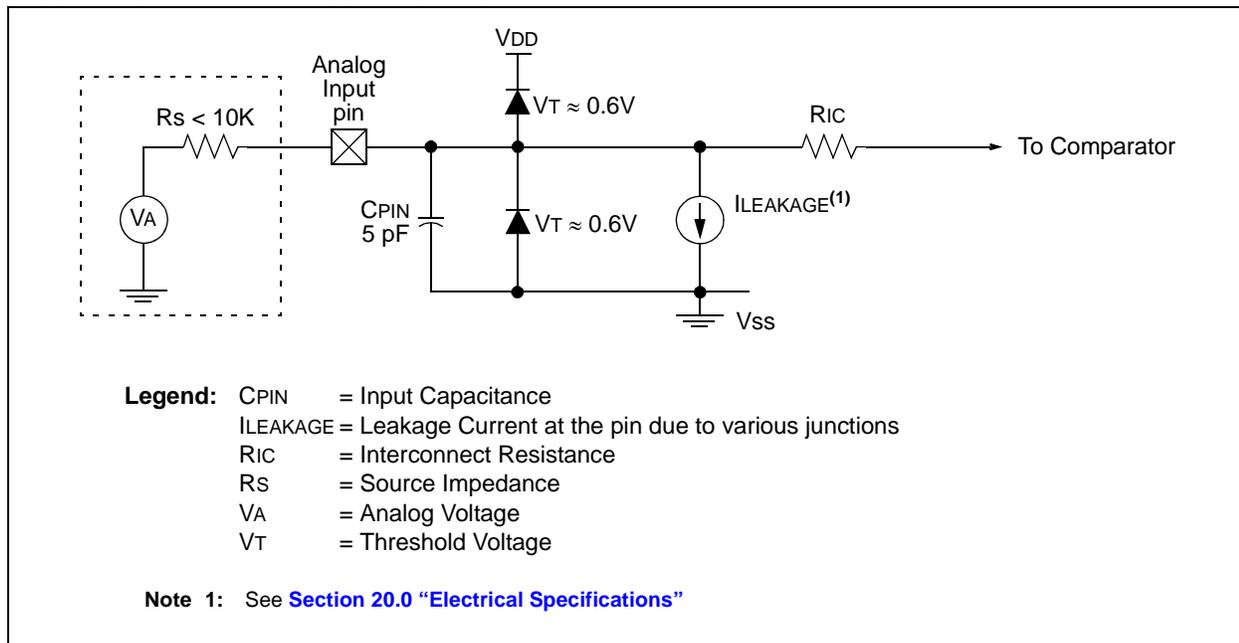

## 15.12 Comparator Control Registers

**REGISTER 15-1: CMxCON0: COMPARATOR Cx CONTROL REGISTER 0**

| R/W-0/0 | R-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-1/1 | R/W-0/0 | R/W-0/0 |
|---------|-------|---------|---------|---------|---------|---------|---------|
| CxON    | CxOUT | CxOE    | CxPOL   | CxZLF   | CxSP    | CxHYS   | CxSYNC  |
| bit 7   |       |         |         |         |         |         | bit 0   |

**Legend:**

|                      |                      |   |
|----------------------|----------------------|---|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared |   |

- bit 7      **CxON:** Comparator Enable bit  
           1 = Comparator is enabled  
           0 = Comparator is disabled and consumes no active power
- bit 6      **CxOUT:** Comparator Output bit  
           If CxPOL = 1 (inverted polarity):  
           1 = CxVP < CxVN  
           0 = CxVP > CxVN  
           If CxPOL = 0 (non-inverted polarity):  
           1 = CxVP > CxVN  
           0 = CxVP < CxVN
- bit 5      **CxOE:** Comparator Output Enable bit  
           1 = CxOUT is present on the CxOUT pin. Requires that the associated TRIS bit be cleared to actually drive the pin. Not affected by CxON.  
           0 = CxOUT is internal only
- bit 4      **CxPOL:** Comparator Output Polarity Select bit  
           1 = Comparator output is inverted  
           0 = Comparator output is not inverted
- bit 3      **CxZLF:** Zero Latency Filter Enable bit  
           1 = Zero latency filter is enabled  
           0 = Zero latency filter is disabled
- bit 2      **CxSP:** Comparator Speed/Power Select bit  
           1 = Comparator operates in normal power, higher speed mode  
           0 = Comparator operates in low-power, low-speed mode
- bit 1      **CxHYS:** Comparator Hysteresis Enable bit  
           1 = Comparator hysteresis enabled  
           0 = Comparator hysteresis disabled
- bit 0      **CxSYNC:** Comparator Output Synchronous Mode bit  
           1 = Comparator output to Timer1 and I/O pin is synchronous to changes on Timer1 clock source. Output updated on the falling edge of Timer1 clock source.  
           0 = Comparator output to Timer1 and I/O pin is asynchronous.

# PIC12F752/HV752

## REGISTER 15-2: CMxCON1: COMPARATOR Cx CONTROL REGISTER 1

|         |         |            |         |     |     |     |         |
|---------|---------|------------|---------|-----|-----|-----|---------|
| R/W-0/0 | R/W-0/0 | R/W-0/0    | R/W-0/0 | U-0 | U-0 | U-0 | R/W-0/0 |
| CxINTP  | CxINTN  | CxPCH<1:0> |         | —   | —   | —   | CxNCH0  |
| bit 7   |         |            |         |     |     |     | bit 0   |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

- bit 7                      **CxINTP:** Comparator Interrupt on Positive Going Edge Enable bit  
1 = The CxIF interrupt flag will be set upon a positive going edge of the CxOUT bit  
0 = No interrupt flag will be set on a positive going edge of the CxOUT bit
- bit 6                      **CxINTN:** Comparator Interrupt on Negative Going Edge Enable bits  
1 = The CxIF interrupt flag will be set upon a negative going edge of the CxOUT bit  
0 = No interrupt flag will be set on a negative going edge of the CxOUT bit
- bit 5-4                      **CxPCH<1:0>:** Comparator Positive Input Channel Select bits  
00 = CxVP connects to CxIN+ pin  
01 = CxVP connects to DAC Voltage Reference (dac\_ref)  
10 = CxVP connects to FVR Voltage Reference (fvr\_ref)  
11 = CxVP connects to Vss
- bit 3-1                      **Unimplemented:** Read as '0'
- bit 0                      **CxNCH0:** Comparator Negative Input Channel Select bits  
0 = CxVN connects to CxIN0- pin  
1 = CxVN connects to CxIN1- pin

## REGISTER 15-3: CMOUT: COMPARATOR OUTPUT REGISTER

|       |     |     |     |     |     |        |        |
|-------|-----|-----|-----|-----|-----|--------|--------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | R-0/0  | R-0/0  |
| —     | —   | —   | —   | —   | —   | MC2OUT | MC1OUT |
| bit 7 |     |     |     |     |     |        | bit 0  |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
u = Bit is unchanged                      x = Bit is unknown                      -n/n = Value at POR and BOR/Value at all other Resets  
'1' = Bit is set                              '0' = Bit is cleared

- bit 7-2                      **Unimplemented:** Read as '0'
- bit 1                      **MC2OUT:** Mirror Copy of C2OUT bit
- bit 0                      **MC1OUT:** Mirror Copy of C1OUT bit

**TABLE 15-2: SUMMARY OF REGISTERS ASSOCIATED WITH COMPARATOR MODULE**

| Name    | Bit 7  | Bit 6  | Bit 5         | Bit 4         | Bit 3                 | Bit 2   | Bit 1  | Bit 0  | Register on Page |
|---------|--------|--------|---------------|---------------|-----------------------|---------|--------|--------|------------------|
| CM1CON0 | C1ON   | C1OUT  | C1OE          | C1POL         | C1ZLF                 | C1SP    | C1HYS  | C1SYNC | 113              |
| CM1CON1 | C1INTP | C1INTN | C1PCH<1:0>    |               | —                     | —       | —      | C1NCH0 | 114              |
| CM2CON0 | C2ON   | C2OUT  | C2OE          | C2POL         | C2ZLF                 | C2SP    | C2HYS  | C2SYNC | 113              |
| CM2CON1 | C2INTP | C2INTN | C2PCH<1:0>    |               | —                     | —       | —      | C2NCH0 | 114              |
| CMOUT   | —      | —      | —             | —             | —                     | —       | MCOUT2 | MCOUT1 | 114              |
| DACCON0 | DACEN  | DACRNG | DACOE         | —             | —                     | DACPSS0 | —      | —      | 105              |
| DACCON1 | —      | —      | —             | DACR<4:0>     |                       |         |        | —      | 105              |
| FVRCON  | FVREN  | FVRRDY | FVR-<br>BUFEN | FVR-<br>BUFSS | —                     | —       | —      | —      | 101              |
| INTCON  | GIE    | PEIE   | T0IE          | INTE          | IOCIE                 | T0IF    | INTF   | IOCIF  | 15               |
| PIE2    | —      | —      | C2IE          | C1IE          | —                     | COG1IE  | —      | CCP1IE | 17               |
| PIR2    | —      | —      | C2IF          | C1IF          | —                     | COG1IF  | —      | CCP1IF | 19               |
| TRISA   | —      | —      | TRISA5        | TRISA4        | TRISA3 <sup>(1)</sup> | TRISA2  | TRISA1 | TRISA0 | 40               |
| ANSELA  | —      | —      | ANSA5         | ANSA4         | —                     | ANSA2   | ANSA1  | ANSA0  | 41               |

**Legend:** — = unimplemented location, read as '0'. Shaded cells are unused by the comparator module.

**Note 1:** TRISA3 always reads '1'.

# PIC12F752/HV752

## 16.0 INSTRUCTION SET SUMMARY

The PIC12F752/HV752 instruction set is highly orthogonal and is comprised of three basic categories:

- **Byte-oriented** operations
- **Bit-oriented** operations
- **Literal and control** operations

Each PIC16 instruction is a 14-bit word divided into an **opcode**, which specifies the instruction type and one or more **operands**, which further specify the operation of the instruction. The formats for each of the categories is presented in [Figure 16-1](#), while the various opcode fields are summarized in [Table 16-1](#).

[Table 16-2](#) lists the instructions recognized by the MPASM™ assembler.

For **byte-oriented** instructions, 'f' represents a file register designator and 'd' represents a destination designator. The file register designator specifies which file register is to be used by the instruction.

The destination designator specifies where the result of the operation is to be placed. If 'd' is zero, the result is placed in the W register. If 'd' is one, the result is placed in the file register specified in the instruction.

For **bit-oriented** instructions, 'b' represents a bit field designator, which selects the bit affected by the operation, while 'f' represents the address of the file in which the bit is located.

For **literal and control** operations, 'k' represents an 8-bit or 11-bit constant, or literal value.

One instruction cycle consists of four oscillator periods; for an oscillator frequency of 4 MHz, this gives a normal instruction execution time of 1 μs. All instructions are executed within a single instruction cycle, unless a conditional test is true, or the program counter is changed as a result of an instruction. When this occurs, the execution takes two instruction cycles, with the second cycle executed as a NOP.

All instruction examples use the format '0xhh' to represent a hexadecimal number, where 'h' signifies a hexadecimal digit.

### 16.1 Read-Modify-Write Operations


Any instruction that specifies a file register as part of the instruction performs a Read-Modify-Write (RMW) operation. The register is read, the data is modified, and the result is stored according to either the instruction or the destination designator 'd'. A read operation is performed on a register even if the instruction writes to that register.

For example, a `CLRF PORTA` instruction will read PORTA, clear all the data bits, then write the result back to PORTA. This example would have the unintended consequence of clearing the condition that set the IOCIF flag.

**TABLE 16-1: OPCODE FIELD DESCRIPTIONS**

| Field | Description   |
|-------|---|
| f     | Register file address (0x00 to 0x7F)  |
| W     | Working register (accumulator)  |
| b     | Bit address within an 8-bit file register   |
| k     | Literal field, constant data or label   |
| x     | Don't care location (= 0 or 1). The assembler will generate code with x = 0. It is the recommended form of use for compatibility with all Microchip software tools. |
| d     | Destination select; d = 0: store result in W, d = 1: store result in file register f. Default is d = 1.   |
| PC    | Program Counter   |
| TO    | Time-out bit  |
| C     | Carry bit   |
| DC    | Digit carry bit   |
| Z     | Zero bit  |
| PD    | Power-down bit  |

**FIGURE 16-1: GENERAL FORMAT FOR INSTRUCTIONS**

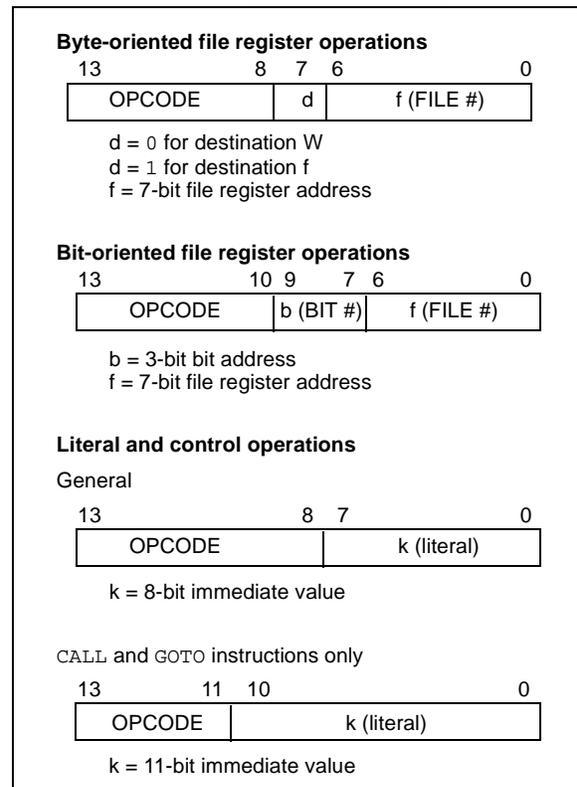

**TABLE 16-2: PIC12F752/HV752 INSTRUCTION SET**

| Mnemonic,<br>Operands                         | Description | Cycles                       | 14-Bit Opcode |    |      |      | Status<br>Affected | Notes                             |         |
|---|-------------|------------------------------|---------------|----|------|------|--------------------|-----------------------------------|---------|
|   |             |                              | MSb           |    | LSb  |      |                    |                                   |         |
| <b>BYTE-ORIENTED FILE REGISTER OPERATIONS</b> |             |                              |               |    |      |      |                    |                                   |         |
| ADDWF   | f, d        | Add W and f                  | 1             | 00 | 0111 | dfff | ffff               | C, DC, Z                          | 1, 2    |
| ANDWF   | f, d        | AND W with f                 | 1             | 00 | 0101 | dfff | ffff               | Z                                 | 1, 2    |
| CLRF  | f           | Clear f                      | 1             | 00 | 0001 | 1fff | ffff               | Z                                 | 2       |
| CLRWF   | –           | Clear W                      | 1             | 00 | 0001 | 0xxx | xxxx               | Z                                 |         |
| COMF  | f, d        | Complement f                 | 1             | 00 | 1001 | dfff | ffff               | Z                                 | 1, 2    |
| DECF  | f, d        | Decrement f                  | 1             | 00 | 0011 | dfff | ffff               | Z                                 | 1, 2    |
| DECFSZ  | f, d        | Decrement f, Skip if 0       | 1(2)          | 00 | 1011 | dfff | ffff               |                                   | 1, 2, 3 |
| INCF  | f, d        | Increment f                  | 1             | 00 | 1010 | dfff | ffff               | Z                                 | 1, 2    |
| INCFSZ  | f, d        | Increment f, Skip if 0       | 1(2)          | 00 | 1111 | dfff | ffff               |                                   | 1, 2, 3 |
| IORWF   | f, d        | Inclusive OR W with f        | 1             | 00 | 0100 | dfff | ffff               | Z                                 | 1, 2    |
| MOVF  | f, d        | Move f                       | 1             | 00 | 1000 | dfff | ffff               | Z                                 | 1, 2    |
| MOVWF   | f           | Move W to f                  | 1             | 00 | 0000 | 1fff | ffff               |                                   |         |
| NOP   | –           | No Operation                 | 1             | 00 | 0000 | 0xx0 | 0000               |                                   |         |
| RLF   | f, d        | Rotate Left f through Carry  | 1             | 00 | 1101 | dfff | ffff               | C                                 | 1, 2    |
| RRF   | f, d        | Rotate Right f through Carry | 1             | 00 | 1100 | dfff | ffff               | C                                 | 1, 2    |
| SUBWF   | f, d        | Subtract W from f            | 1             | 00 | 0010 | dfff | ffff               | C, DC, Z                          | 1, 2    |
| SWAPF   | f, d        | Swap nibbles in f            | 1             | 00 | 1110 | dfff | ffff               |                                   | 1, 2    |
| XORWF   | f, d        | Exclusive OR W with f        | 1             | 00 | 0110 | dfff | ffff               | Z                                 | 1, 2    |
| <b>BIT-ORIENTED FILE REGISTER OPERATIONS</b>  |             |                              |               |    |      |      |                    |                                   |         |
| BCF   | f, b        | Bit Clear f                  | 1             | 01 | 00bb | bfff | ffff               |                                   | 1, 2    |
| BSF   | f, b        | Bit Set f                    | 1             | 01 | 01bb | bfff | ffff               |                                   | 1, 2    |
| BTFSC   | f, b        | Bit Test f, Skip if Clear    | 1(2)          | 01 | 10bb | bfff | ffff               |                                   | 3       |
| BTFSS   | f, b        | Bit Test f, Skip if Set      | 1(2)          | 01 | 11bb | bfff | ffff               |                                   | 3       |
| <b>LITERAL AND CONTROL OPERATIONS</b>         |             |                              |               |    |      |      |                    |                                   |         |
| ADDLW   | k           | Add literal and W            | 1             | 11 | 111x | kkkk | kkkk               | C, DC, Z                          |         |
| ANDLW   | k           | AND literal with W           | 1             | 11 | 1001 | kkkk | kkkk               | Z                                 |         |
| CALL  | k           | Call Subroutine              | 2             | 10 | 0kkk | kkkk | kkkk               |                                   |         |
| CLRWDT  | –           | Clear Watchdog Timer         | 1             | 00 | 0000 | 0110 | 0100               | $\overline{TO}$ , $\overline{PD}$ |         |
| GOTO  | k           | Go to address                | 2             | 10 | 1kkk | kkkk | kkkk               |                                   |         |
| IORLW   | k           | Inclusive OR literal with W  | 1             | 11 | 1000 | kkkk | kkkk               | Z                                 |         |
| MOVLW   | k           | Move literal to W            | 1             | 11 | 00xx | kkkk | kkkk               |                                   |         |
| RETFIE  | –           | Return from interrupt        | 2             | 00 | 0000 | 0000 | 1001               |                                   |         |
| RETLW   | k           | Return with literal in W     | 2             | 11 | 01xx | kkkk | kkkk               |                                   |         |
| RETURN  | –           | Return from Subroutine       | 2             | 00 | 0000 | 0000 | 1000               |                                   |         |
| SLEEP   | –           | Go into Standby mode         | 1             | 00 | 0000 | 0110 | 0011               | $\overline{TO}$ , $\overline{PD}$ |         |
| SUBLW   | k           | Subtract W from literal      | 1             | 11 | 110x | kkkk | kkkk               | C, DC, Z                          |         |
| XORLW   | k           | Exclusive OR literal with W  | 1             | 11 | 1010 | kkkk | kkkk               | Z                                 |         |

- Note 1:** When an I/O register is modified as a function of itself (e.g., `MOVF PORTA, 1`), the value used will be that value present on the pins themselves. For example, if the data latch is '1' for a pin configured as input and is driven low by an external device, the data will be written back with a '0'.
- 2:** If this instruction is executed on the TMR0 register (and where applicable,  $d = 1$ ), the prescaler will be cleared if assigned to the Timer0 module.
- 3:** If the Program Counter (PC) is modified, or a conditional test is true, the instruction requires two cycles. The second cycle is executed as a NOP.

# PIC12F752/HV752

## 16.2 Instruction Descriptions

### **ADDLW**      **Add literal and W**

**Syntax:**      [ *label* ] ADDLW    *k*

**Operands:**     $0 \leq k \leq 255$

**Operation:**     $(W) + k \rightarrow (W)$

**Status Affected:**    C, DC, Z

**Description:**    The contents of the W register are added to the 8-bit literal 'k' and the result is placed in the W register.

### **ADDWF**      **Add W and f**

**Syntax:**      [ *label* ] ADDWF    *f*,*d*

**Operands:**     $0 \leq f \leq 127$   
 $d \in [0,1]$

**Operation:**     $(W) + (f) \rightarrow (\text{destination})$

**Status Affected:**    C, DC, Z

**Description:**    Add the contents of the W register with register 'f'. If 'd' is '0', the result is stored in the W register. If 'd' is '1', the result is stored back in register 'f'.

### **ANDLW**      **AND literal with W**

**Syntax:**      [ *label* ] ANDLW    *k*

**Operands:**     $0 \leq k \leq 255$

**Operation:**     $(W) .\text{AND.} (k) \rightarrow (W)$

**Status Affected:**    Z

**Description:**    The contents of W register are AND'ed with the 8-bit literal 'k'. The result is placed in the W register.

### **ANDWF**      **AND W with f**

**Syntax:**      [ *label* ] ANDWF    *f*,*d*

**Operands:**     $0 \leq f \leq 127$   
 $d \in [0,1]$

**Operation:**     $(W) .\text{AND.} (f) \rightarrow (\text{destination})$

**Status Affected:**    Z

**Description:**    AND the W register with register 'f'. If 'd' is '0', the result is stored in the W register. If 'd' is '1', the result is stored back in register 'f'.

### **BCF**          **Bit Clear f**

**Syntax:**      [ *label* ] BCF    *f*,*b*

**Operands:**     $0 \leq f \leq 127$   
 $0 \leq b \leq 7$

**Operation:**     $0 \rightarrow (f<b>)$

**Status Affected:**    None

**Description:**    Bit 'b' in register 'f' is cleared.

### **BSF**          **Bit Set f**

**Syntax:**      [ *label* ] BSF    *f*,*b*

**Operands:**     $0 \leq f \leq 127$   
 $0 \leq b \leq 7$

**Operation:**     $1 \rightarrow (f<b>)$

**Status Affected:**    None

**Description:**    Bit 'b' in register 'f' is set.

### **BTFSC**      **Bit Test f, Skip if Clear**

**Syntax:**      [ *label* ] BTFSC    *f*,*b*

**Operands:**     $0 \leq f \leq 127$   
 $0 \leq b \leq 7$

**Operation:**    skip if  $(f<b>) = 0$

**Status Affected:**    None

**Description:**    If bit 'b' in register 'f' is '1', the next instruction is executed. If bit 'b' in register 'f' is '0', the next instruction is discarded, and a NOP is executed instead, making this a 2-cycle instruction.

| <b>BTSS</b>      | <b>Bit Test f, Skip if Set</b>  |
|------------------|---|
| Syntax:          | [ <i>label</i> ] BTSS <i>f</i> , <i>b</i>   |
| Operands:        | $0 \leq f \leq 127$<br>$0 \leq b < 7$   |
| Operation:       | skip if $(f \ll b) = 1$   |
| Status Affected: | None  |
| Description:     | If bit 'b' in register 'f' is '0', the next instruction is executed.<br>If bit 'b' is '1', then the next instruction is discarded and a NOP is executed instead, making this a 2-cycle instruction. |

| <b>CLRWDT</b>    | <b>Clear Watchdog Timer</b>  |
|------------------|--|
| Syntax:          | [ <i>label</i> ] CLRWDT  |
| Operands:        | None   |
| Operation:       | 00h → WDT<br>0 → WDT prescaler,<br>1 → $\overline{TO}$<br>1 → $\overline{PD}$  |
| Status Affected: | $\overline{TO}$ , $\overline{PD}$  |
| Description:     | CLRWDT instruction resets the Watchdog Timer. It also resets the prescaler of the WDT.<br>Status bits $\overline{TO}$ and $\overline{PD}$ are set. |

| <b>CALL</b>      | <b>Call Subroutine</b>  |
|------------------|---|
| Syntax:          | [ <i>label</i> ] CALL <i>k</i>  |
| Operands:        | $0 \leq k \leq 2047$  |
| Operation:       | (PC)+1 → TOS,<br><i>k</i> → PC<10:0>,<br>(PCLATH<4:3>) → PC<12:11>  |
| Status Affected: | None  |
| Description:     | Call Subroutine. First, return address (PC + 1) is pushed onto the stack. The 11-bit immediate address is loaded into PC bits <10:0>. The upper bits of the PC are loaded from PCLATH. CALL is a 2-cycle instruction. |

| <b>COMF</b>      | <b>Complement f</b>  |
|------------------|--|
| Syntax:          | [ <i>label</i> ] COMF <i>f</i> , <i>d</i>  |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0,1]$   |
| Operation:       | $(\bar{f}) \rightarrow$ (destination)  |
| Status Affected: | Z  |
| Description:     | The contents of register 'f' are complemented. If 'd' is '0', the result is stored in W. If 'd' is '1', the result is stored back in register 'f'. |

| <b>CLRF</b>      | <b>Clear f</b>   |
|------------------|--|
| Syntax:          | [ <i>label</i> ] CLRF <i>f</i>                                 |
| Operands:        | $0 \leq f \leq 127$  |
| Operation:       | 00h → (f)<br>1 → Z   |
| Status Affected: | Z  |
| Description:     | The contents of register 'f' are cleared and the Z bit is set. |

| <b>DECF</b>      | <b>Decrement f</b>   |
|------------------|--|
| Syntax:          | [ <i>label</i> ] DECF <i>f</i> , <i>d</i>  |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0,1]$   |
| Operation:       | $(f) - 1 \rightarrow$ (destination)  |
| Status Affected: | Z  |
| Description:     | Decrement register 'f'. If 'd' is '0', the result is stored in the W register. If 'd' is '1', the result is stored back in register 'f'. |

| <b>CLRW</b>      | <b>Clear W</b>                              |
|------------------|---|
| Syntax:          | [ <i>label</i> ] CLRW                       |
| Operands:        | None  |
| Operation:       | 00h → (W)<br>1 → Z                          |
| Status Affected: | Z   |
| Description:     | W register is cleared. Zero bit (Z) is set. |

# PIC12F752/HV752

---

## **DECFSZ**      **Decrement f, Skip if 0**

---

Syntax:      [ *label* ] DECFSZ f,d

Operands:     $0 \leq f \leq 127$   
               $d \in [0,1]$

Operation:    (f) - 1 → (destination);  
              skip if result = 0

Status Affected: None

Description:    The contents of register 'f' are decremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.  
              If the result is '1', the next instruction is executed. If the result is '0', then a NOP is executed instead, making it a 2-cycle instruction.

## **INCFSZ**      **Increment f, Skip if 0**

---

Syntax:      [ *label* ] INCFSZ f,d

Operands:     $0 \leq f \leq 127$   
               $d \in [0,1]$

Operation:    (f) + 1 → (destination),  
              skip if result = 0

Status Affected: None

Description:    The contents of register 'f' are incremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.  
              If the result is '1', the next instruction is executed. If the result is '0', a NOP is executed instead, making it a 2-cycle instruction.

## **GOTO**      **Unconditional Branch**

---

Syntax:      [ *label* ] GOTO k

Operands:     $0 \leq k \leq 2047$

Operation:     $k \rightarrow PC<10:0>$   
               $PCLATH<4:3> \rightarrow PC<12:11>$

Status Affected: None

Description:    GOTO is an unconditional branch. The 11-bit immediate value is loaded into PC bits <10:0>. The upper bits of PC are loaded from PCLATH<4:3>. GOTO is a 2-cycle instruction.

## **IORLW**      **Inclusive OR literal with W**

---

Syntax:      [ *label* ] IORLW k

Operands:     $0 \leq k \leq 255$

Operation:    (W) .OR. k → (W)

Status Affected: Z

Description:    The contents of the W register are OR'ed with the 8-bit literal 'k'. The result is placed in the W register.

## **INCF**      **Increment f**

---

Syntax:      [ *label* ] INCF f,d

Operands:     $0 \leq f \leq 127$   
               $d \in [0,1]$

Operation:    (f) + 1 → (destination)

Status Affected: Z

Description:    The contents of register 'f' are incremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.

## **IORWF**      **Inclusive OR W with f**

---

Syntax:      [ *label* ] IORWF f,d

Operands:     $0 \leq f \leq 127$   
               $d \in [0,1]$

Operation:    (W) .OR. (f) → (destination)

Status Affected: Z

Description:    Inclusive OR the W register with register 'f'. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.

| <b>MOVF</b>      | <b>Move f</b>   |
|------------------|---|
| Syntax:          | [ <i>label</i> ] MOVF f,d   |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0,1]$  |
| Operation:       | (f) → (dest)  |
| Status Affected: | Z   |
| Description:     | The contents of register 'f' is moved to a destination dependent upon the status of 'd'. If d = 0, destination is W register. If d = 1, the destination is file register 'f' itself. d = 1 is useful to test a file register since Status flag Z is affected. |
| Words:           | 1   |
| Cycles:          | 1   |
| <u>Example:</u>  | MOVF FSR, 0<br>After Instruction<br>W = value in FSR register<br>Z = 1  |

| <b>MOVWF</b>     | <b>Move W to f</b>   |
|------------------|--|
| Syntax:          | [ <i>label</i> ] MOVWF f   |
| Operands:        | $0 \leq f \leq 127$  |
| Operation:       | (W) → (f)  |
| Status Affected: | None   |
| Description:     | Move data from W register to register 'f'.   |
| Words:           | 1  |
| Cycles:          | 1  |
| <u>Example:</u>  | MOVWF OPTION<br>F<br>Before Instruction<br>OPTION = 0xFF<br>W = 0x4F<br>After Instruction<br>OPTION = 0x4F<br>W = 0x4F |

| <b>MOVLW</b>     | <b>Move literal to W</b>  |
|------------------|---|
| Syntax:          | [ <i>label</i> ] MOVLW k  |
| Operands:        | $0 \leq k \leq 255$   |
| Operation:       | $k \rightarrow (W)$   |
| Status Affected: | None  |
| Description:     | The 8-bit literal 'k' is loaded into W register. The "don't cares" will assemble as '0's. |
| Words:           | 1   |
| Cycles:          | 1   |
| <u>Example:</u>  | MOVLW 0x5A<br>After Instruction<br>W = 0x5A   |

| <b>NOP</b>       | <b>No Operation</b>  |
|------------------|----------------------|
| Syntax:          | [ <i>label</i> ] NOP |
| Operands:        | None                 |
| Operation:       | No operation         |
| Status Affected: | None                 |
| Description:     | No operation         |
| Words:           | 1                    |
| Cycles:          | 1                    |
| <u>Example:</u>  | NOP                  |



## RLF Rotate Left f through Carry

**Syntax:** [ *label* ] RLF f,d

**Operands:**  $0 \leq f \leq 127$   
 $d \in [0,1]$

**Operation:** See description below

**Status Affected:** C

**Description:** The contents of register 'f' are rotated one bit to the left through the Carry flag. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is stored back in register 'f'.



**Words:** 1

**Cycles:** 1

**Example:** RLF REG1,0

Before Instruction

```
REG1 = 1110 0110
C     = 0
```

After Instruction

```
REG1 = 1110 0110
W     = 1100 1100
C     = 1
```

## SLEEP Enter Sleep mode

**Syntax:** [ *label* ] SLEEP

**Operands:** None

**Operation:** 00h → WDT,  
0 → WDT prescaler,  
1 →  $\overline{TO}$ ,  
0 →  $\overline{PD}$

**Status Affected:**  $\overline{TO}$ ,  $\overline{PD}$

**Description:** The power-down Status bit,  $\overline{PD}$  is cleared. Time-out Status bit,  $\overline{TO}$  is set. Watchdog Timer and its prescaler are cleared. The processor is put into Sleep mode with the oscillator stopped.

## RRF Rotate Right f through Carry

**Syntax:** [ *label* ] RRF f,d

**Operands:**  $0 \leq f \leq 127$   
 $d \in [0,1]$

**Operation:** See description below

**Status Affected:** C

**Description:** The contents of register 'f' are rotated one bit to the right through the Carry flag. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.



## SUBLW Subtract W from literal

**Syntax:** [ *label* ] SUBLW k

**Operands:**  $0 \leq k \leq 255$

**Operation:**  $k - (W) \rightarrow (W)$

**Status Affected:** C, DC, Z

**Description:** The W register is subtracted (2's complement method) from the 8-bit literal 'k'. The result is placed in the W register.

| Result | Condition  |
|--------|--|
| C = 0  | $W > k$  |
| C = 1  | $W \leq k$                                       |
| DC = 0 | $W\langle 3:0 \rangle > k\langle 3:0 \rangle$    |
| DC = 1 | $W\langle 3:0 \rangle \leq k\langle 3:0 \rangle$ |

# PIC12F752/HV752

---

## **SUBWF**      **Subtract W from f**

---

Syntax:      [ *label* ] SUBWF f,d

Operands:     $0 \leq f \leq 127$   
               $d \in [0,1]$

Operation:    (f) - (W) → (destination)

Status Affected: C, DC, Z

Description:   Subtract (2's complement method) W register from register 'f'. If 'd' is '0', the result is stored in the W register. If 'd' is '1', the result is stored back in register 'f'.

|        |                 |
|--------|-----------------|
| C = 0  | W > f           |
| C = 1  | W ≤ f           |
| DC = 0 | W<3:0> > f<3:0> |
| DC = 1 | W<3:0> ≤ f<3:0> |

## **XORWF**      **Exclusive OR W with f**

---

Syntax:      [ *label* ] XORWF f,d

Operands:     $0 \leq f \leq 127$   
               $d \in [0,1]$

Operation:    (W) .XOR. (f) → (destination)

Status Affected: Z

Description:   Exclusive OR the contents of the W register with register 'f'. If 'd' is '0', the result is stored in the W register. If 'd' is '1', the result is stored back in register 'f'.

## **SWAPF**      **Swap Nibbles in f**

---

Syntax:      [ *label* ] SWAPF f,d

Operands:     $0 \leq f \leq 127$   
               $d \in [0,1]$

Operation:    (f<3:0>) → (destination<7:4>),  
              (f<7:4>) → (destination<3:0>)

Status Affected: None

Description:   The upper and lower nibbles of register 'f' are exchanged. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed in register 'f'.

## **XORLW**      **Exclusive OR literal with W**

---

Syntax:      [ *label* ] XORLW k

Operands:     $0 \leq k \leq 255$

Operation:    (W) .XOR. k → (W)

Status Affected: Z

Description:   The contents of the W register are XOR'ed with the 8-bit literal 'k'. The result is placed in the W register.

## 17.0 SPECIAL FEATURES OF THE CPU

The PIC12F752/HV752 has a host of features intended to maximize system reliability, minimize cost through elimination of external components, provide power-saving features and offer code protection.

These features are:

- Reset:
  - Power-on Reset (POR)
  - Power-up Timer (PWRT)
  - Brown-out Reset (BOR)
- Interrupts
- Watchdog Timer (WDT)
- Oscillator selection
- Sleep
- Code protection
- ID Locations
- In-Circuit Serial Programming

The Power-up Timer (PWRT), which provides a fixed delay of 64 ms (nominal) on power-up only, is designed to keep the part in Reset while the power supply stabilizes. There is also circuitry to reset the device if a brown-out occurs, which can use the Power-up Timer to provide at least a 64 ms Reset. With these functions-on-chip, most applications need no external Reset circuitry.

The Sleep mode is designed to offer a very low-current Power-Down mode. The user can wake-up from Sleep through:

- External Reset
- Watchdog Timer Wake-up
- An interrupt

Oscillator selection options are available to allow the part to fit the application. The INTOSC options save system cost, while the External Clock (EC) option provides a means for specific frequency and accurate clock sources. Configuration bits are used to select various options (see [Register 17-1](#)).

## 17.1 Configuration Bits

The Configuration bits can be programmed (read as '0') or left unprogrammed (read as '1') to select various device configurations as shown in [Register 17-1](#). These bits are mapped in program memory location 2007h.

**Note:** Address 2007h is beyond the user program memory space. It belongs to the special configuration memory space (2000h-3FFFh), which can be accessed only during programming. See "PIC12F752/HV752 Flash Memory Programming Specification" (DS41561) for more information.

# PIC12F752/HV752

## REGISTER 17-1: CONFIGURATION WORD

|        |          |          |       |            |       |
|--------|----------|----------|-------|------------|-------|
| R/P-1  | R/P-1    | R/P-1    | R/P-1 | R/P-1      | R/P-1 |
| DEBUG  | CLKOUTEN | WRT<1:0> |       | BOREN<1:0> |       |
| bit 13 |          |          |       |            | bit 8 |

|       |       |       |       |       |     |     |       |
|-------|-------|-------|-------|-------|-----|-----|-------|
| U-1   | R/P-1 | R/P-1 | R/P-1 | R/P-1 | U-1 | U-1 | R/P-1 |
| —     | CP    | MCLRE | PWRTE | WDTE  | —   | —   | FOSC0 |
| bit 7 |       |       |       |       |     |     | bit 0 |

### Legend:

R = Readable bit      P = Programmable bit      U = Unimplemented bit, read as '1'  
 '0' = Bit is cleared      '1' = Bit is set      -n = Value when blank or after Bulk Erase

- bit 13      **DEBUG:** Debug Mode Enable bit<sup>(2)</sup>  
 1 = Background debugger is disabled  
 0 = Background debugger is enabled
- bit 12      **CLKOUTEN:** Clock Out Enable bit  
 1 = Clock out function disabled. CLKOUT pin acts as I/O pin  
 0 = General purpose I/O disabled. CLKOUT pin acts as CLKOUT
- bit 11-10      **WRT<1:0>:** Flash Program Memory Self Write Enable bit  
 11 = Write protection off  
 10 = 000h to FFh write-protected, 100h to 3FFh may be modified by PMCON1 control  
 01 = 000h to 1FFh write-protected, 200h to 3FFh may be modified by PMCON1 control  
 00 = 000h to 3FFh write-protected, entire program is write-protected
- bit 8-9      **BOREN<1:0>:** Brown-out Reset Enable bits  
 11 = BOR enabled  
 10 = BOR enabled during operation and disabled in Sleep  
 0x = BOR disabled
- bit 7      Unimplemented: Read as '1'.
- bit 6      **CP:** Code Protection bit  
 1 = Program memory code protection is disabled  
 0 = Program memory code protection is enabled
- bit 5      **MCLRE:** MCLR/VPP Pin Function Select bit  
 1 = MCLR pin is MCLR function and weak internal pull-up is enabled  
 0 = MCLR pin is input function, MCLR function is internally disabled
- bit 4      **PWRTE:** Power-up Timer Enable bit<sup>(1)</sup>  
 1 = PWRT disabled  
 0 = PWRT enabled
- bit 3      **WDTE:** Watchdog Timer Enable bit  
 1 = WDT enabled  
 0 = WDT disabled
- bit 2-1      Unimplemented: Read as '1'.
- bit 0      **FOSC:** Oscillator Selection bits  
 1 = EC oscillator selected: CLKIN on RA5/CLKIN  
 0 = Internal oscillator: I/O function on RA5/CLKIN

**Note 1:** Enabling Brown-out Reset does not automatically enable Power-up Timer.

**Note 2:** The Configuration bit is managed automatically by the device development tools. The user should not attempt to manually write this bit location. However, the user should ensure that this location has been programmed to a '1' and the device checksum is correct for proper operation of production software.

## 17.2 Calibration Bits

The 8 MHz internal oscillator is factory calibrated. These calibration values are stored in fuses located in the Calibration Word (2008h). The Calibration Word is not erased when using the specified bulk erase sequence in the “PIC12F752/HV752 Flash Memory Programming Specification” (DS41561) and thus, does not require reprogramming.

## 17.3 Reset

The PIC12F752/HV752 device differentiates between various kinds of Reset:

- Power-on Reset (POR)
- WDT Reset during normal operation
- WDT Reset during Sleep
- MCLR Reset during normal operation
- MCLR Reset during Sleep
- Brown-out Reset (BOR)

Some registers are not affected in any Reset condition; their status is unknown on POR and unchanged in any other Reset. Most other registers are reset to a “Reset state” on:


- Power-on Reset
- MCLR Reset
- MCLR Reset during Sleep
- WDT Reset
- Brown-out Reset (BOR)

WDT wake-up does not cause register resets in the same manner as a WDT Reset since wake-up is viewed as the resumption of normal operation.  $\overline{TO}$  and  $\overline{PD}$  bits are set or cleared differently in different Reset situations, as indicated in Table 17-2. Software can use these bits to determine the nature of the Reset. See Table 17-4 for a full description of Reset states of all registers.

A simplified block diagram of the On-Chip Reset Circuit is shown in Figure 17-1.

The MCLR Reset path has a noise filter to detect and ignore small pulses. See Section 20.0 “Electrical Specifications” for pulse-width specifications.

**FIGURE 17-1: SIMPLIFIED BLOCK DIAGRAM OF ON-CHIP RESET CIRCUIT**

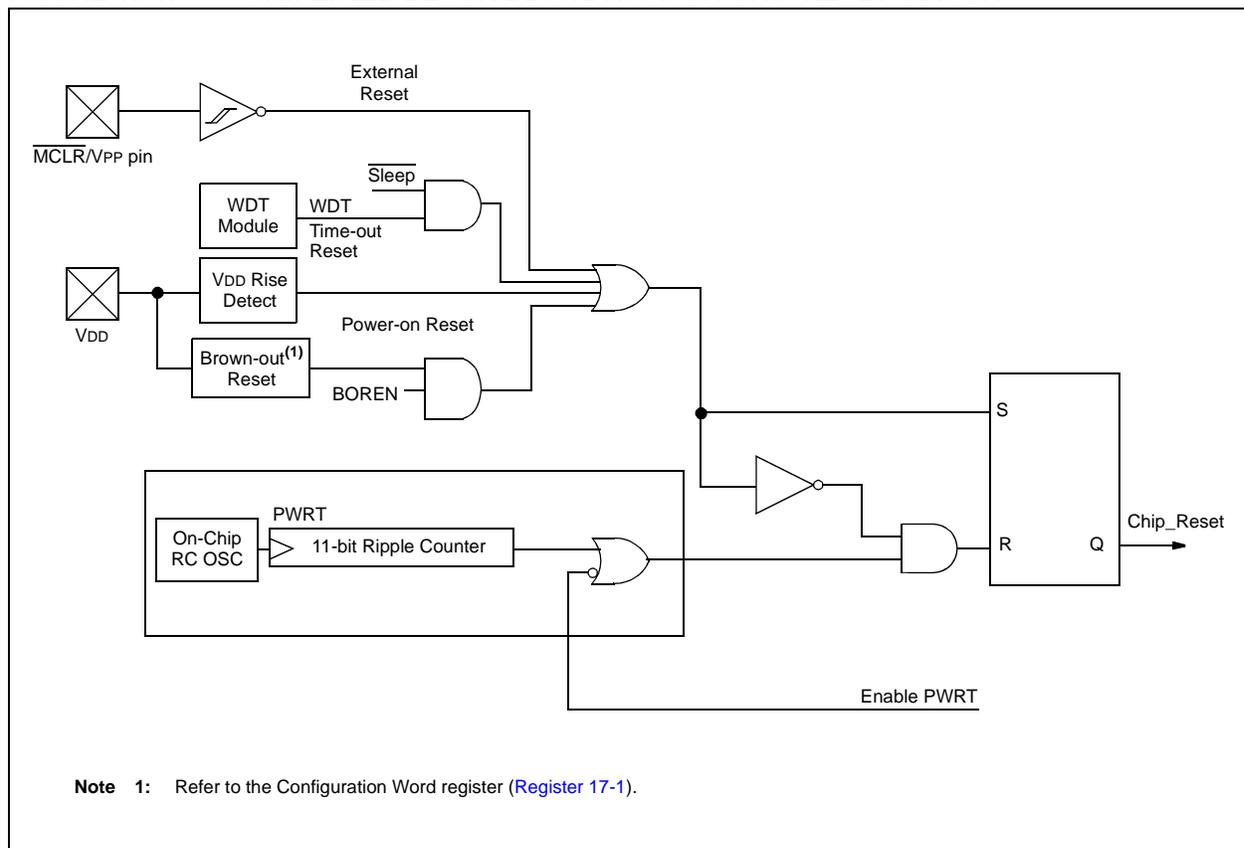

# PIC12F752/HV752

**TABLE 17-1: TIME-OUT IN VARIOUS SITUATIONS**

| Oscillator Configuration | Power-up                      |                               | Brown-out Reset               |                               | Wake-up from Sleep |
|--------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------|
|                          | $\overline{\text{PWRTE}} = 0$ | $\overline{\text{PWRTE}} = 1$ | $\overline{\text{PWRTE}} = 0$ | $\overline{\text{PWRTE}} = 1$ |                    |
| EC, INTOSC               | TPWRT                         | —                             | TPWRT                         | —                             | —                  |

**TABLE 17-2: STATUS/PCON BITS AND THEIR SIGNIFICANCE**

| $\overline{\text{POR}}$ | $\overline{\text{BOR}}$ | $\overline{\text{TO}}$ | $\overline{\text{PD}}$ | Condition  |
|-------------------------|-------------------------|------------------------|------------------------|--|
| 0                       | x                       | 1                      | 1                      | Power-on Reset   |
| u                       | 0                       | 1                      | 1                      | Brown-out Reset  |
| u                       | u                       | 0                      | u                      | WDT Reset  |
| u                       | u                       | 0                      | 0                      | WDT Wake-up  |
| u                       | u                       | u                      | u                      | $\overline{\text{MCLR}}$ Reset during normal operation |
| u                       | u                       | 1                      | 0                      | $\overline{\text{MCLR}}$ Reset during Sleep            |

**Legend:** u = unchanged, x = unknown

## 17.3.1 POWER-ON RESET (POR)

The on-chip POR circuit holds the chip in Reset until VDD has reached a high enough level for proper operation. To take advantage of the POR, simply connect the MCLR pin through a resistor to VDD. This will eliminate external RC components usually needed to create Power-on Reset. A maximum rise time for VDD is required. See [Section 20.0 “Electrical Specifications”](#) for details. If the BOR is enabled, the maximum rise time specification does not apply. The BOR circuitry will keep the device in Reset until VDD reaches VBOR (see [Section 17.3.4 “Brown-out Reset \(BOR\)”](#)).

**Note:** The POR circuit does not produce an internal Reset when VDD declines. To re-enable the POR, VDD must reach VSS for a minimum of 100  $\mu$ s.

When the device starts normal operation (exits the Reset condition), device operating parameters (i.e., voltage, frequency, temperature, etc.) must be met to ensure proper operation. If these conditions are not met, the device must be held in Reset until the operating conditions are met.

For additional information, refer to Application Note AN607, “Power-up Trouble Shooting” (DS00000607).

## 17.3.2 MCLR


PIC12F752/HV752 has a noise filter in the MCLR Reset path. The filter will detect and ignore small pulses.

It should be noted that a WDT Reset does not drive MCLR pin low.

Voltages applied to the MCLR pin that exceed its specification can result in both MCLR Resets and excessive current beyond the device specification during the ESD event. For this reason, Microchip recommends that the MCLR pin no longer be tied directly to VDD. The use of an RC network, as shown in [Figure 17-2](#), is suggested.

An internal MCLR option is enabled by clearing the MCLRE bit in the Configuration Word register. When MCLRE = 0, the Reset signal to the chip is generated internally. When the MCLRE = 1, the MCLR pin becomes an external Reset input. In this mode, the MCLR pin has a weak pull-up to VDD.

**FIGURE 17-2: RECOMMENDED MCLR CIRCUIT**

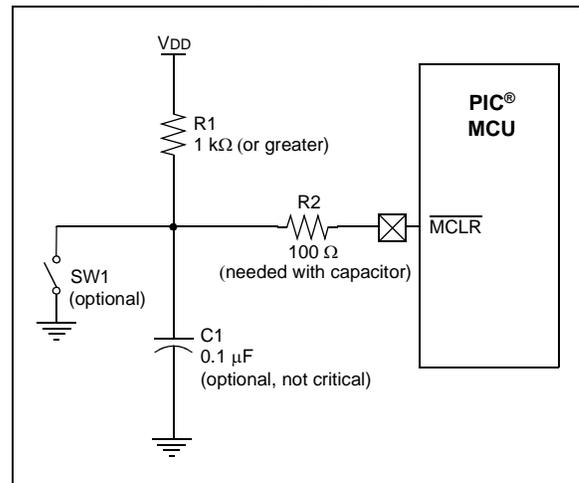

## 17.3.3 POWER-UP TIMER (PWRT)

The Power-up Timer provides a fixed 64 ms (nominal) time-out on power-up only, from POR or Brown-out Reset. The Power-up Timer operates from an internal RC oscillator. For more information, see [Section 4.2.2 “Internal Clock Mode”](#). The chip is kept in Reset as long as PWRT is active. The PWRT delay allows the VDD to rise to an acceptable level. A Configuration bit, PWRT $\overline{E}$ , can disable (if set) or enable (if cleared or programmed) the Power-up Timer. The Power-up Timer should be enabled when Brown-out Reset is enabled, although it is not required.

The Power-up Timer delay will vary from chip-to-chip due to:

- VDD variation
- Temperature variation
- Process variation

See DC parameters for details ([Section 20.0 “Electrical Specifications”](#)).

**Note:** Voltage spikes below VSS at the MCLR pin, inducing currents greater than 80 mA, may cause latch-up. Thus, a series resistor of 50-100  $\Omega$  should be used when applying a “low” level to the MCLR pin, rather than pulling this pin directly to VSS.

# PIC12F752/HV752

## 17.3.4 BROWN-OUT RESET (BOR)

The BOREN<1:0> bits in the Configuration Word register select one of three BOR modes. One mode has been added to allow control of the BOR enable for lower current during Sleep. By selecting BOREN<1:0> = 10, the BOR is automatically disabled in Sleep to conserve power and enabled on wake-up. See Register 17-1 for the Configuration Word definition.

A brown-out occurs when VDD falls below VBOR for greater than parameter TBOR (see Section 20.0 “Electrical Specifications”). The brown-out condition will reset the device. This will occur regardless of VDD slew rate. A Brown-out Reset may not occur if VDD falls below VBOR for less than parameter TBOR.


On any Reset (Power-on, Brown-out Reset, Watchdog timer, etc.), the chip will remain in Reset until VDD rises above VBOR (see Figure 17-3). If enabled, the Power-up Timer will be invoked by the Reset and keep the chip in Reset an additional 64 ms.

**Note:** The Power-up Timer is enabled by the  $\overline{\text{PWRTE}}$  bit in the Configuration Word register.

If VDD drops below VBOR while the Power-up Timer is running, the chip will go back into a Brown-out Reset and the Power-up Timer will be re-initialized. Once VDD rises above VBOR, the Power-up Timer will execute a 64 ms Reset.

Table 17-3 summarizes the registers associated with BOR.

**FIGURE 17-3: BROWN-OUT SITUATIONS**

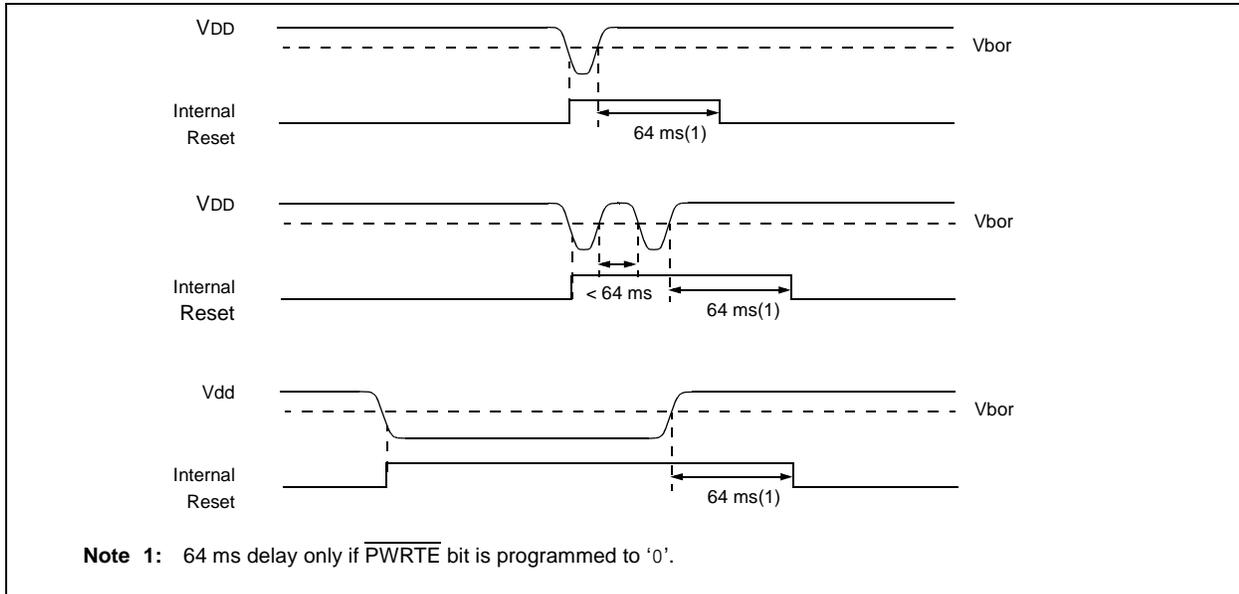

**TABLE 17-3: SUMMARY OF REGISTERS ASSOCIATED WITH BROWN-OUT RESET**

| Name   | Bit 7 | Bit 6 | Bit 5 | Bit 4                  | Bit 3                  | Bit 2 | Bit 1                   | Bit 0                   | Register on Page |
|--------|-------|-------|-------|------------------------|------------------------|-------|-------------------------|-------------------------|------------------|
| PCON   | —     | —     | —     | —                      | —                      | —     | $\overline{\text{POR}}$ | $\overline{\text{BOR}}$ | 20               |
| STATUS | IRP   | RP1   | RP0   | $\overline{\text{TO}}$ | $\overline{\text{PD}}$ | Z     | DC                      | C                       | 13               |

**Legend:** u = unchanged, x = unknown, — = unimplemented bit, reads as '0', q = value depends on condition. Shaded cells are not used by BOR.

**Note 1:** Other (non Power-up) Resets include  $\overline{\text{MCLR}}$  Reset and Watchdog Timer Reset during normal operation.

## 17.3.5 TIME-OUT SEQUENCE

On power-up, the time-out sequence is as follows:

- PWRT time-out is invoked after POR has expired
- OST is activated after the PWRT time-out has expired

The total time-out will vary based on oscillator configuration and PWRT bit status. For example, in EC mode with PWRT bit erased (PWRT disabled), there will be no time-out at all. Figure 17-4, Figure 17-5 and Figure 17-6 depict time-out sequences.

Since the time-outs occur from the POR pulse, if  $\overline{\text{MCLR}}$  is kept low long enough, the time-outs will expire. Then, bringing  $\overline{\text{MCLR}}$  high will begin execution immediately (see Figure 17-5). This is useful for testing purposes or to synchronize more than one PIC12F752/HV752 device operating in parallel.

Table 17-5 shows the Reset conditions for some special registers, while Table 17-4 shows the Reset conditions for all the registers.

## 17.3.6 POWER CONTROL (PCON) REGISTER


The Power Control register PCON (address 8Eh) has two Status bits to indicate what type of Reset occurred last.

Bit 0 is  $\overline{\text{BOR}}$  (Brown-out).  $\overline{\text{BOR}}$  is unknown on Power-on Reset. It must then be set by the user and checked on subsequent Resets to see if  $\overline{\text{BOR}} = 0$ , indicating that a Brown-out has occurred. The BOR Status bit is a “don’t care” and is not necessarily predictable if the brown-out circuit is disabled ( $\text{BOREN}\langle 1:0 \rangle = 00$  in the Configuration Word register).

Bit 1 is  $\overline{\text{POR}}$  (Power-on Reset). It is a ‘0’ on Power-on Reset and unaffected otherwise. The user must write a ‘1’ to this bit following a Power-on Reset. On a subsequent Reset, if  $\overline{\text{POR}}$  is ‘0’, it will indicate that a Power-on Reset has occurred (i.e., VDD may have gone too low).


For more information, see Section 17.3.4 “Brown-out Reset (BOR)”.

**FIGURE 17-4: TIME-OUT SEQUENCE ON POWER-UP (DELAYED  $\overline{\text{MCLR}}$ ): CASE 1**

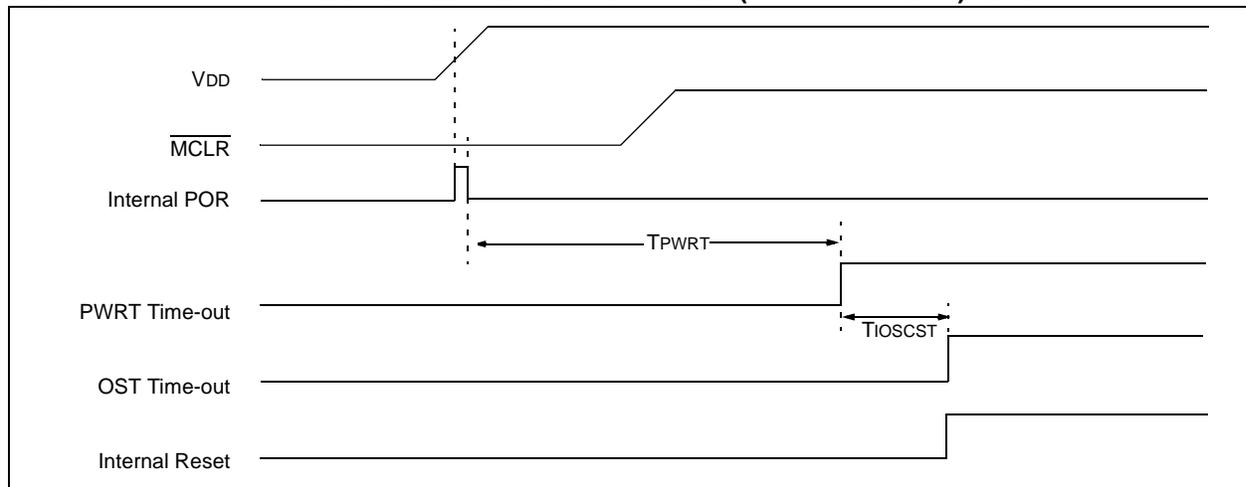


# PIC12F752/HV752

**FIGURE 17-5: TIME-OUT SEQUENCE ON POWER-UP (DELAYED  $\overline{\text{MCLR}}$ ): CASE 2**

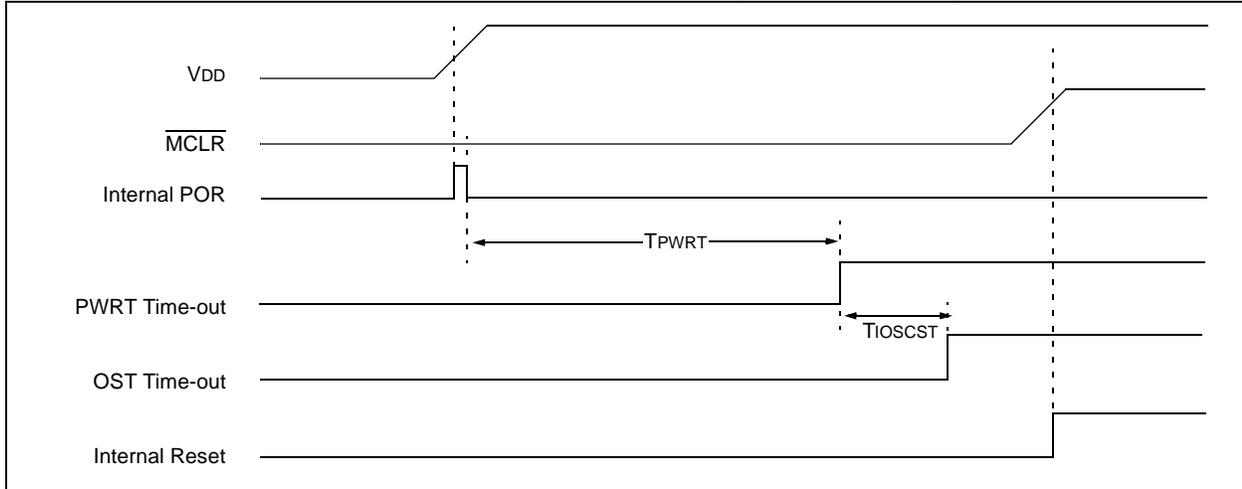

**FIGURE 17-6: TIME-OUT SEQUENCE ON POWER-UP ( $\overline{\text{MCLR}}$  WITH VDD)**

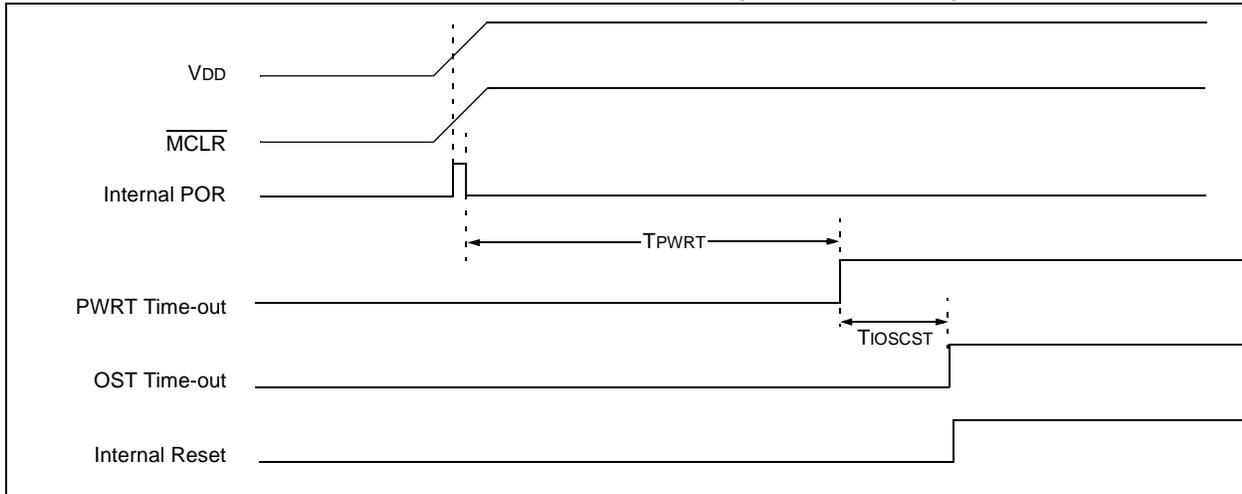

**TABLE 17-4: INITIALIZATION CONDITION FOR REGISTERS**

| Register               | Address               | Power-on Reset | MCLR Reset<br>WDT Reset<br>Brown-out Reset <sup>(1)</sup> | Wake-up from Sleep through<br>Interrupt<br>Wake-up from Sleep through<br>WDT Time-out |
|------------------------|-----------------------|----------------|---|---|
| W                      | —                     | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| INDF                   | 00h/80h/<br>100h/180h | xxxx xxxx      | xxxx xxxx   | uuuu uuuu   |
| TMR0                   | 01h                   | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| PCL                    | 02h/82h/<br>102h/182h | 0000 0000      | 0000 0000   | PC + 1 <sup>(3)</sup>   |
| STATUS                 | 03h/83h/<br>103h/183h | 0001 1xxx      | 000q quuu <sup>(4)</sup>                                  | uuuq quuu <sup>(4)</sup>  |
| FSR                    | 04h/84h/<br>104h/184h | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| PORTA                  | 05h                   | --xx xxxx      | --uu uuuu   | --uu uuuu   |
| IOCAF                  | 08h                   | --00 0000      | --00 0000   | --uu uuuu   |
| PCLATH                 | 0Ah/8Ah/<br>10Ah/18Ah | ---0 0000      | ---0 0000   | ---u uuuu   |
| INTCON                 | 0Bh/8Bh/<br>10Bh/18Bh | 0000 0000      | 0000 0000   | uuuu uuuu <sup>(2)</sup>  |
| PIR1                   | 0Ch                   | 00-- -0-0      | 00-- -0-0   | uu-- -u-u <sup>(2)</sup>  |
| PIR2                   | 0Dh                   | --00 -0-0      | --00 -0-0   | --uu -u-u <sup>(2)</sup>  |
| TMR1L                  | 0Fh                   | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| TMR1H                  | 10h                   | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| T1CON                  | 11h                   | 0000 00-0      | uuuu uu-u   | uuuu uu-u   |
| T1GCON                 | 12h                   | 0000 0x00      | 0000 0x00   | uuuu uuuu   |
| CCPR1L <sup>(1)</sup>  | 13h                   | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| CCPR1H <sup>(1)</sup>  | 14h                   | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| CCP1CON <sup>(1)</sup> | 15h                   | --00 0000      | --00 0000   | --uu uuuu   |
| ADRESL <sup>(1)</sup>  | 1Ch                   | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| ADRESH <sup>(1)</sup>  | 1Dh                   | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| ADCON0 <sup>(1)</sup>  | 1Eh                   | 0000 0000      | 0000 0000   | uuuu uuuu   |
| ADCON1 <sup>(1)</sup>  | 1Fh                   | -000 ----      | -000 ----   | -uuu ----   |
| OPTION_REG             | 81h/181h              | 1111 1111      | 1111 1111   | uuuu uuuu   |
| TRISA                  | 85h                   | --11 1111      | --11 1111   | --uu uuuu   |
| IOCAP                  | 88h                   | --00 0000      | --00 0000   | --uu uuuu   |
| PIE1                   | 8Ch                   | 00-- -000      | 00-- -000   | uu-- -uuu   |
| PIE2                   | 8Dh                   | --00 -0-0      | --00 -0-0   | --uu -u-u   |
| OSCCON                 | 8Fh                   | --01 -00-      | --uu -uu-   | --uu -uu-   |
| FVRCON                 | 90h                   | 0000 ----      | 0000 ----   | uuuu ----   |
| DACCON0                | 91h                   | 000- -0--      | 000- -0--   | uuu- -u--   |
| DACCON1                | 92h                   | ---0 0000      | ---0 0000   | ---u uuuu   |
| CM2CON0                | 9Bh                   | 0000 0100      | 0000 0100   | uuuu uuuu   |
| CM2CON1                | 9Ch                   | 0000 ---0      | 0000 ---0   | uuuu ---u   |

**Legend:** u = unchanged, x = unknown, - = unimplemented bit, reads as '0', q = value depends on condition.

**Note 1:** If VDD goes too low, Power-on Reset will be activated and registers will be affected differently.

**2:** One or more bits in INTCON and/or PIRx will be affected (to cause wake-up).

**3:** When the wake-up is due to an interrupt and the GIE bit is set, the PC is loaded with the interrupt vector (0004h).

**4:** See Table 17-5 for Reset value for specific condition.

**5:** If Reset was due to brown-out, then bit 0 = 0. All other Resets will cause bit 0 = u.

# PIC12F752/HV752

**TABLE 17-4: INITIALIZATION CONDITION FOR REGISTERS (CONTINUED)**

| Register | Address | Power-on Reset | MCLR Reset<br>WDT Reset (Continued)<br>Brown-out Reset <sup>(1)</sup> | Wake-up from Sleep through<br>Interrupt<br>Wake-up from Sleep through<br>WDT Time-out |
|----------|---------|----------------|---|---|
| CM1CON0  | 9Dh     | 0000 0100      | 0000 0100   | uuuu uuuu   |
| CM1CON1  | 9Eh     | 0000 ---0      | 0000 ---0   | uuuu ---u   |
| CMOUT    | 9Fh     | ---- --00      | ---- --00   | ---- --uu   |
| LATA     | 105h    | --xx -xxx      | --uu -uuu   | --uu -uuu   |
| IOCAN    | 108h    | --00 0000      | --00 0000   | --uu uuuu   |
| WPUA     | 10Ch    | --00 0000      | --00 0000   | --uu uuuu   |
| SLRCON0  | 10Dh    | ---- -0-0      | ---- -0-0   | ---- -u-u   |
| PCON     | 10Fh    | ---- -q        | ---- --uu <sup>(1, 5)</sup>   | ---- --uu   |
| TMR2     | 110h    | 0000 0000      | 0000 0000   | uuuu uuuu   |
| PR2      | 111h    | 1111 1111      | 1111 1111   | uuuu uuuu   |
| T2CON    | 112h    | -000 0000      | -000 0000   | -uuu uuuu   |
| HLTMR1   | 113h    | 0000 0000      | 0000 0000   | uuuu uuuu   |
| HLTPR1   | 114h    | 1111 1111      | 1111 1111   | uuuu uuuu   |
| HLT1CON0 | 115h    | -000 0000      | -000 0000   | -uuu uuuu   |
| HLT1CON1 | 116h    | ---0 0000      | ---0 0000   | ---u uuuu   |
| ANSELA   | 185h    | --11 -111      | --11 -111   | --uu -uuu   |
| APFCON   | 188h    | ---0 -000      | ---0 -000   | ---u -uuu   |
| OSCTUNE  | 189h    | ---0 0000      | ---u uuuu   | ---u uuuu   |
| PMCON1   | 18Ch    | ---- -000      | ---- -000   | ---- -uuu   |
| PMCON2   | 18Dh    | ---- ----      | ---- ----   | ---- ----   |
| PMADRL   | 18Eh    | 0000 0000      | 0000 0000   | uuuu uuuu   |
| PMADRH   | 18Fh    | ---- --00      | ---- --00   | ---- --uu   |
| PMDATL   | 190h    | 0000 0000      | 0000 0000   | uuuu uuuu   |
| PMDATH   | 191h    | --00 0000      | --00 0000   | --uu uuuu   |
| COG1PH   | 192h    | ---- xxxx      | ---- uuuu   | ---- uuuu   |
| COG1BLK  | 193h    | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| COG1DB   | 194h    | xxxx xxxx      | uuuu uuuu   | uuuu uuuu   |
| COG1CON0 | 195h    | 0000 0000      | 0000 0000   | uuuu uuuu   |
| COG1CON1 | 196h    | --00 0000      | --00 0000   | --uu uuuu   |
| COG1ASD  | 197h    | 0000 0000      | 0000 0000   | uuuu uuuu   |

**Legend:** u = unchanged, x = unknown, - = unimplemented bit, reads as '0', q = value depends on condition.

**Note 1:** If VDD goes too low, Power-on Reset will be activated and registers will be affected differently.

**2:** One or more bits in INTCON and/or PIRx will be affected (to cause wake-up).

**3:** When the wake-up is due to an interrupt and the GIE bit is set, the PC is loaded with the interrupt vector (0004h).

**4:** See [Table 17-5](#) for Reset value for specific condition.

**5:** If Reset was due to brown-out, then bit 0 = 0. All other Resets will cause bit 0 = u.

**TABLE 17-5: INITIALIZATION CONDITION FOR SPECIAL REGISTERS**

| Condition                          | Program Counter       | Status Register | PCON Register |
|------------------------------------|-----------------------|-----------------|---------------|
| Power-on Reset                     | 000h                  | 0001 1xxx       | ---- --0x     |
| MCLR Reset during normal operation | 000h                  | 000u uuuu       | ---- --uu     |
| MCLR Reset during Sleep            | 000h                  | 0001 0uuu       | ---- --uu     |
| WDT Reset                          | 000h                  | 0000 uuuu       | ---- --uu     |
| WDT Wake-up                        | PC + 1                | uuu0 0uuu       | ---- --uu     |
| Brown-out Reset                    | 000h                  | 0001 1uuu       | ---- --u0     |
| Interrupt Wake-up from Sleep       | PC + 1 <sup>(1)</sup> | uuu1 0uuu       | ---- --uu     |

**Legend:** u = unchanged, x = unknown, – = unimplemented bit, reads as '0'.

**Note 1:** When the wake-up is due to an interrupt and Global Interrupt Enable bit, GIE, is set, the PC is loaded with the interrupt vector (0004h) after execution of PC + 1.

# PIC12F752/HV752

## 17.4 Interrupts

The PIC12F752/HV752 has multiple sources of interrupt:

- External Interrupt (INT pin)
- Interrupt-On-Change (IOC) Interrupts
- Timer0 Overflow Interrupt
- Timer1 Overflow Interrupt
- Timer2 Match Interrupt
- Hardware Limit Timer (HLT) Interrupt
- Comparator Interrupt (C1/C2)
- ADC Interrupt
- Complementary Output Generator (COG)
- CCP1 Interrupt
- Flash Memory Self Write

The Interrupt Control register (INTCON) and Peripheral Interrupt Request Registers (PIRx) record individual interrupt requests in flag bits. The INTCON register also has individual and global interrupt enable bits.

The Global Interrupt Enable bit, GIE of the INTCON register, enables (if set) all unmasked interrupts, or disables (if cleared) all interrupts. Individual interrupts can be disabled through their corresponding enable bits in the INTCON register and PIEx registers. GIE is cleared on Reset.

When an interrupt is serviced, the following actions occur automatically:

- The GIE is cleared to disable any further interrupt
- The return address is pushed onto the stack
- The PC is loaded with 0004h

The Return from Interrupt instruction, `RETFIE`, exits the interrupt routine, as well as sets the GIE bit, which re-enables unmasked interrupts.

The following interrupt flags are contained in the INTCON register:

- INT Pin Interrupt
- Interrupt-On-Change (IOC) Interrupts
- Timer0 Overflow Interrupt

The peripheral interrupt flags are contained in the PIR1 and PIR2 registers. The corresponding interrupt enable bit is contained in the PIE1 and PIE2 registers.

The following interrupt flags are contained in the PIR1 register:

- A/D Interrupt
- Comparator Interrupt
- Timer1 Overflow Interrupt
- Timer2 Match Interrupt
- Enhanced CCP Interrupt

For external interrupt events, such as the INT pin or PORTA change interrupt, the interrupt latency will be three or four instruction cycles. The exact latency depends upon when the interrupt event occurs (see

Figure 17-8). The latency is the same for one or two-cycle instructions. Once in the Interrupt Service Routine, the source(s) of the interrupt can be determined by polling the interrupt flag bits. The interrupt flag bit(s) must be cleared in software before re-enabling interrupts to avoid multiple interrupt requests.

**Note 1:** Individual interrupt flag bits are set, regardless of the status of their corresponding mask bit or the GIE bit.

**2:** When an instruction that clears the GIE bit is executed, any interrupts that were pending for execution in the next cycle are ignored. The interrupts, which were ignored, are still pending to be serviced when the GIE bit is set again.

For additional information on Timer1, Timer2, comparators, ADC, Enhanced CCP modules, refer to the respective peripheral section.

### 17.4.1 RA2/INT INTERRUPT

The external interrupt on the RA2/INT pin is edge-triggered; either on the rising edge if the INTEDG bit of the OPTION register is set, or the falling edge, if the INTEDG bit is clear. When a valid edge appears on the RA2/INT pin, the INTF bit of the INTCON register is set. This interrupt can be disabled by clearing the INTE control bit of the INTCON register. The INTF bit must be cleared by software in the Interrupt Service Routine before re-enabling this interrupt. The RA2/INT interrupt can wake-up the processor from Sleep, if the INTE bit was set prior to going into Sleep. See [Section 17.7 “Power-down Mode \(Sleep\)”](#) for details on Sleep and [Figure 17-10](#) for timing of wake-up from Sleep through RA2/INT interrupt.

**Note:** The ANSEL register must be initialized to configure an analog channel as a digital input. Pins configured as analog inputs will read '0' and cannot generate an interrupt.

### 17.4.2 TIMER0 INTERRUPT


An overflow (FFh → 00h) in the TMR0 register will set the T0IF bit of the INTCON register. The interrupt can be enabled/disabled by setting/clearing T0IE bit of the INTCON register. See [Section 6.0 “Timer0 Module”](#) for operation of the Timer0 module.

## 17.4.3 PORTA INTERRUPT-ON-CHANGE

An input change on PORTA sets the IOCIF bit of the INTCON register. The interrupt can be enabled/disabled by setting/clearing the IOCIE bit of the INTCON register. Plus, individual pins can be configured through the IOC register.


**Note:** If a change on the I/O pin should occur when any PORTA operation is being executed, then the IOCIF interrupt flag may not get set.

**FIGURE 17-7: INTERRUPT LOGIC**

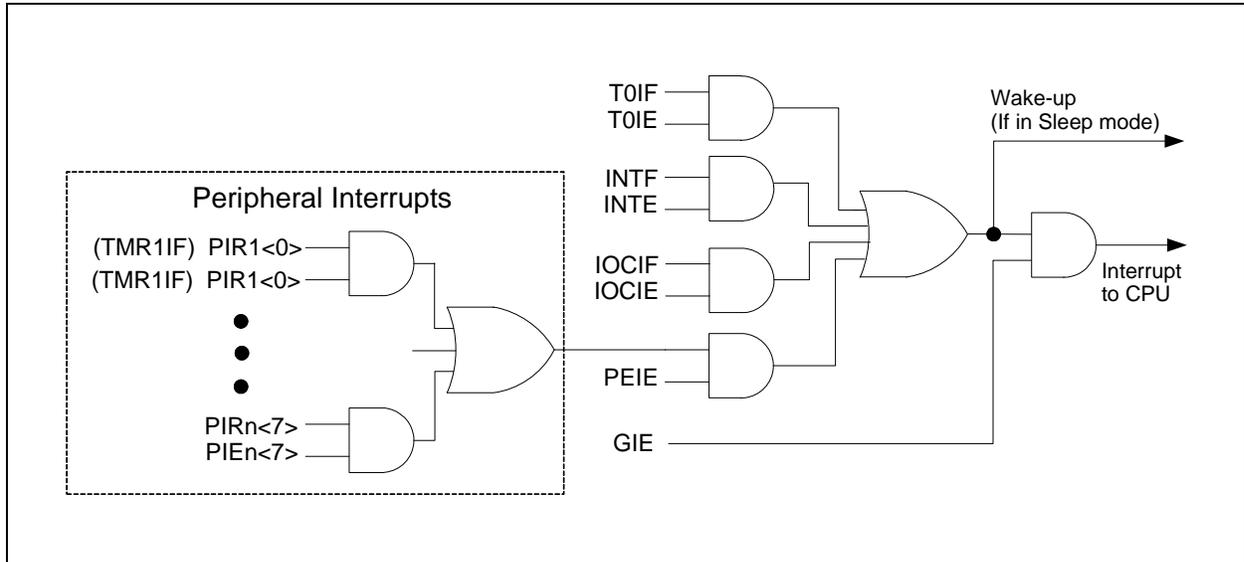

# PIC12F752/HV752

**FIGURE 17-8: INT PIN INTERRUPT TIMING**

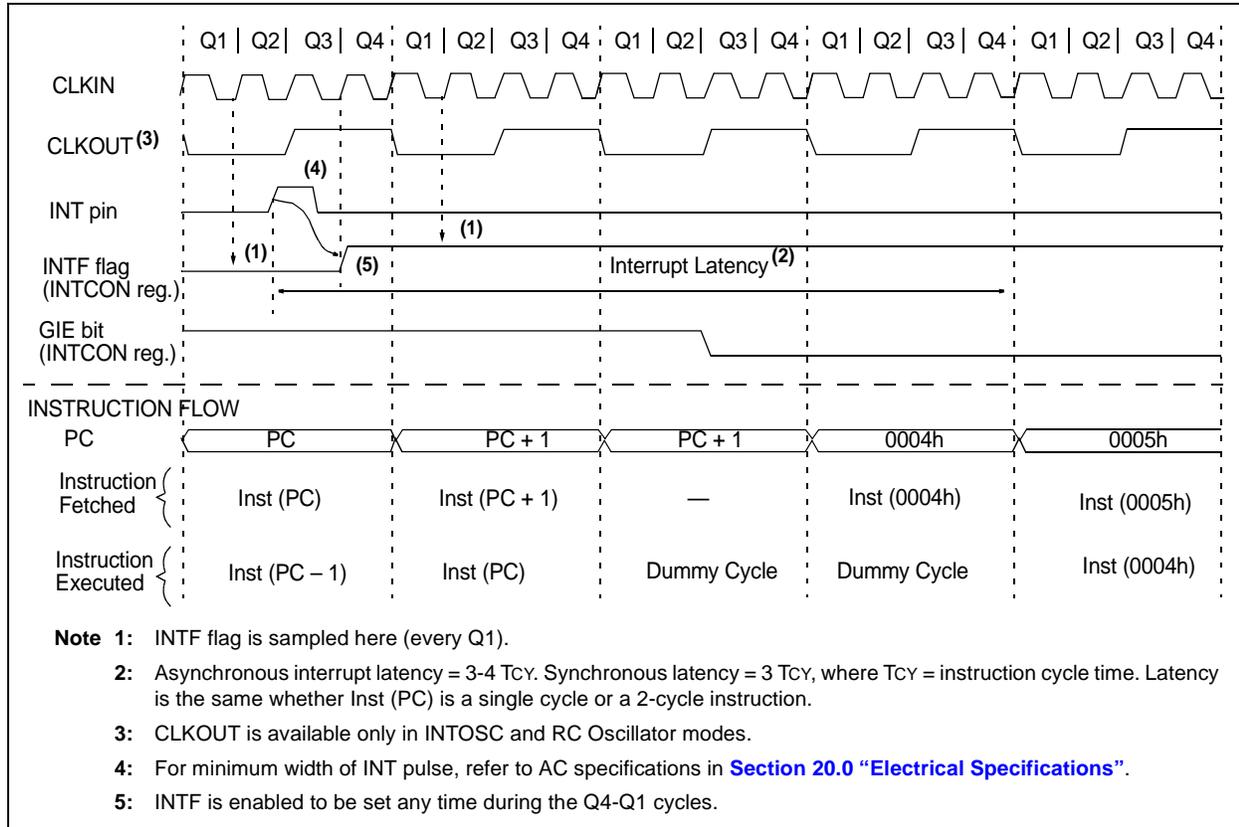

**TABLE 17-6: SUMMARY OF REGISTERS ASSOCIATED WITH INTERRUPTS**

| Name   | Bit 7   | Bit 6 | Bit 5  | Bit 4  | Bit 3  | Bit 2    | Bit 1  | Bit 0  | Register on Page |
|--------|---------|-------|--------|--------|--------|----------|--------|--------|------------------|
| INTCON | GIE     | PEIE  | T0IE   | INTE   | IOCIE  | T0IF     | INTF   | IOCIF  | 15               |
| IOCAF  | —       | —     | IOCAF5 | IOCAF4 | IOCAF3 | IOCAF2   | IOCAF1 | IOCAF0 | 45               |
| IOCAN  | —       | —     | IOCAN5 | IOCAN4 | IOCAN3 | IOCAN2   | IOCAN1 | IOCAN0 | 45               |
| IOCAP  | —       | —     | IOCAP5 | IOCAP4 | IOCAP3 | IOCAP2   | IOCAP1 | IOCAP0 | 45               |
| LATA   | —       | —     | LATA5  | LATA4  | —      | LATA2    | LATA1  | LATA0  | 40               |
| PIE1   | TMR1GIE | ADIE  | —      | —      | —      | HLTMR1IE | TMR2IE | TMR1IE | 16               |
| PIR1   | TMR1GIF | ADIF  | —      | —      | —      | HLTMR1IF | TMR2IF | TMR1IF | 18               |

**Legend:** x = unknown, u = unchanged, — = unimplemented read as '0', α = value depends upon condition. Shaded cells are not used by the Interrupt module.

## 17.5 Context Saving during Interrupts

During an interrupt, only the return PC value is saved on the stack. Typically, users may wish to save key registers during an interrupt (e.g., W and STATUS registers). This must be implemented in software.

Temporary holding registers W\_TEMP and STATUS\_TEMP should be placed in the last 16 bytes of GPR (see [Figure 2-1](#)). These 16 locations are common to all banks and do not require banking. This makes context save and restore operations simpler. The code shown in [Example 17-1](#) can be used to:

- Store the W register
- Store the STATUS register
- Execute the ISR code
- Restore the Status (and Bank Select Bit register)
- Restore the W register.

**Note:** The PIC12F752/HV752 does not require saving the PCLATH. However, if computed GOTOS are used in both the ISR and the main code, the PCLATH must be saved and restored in the ISR.

### EXAMPLE 17-1: SAVING STATUS AND W REGISTERS IN RAM

```
MOVWF  W_TEMP           ;Copy W to TEMP register
SWAPF  STATUS,W         ;Swap status to be saved into W
                          ;Swaps are used because they do not affect the status bits
MOVWF  STATUS_TEMP     ;Save status to bank zero STATUS_TEMP register
:
:(ISR)                   ;Insert user code here
:
SWAPF  STATUS_TEMP,W   ;Swap STATUS_TEMP register into W
                          ;(sets bank to original state)
MOVWF  STATUS           ;Move W into STATUS register
SWAPF  W_TEMP,F        ;Swap W_TEMP
SWAPF  W_TEMP,W        ;Swap W_TEMP into W
```



**TABLE 17-7: WDT STATUS**

| Conditions     | WDT     |
|----------------|---------|
| WDTE = 0       | Cleared |
| CLRWDT Command |         |
| Exit Sleep     |         |

**TABLE 17-8: SUMMARY OF REGISTERS ASSOCIATED WITH WATCHDOG TIMER**

| Name       | Bit 7 | Bit 6  | Bit 5 | Bit 4 | Bit 3 | Bit 2   | Bit 1 | Bit 0 | Register on Page |
|------------|-------|--------|-------|-------|-------|---------|-------|-------|------------------|
| OPTION_REG | RAPU  | INTEDG | T0CS  | T0SE  | PSA   | PS<2:0> |       |       | 49               |

**Legend:** Shaded cells are not used by the Watchdog Timer.

**Note 1:** See [Register 17-1](#) for operation of all Configuration Word register bits.

**TABLE 17-9: SUMMARY OF CONFIGURATION WORD WITH WATCHDOG TIMER**

| Name   | Bits | Bit -/7 | Bit -/6 | Bit 13/5 | Bit 12/4 | Bit 11/3 | Bit 10/2 | Bit 9/1    | Bit 8/0 | Register on Page |
|--------|------|---------|---------|----------|----------|----------|----------|------------|---------|------------------|
| CONFIG | 13:8 | —       | —       | DEBUG    | CLKOUTEN | WRT<1:0> |          | BOREN<1:0> |         | 126              |
|        | 7:0  | —       | CP      | MCLRE    | PWRTE    | WDTE     | —        | —          | FOSC0   |                  |

**Legend:** — = unimplemented location, read as '1'. Shaded cells are not used by Watchdog Timer.

# PIC12F752/HV752

## 17.7 Power-down Mode (Sleep)

The Power-Down mode is entered by executing a `SLEEP` instruction.

If the Watchdog Timer is enabled:

- $\overline{\text{WDT}}$  will be cleared but keeps running
- $\overline{\text{PD}}$  bit in the STATUS register is cleared
- $\overline{\text{TO}}$  bit is set
- Oscillator driver is turned off
- I/O ports maintain the status they had before `SLEEP` was executed (driving high, low or high-impedance)

For lowest current consumption in this mode, all I/O pins should be either at  $V_{\text{DD}}$  or  $V_{\text{SS}}$ , with no external circuitry drawing current from the I/O pin and the comparators, DAC and FVR should be disabled. I/O pins that are high-impedance inputs should be pulled high or low externally to avoid switching currents caused by floating inputs. The  $\overline{\text{TOCKI}}$  input should also be at  $V_{\text{DD}}$  or  $V_{\text{SS}}$  for lowest current consumption. The contribution from on-chip pull-ups on PORTA should be considered.

The  $\overline{\text{MCLR}}$  pin must be at a logic high level.

**Note:** It should be noted that a Reset generated by a WDT time-out does not drive  $\overline{\text{MCLR}}$  pin low.

### 17.7.1 WAKE-UP FROM SLEEP

The device can wake-up from Sleep through one of the following events:

1. External Reset input on  $\overline{\text{MCLR}}$  pin
2. Watchdog Timer wake-up
3. Interrupt from INT pin
4. Interrupt-On-Change input change
5. Peripheral interrupt

The first event will cause a device Reset. The other events are considered a continuation of program execution. The  $\overline{\text{TO}}$  and  $\overline{\text{PD}}$  bits in the STATUS register can be used to determine the cause of device Reset. The  $\overline{\text{PD}}$  bit, which is set on power-up, is cleared when Sleep is invoked.  $\overline{\text{TO}}$  bit is cleared if WDT wake-up occurred.

The following peripheral interrupts can wake the device from Sleep:

1. Timer1 interrupt. Timer1 must be operating as an asynchronous counter
2. CCP Capture mode interrupt
3. A/D conversion (when A/D clock source is RC)
4. Comparator output changes state
5. Interrupt-on-change
6. External Interrupt from INT pin

Other peripherals cannot generate interrupts since during Sleep, no on-chip clocks are present.

When the `SLEEP` instruction is being executed, the next instruction ( $\text{PC} + 1$ ) is prefetched. For the device to wake-up through an interrupt event, the corresponding interrupt enable bit must be set (enabled). Wake-up is regardless of the state of the GIE bit. If the GIE bit is clear (disabled), the device continues execution at the instruction after the `SLEEP` instruction. If the GIE bit is set (enabled), the device executes the instruction after the `SLEEP` instruction, then branches to the interrupt address (0004h). In cases where the execution of the instruction following `SLEEP` is not desirable, the user should have a `NOP` after the `SLEEP` instruction.

**Note:** If the global interrupts are disabled (GIE is cleared) and any interrupt source has both its interrupt enable bit and the corresponding interrupt flag bits set, the device will immediately wake-up from Sleep.

The WDT is cleared when the device wakes up from Sleep, regardless of the source of wake-up.

### 17.7.2 WAKE-UP USING INTERRUPTS

When global interrupts are disabled (GIE cleared) and any interrupt source has both its interrupt enable bit and interrupt flag bit set, one of the following will occur:

- If the interrupt occurs **before** the execution of a `SLEEP` instruction, the `SLEEP` instruction will complete as a `NOP`. Therefore, the WDT and WDT prescaler and postscaler (if enabled) will not be cleared, the  $\overline{\text{TO}}$  bit will not be set and the  $\overline{\text{PD}}$  bit will not be cleared.
- If the interrupt occurs **during or after** the execution of a `SLEEP` instruction, the device will immediately wake-up from Sleep. The `SLEEP` instruction is executed. Therefore, the WDT and WDT prescaler and postscaler (if enabled) will be cleared, the  $\overline{\text{TO}}$  bit will be set and the  $\overline{\text{PD}}$  bit will be cleared.

Even if the flag bits were checked before executing a `SLEEP` instruction, it may be possible for flag bits to become set before the `SLEEP` instruction completes. To determine whether a `SLEEP` instruction executed, test the  $\overline{\text{PD}}$  bit. If the  $\overline{\text{PD}}$  bit is set, the `SLEEP` instruction was executed as a `NOP`.

To ensure that the WDT is cleared, a `CLRWDT` instruction should be executed before a `SLEEP` instruction. See [Figure 17-10](#) for more details.



# PIC12F752/HV752

## 17.10 In-Circuit Serial Programming™

The PIC12F752/HV752 microcontrollers can be serially programmed while in the end application circuit. This is simply done with five connections for:

- Clock
- Data
- Power
- Ground
- Programming Voltage


This allows customers to manufacture boards with unprogrammed devices and then program the microcontroller just before shipping the product. This also allows the most recent firmware or a custom firmware to be programmed.

The device is placed into a Program/Verify mode by holding the  $\overline{\text{ICSPDAT}}$  and ICSPCLK pins low, while raising the  $\overline{\text{MCLR}}$  ( $V_{PP}$ ) pin from  $V_{IL}$  to  $V_{IH}$ . See the “PIC12F752/HV752 Flash Memory Programming Specification” (DS41561) for more information. ICSPDAT becomes the programming data and ICSPCLK becomes the programming clock. Both ICSPDAT and ICSPCLK are Schmitt Trigger inputs in Program/Verify mode.

A typical In-Circuit Serial Programming connection is shown in Figure 17-11.

**Note:** To erase the device,  $V_{DD}$  must be above the Bulk Erase  $V_{DD}$  minimum given in the “PIC12F752/HV752 Flash Memory Programming Specification” (DS41561)

**FIGURE 17-11: TYPICAL IN-CIRCUIT SERIAL PROGRAMMING™ CONNECTION**

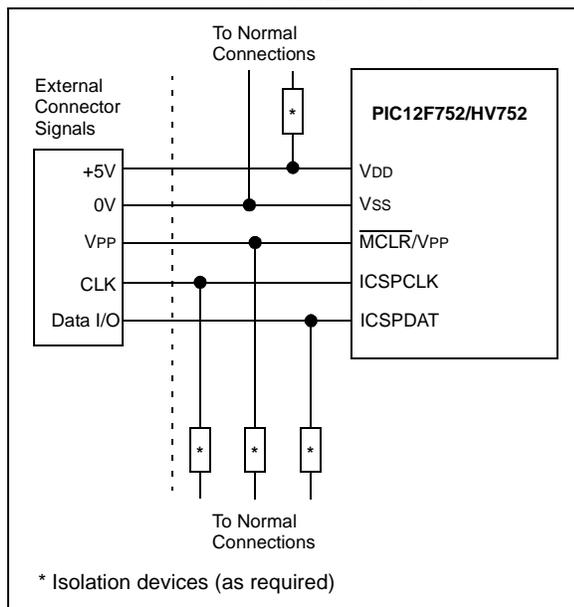


## 18.0 SHUNT REGULATOR (PIC12HV752 ONLY)

The PIC12HV752 devices include a permanent internal 5 volt (nominal) shunt regulator in parallel with the VDD pin. This eliminates the need for an external voltage regulator in systems sourced by an unregulated supply. All external devices connected directly to the VDD pin will share the regulated supply voltage and contribute to the total VDD supply current (I<sub>LOAD</sub>).

### 18.1 Regulator Operation

A shunt regulator generates a specific supply voltage by creating a voltage drop across a pass resistor R<sub>SER</sub>. The voltage at the VDD pin of the microcontroller is monitored and compared to an internal voltage reference. The current through the resistor is then adjusted, based on the result of the comparison, to produce a voltage drop equal to the difference between the supply voltage V<sub>UNREG</sub> and the VDD of the microcontroller. See Figure 18-1 for voltage regulator schematic.

**FIGURE 18-1: SHUNT REGULATOR**

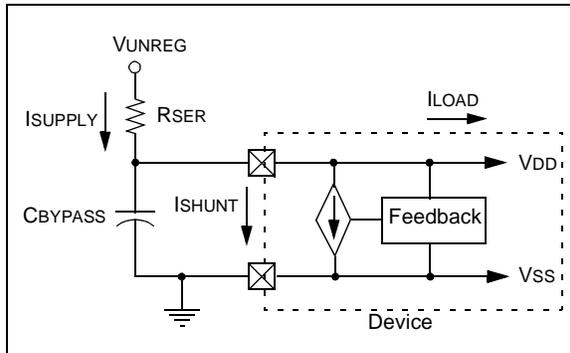

An external current limiting resistor, R<sub>SER</sub>, located between the unregulated supply, V<sub>UNREG</sub>, and the VDD pin, drops the difference in voltage between V<sub>UNREG</sub> and VDD. R<sub>SER</sub> must be between R<sub>MAX</sub> and R<sub>MIN</sub> as defined by Equation 18-1.

### EQUATION 18-1: R<sub>SER</sub> LIMITING RESISTOR

$$R_{MAX} = \frac{(V_{UMIN} - 5V)}{1.05 \cdot (1\text{ MA} + I_{LOAD})}$$

$$R_{MIN} = \frac{(V_{UMAX} - 5V)}{0.95 \cdot (50\text{ MA})}$$

Where:

R<sub>MAX</sub> = maximum value of R<sub>SER</sub> (ohms)

R<sub>MIN</sub> = minimum value of R<sub>SER</sub> (ohms)

V<sub>UMIN</sub> = minimum value of V<sub>UNREG</sub>

V<sub>UMAX</sub> = maximum value of V<sub>UNREG</sub>

VDD = regulated voltage (5V nominal)

I<sub>LOAD</sub> = maximum expected load current in mA including I/O pin currents and external circuits connected to VDD.

1.05 = compensation for +5% tolerance of R<sub>SER</sub>

0.95 = compensation for -5% tolerance of R<sub>SER</sub>

### 18.2 Regulator Considerations

The supply voltage V<sub>UNREG</sub> and load current are not constant. Therefore, the current range of the regulator is limited. Selecting a value for R<sub>SER</sub> must take these three factors into consideration.

Since the regulator uses the band gap voltage as the regulated voltage reference, this voltage reference is permanently enabled in the PIC12HV752 devices.

The shunt regulator will still consume current when below operating voltage range for the shunt regulator.

### 18.3 Design Considerations

For more information on using the shunt regulator and managing current load, see Application Note AN1035, "Designing with HV Microcontrollers" (DS01035).

## 19.0 DEVELOPMENT SUPPORT

The PIC<sup>®</sup> microcontrollers (MCU) and dsPIC<sup>®</sup> digital signal controllers (DSC) are supported with a full range of software and hardware development tools:

- Integrated Development Environment:
  - MPLAB<sup>®</sup> X IDE Software
- Compilers/Assemblers/Linkers:
  - MPLAB XC Compiler
  - MPASM<sup>™</sup> Assembler
  - MPLINK<sup>™</sup> Object Linker/  
MPLIB<sup>™</sup> Object Librarian
  - MPLAB Assembler/Linker/Librarian for  
Various Device Families
- Simulators:
  - MPLAB X SIM Software Simulator
- Emulators:
  - MPLAB REAL ICE<sup>™</sup> In-Circuit Emulator
- In-Circuit Debuggers/Programmers:
  - MPLAB ICD 3
  - PICKit<sup>™</sup> 3
- Device Programmers:
  - MPLAB PM3 Device Programmer
- Low-Cost Demonstration/Development Boards,  
Evaluation Kits and Starter Kits
- Third-party development tools

## 19.1 MPLAB X Integrated Development Environment Software

The MPLAB X IDE is a single, unified graphical user interface for Microchip and third-party software, and hardware development tool that runs on Windows<sup>®</sup>, Linux and Mac OS<sup>®</sup> X. Based on the NetBeans IDE, MPLAB X IDE is an entirely new IDE with a host of free software components and plug-ins for high-performance application development and debugging. Moving between tools and upgrading from software simulators to hardware debugging and programming tools is simple with the seamless user interface.

With complete project management, visual call graphs, a configurable watch window and a feature-rich editor that includes code completion and context menus, MPLAB X IDE is flexible and friendly enough for new users. With the ability to support multiple tools on multiple projects with simultaneous debugging, MPLAB X IDE is also suitable for the needs of experienced users.

Feature-Rich Editor:

- Color syntax highlighting
- Smart code completion makes suggestions and provides hints as you type
- Automatic code formatting based on user-defined rules
- Live parsing

User-Friendly, Customizable Interface:

- Fully customizable interface: toolbars, toolbar buttons, windows, window placement, etc.
- Call graph window

Project-Based Workspaces:

- Multiple projects
- Multiple tools
- Multiple configurations
- Simultaneous debugging sessions

File History and Bug Tracking:

- Local file history feature
- Built-in support for Bugzilla issue tracker

## 19.2 MPLAB XC Compilers

The MPLAB XC Compilers are complete ANSI C compilers for all of Microchip's 8, 16, and 32-bit MCU and DSC devices. These compilers provide powerful integration capabilities, superior code optimization and ease of use. MPLAB XC Compilers run on Windows, Linux or MAC OS X.

For easy source level debugging, the compilers provide debug information that is optimized to the MPLAB X IDE.

The free MPLAB XC Compiler editions support all devices and commands, with no time or memory restrictions, and offer sufficient code optimization for most applications.

MPLAB XC Compilers include an assembler, linker and utilities. The assembler generates relocatable object files that can then be archived or linked with other relocatable object files and archives to create an executable file. MPLAB XC Compiler uses the assembler to produce its object file. Notable features of the assembler include:

- Support for the entire device instruction set
- Support for fixed-point and floating-point data
- Command-line interface
- Rich directive set
- Flexible macro language
- MPLAB X IDE compatibility

## 19.3 MPASM Assembler

The MPASM Assembler is a full-featured, universal macro assembler for PIC10/12/16/18 MCUs.

The MPASM Assembler generates relocatable object files for the MPLINK Object Linker, Intel® standard HEX files, MAP files to detail memory usage and symbol reference, absolute LST files that contain source lines and generated machine code, and COFF files for debugging.

The MPASM Assembler features include:

- Integration into MPLAB X IDE projects
- User-defined macros to streamline assembly code
- Conditional assembly for multipurpose source files
- Directives that allow complete control over the assembly process

## 19.4 MPLINK Object Linker/ MPLIB Object Librarian

The MPLINK Object Linker combines relocatable objects created by the MPASM Assembler. It can link relocatable objects from precompiled libraries, using directives from a linker script.

The MPLIB Object Librarian manages the creation and modification of library files of precompiled code. When a routine from a library is called from a source file, only the modules that contain that routine will be linked in with the application. This allows large libraries to be used efficiently in many different applications.

The object linker/librarian features include:

- Efficient linking of single libraries instead of many smaller files
- Enhanced code maintainability by grouping related modules together
- Flexible creation of libraries with easy module listing, replacement, deletion and extraction

## 19.5 MPLAB Assembler, Linker and Librarian for Various Device Families

MPLAB Assembler produces relocatable machine code from symbolic assembly language for PIC24, PIC32 and dsPIC DSC devices. MPLAB XC Compiler uses the assembler to produce its object file. The assembler generates relocatable object files that can then be archived or linked with other relocatable object files and archives to create an executable file. Notable features of the assembler include:

- Support for the entire device instruction set
- Support for fixed-point and floating-point data
- Command-line interface
- Rich directive set
- Flexible macro language
- MPLAB X IDE compatibility

# PIC12F752/HV752

---

## 19.6 MPLAB X SIM Software Simulator

The MPLAB X SIM Software Simulator allows code development in a PC-hosted environment by simulating the PIC MCUs and dsPIC DSCs on an instruction level. On any given instruction, the data areas can be examined or modified and stimuli can be applied from a comprehensive stimulus controller. Registers can be logged to files for further run-time analysis. The trace buffer and logic analyzer display extend the power of the simulator to record and track program execution, actions on I/O, most peripherals and internal registers.

The MPLAB X SIM Software Simulator fully supports symbolic debugging using the MPLAB XC Compilers, and the MPASM and MPLAB Assemblers. The software simulator offers the flexibility to develop and debug code outside of the hardware laboratory environment, making it an excellent, economical software development tool.

## 19.7 MPLAB REAL ICE In-Circuit Emulator System

The MPLAB REAL ICE In-Circuit Emulator System is Microchip's next generation high-speed emulator for Microchip Flash DSC and MCU devices. It debugs and programs all 8, 16 and 32-bit MCU, and DSC devices with the easy-to-use, powerful graphical user interface of the MPLAB X IDE.

The emulator is connected to the design engineer's PC using a high-speed USB 2.0 interface and is connected to the target with either a connector compatible with in-circuit debugger systems (RJ-11) or with the new high-speed, noise tolerant, Low-Voltage Differential Signal (LVDS) interconnection (CAT5).

The emulator is field upgradable through future firmware downloads in MPLAB X IDE. MPLAB REAL ICE offers significant advantages over competitive emulators including full-speed emulation, run-time variable watches, trace analysis, complex breakpoints, logic probes, a ruggedized probe interface and long (up to three meters) interconnection cables.

## 19.8 MPLAB ICD 3 In-Circuit Debugger System

The MPLAB ICD 3 In-Circuit Debugger System is Microchip's most cost-effective, high-speed hardware debugger/programmer for Microchip Flash DSC and MCU devices. It debugs and programs PIC Flash microcontrollers and dsPIC DSCs with the powerful, yet easy-to-use graphical user interface of the MPLAB IDE.

The MPLAB ICD 3 In-Circuit Debugger probe is connected to the design engineer's PC using a high-speed USB 2.0 interface and is connected to the target with a connector compatible with the MPLAB ICD 2 or MPLAB REAL ICE systems (RJ-11). MPLAB ICD 3 supports all MPLAB ICD 2 headers.

## 19.9 PICkit 3 In-Circuit Debugger/Programmer

The MPLAB PICkit 3 allows debugging and programming of PIC and dsPIC Flash microcontrollers at a most affordable price point using the powerful graphical user interface of the MPLAB IDE. The MPLAB PICkit 3 is connected to the design engineer's PC using a full-speed USB interface and can be connected to the target via a Microchip debug (RJ-11) connector (compatible with MPLAB ICD 3 and MPLAB REAL ICE). The connector uses two device I/O pins and the Reset line to implement in-circuit debugging and In-Circuit Serial Programming™ (ICSP™).

## 19.10 MPLAB PM3 Device Programmer

The MPLAB PM3 Device Programmer is a universal, CE compliant device programmer with programmable voltage verification at VDDMIN and VDDMAX for maximum reliability. It features a large LCD display (128 x 64) for menus and error messages, and a modular, detachable socket assembly to support various package types. The ICSP cable assembly is included as a standard item. In Stand-Alone mode, the MPLAB PM3 Device Programmer can read, verify and program PIC devices without a PC connection. It can also set code protection in this mode. The MPLAB PM3 connects to the host PC via an RS-232 or USB cable. The MPLAB PM3 has high-speed communications and optimized algorithms for quick programming of large memory devices, and incorporates an MMC card for file storage and data applications.

## 19.11 Demonstration/Development Boards, Evaluation Kits, and Starter Kits

A wide variety of demonstration, development and evaluation boards for various PIC MCUs and dsPIC DSCs allows quick application development on fully functional systems. Most boards include prototyping areas for adding custom circuitry and provide application firmware and source code for examination and modification.

The boards support a variety of features, including LEDs, temperature sensors, switches, speakers, RS-232 interfaces, LCD displays, potentiometers and additional EEPROM memory.

The demonstration and development boards can be used in teaching environments, for prototyping custom circuits and for learning about various microcontroller applications.

In addition to the PICDEM™ and dsPICDEM™ demonstration/development board series of circuits, Microchip has a line of evaluation kits and demonstration software for analog filter design, KEELOQ® security ICs, CAN, IrDA®, PowerSmart battery management, SEEVAL® evaluation system, Sigma-Delta ADC, flow rate sensing, plus many more.

Also available are starter kits that contain everything needed to experience the specified device. This usually includes a single application and debug capability, all on one board.

Check the Microchip web page ([www.microchip.com](http://www.microchip.com)) for the complete list of demonstration, development and evaluation kits.

## 19.12 Third-Party Development Tools

Microchip also offers a great collection of tools from third-party vendors. These tools are carefully selected to offer good value and unique functionality.

- Device Programmers and Gang Programmers from companies, such as SoftLog and CCS
- Software Tools from companies, such as Gimpel and Trace Systems
- Protocol Analyzers from companies, such as Saleae and Total Phase
- Demonstration Boards from companies, such as MikroElektronika, Digilent® and Olimex
- Embedded Ethernet Solutions from companies, such as EZ Web Lynx, WIZnet and IPLogika®

# PIC12F752/HV752

## 20.0 ELECTRICAL SPECIFICATIONS

### Absolute Maximum Ratings<sup>(†)</sup>

|  |                                   |
|--|-----------------------------------|
| Ambient temperature under bias .....   | -40° to +125°C                    |
| Storage temperature .....  | -65°C to +150°C                   |
| Voltage on pins with respect to V <sub>SS</sub>  |                                   |
| on V <sub>DD</sub> pin   |                                   |
| PIC12HV752 .....   | -0.3V to +6.5V                    |
| PIC12F752 .....  | -0.3V to +6.5V                    |
| on $\overline{\text{MCLR}}$ .....  | -0.3V to +13.5V                   |
| on all other pins.....   | -0.3V to (V <sub>DD</sub> + 0.3V) |
| Maximum current  |                                   |
| on V <sub>SS</sub> pin <sup>(1)</sup>  |                                   |
| -40°C ≤ T <sub>A</sub> ≤ +85°C .....   | 95 mA                             |
| -40°C ≤ T <sub>A</sub> ≤ +125°C .....  | 95 mA                             |
| on V <sub>DD</sub> pin <sup>(1)</sup>  |                                   |
| -40°C ≤ T <sub>A</sub> ≤ +85°C .....   | 95 mA                             |
| -40°C ≤ T <sub>A</sub> ≤ +125°C .....  | 95 mA                             |
| on RA1, RA4, RA5 .....   | 25 mA                             |
| on RA0, RA2 .....  | 50 mA                             |
| Clamp current, I <sub>K</sub> (V <sub>PIN</sub> < 0 or V <sub>PIN</sub> > V <sub>DD</sub> )..... | ± 20 mA                           |

**Note 1:** Maximum current rating requires even load distribution across I/O pins. Maximum current rating may be limited by the device package power dissipation characteristics. See [Table 20-6](#) to calculate device specific limitations.

† NOTICE: Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure above maximum rating conditions for extended periods may affect device reliability.

## 20.1 Standard Operating Conditions

The standard operating conditions for any device are defined as:

Operating Voltage:  $V_{DDMIN} \leq V_{DD} \leq V_{DDMAX}$

Operating Temperature:  $T_{A\_MIN} \leq T_A \leq T_{A\_MAX}$

### V<sub>DD</sub> — Operating Supply Voltage<sup>(1)</sup>

#### PIC12F752

V<sub>DDMIN</sub> (F<sub>osc</sub> ≤ 8 MHz) ..... +2.0V

V<sub>DDMIN</sub> (8 MHz < F<sub>osc</sub> ≤ 10 MHz) ..... +3.0V

V<sub>DDMAX</sub> (10 MHz < F<sub>osc</sub> ≤ 20 MHz) ..... +5.5V

#### PIC12HV752

V<sub>DDMIN</sub> (F<sub>osc</sub> ≤ 8 MHz) ..... +2.0V

V<sub>DDMIN</sub> (8 MHz < F<sub>osc</sub> ≤ 10 MHz) ..... +3.0V

V<sub>DDMAX</sub> (10 MHz < F<sub>osc</sub> ≤ 20 MHz) ..... +5.0V

### T<sub>A</sub> — Operating Ambient Temperature Range

#### Industrial Temperature

T<sub>A\\_MIN</sub> ..... -40°C

T<sub>A\\_MAX</sub> ..... +85°C

#### Extended Temperature


T<sub>A\\_MIN</sub> ..... -40°C

T<sub>A\\_MAX</sub> ..... +125°C


**Note 1:** See Parameter [D001](#), DS Characteristics: Supply Voltage.

# PIC12F752/HV752

**FIGURE 20-1: PIC12F752 VOLTAGE-FREQUENCY GRAPH,  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$**

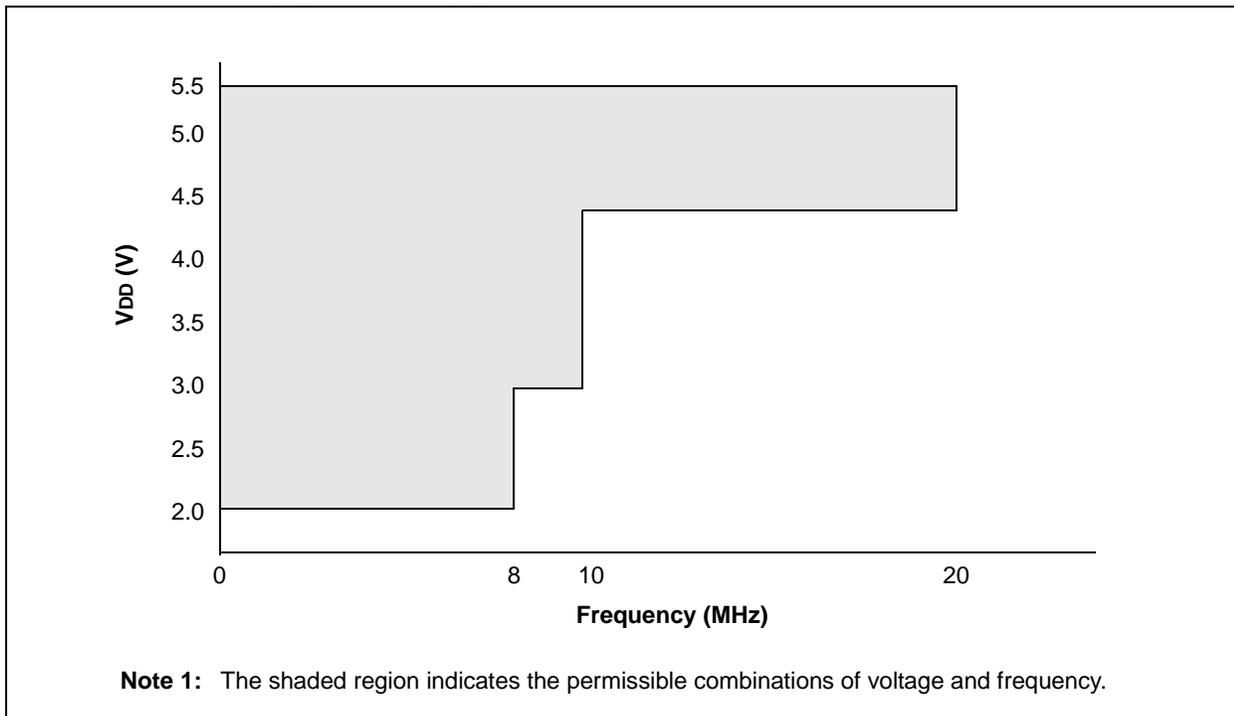

**FIGURE 20-2: PIC12HV752 VOLTAGE-FREQUENCY GRAPH,  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$**

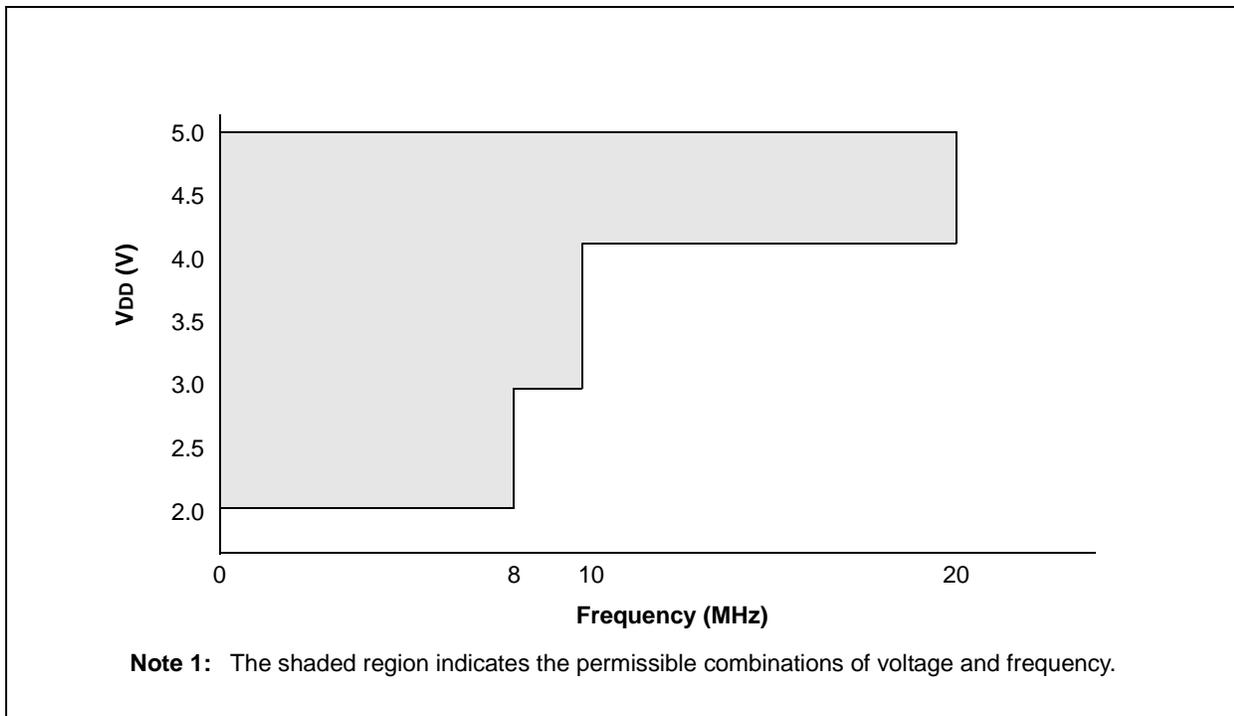

## 20.2 DC Characteristics

TABLE 20-1: SUPPLY VOLTAGE

| PIC12F752  |      | Standard Operating Conditions (unless otherwise stated)                     |        |       |        |               |   |
|------------|------|---|--------|-------|--------|---------------|---|
| PIC12HV752 |      |   |        |       |        |               |   |
| Param. No. | Sym. | Characteristic  | Min.   | Typ.† | Max.   | Units         | Conditions                                  |
| D001       | VDD  | <b>Supply Voltage</b>   |        |       |        |               |   |
|            |      |   | VDDMIN | —     | VDDMAX |               |   |
|            |      |   | 2.0    | —     | 5.5    | V             | FOSC ≤ 8 MHz                                |
|            |      |   | 3.0    | —     | 5.5    | V             | FOSC ≤ 10 MHz                               |
|            |      | 4.5   | —      | 5.5   | V      | FOSC ≤ 20 MHz |   |
| D001       |      |   | 2.0    | —     | 5.0    | V             | FOSC ≤ 8 MHz <sup>(2)</sup>                 |
|            |      |   | 3.0    | —     | 5.0    | V             | FOSC ≤ 10 MHz <sup>(2)</sup>                |
|            |      |   | 4.5    | —     | 5.0    | V             | FOSC ≤ 20 MHz <sup>(2)</sup>                |
| D002*      | VDR  | <b>RAM Data Retention Voltage<sup>(1)</sup></b>                             |        |       |        |               |   |
|            |      |   | 1.5    | —     | —      | V             | Device in Sleep mode                        |
| D002       |      |   | 1.5    | —     | —      | V             | Device in Sleep mode                        |
| D003*      | VPOR | <b>VDD Start Voltage</b> to ensure internal Power-on Reset signal           |        |       |        |               |   |
|            |      |   | —      | 1.6   | —      | V             |   |
| D003       |      |   | —      | 1.6   | —      | V             |   |
| D004*      | SVDD | <b>VDD Rise Rate</b> to ensure VDD Rise Rate internal Power-on Reset signal |        |       |        |               |   |
|            |      |   | 0.05   | —     | —      | V/ms          | See <a href="#">Table 17-1</a> for details. |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**Note 1:** This is the limit to which VDD can be lowered in Sleep mode without losing RAM data.

**Note 2:** On the PIC12HV752, VDD is regulated by a Shunt Regulator and is dependent on series resistor (connected between the unregulated supply voltage and the VDD pin) to limit the current to 50 mA. See [Section " "](#) for design requirements.

# PIC12F752/HV752

TABLE 20-2: SUPPLY CURRENT (IDD)<sup>(1,2)</sup>

| PIC12F752                              |                        | Standard Operating Conditions (unless otherwise stated) |       |           |            |       |            |                                    |
|--|------------------------|---|-------|-----------|------------|-------|------------|------------------------------------|
| PIC12HV752                             |                        |   |       |           |            |       |            |                                    |
| Param. No.                             | Device Characteristics | Min.  | Typ.† | Max. 85°C | Max. 125°C | Units | Conditions |                                    |
|  |                        |   |       |           |            |       | VDD        | Note                               |
| Supply Current (IDD) <sup>(1, 2)</sup> |                        |   |       |           |            |       |            |                                    |
| D010                                   |                        | —   | 13    | 25        | 25         | μA    | 2.0        | Fosc = 31 kHz<br>LFINTOSC mode     |
|  |                        | —   | 19    | 29        | 29         | μA    | 3.0        |                                    |
|  |                        | —   | 32    | 51        | 51         | μA    | 5.0        |                                    |
| D010                                   |                        | —   | 160   | 230       | 230        | μA    | 2.0        | Fosc = 31 kHz<br>LFINTOSC mode     |
|  |                        | —   | 240   | 310       | 310        | μA    | 3.0        |                                    |
|  |                        | —   | 280   | 400       | 400        | μA    | 4.5        |                                    |
| D016                                   |                        | —   | 75    | 280       | 280        | μA    | 2.0        | Fosc = 1 MHz<br>EC Oscillator mode |
|  |                        | —   | 155   | 320       | 320        | μA    | 3.0        |                                    |
|  |                        | —   | 345   | 530       | 530        | μA    | 5.0        |                                    |
| D016                                   |                        | —   | 215   | 310       | 310        | μA    | 2.0        | Fosc = 1 MHz<br>EC Oscillator mode |
|  |                        | —   | 375   | 470       | 470        | μA    | 3.0        |                                    |
|  |                        | —   | 570   | 650       | 650        | μA    | 4.5        |                                    |
| D011                                   |                        | —   | 130   | 280       | 280        | μA    | 2.0        | Fosc = 1 MHz<br>HFINTOSC mode      |
|  |                        | —   | 175   | 320       | 320        | μA    | 3.0        |                                    |
|  |                        | —   | 290   | 535       | 535        | μA    | 5.0        |                                    |
| D011                                   |                        | —   | 195   | 296       | 296        | μA    | 2.0        | Fosc = 1 MHz<br>HFINTOSC mode      |
|  |                        | —   | 315   | 440       | 440        | μA    | 3.0        |                                    |
|  |                        | —   | 425   | 650       | 650        | μA    | 4.5        |                                    |
| D012                                   |                        | —   | 185   | 340       | 340        | μA    | 2.0        | Fosc = 4 MHz<br>EC Oscillator mode |
|  |                        | —   | 325   | 475       | 475        | μA    | 3.0        |                                    |
|  |                        | —   | 665   | 845       | 845        | μA    | 5.0        |                                    |
| D012                                   |                        | —   | 330   | 475       | 475        | μA    | 2.0        | Fosc = 4 MHz<br>EC Oscillator mode |
|  |                        | —   | 550   | 800       | 800        | μA    | 3.0        |                                    |
|  |                        | —   | 850   | 1200      | 1200       | μA    | 4.5        |                                    |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note 1:** The test conditions for all IDD measurements in active operation mode are: OSC1 = external square wave, from rail-to-rail; all I/O pins tri-stated, pulled to VSS; MCLR = VDD; WDT disabled.
- 2:** The supply current is mainly a function of the operating voltage and frequency. Other factors, such as I/O pin loading and switching rate, oscillator type, internal code execution pattern and temperature, also have an impact on the current consumption.

**TABLE 20-2: SUPPLY CURRENT (IDD)<sup>(1,2)</sup> (CONTINUED)**

| PIC12F752                                    |                        | Standard Operating Conditions (unless otherwise stated) |       |           |            |       |            |                                     |
|--|------------------------|---|-------|-----------|------------|-------|------------|-------------------------------------|
| PIC12HV752                                   |                        |   |       |           |            |       |            |                                     |
| Param. No.                                   | Device Characteristics | Min.  | Typ.† | Max. 85°C | Max. 125°C | Units | Conditions |                                     |
|  |                        |   |       |           |            |       | VDD        | Note                                |
| <b>Supply Current (IDD)<sup>(1, 2)</sup></b> |                        |   |       |           |            |       |            |                                     |
| D013   |                        | —   | 245   | 340       | 340        | μA    | 2.0        | Fosc = 4 MHz<br>HFINTOSC mode       |
|  |                        | —   | 360   | 485       | 485        | μA    | 3.0        |                                     |
|  |                        | —   | 620   | 845       | 845        | μA    | 5.0        |                                     |
| D013   |                        | —   | 310   | 435       | 435        | μA    | 2.0        | Fosc = 4 MHz<br>HFINTOSC mode       |
|  |                        | —   | 500   | 700       | 700        | μA    | 3.0        |                                     |
|  |                        | —   | 740   | 1100      | 1100       | μA    | 4.5        |                                     |
| D014   |                        | —   | 395   | 550       | 550        | μA    | 2.0        | Fosc = 8 MHz<br>HFINTOSC mode       |
|  |                        | —   | 620   | 850       | 850        | μA    | 3.0        |                                     |
|  |                        | —   | 1.2   | 1.6       | 1.6        | mA    | 5.0        |                                     |
| D014   |                        | —   | 460   | 650       | 650        | μA    | 2.0        | Fosc = 8 MHz<br>HFINTOSC mode       |
|  |                        | —   | 750   | 1100      | 1100       | μA    | 3.0        |                                     |
|  |                        | —   | 1.2   | 1.6       | 1.6        | mA    | 4.5        |                                     |
| D015   |                        | —   | 1.9   | 2.6       | 2.6        | mA    | 4.5        | Fosc = 20 MHz<br>EC Oscillator mode |
|  |                        | —   | 2.2   | 3         | 3          | mA    | 5.0        |                                     |
| D015   |                        | —   | 2.1   | 3         | 3          | mA    | 4.5        | Fosc = 20 MHz<br>EC Oscillator mode |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note 1:** The test conditions for all IDD measurements in active operation mode are: OSC1 = external square wave, from rail-to-rail; all I/O pins tri-stated, pulled to Vss; MCLR = VDD; WDT disabled.
- 2:** The supply current is mainly a function of the operating voltage and frequency. Other factors, such as I/O pin loading and switching rate, oscillator type, internal code execution pattern and temperature, also have an impact on the current consumption.

# PIC12F752/HV752

TABLE 20-3: POWER-DOWN CURRENTS (IPD) (1,2)

| PIC12F752   |                        | Standard Operating Conditions (unless otherwise stated)<br>Sleep mode |       |           |            |       |            |   |
|---|------------------------|---|-------|-----------|------------|-------|------------|---|
| PIC12HV752  |                        |   |       |           |            |       |            |   |
| Param. No.  | Device Characteristics | Min.  | Typ.† | Max. 85°C | Max. 125°C | Units | Conditions |   |
|   |                        |   |       |           |            |       | VDD        | Note  |
| <b>Power-down Base Current (IPD)<sup>(2)</sup></b>    |                        |   |       |           |            |       |            |   |
| D020  |                        | —   | 0.05  | 1.2       | 4.5        | μA    | 2.0        | WDT, BOR, Comparator, VREF and T1OSC disabled                           |
|   |                        | —   | 0.15  | 1.6       | 5.5        | μA    | 3.0        |   |
|   |                        | —   | 0.35  | 2.1       | 9          | μA    | 5.0        |   |
| D020  |                        | —   | 135   | 200       | 200        | μA    | 2.0        |   |
|   |                        | —   | 210   | 280       | 280        | μA    | 3.0        |   |
|   |                        | —   | 260   | 350       | 350        | μA    | 4.5        |   |
| <b>Power-down Base Current (IPD)<sup>(2, 3)</sup></b> |                        |   |       |           |            |       |            |   |
| D021  |                        | —   | 0.5   | 1.5       | 5          | μA    | 2.0        | WDT Current <sup>(1)</sup>  |
|   |                        | —   | 2.5   | 4         | 8          | μA    | 3.0        |   |
|   |                        | —   | 9.5   | 17        | 19         | μA    | 5.0        |   |
| D021  |                        | —   | 135   | 200       | 200        | μA    | 2.0        |   |
|   |                        | —   | 210   | 285       | 285        | μA    | 3.0        |   |
|   |                        | —   | 265   | 360       | 360        | μA    | 4.5        |   |
| D022  |                        | —   | 5     | 9         | 15         | μA    | 3.0        | BOR Current <sup>(1)</sup>  |
|   |                        | —   | 6     | 12        | 19         | μA    | 5.0        |   |
| D022  |                        | —   | 215   | 285       | 285        | μA    | 3.0        |   |
|   |                        | —   | 265   | 360       | 360        | μA    | 4.5        |   |
| D023  |                        | —   | 160   | 235       | 245        | μA    | 2.0        | CxSP = 1, Comparator Current <sup>(1)</sup> , single comparator enabled |
|   |                        | —   | 180   | 270       | 280        | μA    | 3.0        |   |
|   |                        | —   | 220   | 350       | 360        | μA    | 5.0        |   |
| D023  |                        | —   | 280   | 415       | 415        | μA    | 2.0        |   |
|   |                        | —   | 385   | 540       | 540        | μA    | 3.0        |   |
|   |                        | —   | 455   | 735       | 735        | μA    | 4.5        |   |
| D024  |                        | —   | 50    | 70        | 75         | μA    | 2.0        | CxSP = 0, Comparator Current <sup>(1)</sup> , single comparator enabled |
|   |                        | —   | 55    | 80        | 90         | μA    | 3.0        |   |
|   |                        | —   | 70    | 90        | 120        | μA    | 5.0        |   |
| D024  |                        | —   | 185   | 205       | 205        | μA    | 2.0        |   |
|   |                        | —   | 265   | 315       | 315        | μA    | 3.0        |   |
|   |                        | —   | 320   | 445       | 445        | μA    | 4.5        |   |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note 1:** The peripheral Δ current can be determined by subtracting the base IPD current from this limit. Max values should be used when calculating total current consumption.
- 2:** The power-down current in Sleep mode does not depend on the oscillator type. Power-down current is measured with the part in Sleep mode, with all I/O pins in high-impedance state and tied to VSS.
- 3:** Shunt regulator is always on and always draws operating current.

**TABLE 20-3: POWER-DOWN CURRENTS (IPD) (CONTINUED)<sup>(1,2)</sup>**

| PIC12F752   |                        | Standard Operating Conditions (unless otherwise stated) |       |           |            |       |            | Sleep mode   |  |
|---|------------------------|---|-------|-----------|------------|-------|------------|--|--|
| PIC12HV752  |                        |   |       |           |            |       |            |  |  |
| Param. No.  | Device Characteristics | Min.  | Typ.† | Max. 85°C | Max. 125°C | Units | Conditions |  |  |
|   |                        |   |       |           |            |       | VDD        | Note   |  |
| <b>Power-down Base Current (IPD)<sup>(2, 3)</sup></b> |                        |   |       |           |            |       |            |  |  |
| D025  |                        | —   | 0.2   | 3.0       | 6.5        | μA    | 3.0        | A/D Current <sup>(1)</sup> , no conversion in progress           |  |
|   |                        | —   | 0.36  | 3.5       | 10         | μA    | 5.0        |  |  |
| D025  |                        | —   | 210   | 280       | 280        | μA    | 3.0        |  |  |
|   |                        | —   | 260   | 350       | 350        | μA    | 4.5        |  |  |
| D026  |                        | —   | 20.0  | 30        | 30         | μA    | 2.0        | DAC Current <sup>(1)</sup>                                       |  |
|   |                        | —   | 30.0  | 40        | 40         | μA    | 3.0        |  |  |
|   |                        | —   | 50.0  | 70        | 70         | μA    | 5.0        |  |  |
| D026  |                        | —   | 160   | 238       | 238        | μA    | 2.0        |  |  |
|   |                        | —   | 250   | 322       | 322        | μA    | 3.0        |  |  |
|   |                        | —   | 310   | 448       | 448        | μA    | 4.5        |  |  |
| D027  |                        | —   | 295.0 | 436       | 485        | μA    | 2.0        | FVR Current <sup>(1)</sup> , FVRBUFEN = 1, REFOUT buffer enabled |  |
|   |                        | —   | 300   | 450       | 500        | μA    | 3.0        |  |  |
|   |                        | —   | 325   | 475       | 515        | μA    | 5.0        |  |  |
| D027  |                        | —   | 395.0 | 605       | 605        | μA    | 2.0        |  |  |
|   |                        | —   | 470   | 710       | 710        | μA    | 3.0        |  |  |
|   |                        | —   | 505   | 765       | 765        | μA    | 4.5        |  |  |
| D028  |                        | —   | 5.5   | 10        | 16         | μA    | 2.0        | T1OSC Current, TMR1CS <1:0> = 11                                 |  |
|   |                        | —   | 7.0   | 12        | 18         | μA    | 3.0        |  |  |
|   |                        | —   | 8.5   | 14        | 22         | μA    | 5.0        |  |  |
| D028  |                        | —   | 140.0 | 205       | 205        | μA    | 2.0        |  |  |
|   |                        | —   | 220.0 | 290       | 290        | μA    | 3.0        |  |  |
|   |                        | —   | 270.0 | 360       | 360        | μA    | 4.5        |  |  |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note 1:** The peripheral Δ current can be determined by subtracting the base IPD current from this limit. Max values should be used when calculating total current consumption.
- 2:** The power-down current in Sleep mode does not depend on the oscillator type. Power-down current is measured with the part in Sleep mode, with all I/O pins in high-impedance state and tied to VSS.
- 3:** Shunt regulator is always on and always draws operating current.

# PIC12F752/HV752

**TABLE 20-4: I/O PORTS**

| DC CHARACTERISTICS            |                 |  | Standard Operating Conditions (unless otherwise stated) |       |                      |       |   |
|-------------------------------|-----------------|--|---|-------|----------------------|-------|---|
| Param. No.                    | Sym.            | Characteristic                             | Min.  | Typ.† | Max.                 | Units | Conditions  |
| D030<br>D030A<br>D031<br>D032 | V <sub>IL</sub> | <b>Input Low Voltage</b>                   |   |       |                      |       |   |
|                               |                 | I/O PORT:                                  |   |       |                      |       |   |
|                               |                 | with TTL buffer                            | —   | —     | 0.8                  | V     | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V   |
|                               |                 | with Schmitt Trigger buffer                | —   | —     | 0.15 V <sub>DD</sub> | V     | 2.0V ≤ V <sub>DD</sub> ≤ 4.5V   |
|                               |                 | MCLR                                       | —   | —     | 0.2 V <sub>DD</sub>  | V     | 2.0V ≤ V <sub>DD</sub> ≤ 5.5V   |
| D040<br>D040A<br>D041<br>D042 | V <sub>IH</sub> | <b>Input High Voltage</b>                  |   |       |                      |       |   |
|                               |                 | I/O PORT:                                  |   |       |                      |       |   |
|                               |                 | with TTL buffer                            | 2.0   | —     | —                    | V     | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V   |
|                               |                 | with Schmitt Trigger buffer                | 0.25 V <sub>DD</sub> + 0.8                              | —     | —                    | V     | 2.0V ≤ V <sub>DD</sub> ≤ 4.5V   |
|                               |                 | MCLR                                       | 0.8 V <sub>DD</sub>                                     | —     | —                    | V     | 2.0V ≤ V <sub>DD</sub> ≤ 5.5V   |
| D060<br>D061<br>D063          | I <sub>IL</sub> | <b>Input Leakage Current<sup>(1)</sup></b> |   |       |                      |       |   |
|                               |                 | I/O ports                                  | —   | ± 0.1 | ± 1                  | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>Pin at high-impedance, 85°C |
|                               |                 | RA3/MCLR <sup>(2)</sup>                    | —   | ± 0.7 | ± 5                  | μA    | V <sub>SS</sub> ≤ V <sub>PIN</sub> ≤ V <sub>DD</sub> ,<br>Pin at high-impedance, 85°C |
|                               |                 |  | —   | ± 0.1 | ± 5                  | μA    | EC Configuration  |
| D070*                         | IPUR            | <b>Weak Pull-up Current<sup>(3)</sup></b>  | 50  | 250   | 400                  | μA    | V <sub>DD</sub> = 5.0V, V <sub>PIN</sub> = V <sub>SS</sub>                            |
| D080                          | V <sub>OL</sub> | <b>Output Low Voltage</b>                  |   |       |                      |       |   |
|                               |                 | I/O Ports RA1, RA4 and RA5                 | —   | —     | 0.6                  | V     | I <sub>OL</sub> = 7 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +125°C     |
|                               |                 |  | —   | —     | 0.6                  | V     | I <sub>OL</sub> = 8.5 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +85°C    |
|                               |                 | I/O Ports RA0 and RA2                      | —   | —     | 0.6                  | V     | I <sub>OL</sub> = 14 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +125°C    |
|                               |                 |  | —   | —     | 0.6                  | V     | I <sub>OL</sub> = 17 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +85°C     |
| D090                          | V <sub>OH</sub> | <b>Output High Voltage</b>                 |   |       |                      |       |   |
|                               |                 | I/O Ports RA1, RA4 and RA5                 | V <sub>DD</sub> -0.7                                    | —     | —                    | V     | I <sub>OH</sub> = -2.5 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +125°C  |
|                               |                 |  | V <sub>DD</sub> -0.7                                    | —     | —                    | V     | I <sub>OH</sub> = -3 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +85°C     |
|                               |                 | I/O Ports RA0 and RA2                      | V <sub>DD</sub> -0.7                                    | —     | —                    | V     | I <sub>OH</sub> = -5 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +125°C    |
|                               |                 |  | V <sub>DD</sub> -0.7                                    | —     | —                    | V     | I <sub>OH</sub> = -6 mA, V <sub>DD</sub> = 4.5V<br>-40°C ≤ T <sub>A</sub> ≤ +85°C     |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note** 1: Negative current is defined as current sourced by the pin.  
 2: The leakage current on the MCLR pin is strongly dependent on the applied voltage level. The specified levels represent normal operating conditions. Higher leakage current may be measured at different input voltages.  
 3: This specification applies to all weak pull-up pins, including the weak pull-up found on RA3/MCLR. When RA3/MCLR is configured as MCLR Reset pin, the weak pull-up is always enabled.

**TABLE 20-4: I/O PORTS (CONTINUED)**

| DC CHARACTERISTICS                             |       |                | Standard Operating Conditions (unless otherwise stated) |       |      |       |            |
|--|-------|----------------|---|-------|------|-------|------------|
| Param. No.                                     | Sym.  | Characteristic | Min.  | Typ.† | Max. | Units | Conditions |
| <b>Capacitive Loading Specs on Output Pins</b> |       |                |   |       |      |       |            |
| D101*  | COSC2 | OSC2 pin       | —   | —     | 15   | pF    |            |
| D101A*   | CIO   | All I/O pins   | —   | —     | 50   | pF    |            |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note 1:** Negative current is defined as current sourced by the pin.
- Note 2:** The leakage current on the MCLR pin is strongly dependent on the applied voltage level. The specified levels represent normal operating conditions. Higher leakage current may be measured at different input voltages.
- Note 3:** This specification applies to all weak pull-up pins, including the weak pull-up found on RA3/MCLR. When RA3/MCLR is configured as MCLR Reset pin, the weak pull-up is always enabled.

**TABLE 20-5: MEMORY PROGRAMMING SPECIFICATIONS**

| Standard Operating Conditions (unless otherwise stated) |                    |  |        |       |        |       |   |
|---|--------------------|--|--------|-------|--------|-------|---|
| Param. No.  | Sym.               | Characteristic                         | Min.   | Typ.† | Max.   | Units | Conditions                                    |
| <b>Program Memory Programming Specifications</b>        |                    |  |        |       |        |       |   |
| D110  | VIHH               | Voltage on MCLR/VPP pin                | 10.0   | —     | 13.0   | V     | (Note 1)                                      |
| D112  | VBE                | VDD for Bulk Erase                     | 4.5    | —     | VDDMAX | V     |   |
| D113  | VPEW               | VDD for Write or Row Erase             | 4.5    | —     | VDDMAX | V     |   |
| D114  | I <sub>PPPGM</sub> | Current on MCLR/VPP during Erase/Write | —      | 300   | 1000   | μA    |   |
| <b>Program Flash Memory</b>                             |                    |  |        |       |        |       |   |
| D121  | EP                 | Cell Endurance                         | 10K    | 100K  | —      | E/W   | -40°C ≤ TA ≤ +85°C<br>(Note 2)                |
| D121A   | EP                 | Cell Endurance                         | 1K     | 10K   | —      | E/W   | -40°C ≤ TA ≤ +125°C<br>(Note 2)               |
| D122  | VPRW               | VDD for Read/Write                     | VDDMIN | —     | VDDMAX | V     |   |
| D123  | TIW                | Self-timed Write Cycle Time            | —      | 2     | 2.5    | ms    |   |
| D124  | TRET               | Characteristic Retention               | 40     | —     | —      | Year  | Provided no other specifications are violated |

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note 1:** Required only if single-supply programming is disabled.
- Note 2:** Self-write and Block Erase.

# PIC12F752/HV752

**TABLE 20-6: THERMAL CHARACTERISTICS**

| Standard Operating Conditions (unless otherwise stated) |                       |  |       |       |  |
|---|-----------------------|--|-------|-------|--|
| Param. No.  | Sym.                  | Characteristic                         | Typ.  | Units | Conditions   |
| TH01  | $\theta_{JA}$         | Thermal Resistance Junction to Ambient | 84.6  | °C/W  | 8-pin PDIP package   |
|   |                       |  | 149.5 | °C/W  | 8-pin SOIC package   |
|   |                       |  | 60    | °C/W  | 8-pin DFN 3x3mm package  |
| TH02  | $\theta_{JC}$         | Thermal Resistance Junction to Case    | 41.2  | °C/W  | 8-pin PDIP package   |
|   |                       |  | 39.9  | °C/W  | 8-pin SOIC package   |
|   |                       |  | 9     | °C/W  | 8-pin DFN 3x3mm package  |
| TH03  | T <sub>JMAX</sub>     | Maximum Junction Temperature           | 150   | °C    |  |
| TH04  | PD                    | Power Dissipation                      | —     | W     | PD = P <sub>INTERNAL</sub> + P <sub>I/O</sub>  |
| TH05  | P <sub>INTERNAL</sub> | Internal Power Dissipation             | —     | W     | P <sub>INTERNAL</sub> = I <sub>DD</sub> × V <sub>DD</sub> <sup>(1)</sup>                               |
| TH06  | P <sub>I/O</sub>      | I/O Power Dissipation                  | —     | W     | P <sub>I/O</sub> = $\Sigma (I_{OL} * V_{OL}) + \Sigma (I_{OH} * (V_{DD} - V_{OH}))$                    |
| TH07  | P <sub>DER</sub>      | Derated Power                          | —     | W     | P <sub>DER</sub> = P <sub>D</sub> MAX (T <sub>J</sub> - T <sub>A</sub> )/ $\theta_{JA}$ <sup>(2)</sup> |

**Note 1:** I<sub>DD</sub> is current to run the chip alone without driving any load on the output pins.

**2:** T<sub>A</sub> = Ambient temperature; T<sub>J</sub> = Junction Temperature

## 20.3 Timing Parameter Symbology

The timing parameter symbols have been created with one of the following formats:

1. TppS2ppS
2. TppS

|          |           |   |      |
|----------|-----------|---|------|
| <b>T</b> |           |   |      |
| F        | Frequency | T | Time |


Lowercase letters (pp) and their meanings:

|           |                 |     |                                    |
|-----------|-----------------|-----|------------------------------------|
| <b>pp</b> |                 |     |                                    |
| cc        | CCP1            | osc | OSC1                               |
| ck        | CLKOUT          | rd  | $\overline{RD}$                    |
| cs        | $\overline{CS}$ | rw  | $\overline{RD}$ or $\overline{WR}$ |
| di        | SDI             | sc  | SCK                                |
| do        | SDO             | ss  | $\overline{SS}$                    |
| dt        | Data in         | t0  | T0CKI                              |
| io        | I/O Port        | t1  | T1CKI                              |
| mc        | MCLR            | wr  | $\overline{WR}$                    |

Uppercase letters and their meanings:

|          |                          |   |                |
|----------|--------------------------|---|----------------|
| <b>S</b> |                          |   |                |
| F        | Fall                     | P | Period         |
| H        | High                     | R | Rise           |
| I        | Invalid (High-Impedance) | V | Valid          |
| L        | Low                      | Z | High-Impedance |

**FIGURE 20-3: LOAD CONDITIONS**

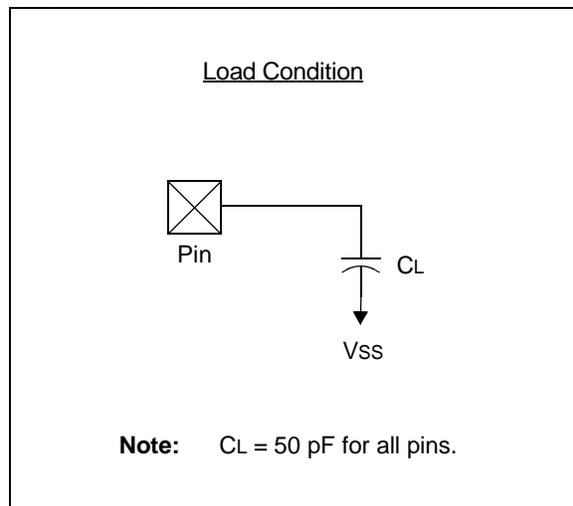

# PIC12F752/HV752

## 20.4 AC Characteristics: PIC12F752/HV752 (Industrial, Extended)

FIGURE 20-4: CLOCK TIMING

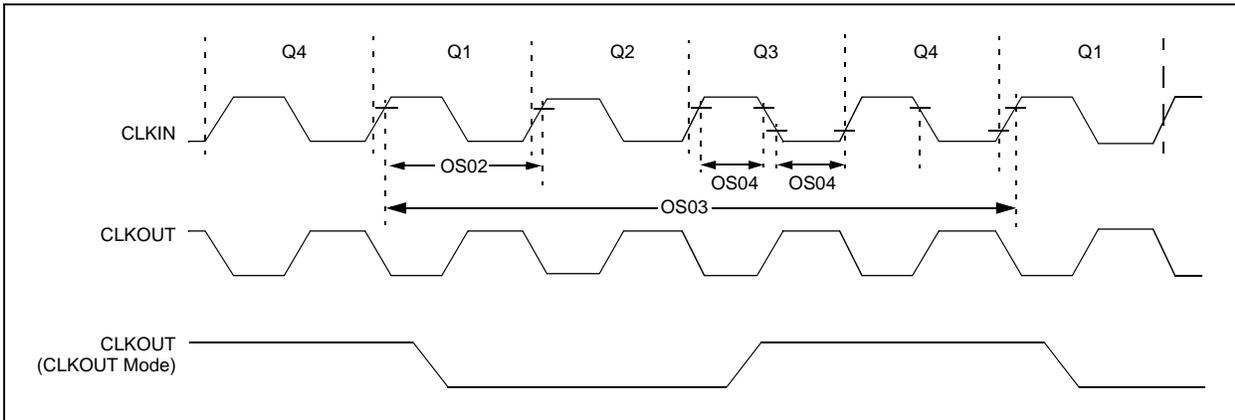


TABLE 20-7: CLOCK OSCILLATOR TIMING REQUIREMENTS

| Standard Operating Conditions (unless otherwise stated) |      |   |      |       |      |       |                    |
|---|------|---|------|-------|------|-------|--------------------|
| Param. No.  | Sym. | Characteristic                          | Min. | Typ.† | Max. | Units | Conditions         |
| OS01  | FOSC | External CLKIN Frequency <sup>(1)</sup> | DC   | —     | 20   | MHz   | EC Oscillator mode |
| OS02  | TOSC | External CLKIN Period <sup>(1)</sup>    | 50   | —     | ∞    | ns    | EC Oscillator mode |
| OS03  | TCY  | Instruction Cycle Time <sup>(1)</sup>   | 200  | TCY   | DC   | ns    | TCY = 4/FOSC       |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**Note 1:** Instruction cycle period (TCY) equals four times the input oscillator time base period. All specified values are based on characterization data for that particular oscillator type under standard operating conditions with the device executing code. Exceeding these specified limits may result in an unstable oscillator operation and/or higher than expected current consumption. All devices are tested to operate at "min" values with an external clock applied to CLKIN pin. When an external clock input is used, the "max" cycle time limit is "DC" (no clock) for all devices.

**TABLE 20-8: OSCILLATOR PARAMETERS**

| Standard Operating Conditions (unless otherwise stated) |          |   |                 |      |       |      |       |  |
|---|----------|---|-----------------|------|-------|------|-------|--|
| Param. No.  | Sym.     | Characteristic  | Freq. Tolerance | Min. | Typ.† | Max. | Units | Conditions   |
| OS06  | TWARM    | Internal Oscillator Switch when running                     | —               | —    | —     | 2    | TOSC  |  |
| OS07  | INTOSC   | Internal Calibrated INTOSC Frequency <sup>(1)</sup> (4 MHz) | ±1%             | 3.96 | 4.0   | 4.04 | MHz   | VDD = 3.5V, TA = 25°C  |
|   |          |   | ±2%             | 3.92 | 4.0   | 4.08 | MHz   | 2.5V ≤ VDD ≤ 5.5V, 0°C ≤ TA ≤ +85°C                                      |
|   |          |   | ±5%             | 3.80 | 4.0   | 4.20 | MHz   | 2.0V ≤ VDD ≤ 5.5V, -40°C ≤ TA ≤ +85°C (Ind.), -40°C ≤ TA ≤ +125°C (Ext.) |
| OS08  | HFOSC    | Internal Calibrated HFINTOSC Frequency <sup>(1)</sup>       | ±1%             | 7.92 | 8     | 8.08 | MHz   | VDD = 3.5V, TA = 25°C  |
|   |          |   | ±2%             | 7.84 | 8     | 8.16 | MHz   | 2.5V ≤ VDD ≤ 5.5V, 0°C ≤ TA ≤ +85°C                                      |
|   |          |   | ±5%             | 7.60 | 8     | 8.40 | MHz   | 2.0V ≤ VDD ≤ 5.5V, -40°C ≤ TA ≤ +85°C (Ind.), -40°C ≤ TA ≤ +125°C (Ext.) |
| OS09  | LFOSC    | Internal LFINTOSC Frequency                                 | —               | —    | 31    | —    | kHz   |  |
| OS10*   | TIOSC ST | HFINTOSC Wake-up from Sleep Start-up Time                   | —               | —    | 12    | 24   | μs    | VDD = 2.0V -40°C ≤ TA ≤ +85°C  |
|   |          |   | —               | —    | 7     | 14   | μs    | VDD = 3.0V -40°C ≤ TA ≤ +85°C  |
|   |          |   | —               | —    | 6     | 11   | μs    | VDD = 5.0V -40°C ≤ TA ≤ +85°C  |


\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**Note 1:** To ensure these oscillator frequency tolerances, VDD and VSS must be capacitively decoupled as close to the device as possible. 0.1 μF and 0.01 μF values in parallel are recommended.

# PIC12F752/HV752

**FIGURE 20-5: CLKOUT AND I/O TIMING**

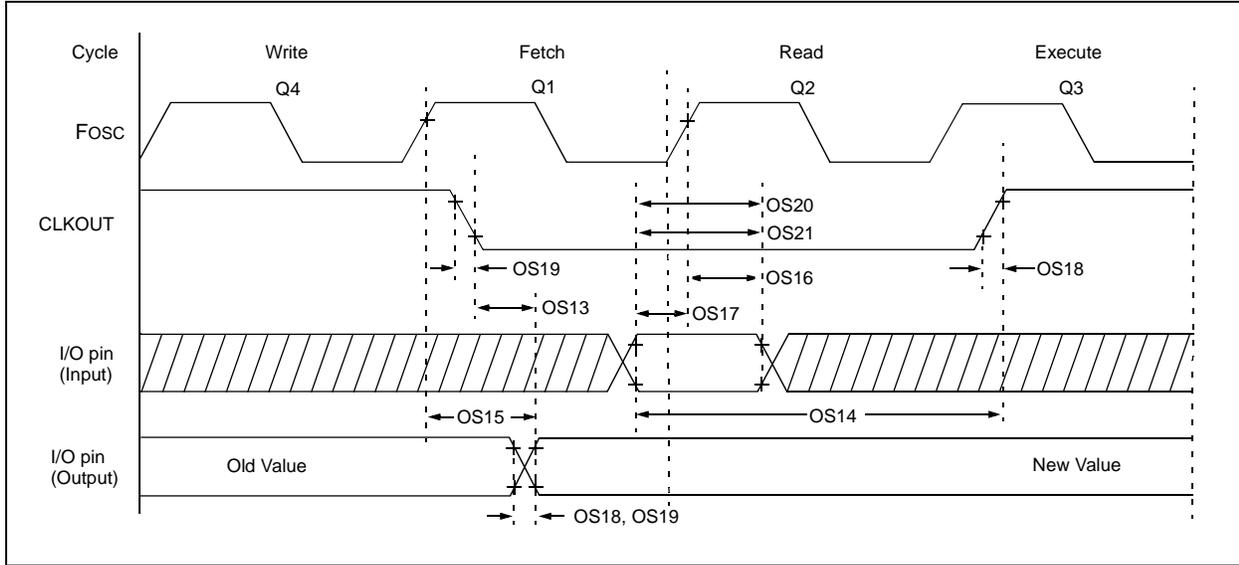

**TABLE 20-9: CLKOUT AND I/O TIMING PARAMETERS**


| Standard Operating Conditions (unless otherwise stated) |          |  |                 |          |          |       |                          |
|---|----------|--|-----------------|----------|----------|-------|--------------------------|
| Param. No.  | Sym.     | Characteristic   | Min.            | Typ.†    | Max.     | Units | Conditions               |
| OS13  | TckL2ioV | CLKOUT↓ to Port out valid <sup>(1)</sup>                   | —               | —        | 20       | ns    |                          |
| OS14  | TioV2ckH | Port input valid before CLKOUT↑ <sup>(1)</sup>             | TOSC + 200 ns   | —        | —        | ns    |                          |
| OS15  | Tosh2ioV | Fosc↑ (Q1 cycle) to Port out valid                         | —               | 50       | 70*      | ns    | VDD = 5.0V               |
| OS16  | Tosh2ioI | Fosc↑ (Q2 cycle) to Port input invalid (I/O in setup time) | 50              | —        | —        | ns    | VDD = 5.0V               |
| OS17  | TioV2osh | Port input valid to Fosc↑ (Q2 cycle) (I/O in setup time)   | 20              | —        | —        | ns    |                          |
| OS18*   | TioR     | Port output rise time                                      | —               | 40<br>15 | 72<br>32 | ns    | VDD = 2.0V<br>VDD = 5.0V |
| OS19*   | TioF     | Port output fall time                                      | —               | 28<br>15 | 55<br>30 | ns    | VDD = 2.0V<br>VDD = 5.0V |
| OS20*   | TiNP     | INT pin input high or low time                             | 25              | —        | —        | ns    |                          |
| OS21*   | TioC     | Interrupt-on-change new input level time                   | T <sub>CY</sub> | —        | —        | ns    |                          |

\* These parameters are characterized but not tested.


† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated.

**Note 1:** Measurements are taken in RC mode where CLKOUT output is 4 x TOSC.

**FIGURE 20-6: RESET, WATCHDOG TIMER AND POWER-UP TIMER TIMING**

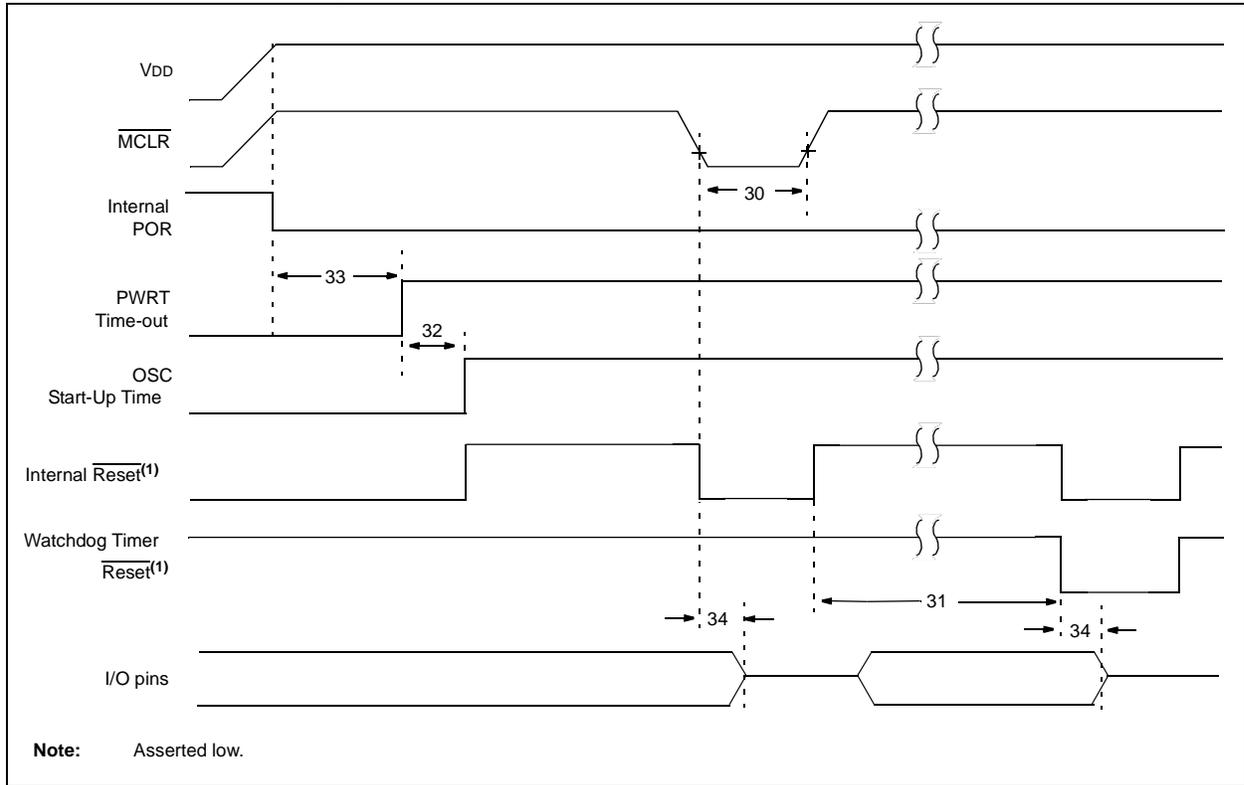

**FIGURE 20-7: BROWN-OUT RESET TIMING AND CHARACTERISTICS**

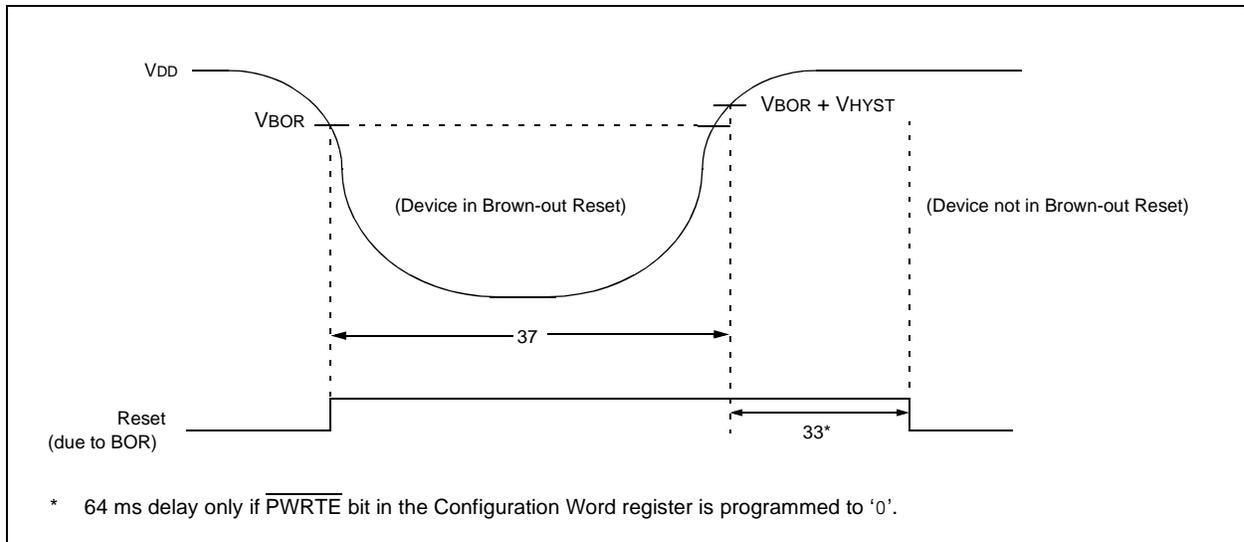

# PIC12F752/HV752

**TABLE 20-10: RESET, WATCHDOG TIMER, OSCILLATOR START-UP TIMER, POWER-UP TIMER AND BROWN-OUT RESET PARAMETERS**


| Standard Operating Conditions (unless otherwise stated) |        |  |          |          |          |          |   |
|---|--------|--|----------|----------|----------|----------|---|
| Param. No.  | Sym.   | Characteristic   | Min.     | Typ.†    | Max.     | Units    | Conditions  |
| 30  | TMCL   | MCLR Pulse Width (low)                                   | 2<br>5   | —<br>—   | —<br>—   | μs<br>μs | VDD = 5V, -40°C to +85°C<br>VDD = 5V, -40°C to +125°C |
| 31  | TWDTLP | Low-Power Watchdog Timer Time-out Period                 | 10<br>10 | 20<br>20 | 30<br>35 | ms<br>ms | VDD = 5V, -40°C to +85°C<br>VDD = 5V, -40°C to +125°C |
| 32*   | TPWRT  | Power-up Timer Period, PWRTE = 0 (No Prescaler)          | 40       | 65       | 140      | ms       |   |
| 33*   | TIOZ   | I/O high-impedance from MCLR Low or Watchdog Timer Reset | —        | —        | 2.0      | μs       |   |
| 34  | VBOR   | Brown-out Reset Voltage <sup>(1)</sup>                   | 2        | 2.15     | 2.3      | V        |   |
| 35*   | VHYST  | Brown-out Reset Hysteresis                               | —        | 100      | —        | mV       | -40°C ≤ TA ≤ +85°C                                    |
| 36*   | TBOR   | Brown-out Reset DC Minimum Detection Period              | 100      | —        | —        | μs       | VDD ≤ VBOR  |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**Note 1:** To ensure these voltage tolerances, VDD and VSS must be capacitively decoupled as close to the device as possible. 0.1 μF and 0.01 μF values in parallel are recommended.

**FIGURE 20-8: TIMER0 AND TIMER1 EXTERNAL CLOCK TIMINGS**

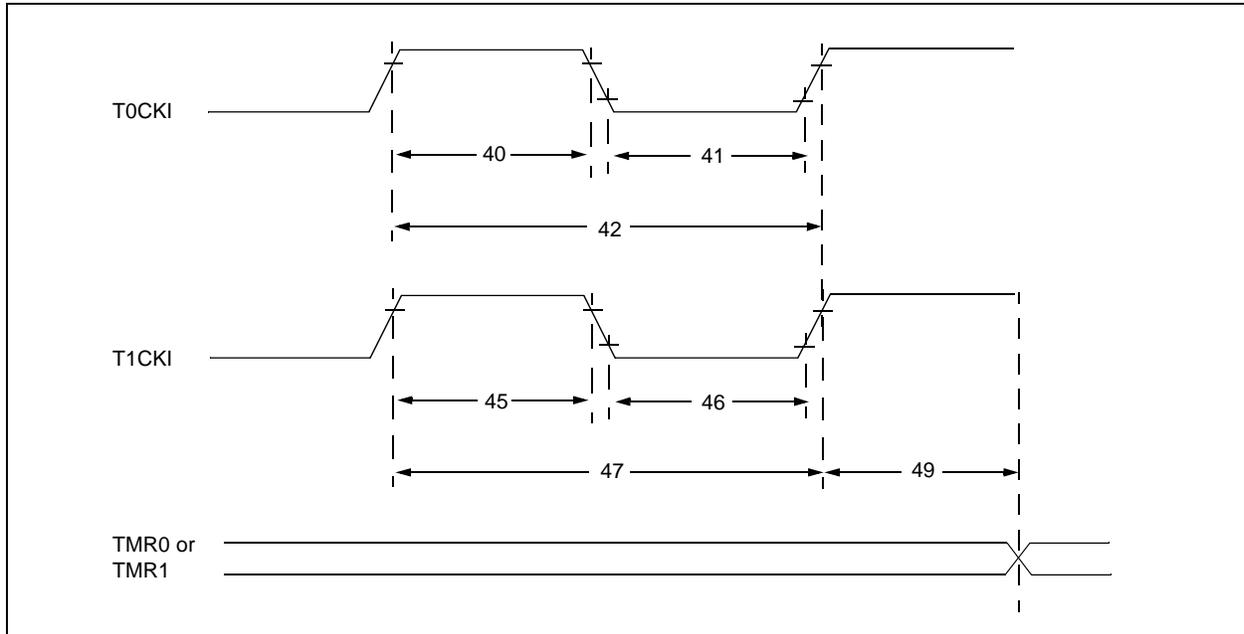

**TABLE 20-11: TIMER0 AND TIMER1 EXTERNAL CLOCK REQUIREMENTS**


| Standard Operating Conditions (unless otherwise stated) |                  |   |                             |  |       |             |       |                     |
|---|------------------|---|-----------------------------|--|-------|-------------|-------|---------------------|
| Param. No.  | Sym.             | Characteristic                                    |                             | Min.   | Typ.† | Max.        | Units | Conditions          |
| 40*   | T <sub>T0H</sub> | T0CKI High Pulse Width                            | No Prescaler                | $0.5 T_{CY} + 20$                              | —     | —           | ns    |                     |
|   |                  |   | With Prescaler              | 10   | —     | —           | ns    |                     |
| 41*   | T <sub>T0L</sub> | T0CKI Low Pulse Width                             | No Prescaler                | $0.5 T_{CY} + 20$                              | —     | —           | ns    |                     |
|   |                  |   | With Prescaler              | 10   | —     | —           | ns    |                     |
| 42*   | T <sub>T0P</sub> | T0CKI Period                                      |                             | Greater of:<br>$20$ or $\frac{T_{CY} + 40}{N}$ | —     | —           | ns    | N = prescale value  |
| 45*   | T <sub>T1H</sub> | T1CKI High Time                                   | Synchronous, No Prescaler   | $0.5 T_{CY} + 20$                              | —     | —           | ns    |                     |
|   |                  |   | Synchronous, with Prescaler | 15   | —     | —           | ns    |                     |
|   |                  |   | Asynchronous                | 30   | —     | —           | ns    |                     |
| 46*   | T <sub>T1L</sub> | T1CKI Low Time                                    | Synchronous, No Prescaler   | $0.5 T_{CY} + 20$                              | —     | —           | ns    |                     |
|   |                  |   | Synchronous, with Prescaler | 15   | —     | —           | ns    |                     |
|   |                  |   | Asynchronous                | 30   | —     | —           | ns    |                     |
| 47*   | T <sub>T1P</sub> | T1CKI Input Period                                | Synchronous                 | Greater of:<br>$30$ or $\frac{T_{CY} + 40}{N}$ | —     | —           | ns    | N = prescale value  |
|   |                  |   | Asynchronous                | 60   | —     | —           | ns    |                     |
| 49*   | TCKEZT-MR1       | Delay from External Clock Edge to Timer Increment |                             | $2 T_{OSC}$                                    | —     | $7 T_{OSC}$ | —     | Timers in Sync mode |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

# PIC12F752/HV752

**FIGURE 20-9: PIC12F752/HV752 CAPTURE/COMPARE/PWM TIMINGS (CCP)**

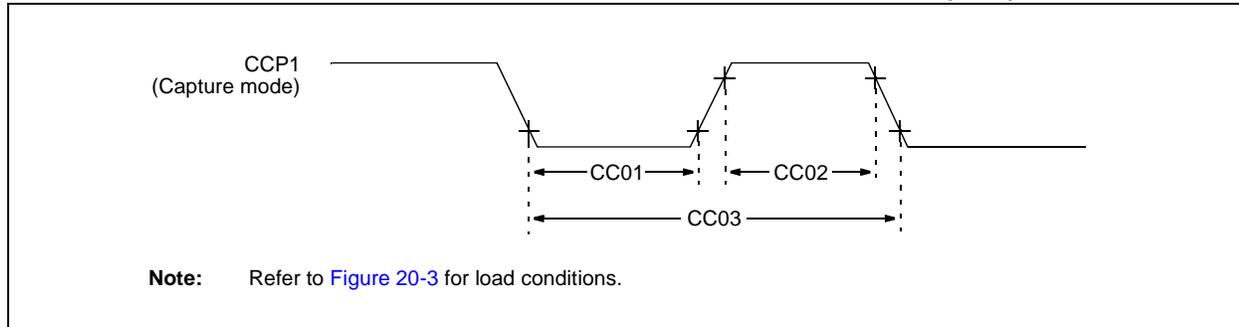

**TABLE 20-12: CAPTURE/COMPARE/PWM REQUIREMENTS (CCP)**

| Standard Operating Conditions (unless otherwise stated) |      |                      |                |                          |       |      |       |                                 |
|---|------|----------------------|----------------|--------------------------|-------|------|-------|---------------------------------|
| Param. No.  | Sym. | Characteristic       |                | Min.                     | Typ.† | Max. | Units | Conditions                      |
| CC01*   | TccL | CCP1 Input Low Time  | No Prescaler   | $0.5T_{CY} + 20$         | —     | —    | ns    |                                 |
|   |      |                      | With Prescaler | 20                       | —     | —    | ns    |                                 |
| CC02*   | TccH | CCP1 Input High Time | No Prescaler   | $0.5T_{CY} + 20$         | —     | —    | ns    |                                 |
|   |      |                      | With Prescaler | 20                       | —     | —    | ns    |                                 |
| CC03*   | TccP | CCP1 Input Period    |                | $\frac{3T_{CY} + 40}{N}$ | —     | —    | ns    | N = prescale value (1, 4 or 16) |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**TABLE 20-13: COMPARATOR SPECIFICATIONS<sup>(1)</sup>**

| Standard Operating Conditions (unless otherwise stated) |         |  |      |                      |                      |          |                      |
|---|---------|--|------|----------------------|----------------------|----------|----------------------|
| Param. No.  | Sym.    | Characteristics                        | Min. | Typ.†                | Max.                 | Units    | Comments             |
| CM01  | VIOFF   | Input Offset Voltage                   | —    | $\pm 10$<br>$\pm 10$ | $\pm 20$<br>$\pm 20$ | mV<br>mV | CxSP = 1<br>CxSP = 0 |
| CM02  | VICM    | Input Common Mode Voltage              | 0    | —                    | $V_{DD} - 1.5$       | V        |                      |
| CM03  | CMRR    | Common Mode Rejection Ratio            | —    | 50                   | —                    | dB       |                      |
| CM04A*  | TRT     | Response Time                          | —    | 38                   | 45                   | ns       | CxSP = 1             |
|   |         |  | —    | 81                   | 100                  | ns       | CxSP = 0             |
| CM05*   | TMC20V  | Comparator Mode Change to Output Valid | —    | —                    | 10                   | μs       |                      |
| CM06  | CHYSTER | Comparator Hysteresis                  | —    | 35                   | 50                   | mV       |                      |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**Note 1:** See [Section 21.0 "DC and AC Characteristics Graphs and Charts"](#) for operating characterization.

**TABLE 20-14: DIGITAL-TO-ANALOG CONVERTER (DAC) SPECIFICATIONS<sup>(1)</sup>**

| Standard Operating Conditions (unless otherwise stated) |      |                              |      |                      |       |       |          |
|---|------|------------------------------|------|----------------------|-------|-------|----------|
| Param. No.  | Sym. | Characteristics              | Min. | Typ.†                | Max.  | Units | Comments |
| DAC01*  | CLSB | Step Size <sup>(2)</sup>     | —    | V <sub>DD</sub> / 32 | —     | V     |          |
| DAC02*  | CACC | Absolute Accuracy            | —    | —                    | ± 1/2 | LSb   |          |
| DAC03*  | CR   | Unit Resistor Value (R)      | —    | 5K                   | —     | Ω     |          |
| DAC04*  | CST  | Settling Time <sup>(3)</sup> | —    | —                    | 10    | μs    |          |

\* These parameters are characterized but not tested.

† Data in “Typ.” column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**Note 1:** See [Section 21.0 “DC and AC Characteristics Graphs and Charts”](#) for operating characterization.

**2:** Setting DACRNG = 1 for full range mode. See [Example 14-2](#) for limited range calculation.

**3:** Settling time measured while DACR<4:0> transitions from ‘0000’ to ‘1111’.

**TABLE 20-15: FIXED VOLTAGE REFERENCE SPECIFICATIONS**

| Standard Operating Conditions (unless otherwise stated) |         |                    |       |      |       |       |          |
|---|---------|--------------------|-------|------|-------|-------|----------|
| Param No.   | Symbol  | Characteristics    | Min.  | Typ. | Max.  | Units | Comments |
| VR01  | VFVR    | FVR Voltage Output | 1.116 | 1.2  | 1.284 | V     |          |
| VR02*   | TSTABLE | FVR Turn On Time   | —     | 200  | —     | μs    |          |

\* These parameters are characterized but not tested.

**TABLE 20-16: SHUNT REGULATOR SPECIFICATIONS (PIC12HV752 only)**

| Standard Operating Conditions (unless otherwise stated) |         |                             |      |      |      |       |                                     |
|---|---------|-----------------------------|------|------|------|-------|-------------------------------------|
| Param. No.  | Symbol  | Characteristics             | Min. | Typ. | Max. | Units | Comments                            |
| SR01  | VSHUNT  | Shunt Voltage               | 4.75 | 5    | 5.5  | V     |                                     |
| SR02  | ISHUNT  | Shunt Current               | 1    | —    | 50   | mA    |                                     |
| SR03*   | TSETTLE | Settling Time               | —    | —    | 150  | ns    | To 1% of final value                |
| SR04  | CLOAD   | Load Capacitance            | 0.01 | —    | 10   | μF    | Bypass capacitor on VDD pin         |
| SR05  | ΔISNT   | Regulator operating current | —    | 180  | —    | μA    | Includes band gap reference current |

\* These parameters are characterized but not tested.

# PIC12F752/HV752

**TABLE 20-17: ANALOG-TO-DIGITAL CONVERTER (ADC) CHARACTERISTICS<sup>(1,2,3)</sup>**

| Standard Operating Conditions (unless otherwise stated) |      |  |            |        |          |       |  |
|---|------|--|------------|--------|----------|-------|--|
| Param. No.  | Sym. | Characteristic                                 | Min.       | Typ.†  | Max.     | Units | Conditions   |
| AD01  | NR   | Resolution                                     | —          | —      | 10       | bit   |  |
| AD02  | EIL  | Integral Error                                 | —          | —      | ±1       | LSb   | VREF = 3.0V  |
| AD03  | EDL  | Differential Error                             | —          | —      | ±1       | LSb   | No missing codes<br>VREF = 3.0V                                      |
| AD04  | E0FF | Offset Error                                   | —          | ±1.5   | ±2.0     | LSb   | VREF = 3.0V  |
| AD05  | EGN  | Gain Error                                     | —          | —      | ±1.0     | LSb   | VREF = 3.0V  |
| AD06  | VREF | Reference Voltage                              | 2.2<br>2.5 | —<br>— | —<br>VDD | V     | Absolute minimum to ensure 1 LSb accuracy                            |
| AD07  | VAIN | Full-Scale Range                               | VSS        | —      | VREF     | V     |  |
| AD08  | ZAIN | Recommended Impedance of Analog Voltage Source | —          | —      | 10       | kΩ    | Can go higher if external 0.01 μF capacitor is present on input pin. |
| AD09*   | IREF | VREF Input Current                             | 10         | —      | 1000     | μA    | During VAIN acquisition. Based on differential of VHOLD to VAIN.     |
|   |      |  | —          | —      | 50       | μA    | During A/D conversion cycle.   |

\* These parameters are characterized but not tested.

† Data in “Typ.” column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note 1:** Total Absolute Error includes integral, differential, offset and gain errors.
- Note 2:** The ADC conversion result never decreases with an increase in the input voltage and has no missing codes.
- Note 3:** See [Section 21.0 “DC and AC Characteristics Graphs and Charts”](#) for operating characterization.

**TABLE 20-18: ADC CONVERSION REQUIREMENTS**

| Standard Operating Conditions (unless otherwise stated) |      |   |      |                            |      |       |  |
|---|------|---|------|----------------------------|------|-------|--|
| Param. No.  | Sym. | Characteristic  | Min. | Typ.†                      | Max. | Units | Conditions                                   |
| AD130*  | TAD  | ADC Internal FRC Oscillator Period                              | 3.0  | 6.0                        | 9.0  | μs    | At VDD = 2.5V                                |
|   |      |   | 1.6  | 4.0                        | 6.0  | μs    | At VDD = 5.0V                                |
|   |      | ADC Clock Period  | 1.6  | —                          | 9.0  | μs    | FOSC-based, VREF ≥ 3.0V                      |
|   |      |   | 3.0  | —                          | 9.0  | μs    | TOSC-based, VREF full range <sup>(2)</sup>   |
| AD131   | TCNV | Conversion Time (not including Acquisition Time) <sup>(1)</sup> | —    | 11                         | —    | TAD   | Set GO/DONE bit to conversion complete       |
| AD132*  | TACQ | Acquisition Time  | —    | 11.5                       | —    | μs    |  |
| AD133*  | TAMP | Amplifier Settling Time   | —    | —                          | 5    | μs    |  |
| AD134   | TGO  | Q4 to A/D Clock Start   | —    | TOSC/2                     | —    | —     |  |
|   | THCD | Holding Capacitor Disconnect Time                               | —    | 1/2 TAD<br>1/2 TAD + 1 TCY | —    | —     | FOSC-based<br>ADCS<2:0> = x11 (ADC FRC mode) |


\* These parameters are characterized but not tested.

† Data in "Typ." column is at 5.0V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

**Note 1:** The ADRES register may be read on the following TCY cycle. See [Section 12.4 "A/D Acquisition Requirements"](#) for minimum conditions.

**2:** Full range for PIC12HV752 powered by the shunt regulator is the 5V regulated voltage.

**FIGURE 20-10: PIC12F752/HV752 A/D CONVERSION TIMING (ADC CLOCK FOSC-BASED)**

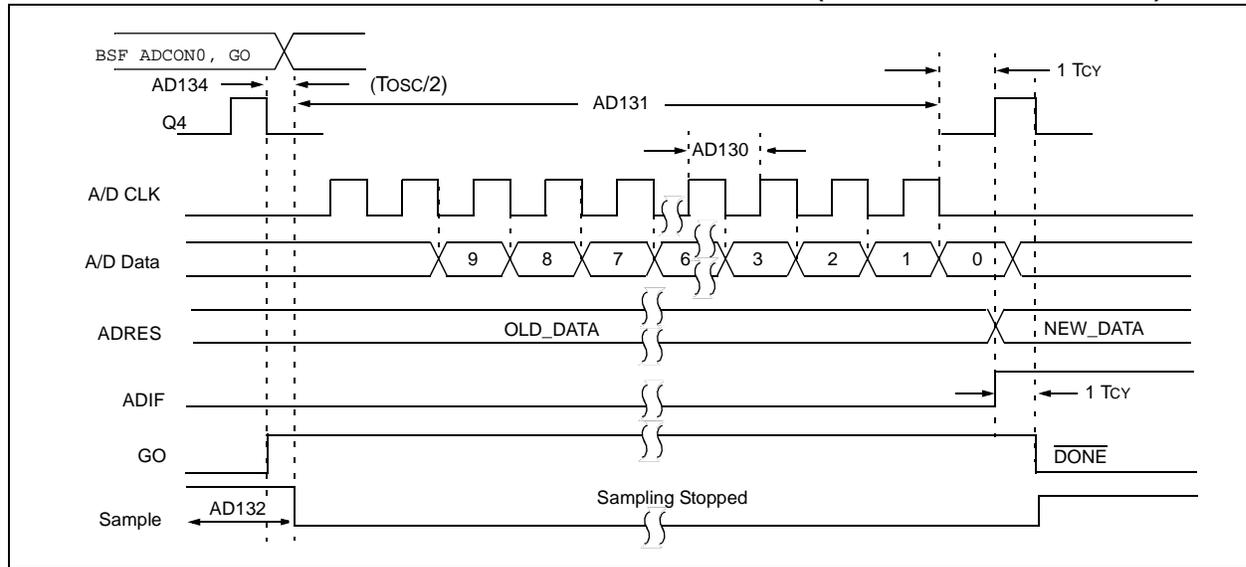

# PIC12F752/HV752

---

## 21.0 DC AND AC CHARACTERISTICS GRAPHS AND CHARTS


The graphs and tables provided in this section are for **design guidance** and are **not tested**.

In some graphs or tables, the data presented are **outside specified operating range** (i.e., outside specified V<sub>DD</sub> range). This is for **information only** and devices are ensured to operate properly only within the specified range.


|   |
|---|
| <b>Note:</b> The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore, outside the warranted range. |
|---|

**“Typical”** represents the mean of the distribution at 25°C. **“MAXIMUM”**, **“Max.”**, **“MINIMUM”** or **“Min.”** represents (mean + 3σ) or (mean - 3σ) respectively, where σ is a standard deviation, over each temperature range.

**FIGURE 21-1:  $I_{DD}$ , LFINTOSC,  $F_{osc} = 31$  kHz, PIC12F752 ONLY**

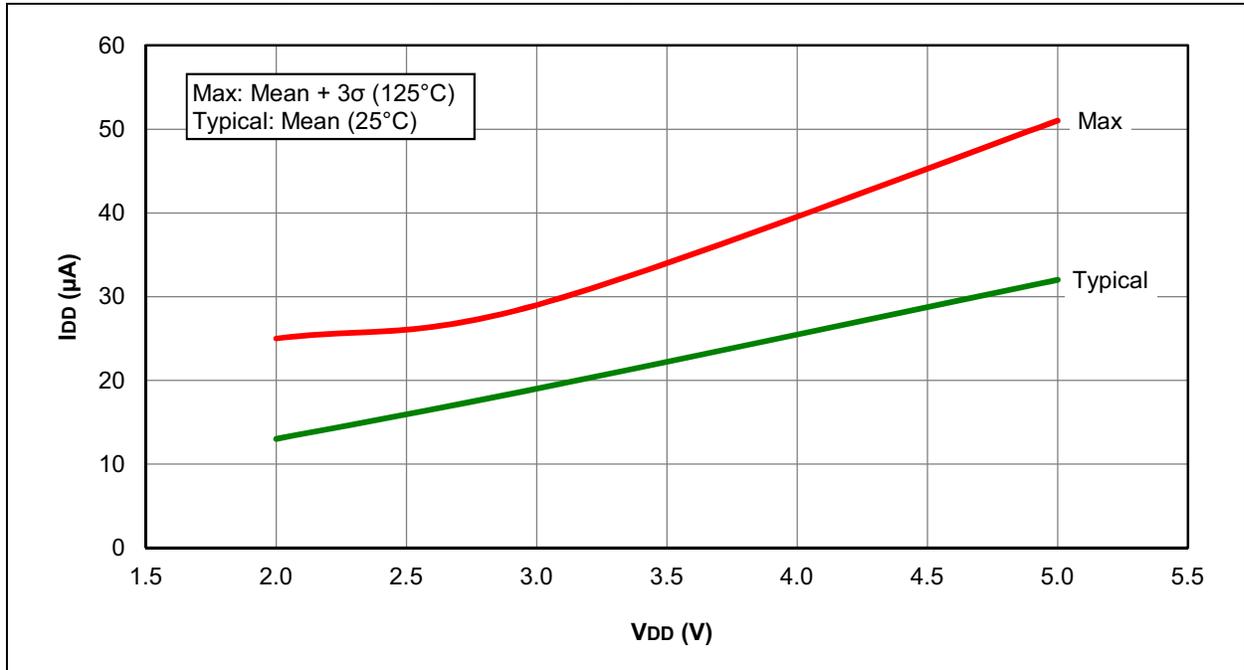

**FIGURE 21-2:  $I_{DD}$ , LFINTOSC,  $F_{osc} = 31$  kHz, PIC12HV752 ONLY**

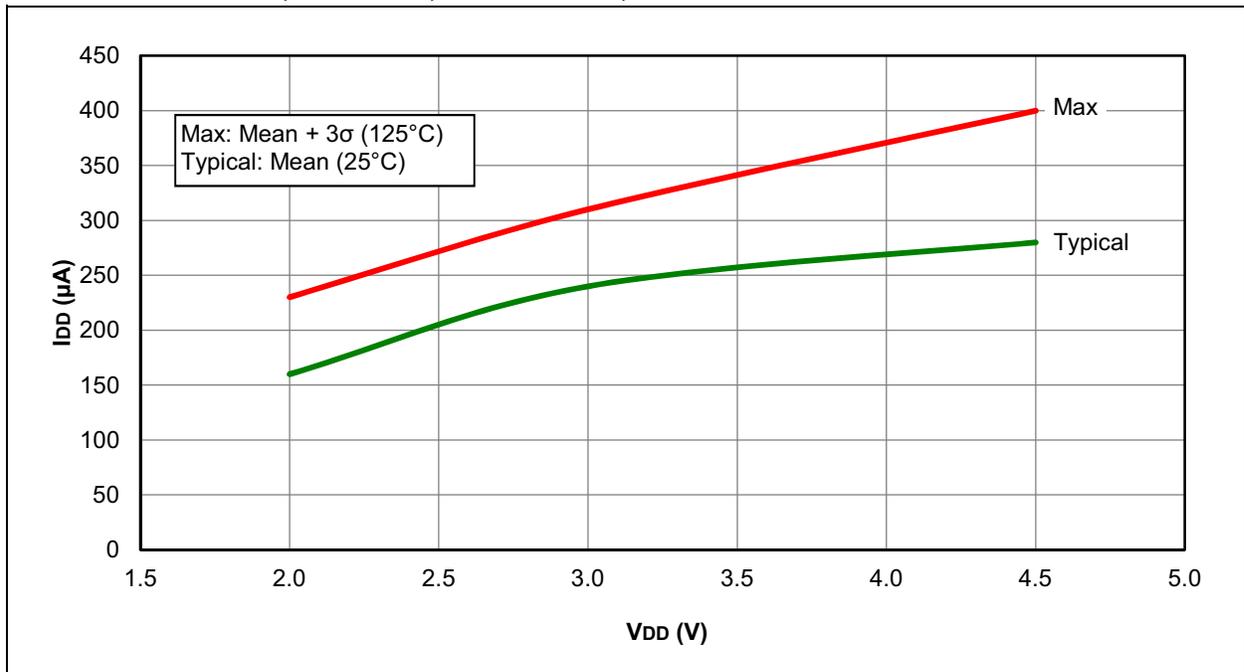

# PIC12F752/HV752

FIGURE 21-3: I<sub>DD</sub> TYPICAL, HFINTOSC, PIC12F752 ONLY



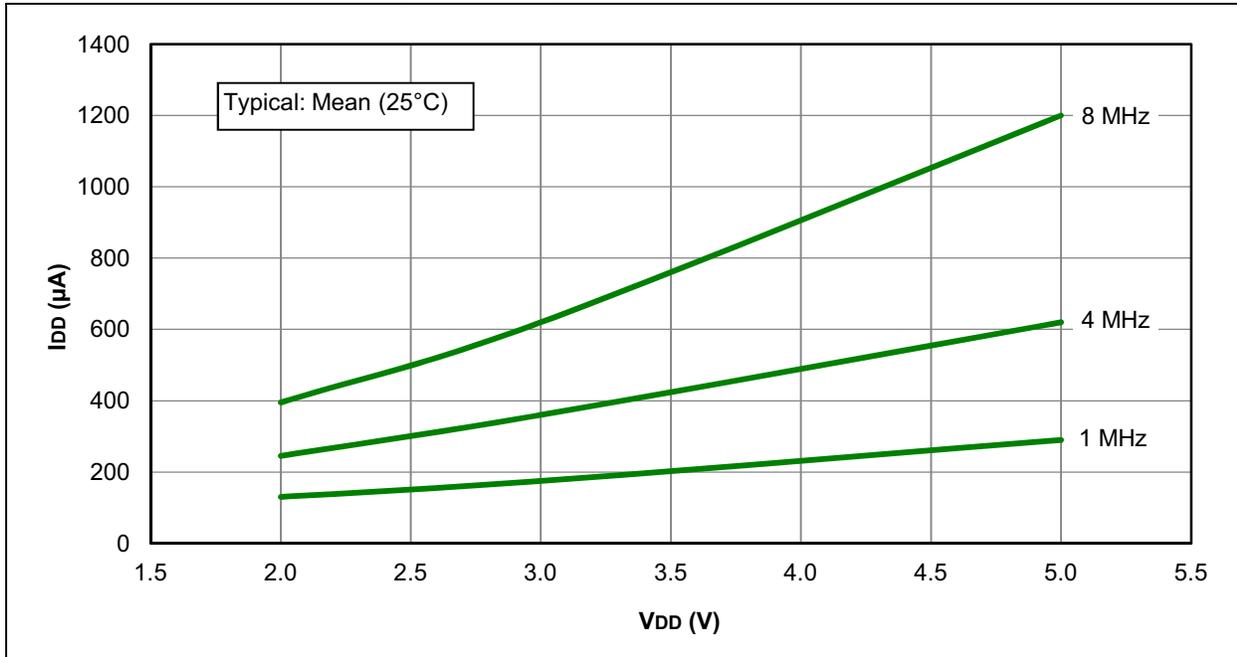



FIGURE 21-4: I<sub>DD</sub> MAXIMUM, HFINTOSC, PIC12F752 ONLY

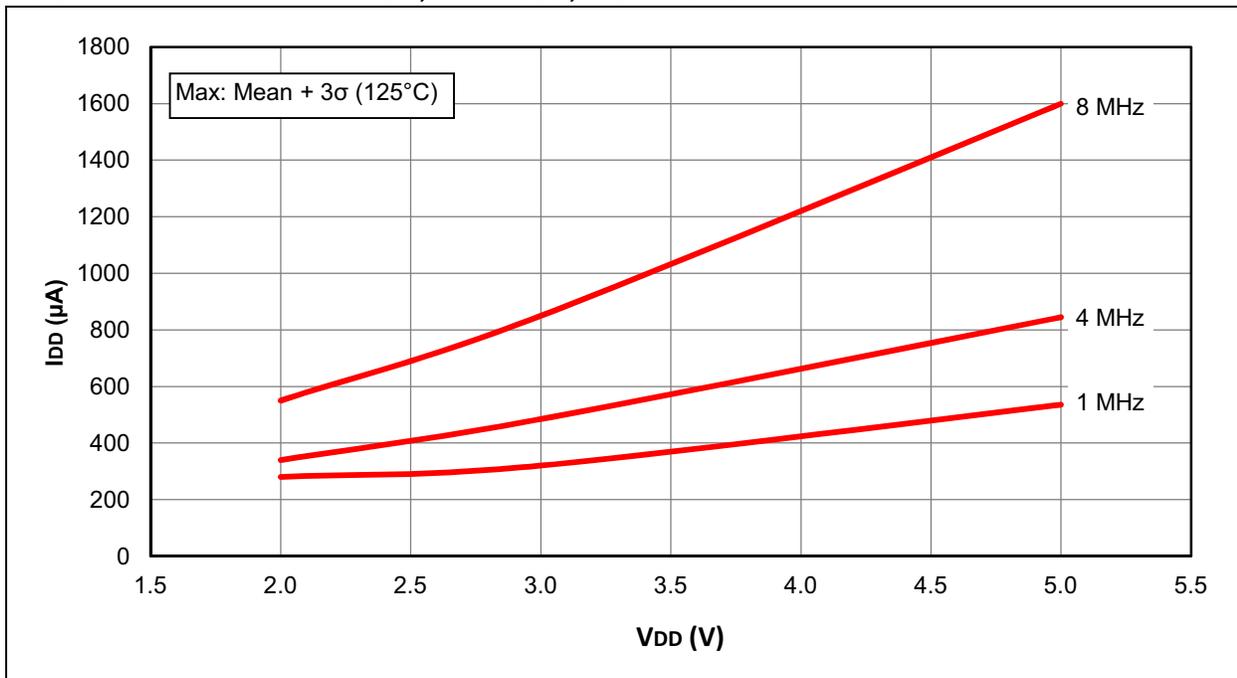

**FIGURE 21-5: I<sub>DD</sub> TYPICAL, HFINTOSC, PIC12HV752 ONLY**

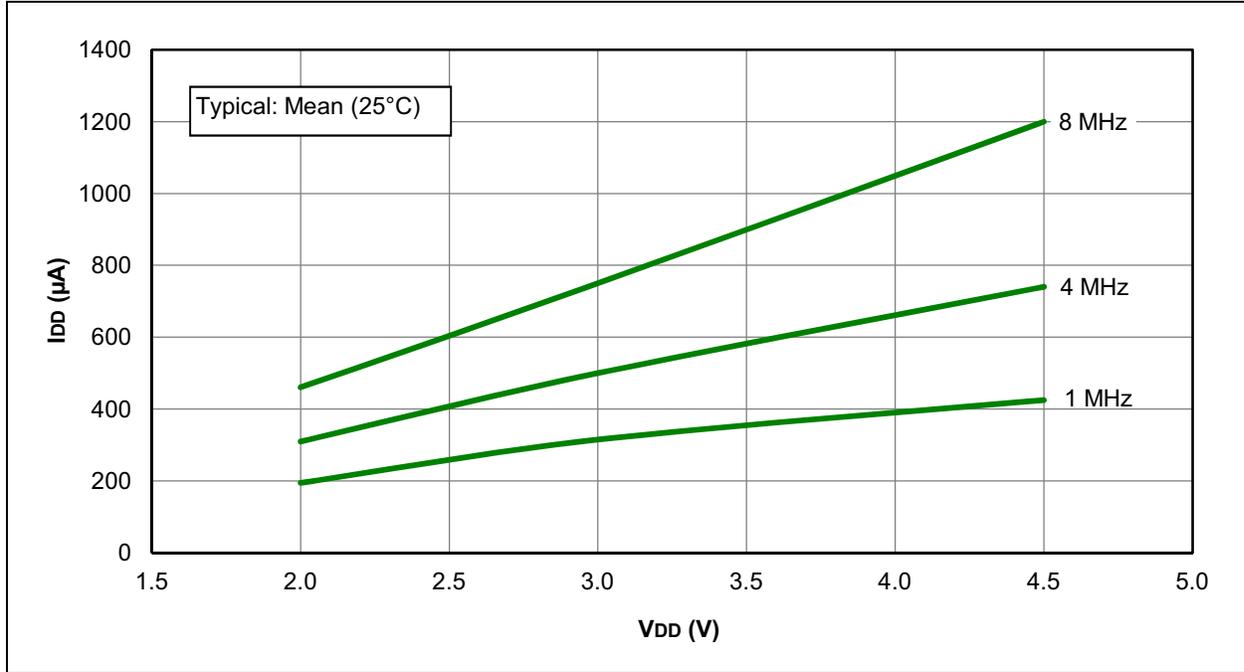

**FIGURE 21-6: I<sub>DD</sub> MAXIMUM, HFINTOSC, PIC12HV752 ONLY**

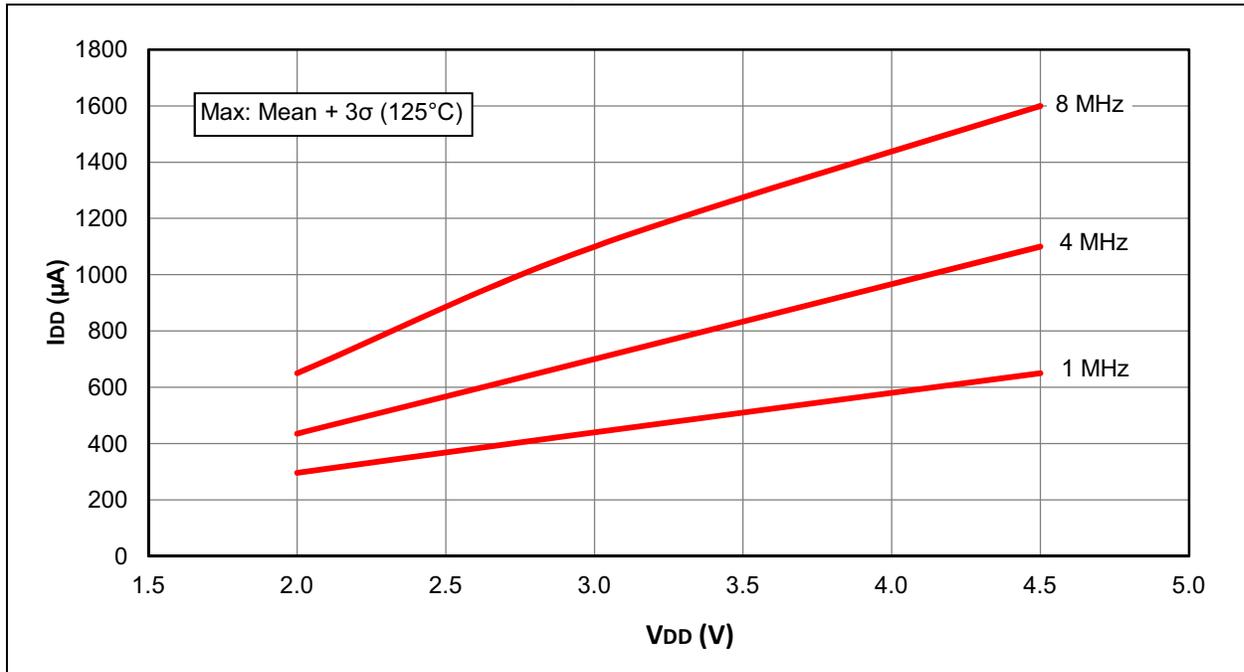

# PIC12F752/HV752

FIGURE 21-7: I<sub>DD</sub> TYPICAL, EXTERNAL CLOCK (EC), PIC12F752 ONLY



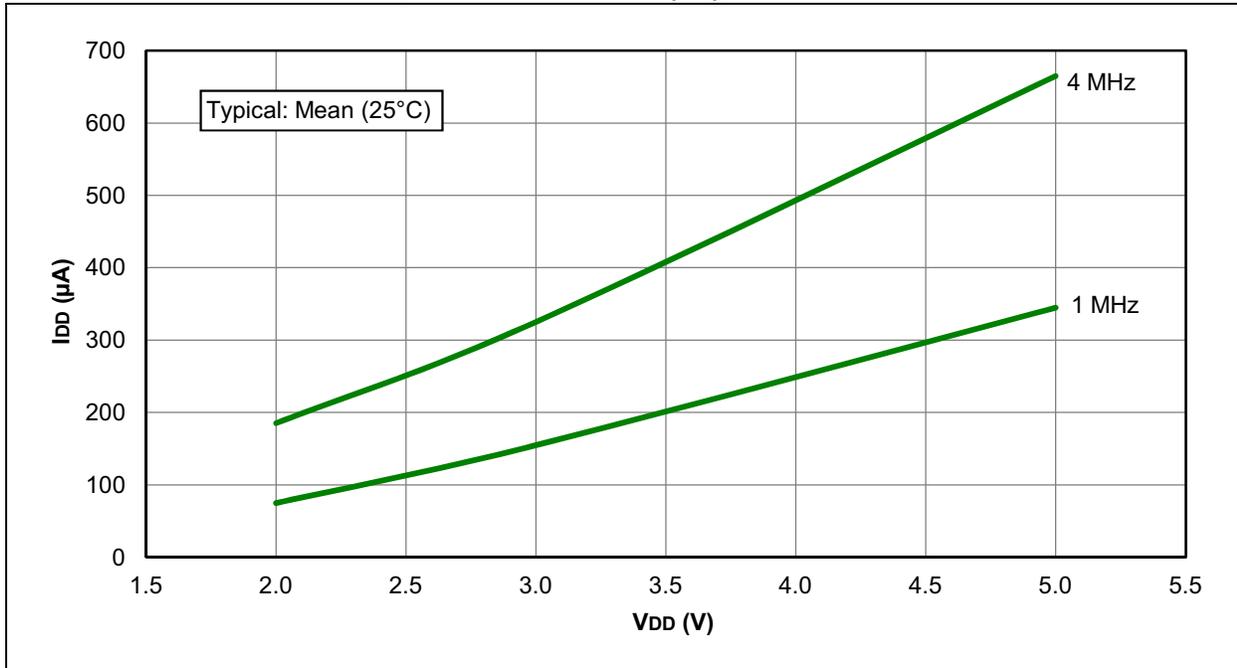



FIGURE 21-8: I<sub>DD</sub> MAXIMUM, EXTERNAL CLOCK (EC), PIC12F752 ONLY

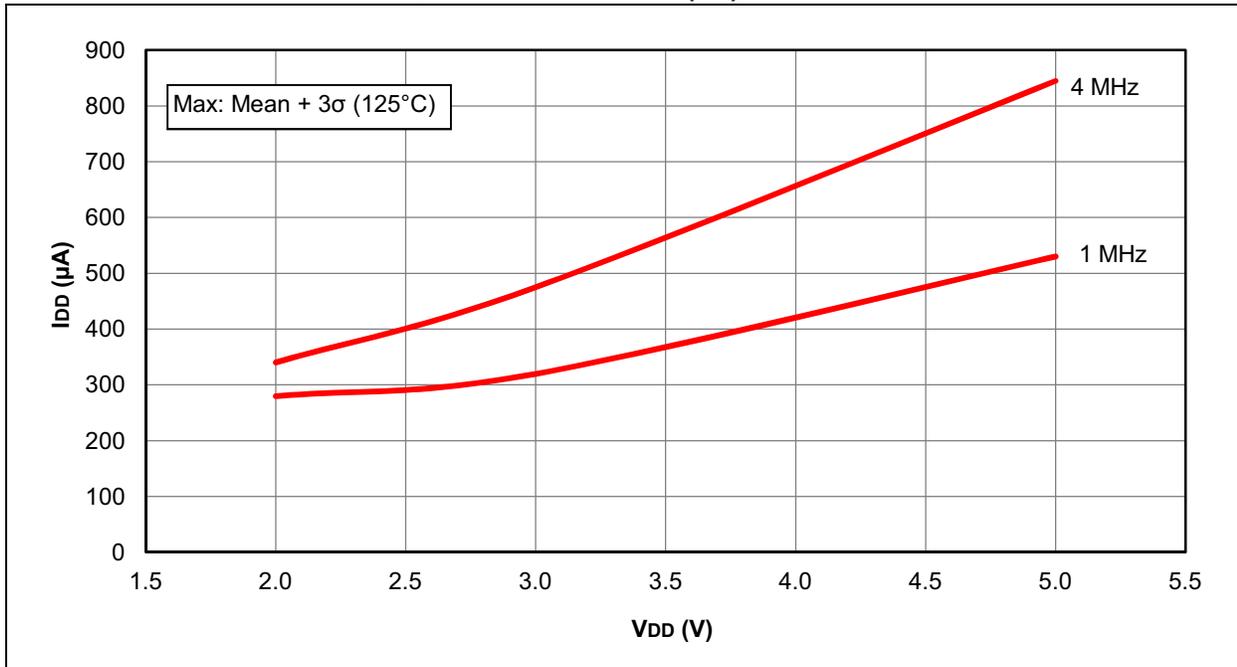

**FIGURE 21-9: I<sub>DD</sub> TYPICAL, EXTERNAL CLOCK (EC), PIC12HV752 ONLY**

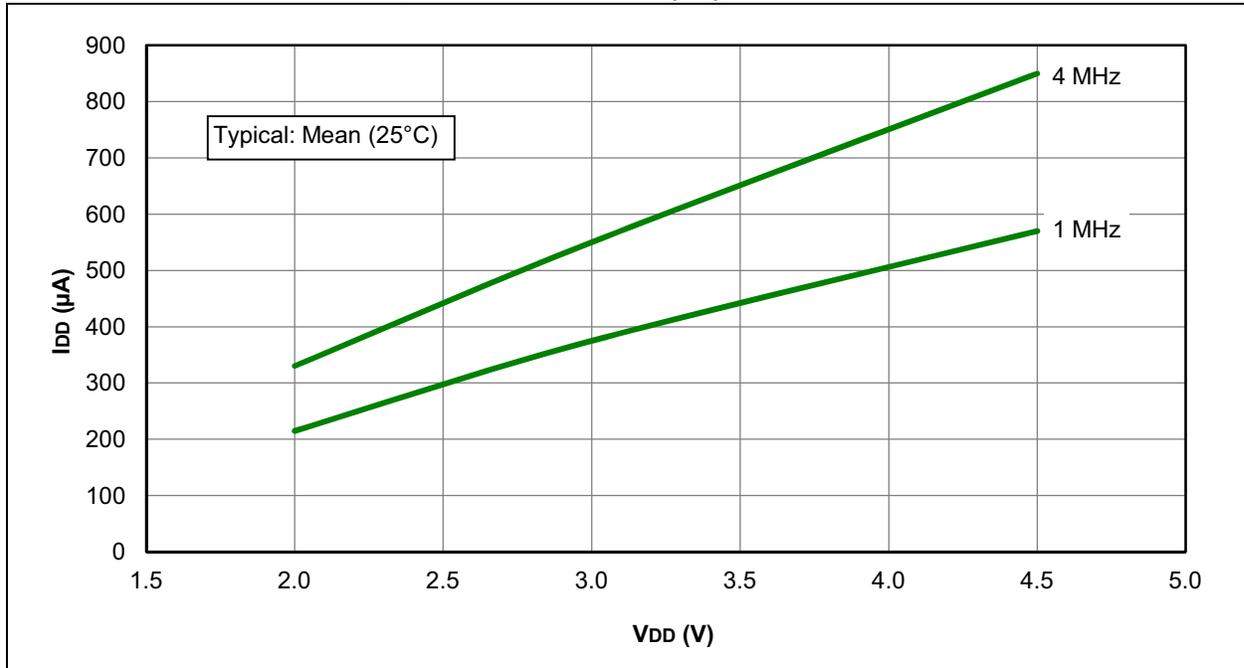


**FIGURE 21-10: I<sub>DD</sub> MAXIMUM, EXTERNAL CLOCK (EC), PIC12HV752 ONLY**

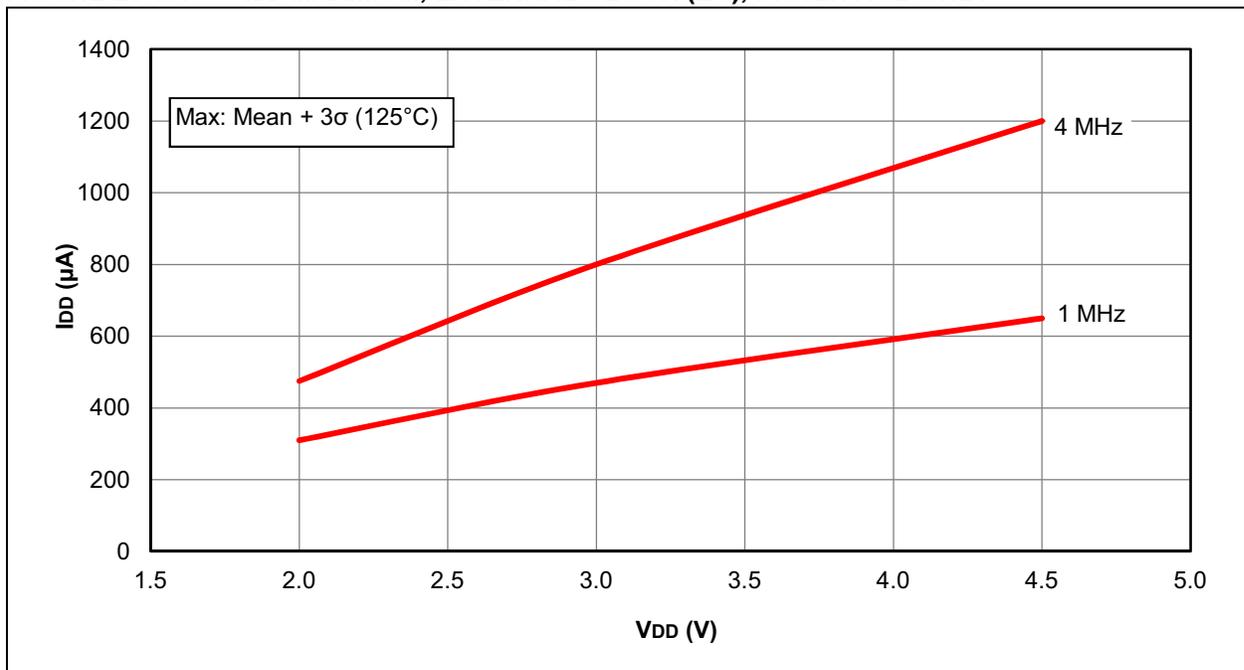


# PIC12F752/HV752


FIGURE 21-11:  $I_{DD}$ , EXTERNAL CLOCK (EC),  $F_{osc} = 20$  MHz, PIC12F752 ONLY

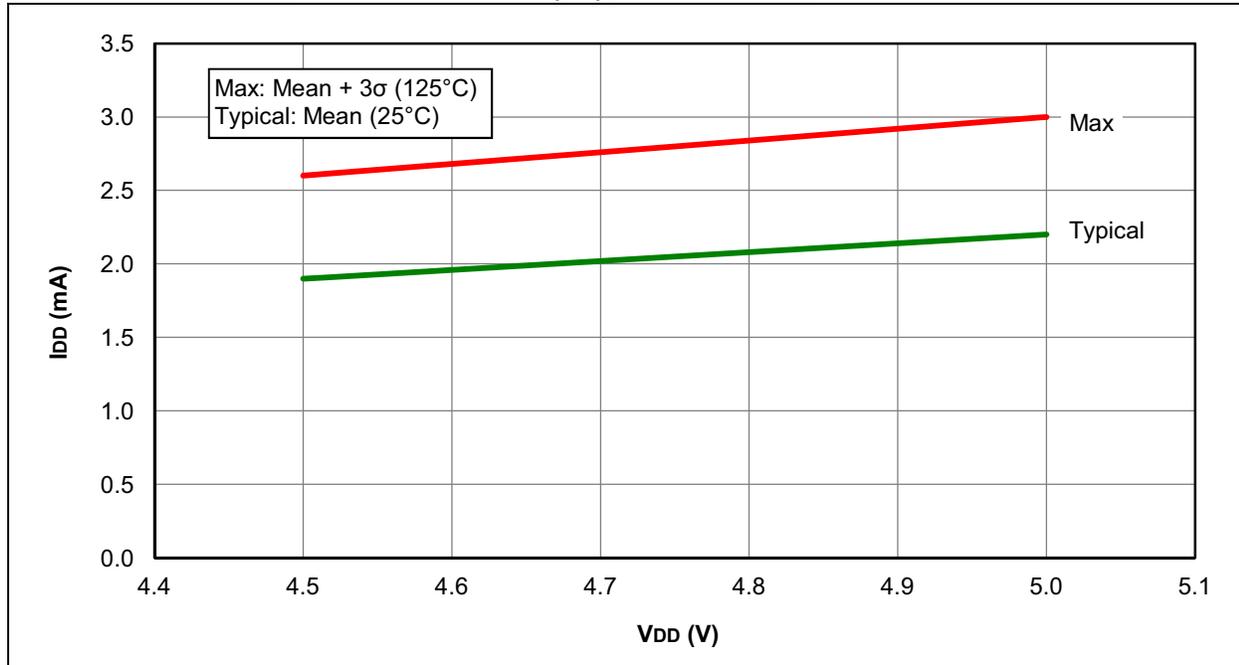

**FIGURE 21-12: I<sub>PD</sub> BASE, PIC12F752 ONLY**

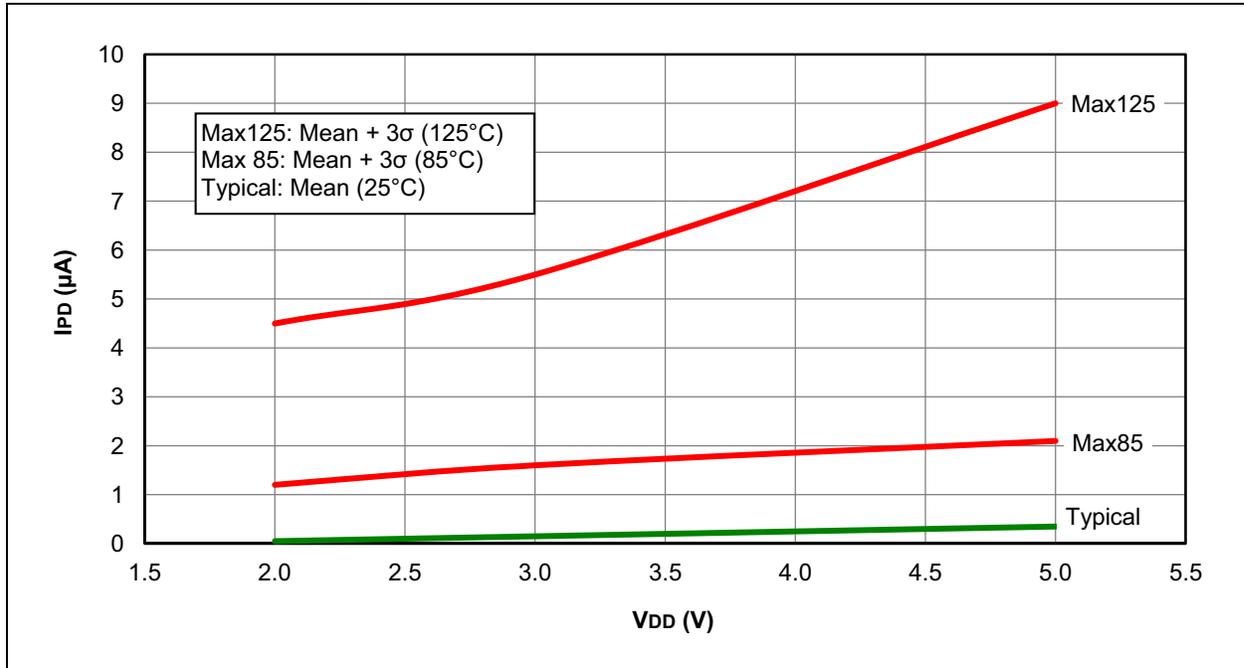

**FIGURE 21-13: I<sub>PD</sub> BASE, PIC12HV752 ONLY**

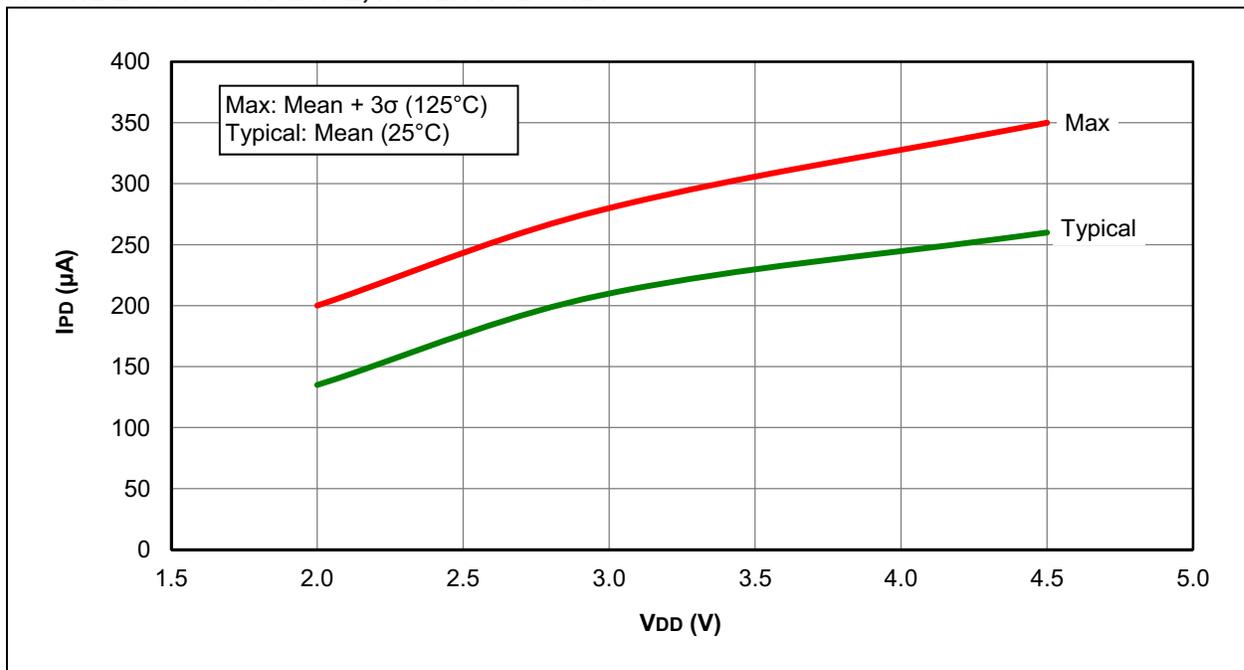

# PIC12F752/HV752

FIGURE 21-14: I<sub>PD</sub>, WATCHDOG TIMER (WDT), PIC12F752 ONLY



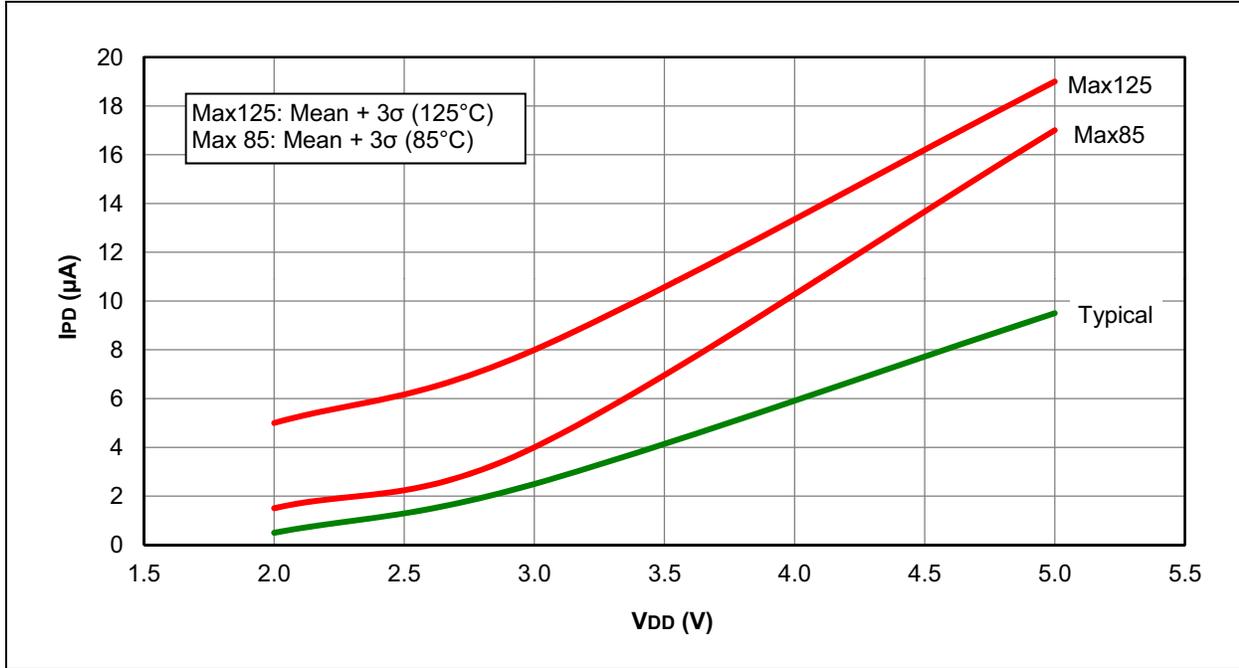



FIGURE 21-15: I<sub>PD</sub>, WATCHDOG TIMER (WDT), PIC12HV752 ONLY

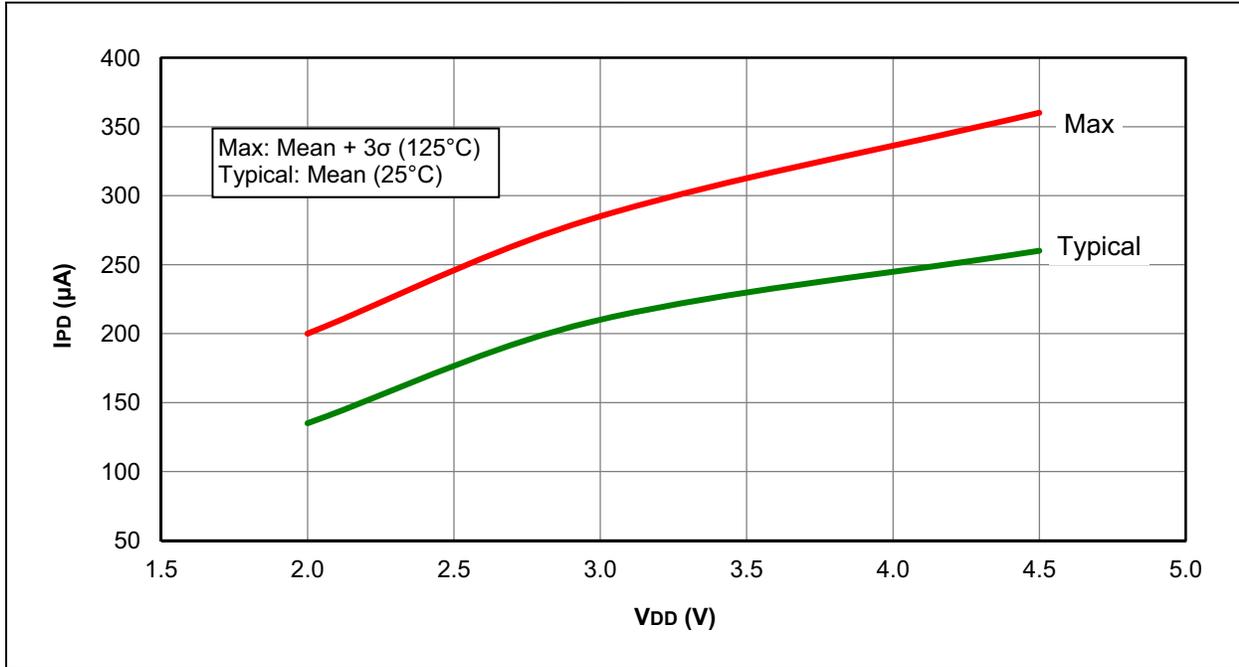

**FIGURE 21-16: I<sub>PD</sub> FIXED VOLTAGE REFERENCE (FVR), PIC12F752 ONLY**

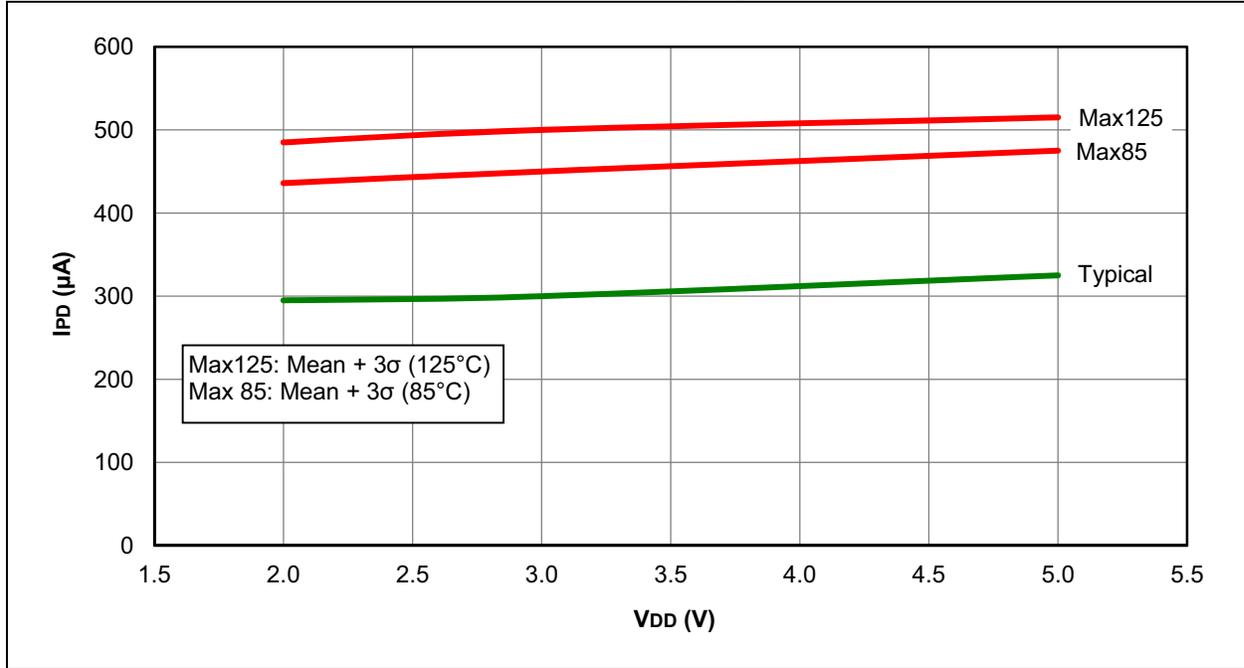

**FIGURE 21-17: I<sub>PD</sub> FIXED VOLTAGE REFERENCE (FVR), PIC12HV752 ONLY**

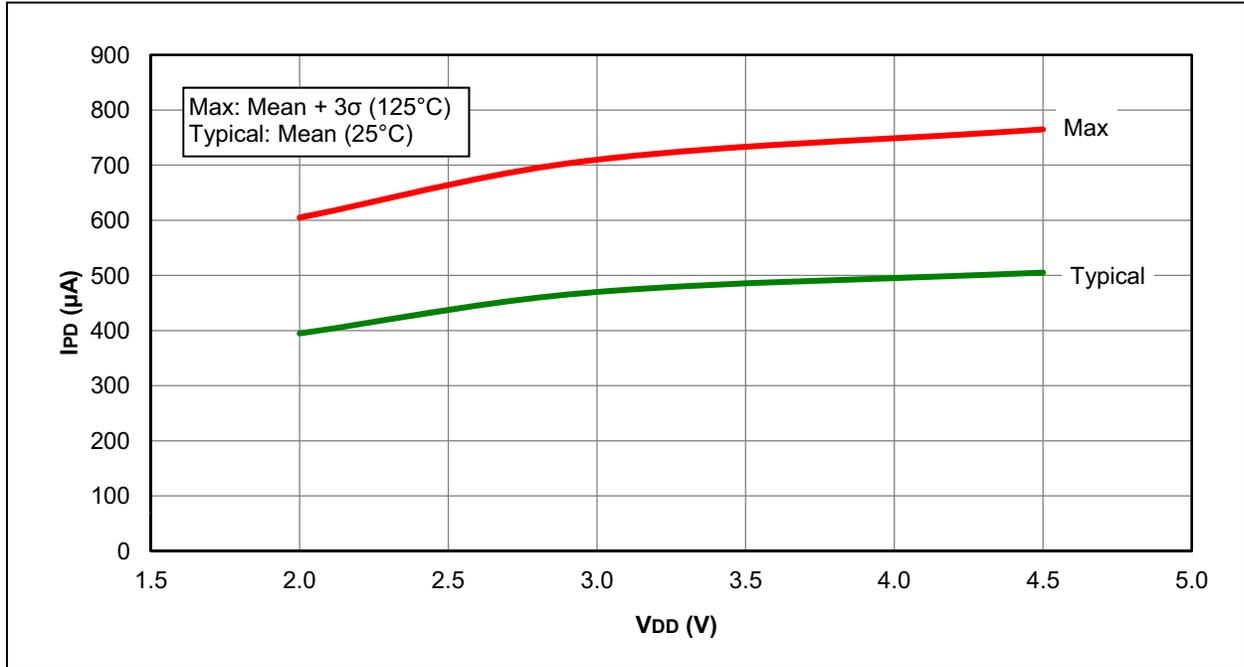

# PIC12F752/HV752

FIGURE 21-18: I<sub>PD</sub>, BROWN-OUT RESET (BOR), PIC12F752 ONLY



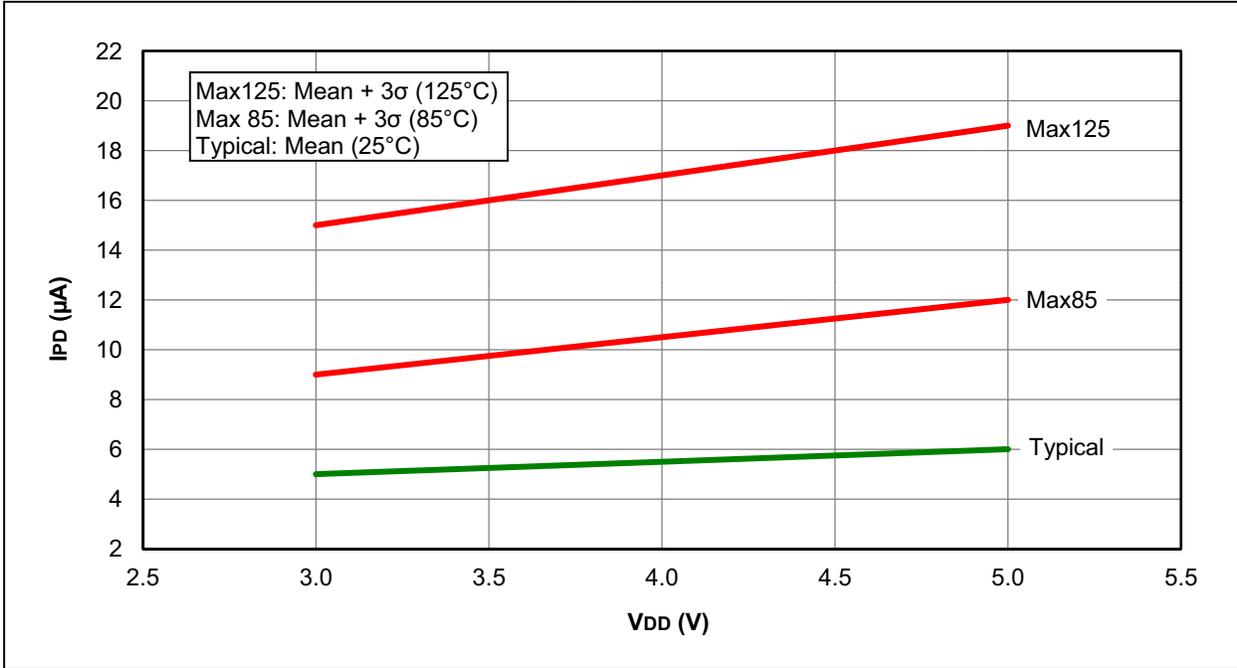



FIGURE 21-19: I<sub>PD</sub>, BROWN-OUT RESET (BOR), PIC12HV752 ONLY

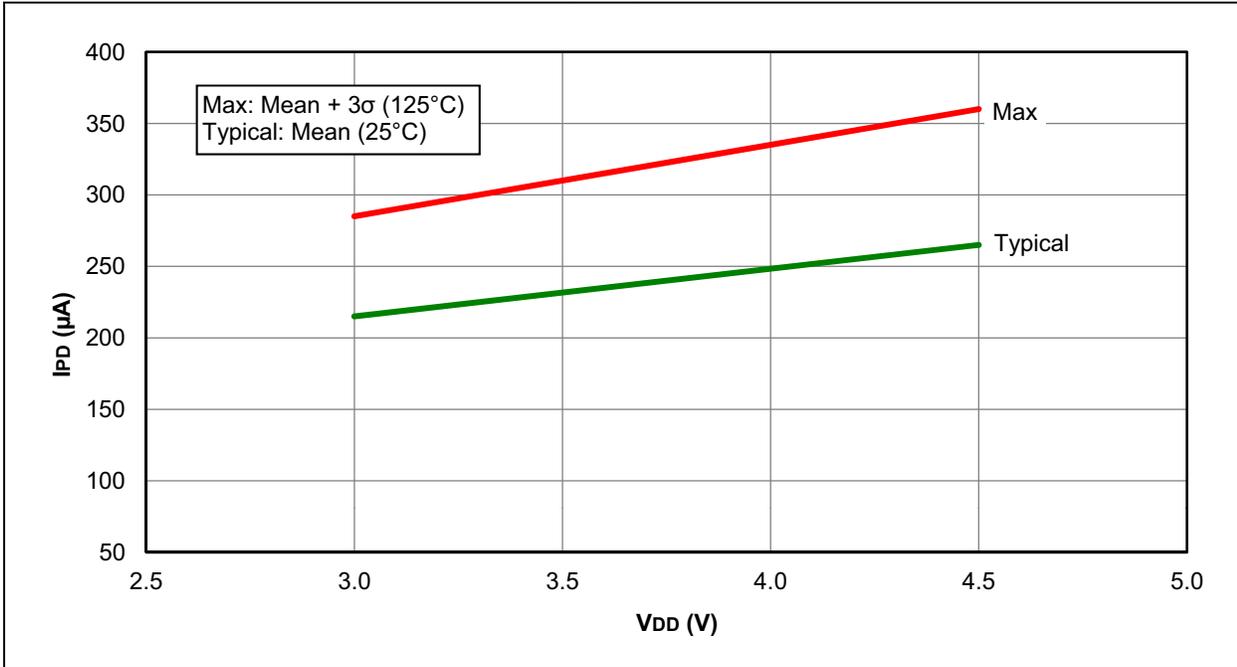

**FIGURE 21-20: I<sub>PD</sub>, TIMER1 OSCILLATOR, F<sub>osc</sub> = 32 kHz, PIC12F752 ONLY**

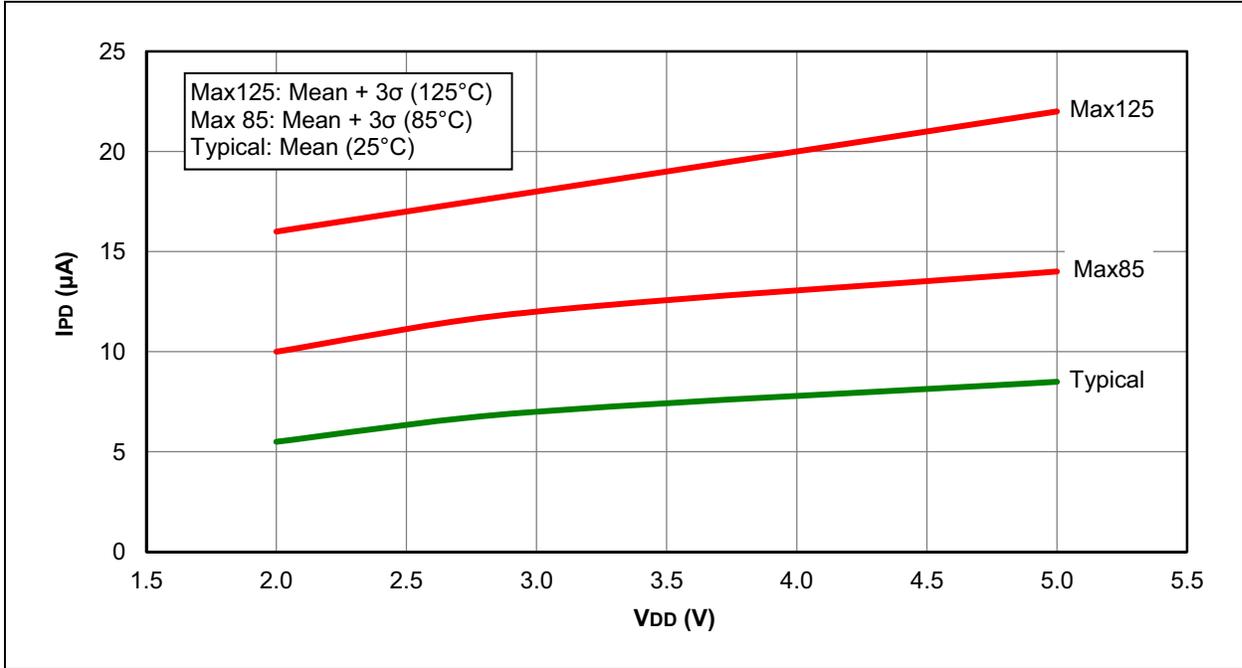

**FIGURE 21-21: I<sub>PD</sub>, TIMER1 OSCILLATOR, F<sub>osc</sub> = 32 kHz, PIC12HV752 ONLY**

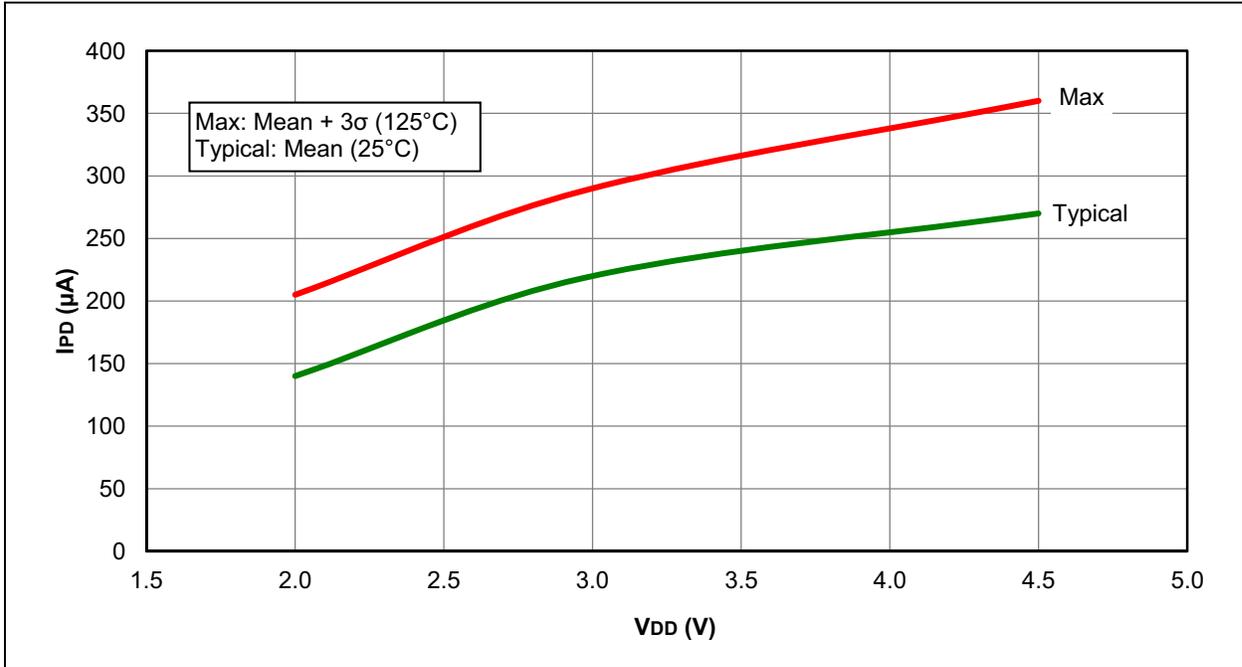

# PIC12F752/HV752

FIGURE 21-22: I<sub>PD</sub>, DAC, PIC12F752 ONLY



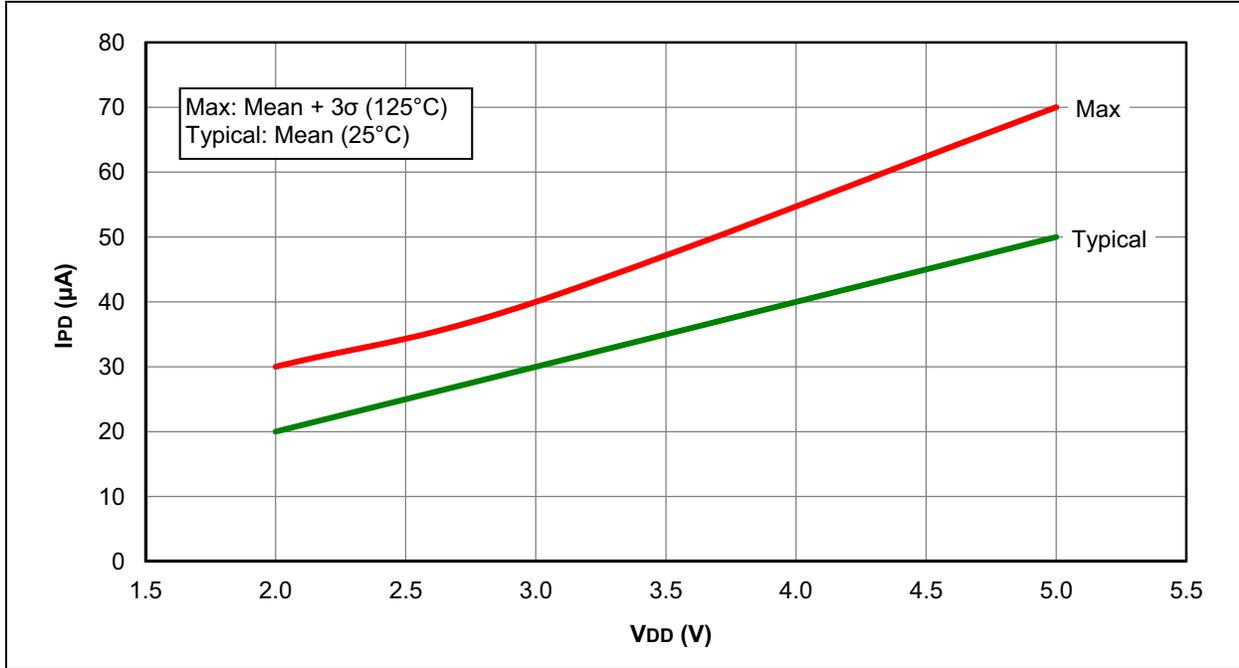



FIGURE 21-23: I<sub>PD</sub>, DAC, PIC12HV752 ONLY

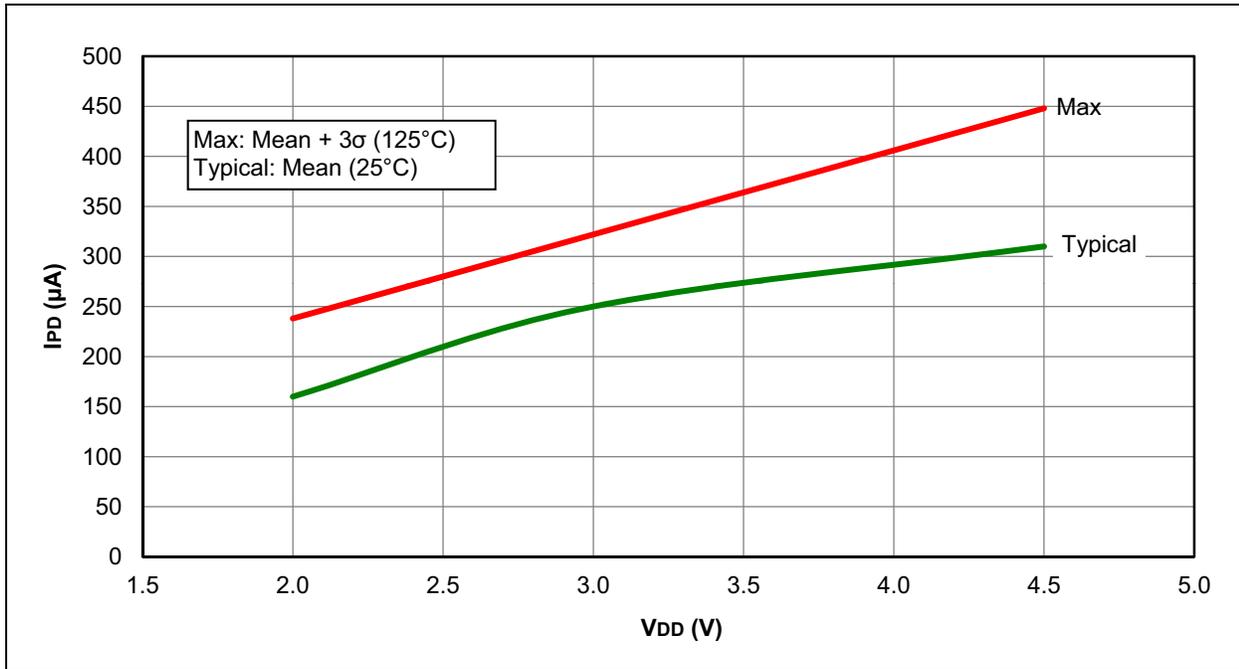

**FIGURE 21-24: I<sub>PD</sub>, COMPARATOR, LOW-POWER MODE, C<sub>xSP</sub> = 0, PIC12F752 ONLY**

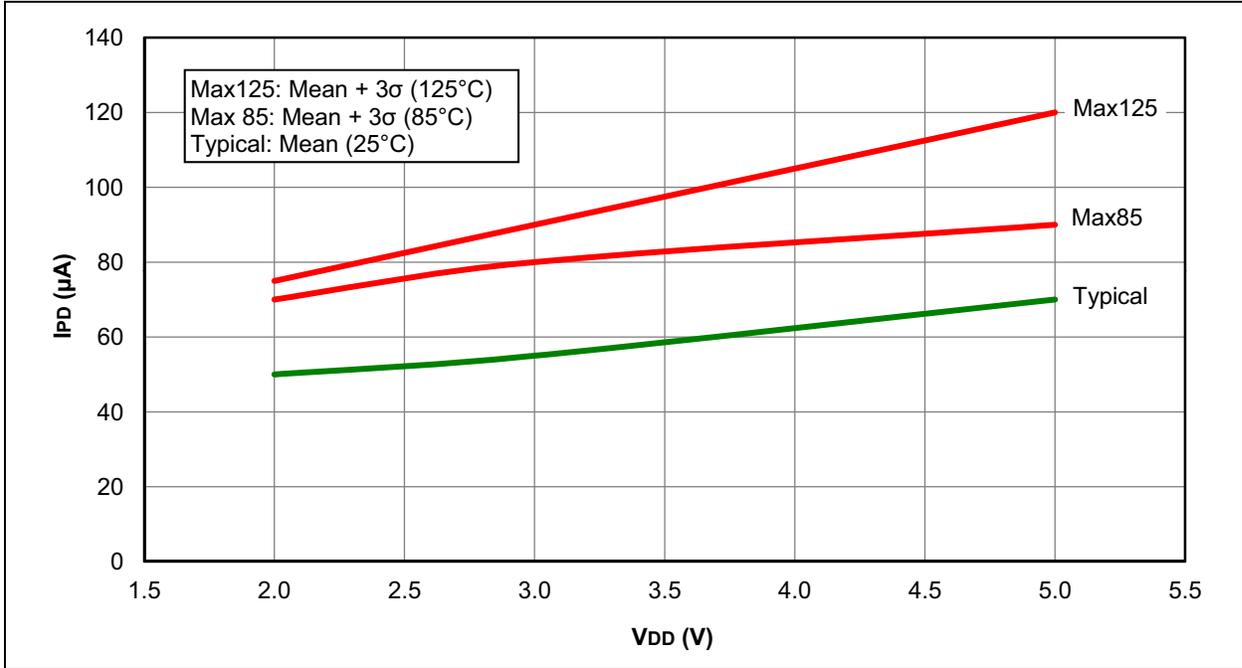

**FIGURE 21-25: I<sub>PD</sub>, COMPARATOR, LOW-POWER MODE, C<sub>xSP</sub> = 0, PIC12HV752 ONLY**

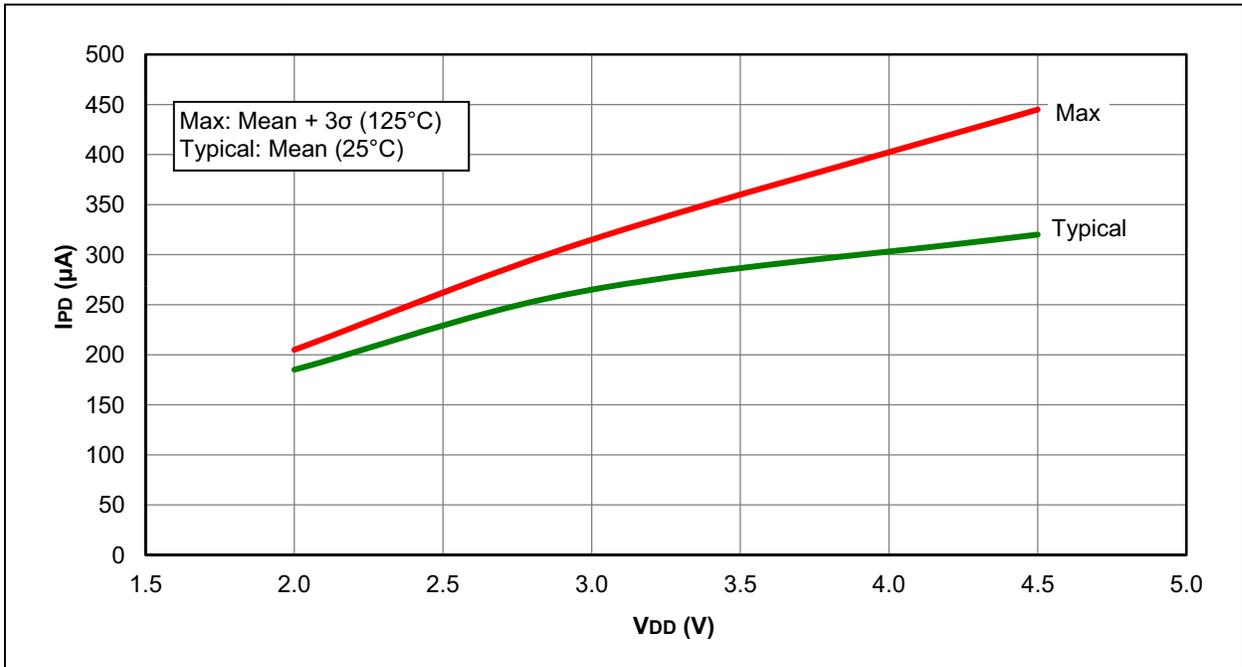

# PIC12F752/HV752

FIGURE 21-26:  $I_{PD}$ , COMPARATOR, NORMAL-POWER MODE,  $C_{xSP} = 1$ , PIC12F752 ONLY



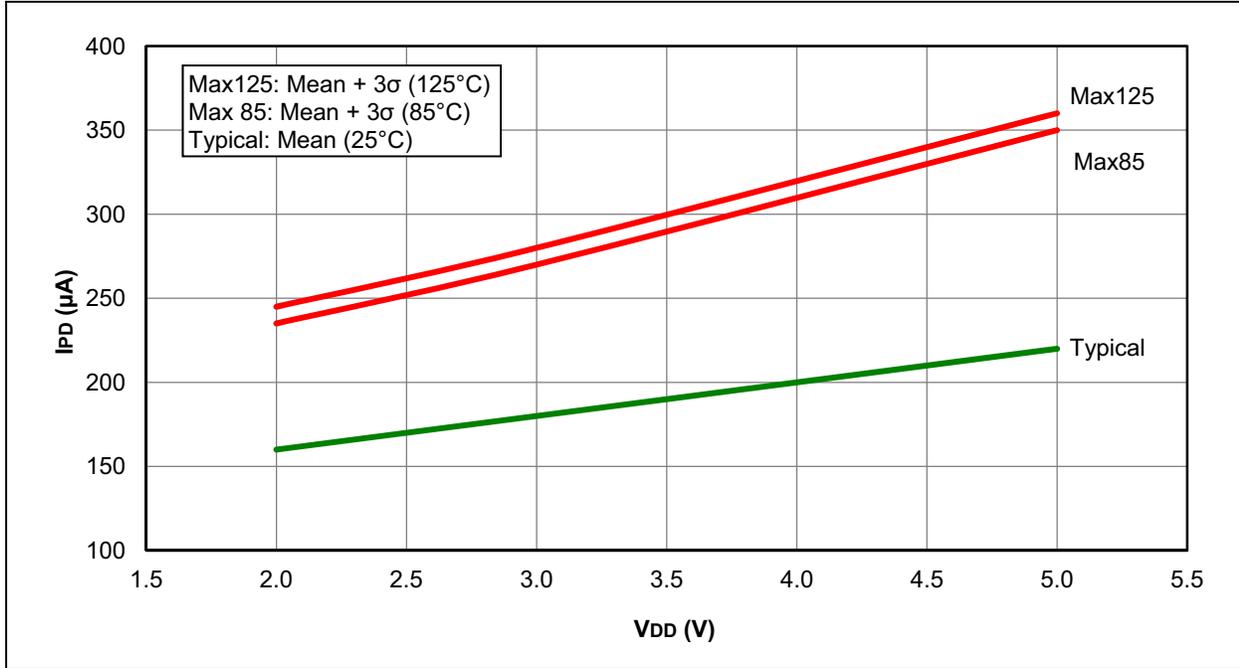



FIGURE 21-27:  $I_{PD}$ , COMPARATOR, NORMAL-POWER MODE,  $C_{xSP} = 1$ , PIC12HV752 ONLY

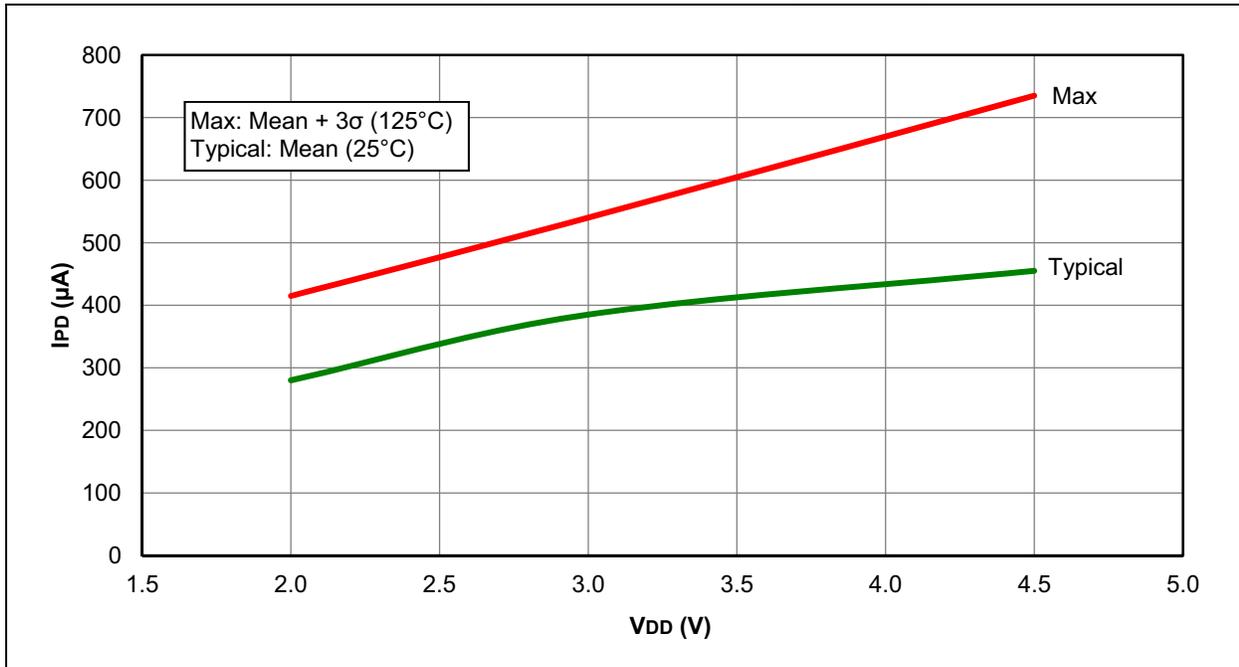

**FIGURE 21-28: I<sub>PD</sub>, ADC NO CONVERSION IN PROGRESS, PIC12F752 ONLY**

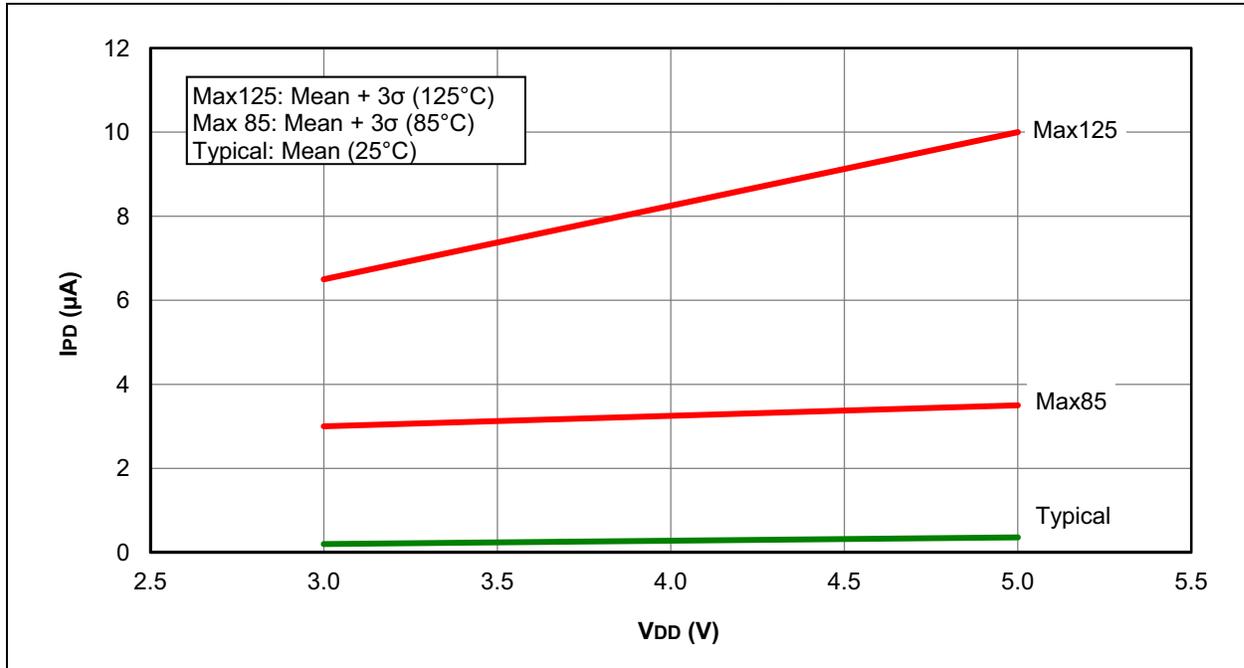

**FIGURE 21-29: I<sub>PD</sub>, ADC NO CONVERSION IN PROGRESS, PIC12HV752 ONLY**

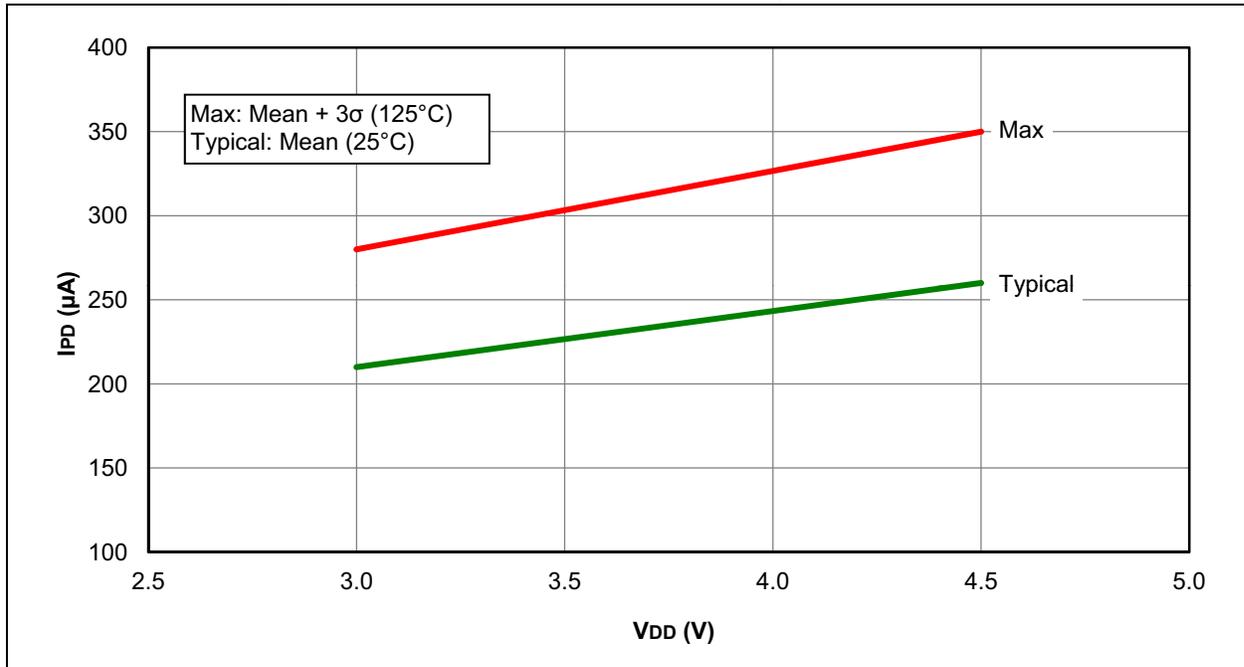

# PIC12F752/HV752

FIGURE 21-30:  $V_{OH}$  vs.  $I_{OH}$ , RA0/RA2, OVER TEMPERATURE,  $V_{DD} = 5.0V$



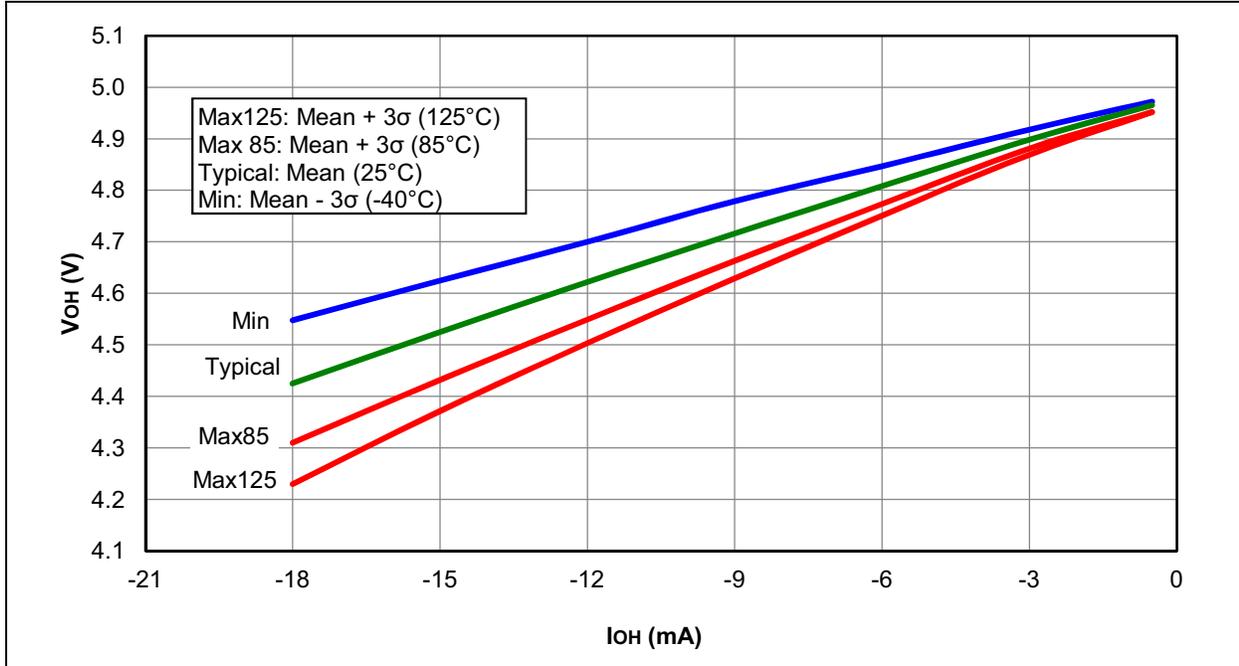



FIGURE 21-31:  $V_{OH}$  vs.  $I_{OH}$ , RA1/RA4/RA5, OVER TEMPERATURE,  $V_{DD} = 5.0V$

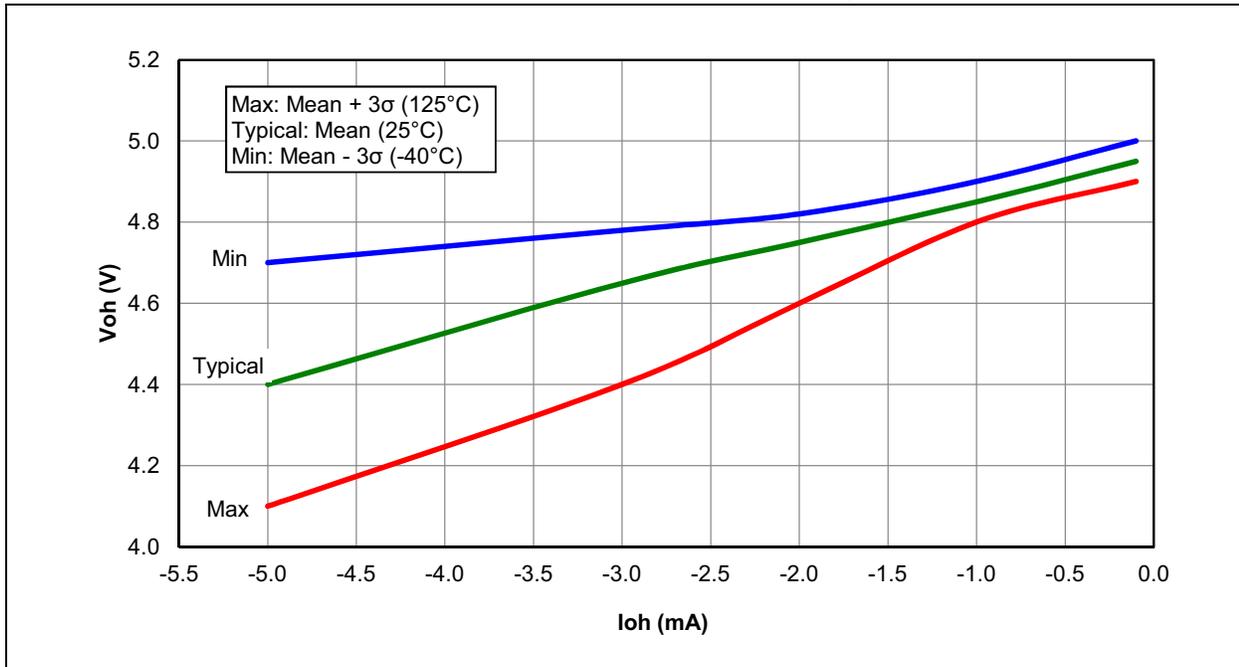

**FIGURE 21-32:  $V_{OH}$  vs.  $I_{OH}$ , RA0/RA2, OVER TEMPERATURE,  $V_{DD} = 3.0V$**

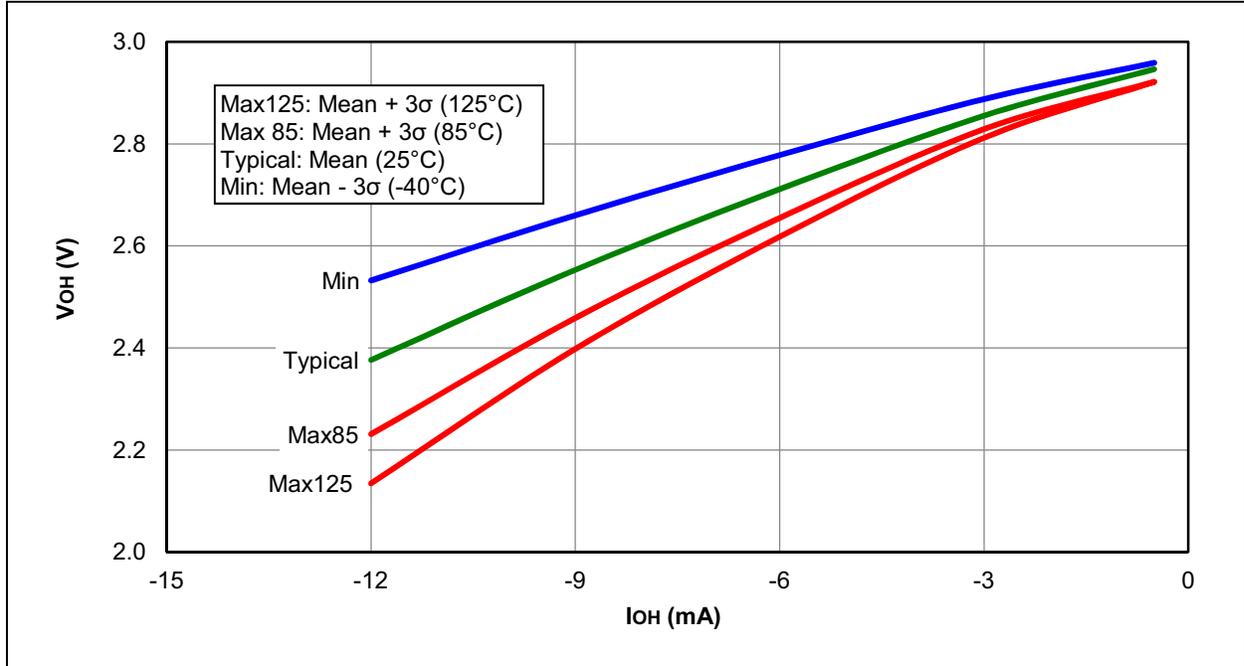


**FIGURE 21-33:  $V_{OH}$  vs.  $I_{OH}$ , RA1/RA4/RA5, OVER TEMPERATURE,  $V_{DD} = 3.0V$**

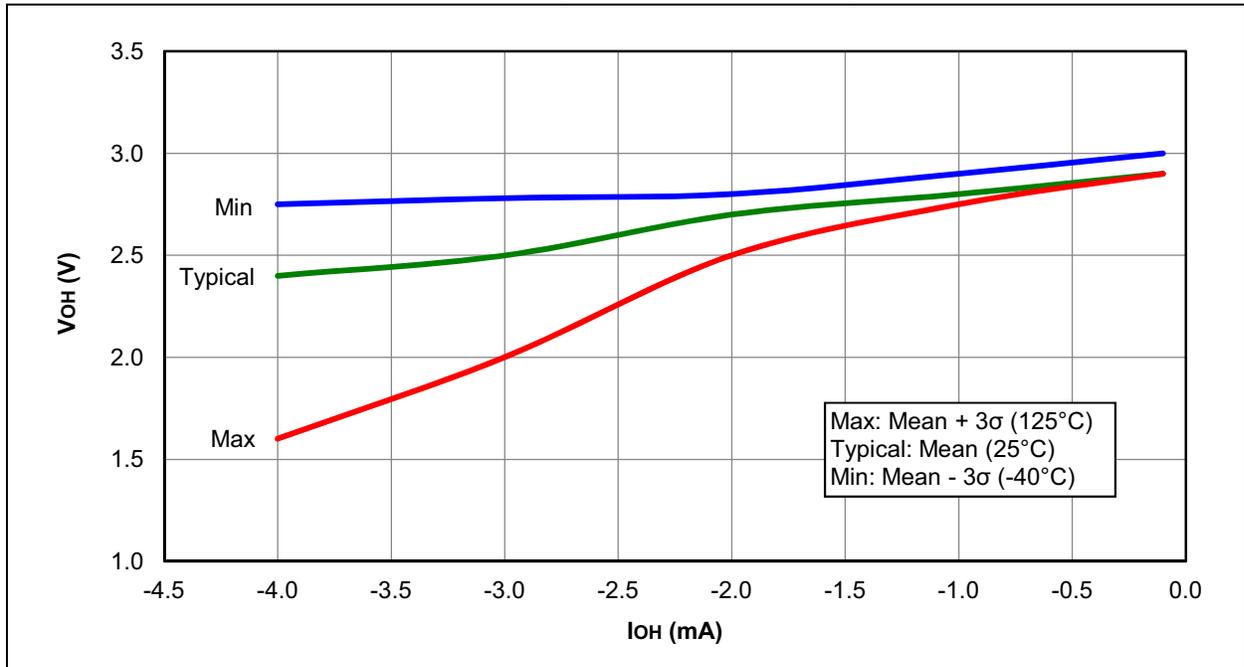


# PIC12F752/HV752


**FIGURE 21-34:  $V_{OL}$  vs.  $I_{OL}$ , RA0/RA2, OVER TEMPERATURE,  $V_{DD} = 5.0V$**

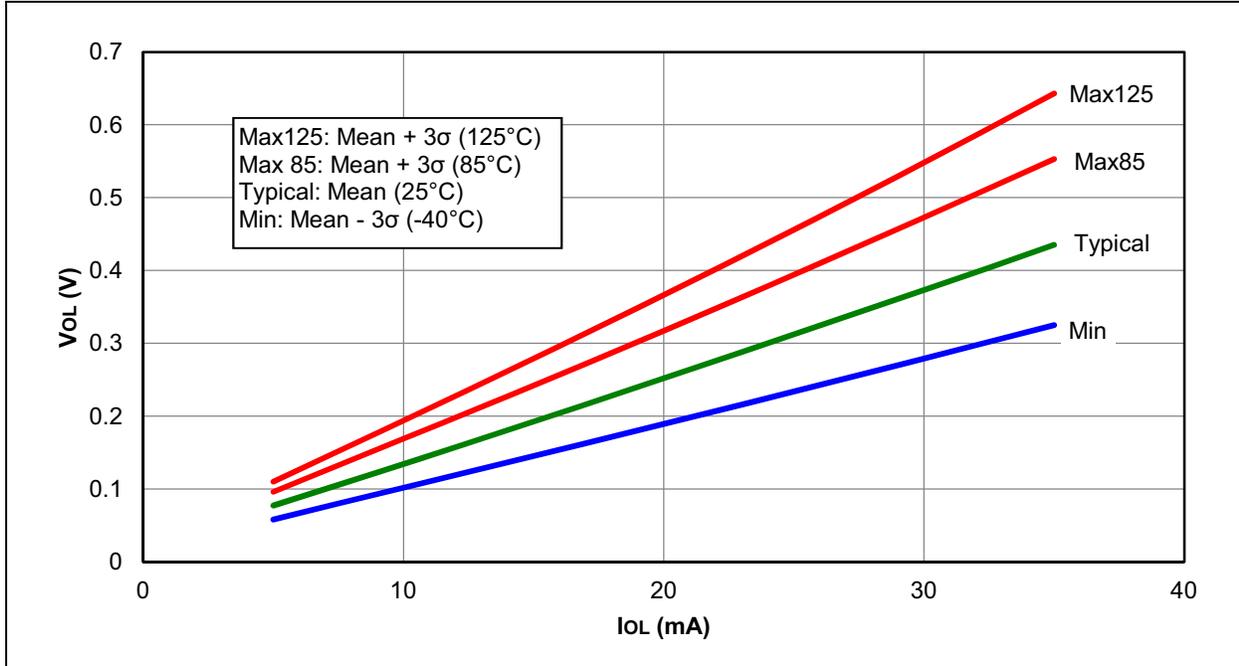


**FIGURE 21-35:  $V_{OL}$  vs.  $I_{OL}$ , RA1/RA4/RA5, OVER TEMPERATURE,  $V_{DD} = 5.0V$**

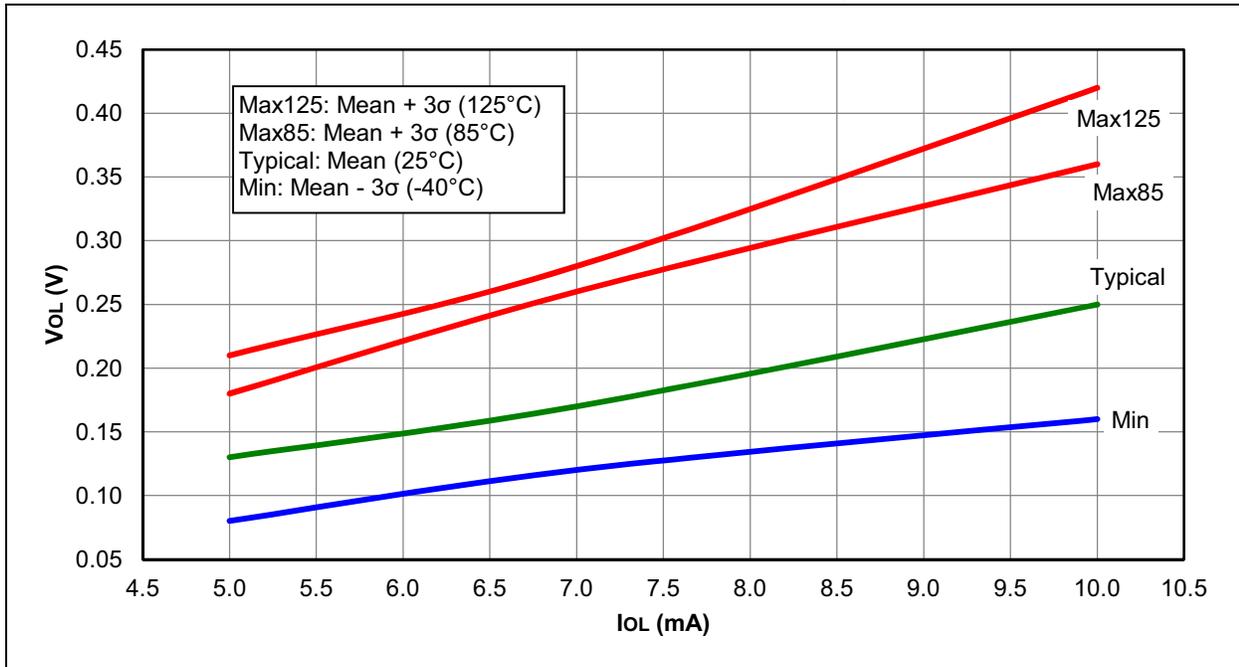

**FIGURE 21-36:  $V_{OL}$  vs.  $I_{OL}$ , RA0/RA2, OVER TEMPERATURE,  $V_{DD} = 3.0V$**

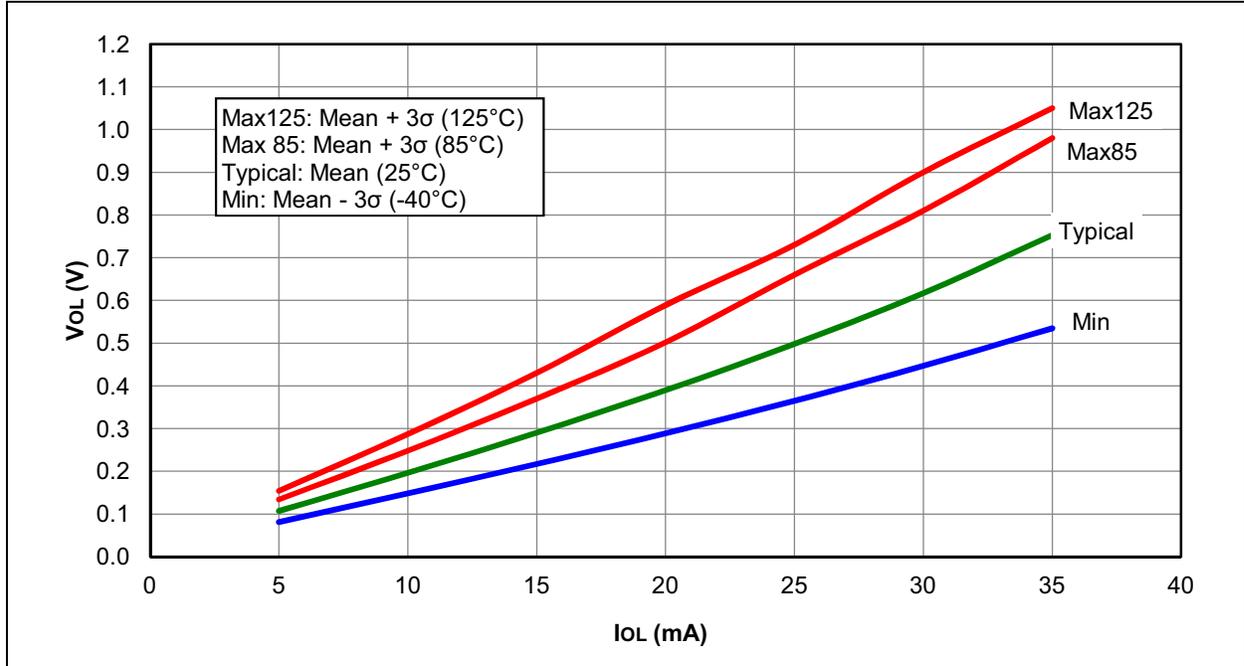

**FIGURE 21-37:  $V_{OL}$  vs.  $I_{OL}$ , RA1/RA4/RA5, OVER TEMPERATURE,  $V_{DD} = 3.0V$**

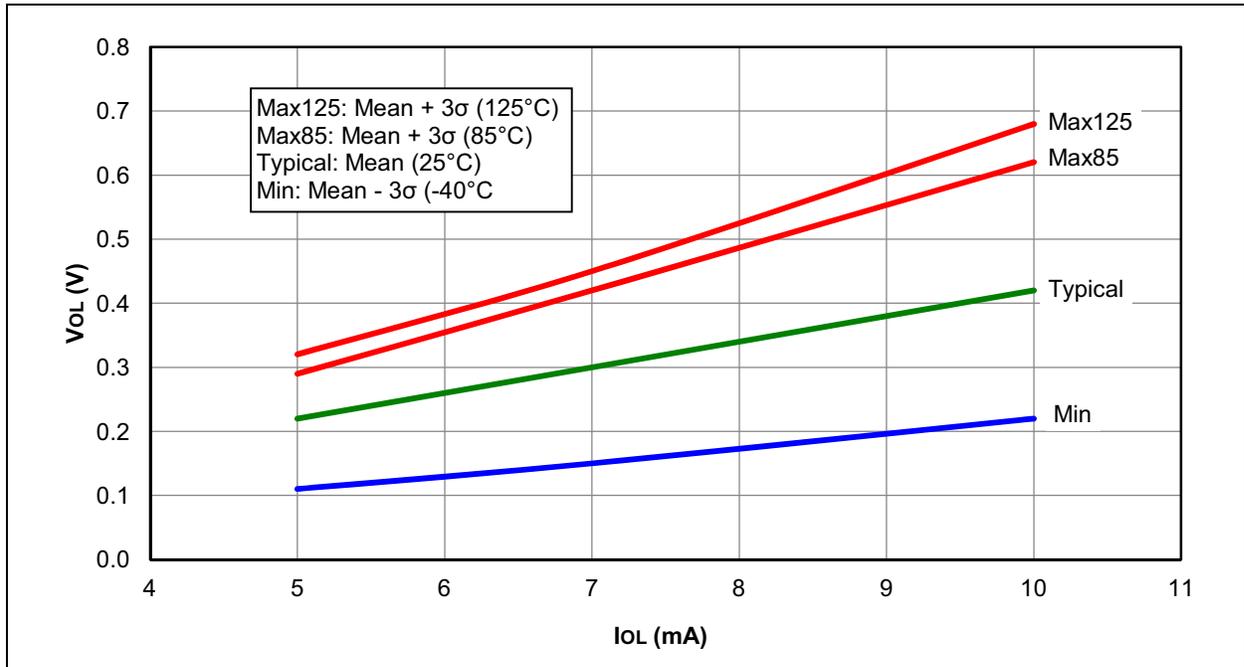

# PIC12F752/HV752

FIGURE 21-38: SCHMITT TRIGGER INPUT THRESHOLD,  $V_{IN}$  vs.  $V_{DD}$ , OVER TEMPERATURE



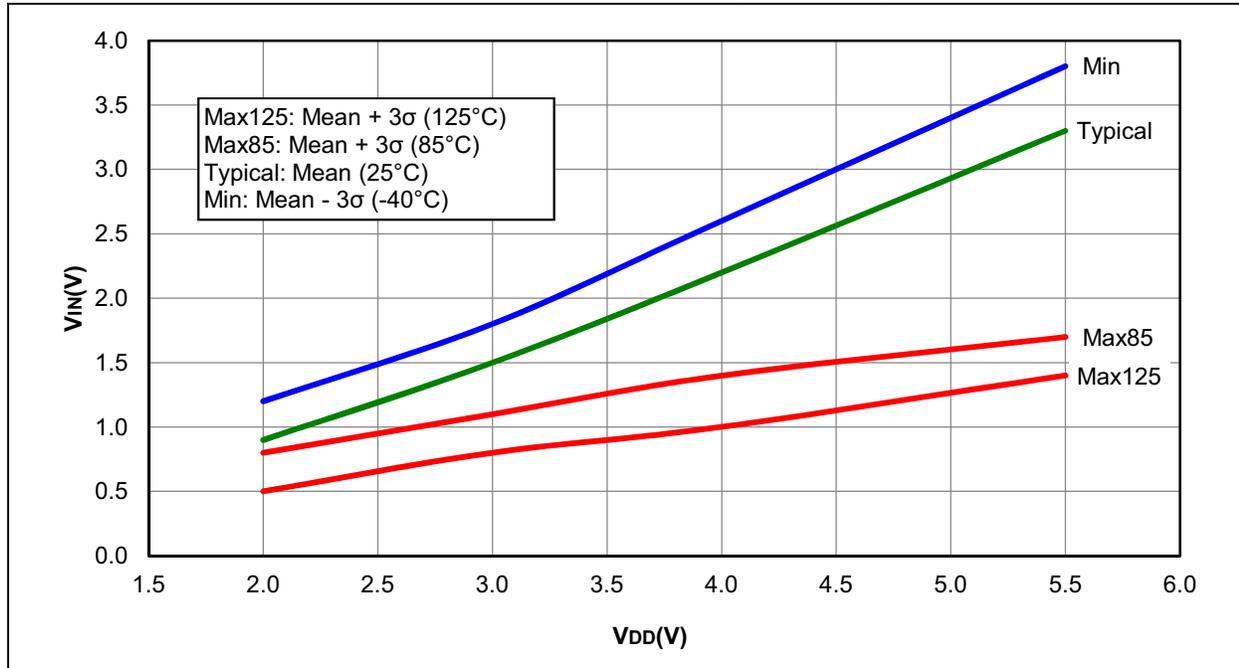



FIGURE 21-39: TTL INPUT THRESHOLD,  $V_{IN}$  vs.  $V_{DD}$ , OVER TEMPERATURE

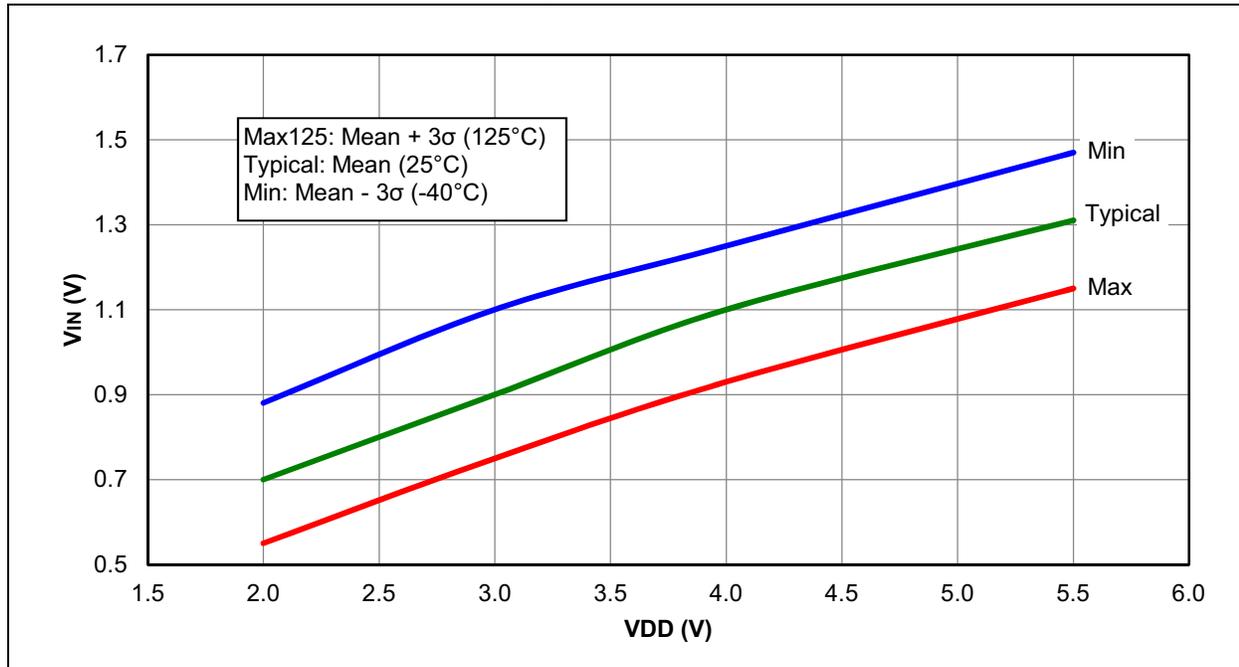

**FIGURE 21-40: SHUNT REGULATOR VOLTAGE, PIC12HV752 ONLY**

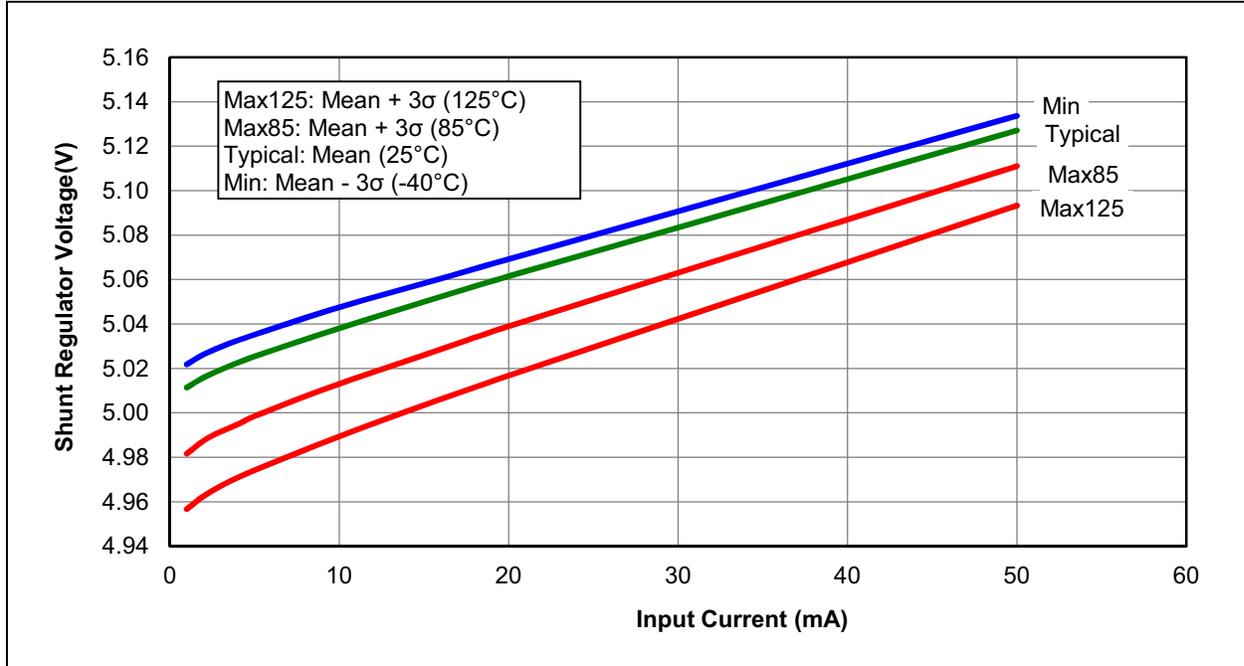


**FIGURE 21-41: TYPICAL HFINTOSC, START-UP TIMES vs. V<sub>DD</sub>, OVER TEMPERATURE**

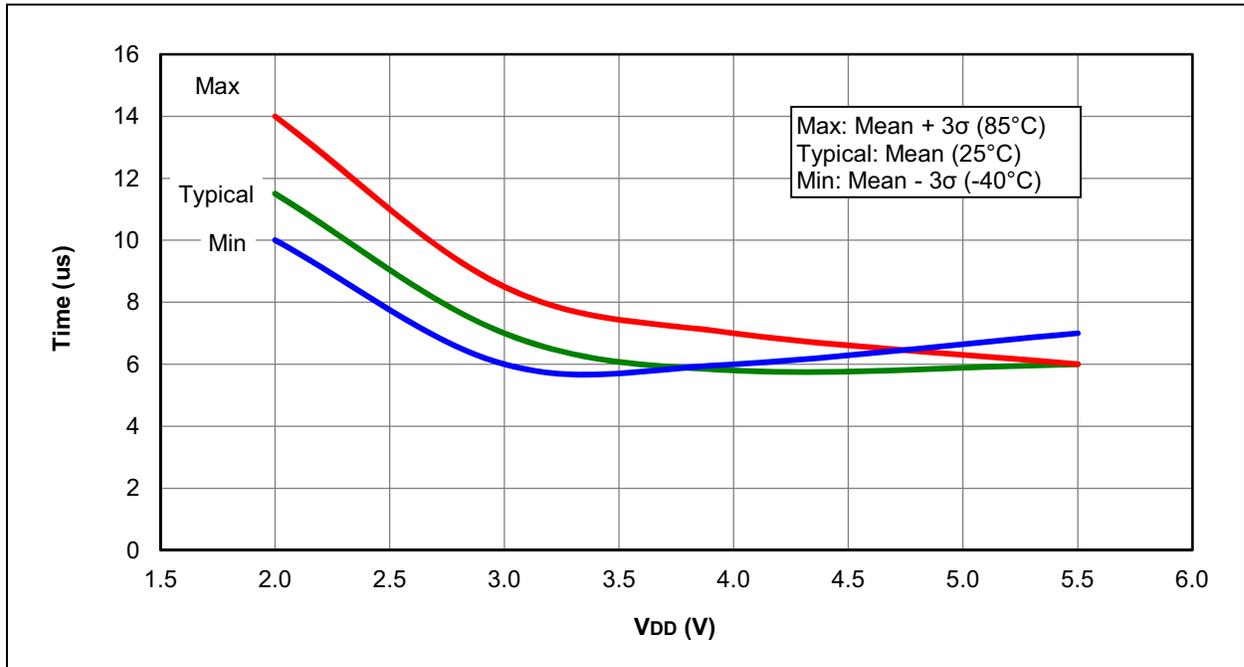


# PIC12F752/HV752


FIGURE 21-42: WDT TIME-OUT PERIOD

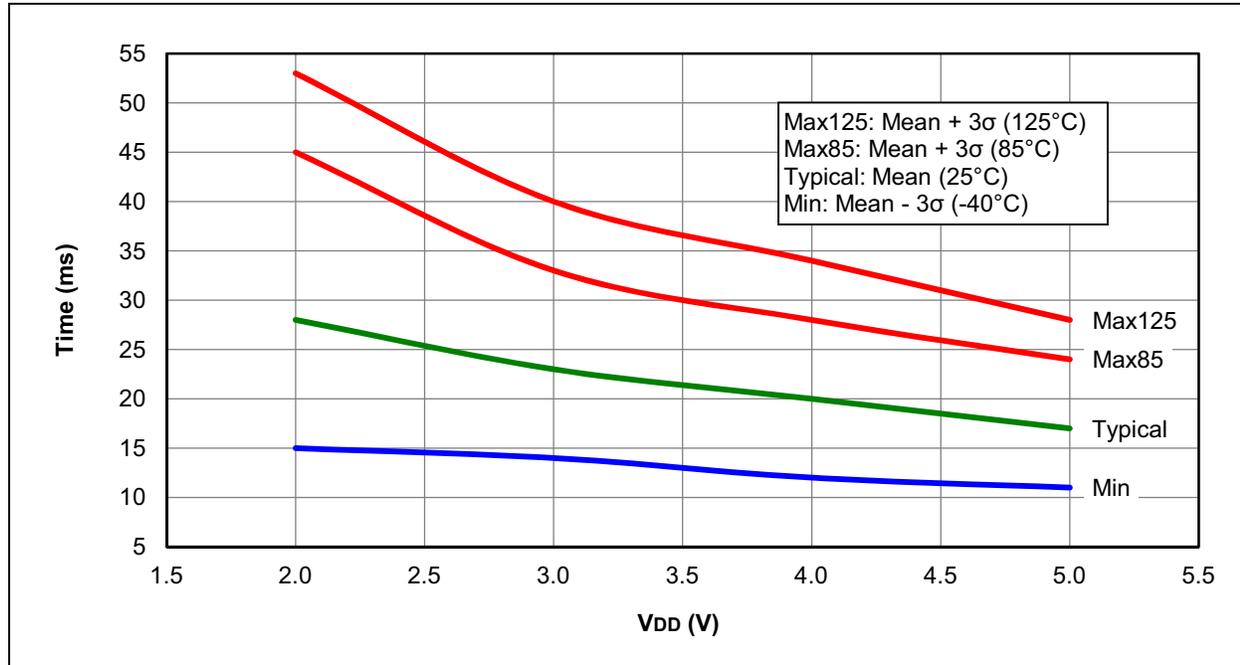

**FIGURE 21-43: COMPARATOR RESPONSE TIME OVER TEMPERATURE, NORMAL-POWER MODE, CxSP = 1, RISING EDGE**

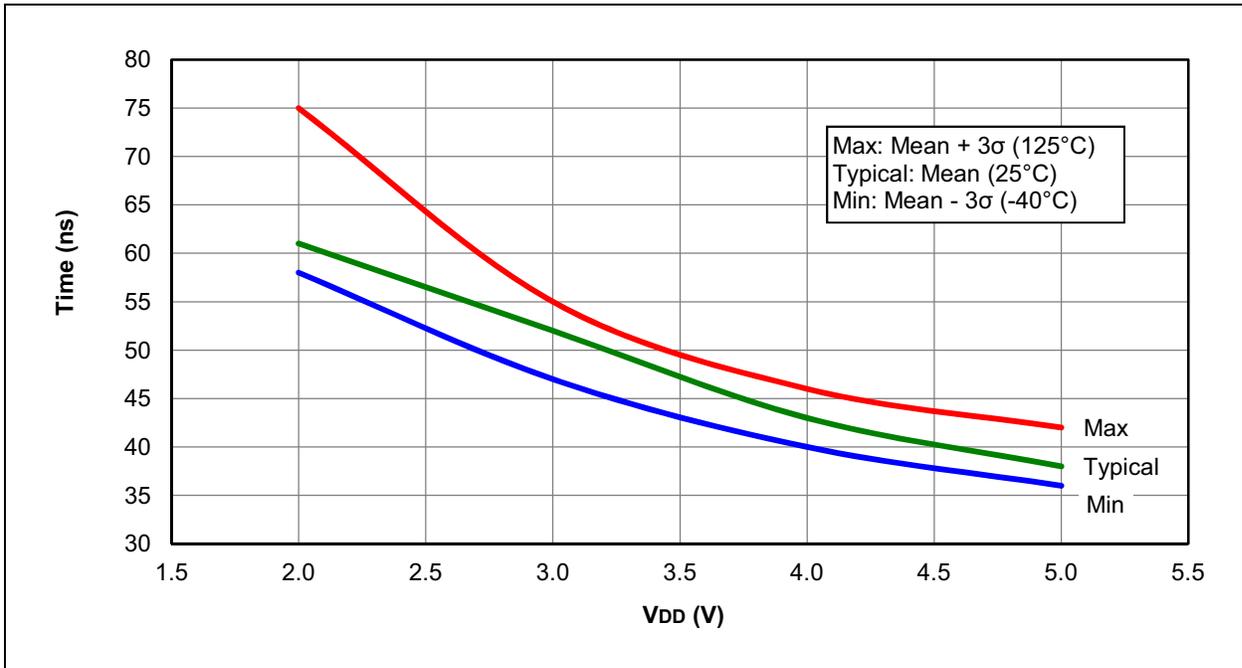

**FIGURE 21-44: COMPARATOR RESPONSE TIME OVER TEMPERATURE, NORMAL-POWER MODE, CxSP = 1, FALLING EDGE**

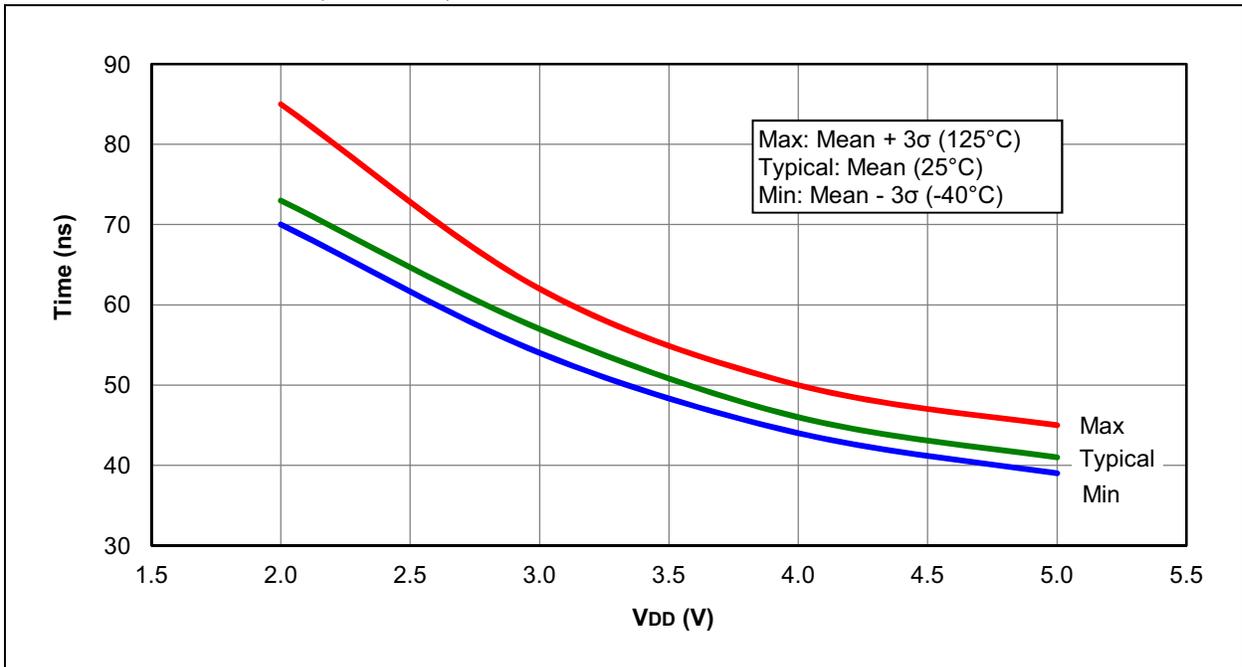


# PIC12F752/HV752


## 22.0 PACKAGING INFORMATION

### 22.1 Package Marking Information


8-Lead PDIP (300 mil)

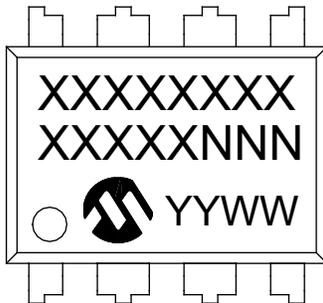

Example

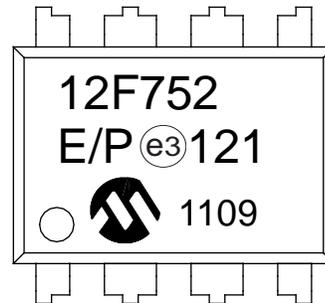

8-Lead SOIC (3.90 mm)

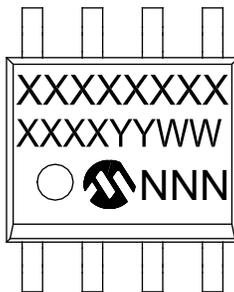

Example




|                |        |  |
|----------------|--------|--|
| <b>Legend:</b> | XX...X | Customer-specific information  |
|                | Y      | Year code (last digit of calendar year)  |
|                | YY     | Year code (last 2 digits of calendar year)   |
|                | WW     | Week code (week of January 1 is week '01')   |
|                | NNN    | Alphanumeric traceability code   |
|                | e3     | Pb-free JEDEC® designator for Matte Tin (Sn)   |
|                | * e3   | This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package. |


**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

## 22.1 Package Marking Information (Continued)

8-Lead DFN (3x3x0.9 mm)

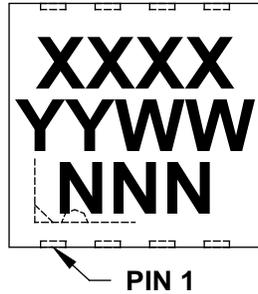

Example

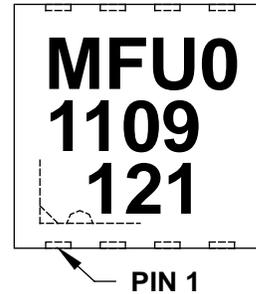

**TABLE 22-1: 8-LEAD 3x3 DFN (MF) TOP MARKING**

| Part Number     | Marking |
|-----------------|---------|
| PIC12F752-E/MF  | MFU0    |
| PIC12F752-I/MF  | MFV0    |
| PIC12HV752-E/MF | MFW0    |
| PIC12HV752-I/MF | MFX0    |

|                |        |  |
|----------------|--------|--|
| <b>Legend:</b> | XX...X | Customer-specific information  |
|                | Y      | Year code (last digit of calendar year)  |
|                | YY     | Year code (last 2 digits of calendar year)   |
|                | WW     | Week code (week of January 1 is week '01')   |
|                | NNN    | Alphanumeric traceability code   |
|                | (e3)   | Pb-free JEDEC designator for Matte Tin (Sn)  |
|                | * (e3) | This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package. |

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.


# PIC12F752/HV752

## 22.2 Package Details

The following sections give the technical details of the packages.

### 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

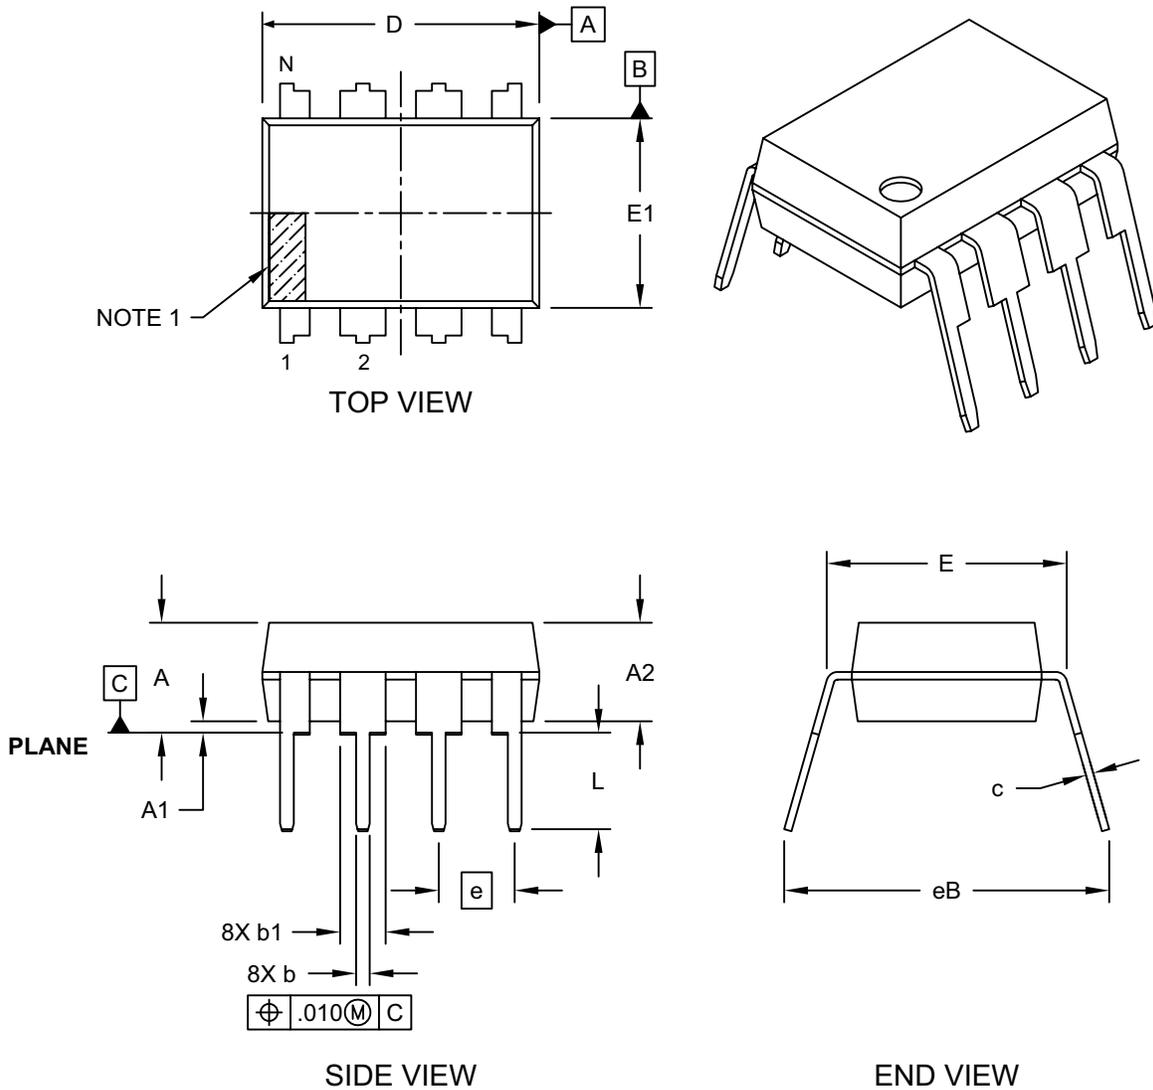


Microchip Technology Drawing No. C04-018D Sheet 1 of 2

## 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

### ALTERNATE LEAD DESIGN (VENDOR DEPENDENT)

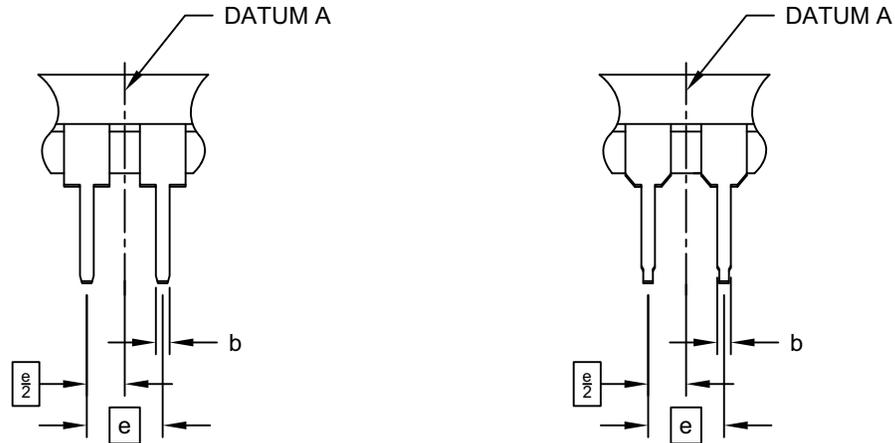

| Dimension Limits           | Units | INCHES   |      |      |
|----------------------------|-------|----------|------|------|
|                            |       | MIN      | NOM  | MAX  |
| Number of Pins             | N     | 8        |      |      |
| Pitch                      | e     | .100 BSC |      |      |
| Top to Seating Plane       | A     | -        | -    | .210 |
| Molded Package Thickness   | A2    | .115     | .130 | .195 |
| Base to Seating Plane      | A1    | .015     | -    | -    |
| Shoulder to Shoulder Width | E     | .290     | .310 | .325 |
| Molded Package Width       | E1    | .240     | .250 | .280 |
| Overall Length             | D     | .348     | .365 | .400 |
| Tip to Seating Plane       | L     | .115     | .130 | .150 |
| Lead Thickness             | c     | .008     | .010 | .015 |
| Upper Lead Width           | b1    | .040     | .060 | .070 |
| Lower Lead Width           | b     | .014     | .018 | .022 |
| Overall Row Spacing        | §     | eB       | -    | .430 |

**Notes:**

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
4. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-018D Sheet 2 of 2

# PIC12F752/HV752

## 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

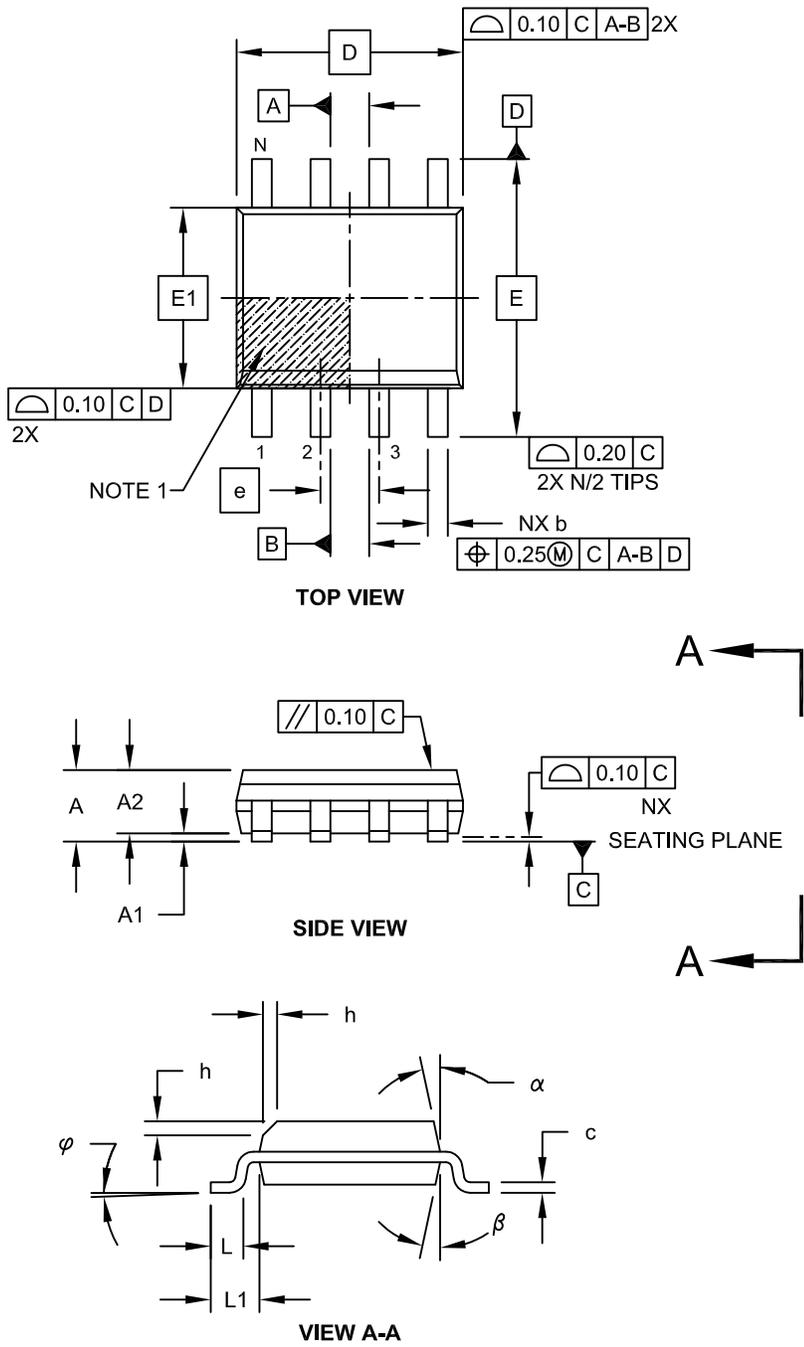


Microchip Technology Drawing No. C04-057C Sheet 1 of 2

# PIC12F752/HV752

## 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

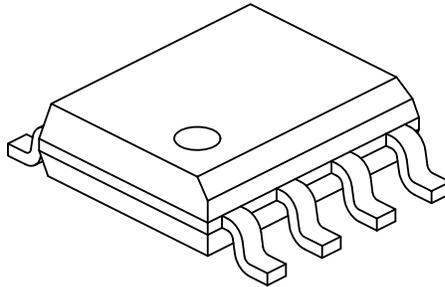

| Units                    |           | MILLIMETERS |     |      |
|--------------------------|-----------|-------------|-----|------|
|                          |           | MIN         | NOM | MAX  |
| Number of Pins           | N         | 8           |     |      |
| Pitch                    | e         | 1.27 BSC    |     |      |
| Overall Height           | A         | -           | -   | 1.75 |
| Molded Package Thickness | A2        | 1.25        | -   | -    |
| Standoff §               | A1        | 0.10        | -   | 0.25 |
| Overall Width            | E         | 6.00 BSC    |     |      |
| Molded Package Width     | E1        | 3.90 BSC    |     |      |
| Overall Length           | D         | 4.90 BSC    |     |      |
| Chamfer (Optional)       | h         | 0.25        | -   | 0.50 |
| Foot Length              | L         | 0.40        | -   | 1.27 |
| Footprint                | L1        | 1.04 REF    |     |      |
| Foot Angle               | $\varphi$ | 0°          | -   | 8°   |
| Lead Thickness           | c         | 0.17        | -   | 0.25 |
| Lead Width               | b         | 0.31        | -   | 0.51 |
| Mold Draft Angle Top     | $\alpha$  | 5°          | -   | 15°  |
| Mold Draft Angle Bottom  | $\beta$   | 5°          | -   | 15°  |

### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing No. C04-057C Sheet 2 of 2

# PIC12F752/HV752

## 8-Lead Plastic Small Outline (SN) – Narrow, 3.90 mm Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

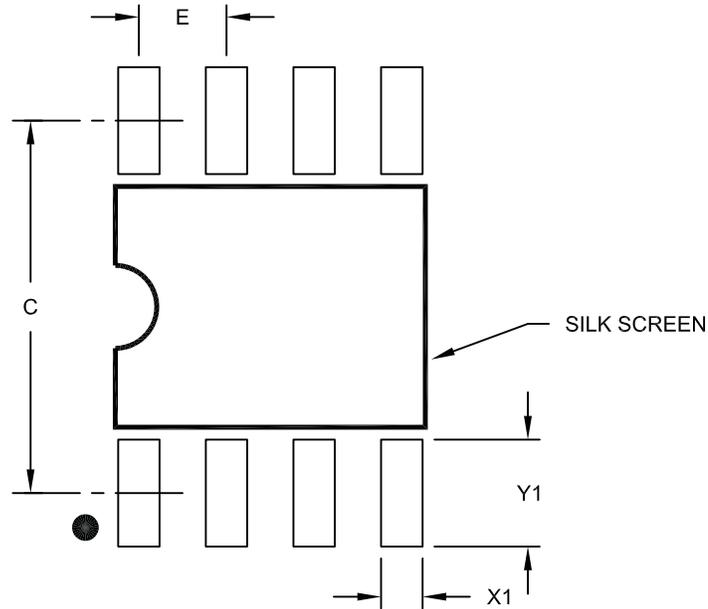

RECOMMENDED LAND PATTERN

|                         |    | Units | MILLIMETERS |      |      |
|-------------------------|----|-------|-------------|------|------|
| Dimension Limits        |    |       | MIN         | NOM  | MAX  |
| Contact Pitch           | E  |       | 1.27 BSC    |      |      |
| Contact Pad Spacing     | C  |       |             | 5.40 |      |
| Contact Pad Width (X8)  | X1 |       |             |      | 0.60 |
| Contact Pad Length (X8) | Y1 |       |             |      | 1.55 |

Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2057A

## 8-Lead Plastic Dual Flat, No Lead Package (MF) - 3x3x0.9mm Body [DFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

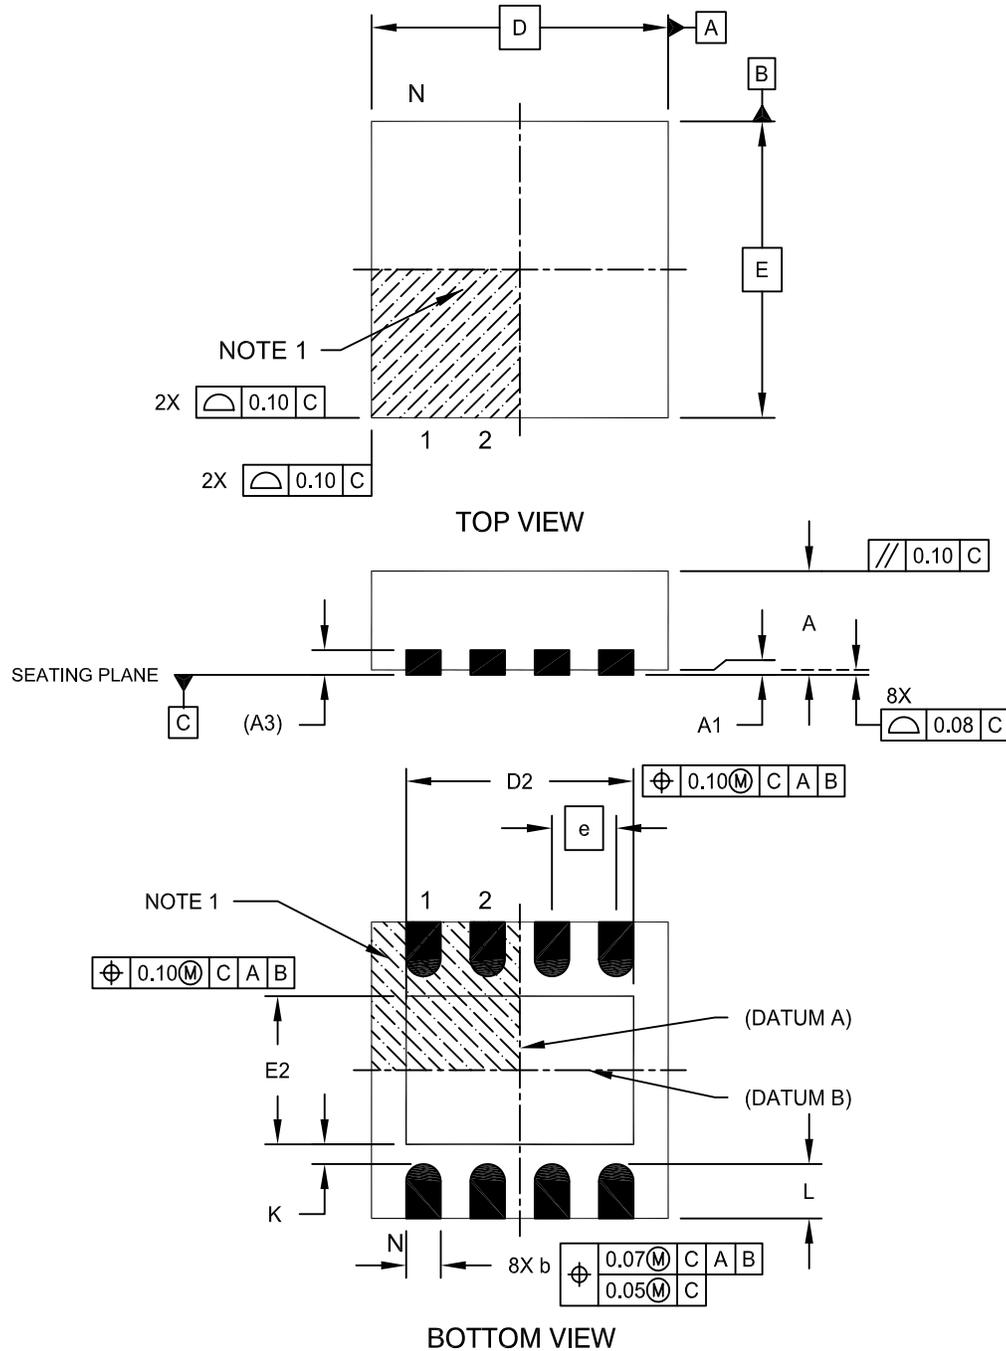


Microchip Technology Drawing No. C04-062C Sheet 1 of 2

# PIC12F752/HV752

## 8-Lead Plastic Dual Flat, No Lead Package (MF) - 3x3x0.9mm Body [DFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

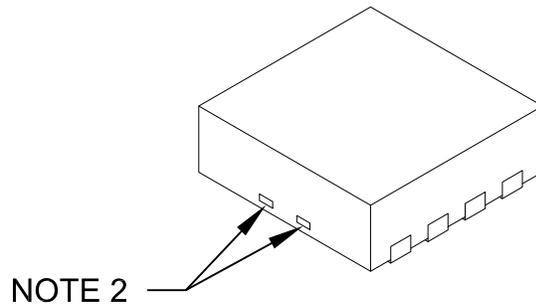

| Dimension Limits       | Units | MILLIMETERS |      |      |
|------------------------|-------|-------------|------|------|
|                        |       | MIN         | NOM  | MAX  |
| Number of Pins         | N     | 8           |      |      |
| Pitch                  | e     | 0.65 BSC    |      |      |
| Overall Height         | A     | 0.80        | 0.90 | 1.00 |
| Standoff               | A1    | 0.00        | 0.02 | 0.05 |
| Contact Thickness      | A3    | 0.20 REF    |      |      |
| Overall Length         | D     | 3.00 BSC    |      |      |
| Exposed Pad Width      | E2    | 1.34        | -    | 1.60 |
| Overall Width          | E     | 3.00 BSC    |      |      |
| Exposed Pad Length     | D2    | 1.60        | -    | 2.40 |
| Contact Width          | b     | 0.25        | 0.30 | 0.35 |
| Contact Length         | L     | 0.20        | 0.30 | 0.55 |
| Contact-to-Exposed Pad | K     | 0.20        | -    | -    |

**Notes:**

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package may have one or more exposed tie bars at ends.
3. Package is saw singulated
4. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing No. C04-062C Sheet 2 of 2

## 8-Lead Plastic Dual Flat, No Lead Package (MF) - 3x3x0.9mm Body [DFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

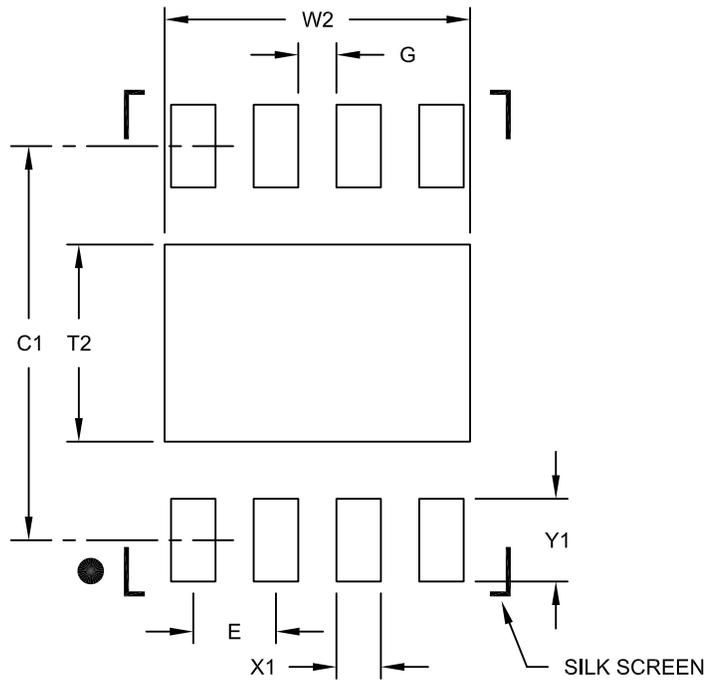

RECOMMENDED LAND PATTERN

| Dimension Limits           | Units | MILLIMETERS |      |      |
|----------------------------|-------|-------------|------|------|
|                            |       | MIN         | NOM  | MAX  |
| Contact Pitch              | E     | 0.65 BSC    |      |      |
| Optional Center Pad Width  | W2    |             |      | 2.40 |
| Optional Center Pad Length | T2    |             |      | 1.55 |
| Contact Pad Spacing        | C1    |             | 3.10 |      |
| Contact Pad Width (X8)     | X1    |             |      | 0.35 |
| Contact Pad Length (X8)    | Y1    |             |      | 0.65 |
| Distance Between Pads      | G     | 0.30        |      |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2062B

# PIC12F752/HV752

## APPENDIX A: DATA SHEET REVISION HISTORY

### Revision A (04/2011)

Original release.

### Revision B (11/2011)

Redefined operation of the COG module; Added slew rate control to the COG module; Added zero latency filter to the comparator; Updated Electrical Specifications.

### Revision C (11/2013)

Redefined operation of the COG module; Updated the I/O Ports chapter; Updated the Electrical Specifications chapter; Added graphs to the DC and AC Characteristics Graphs and Charts chapter; Other minor corrections.

### Revision D (10/2015)

Updated the eXtreme Low-Power Features section, Table 1, Figure 1 and the RA3 pin description in Table1-1; Updated PDIP package drawings in Section 22.2 (Package Details); Other minor corrections.

## APPENDIX B: MIGRATING FROM PIC12HV615

This compares the features of the PIC12HV615 to the PIC12HV752 family of devices.

### B.1 PIC12HV615 to PIC12HV752

TABLE B-1: FEATURE COMPARISON

| Feature   | PIC12HV615    | PIC12HV752              |
|---|---------------|-------------------------|
| Max Operating Speed                                   | 20 MHz        | 20 MHz                  |
| Max Program Memory (Words)                            | 1024          | 1024                    |
| Flash Self Read/<br>Self Write                        | No            | Yes                     |
| SRAM (bytes)  | 64            | 64                      |
| Oscillator modes                                      | 8             | 2                       |
| INTOSC Frequencies                                    | 4/8 MHz       | 1/4/8 MHz<br>and 31 kHz |
| Brown-out Reset (BOR)                                 | Y             | Y                       |
| Internal Pull-ups                                     | GP0/1/2/3/4/5 | RA0/1/2/3/4/5           |
| Interrupt-on-change                                   | GP0/1/2/3/4/5 | RA0/1/2/3/4/5           |
| Analog-to-Digital<br>Converter (ADC)<br>Channels      | 4             | 4                       |
| A/D Resolution  | 10-bit        | 10-bit                  |
| Timers (8/16-bit)                                     | 2/1           | 3/1                     |
| Comparator  | 1             | 2 High Speed            |
| ECCP/CCP  | 1/0           | 0/1                     |
| Complementary Output<br>Generator (COG)               | No            | Yes                     |
| Digital-to-Analog Converter<br>(DAC) 5-bit Dual Range | No            | Yes                     |
| Fixed Voltage Reference<br>(FVR)                      | No            | Yes                     |
| Internal Shunt Regulator                              | Yes           | Yes                     |

**Note:** This device has been designed to perform to the parameters of its data sheet. It has been tested to an electrical specification designed to determine its conformance with these parameters. Due to process differences in the manufacture of this device, this device may have different performance characteristics than its earlier version. These differences may cause this device to perform differently in your application than the earlier version of this device.

## THE MICROCHIP WEB SITE

Microchip provides online support via our web site at [www.microchip.com](http://www.microchip.com). This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at [www.microchip.com](http://www.microchip.com). Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the web site at: <http://www.microchip.com/support>**

# PIC12F752/HV752

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| <u>PART NO.</u>              | [X] <sup>(1)</sup>   | - | X                 | /XX     | XXX     |
|------------------------------|--|---|-------------------|---------|---------|
| Device                       | Tape and Reel Option   |   | Temperature Range | Package | Pattern |
| <b>Device:</b>               | PIC12F752<br>PIC12HV752  |   |                   |         |         |
| <b>Tape and Reel Option:</b> | Blank = Standard packaging (tube or tray)<br>T = Tape and Reel <sup>(1)</sup>  |   |                   |         |         |
| <b>Temperature Range:</b>    | I = -40°C to +85°C (Industrial)<br>E = -40°C to +125°C (Extended)  |   |                   |         |         |
| <b>Package:</b>              | P = Plastic DIP (PDIP)<br>SN = 8-lead Small Outline (3.90 mm) (SOIC)<br>MF = 8-lead Plastic Dual Flat, No Lead (3x3) (DFN) |   |                   |         |         |
| <b>Pattern:</b>              | QTP, SQTP, Code or Special Requirements<br>(blank otherwise)   |   |                   |         |         |

**Examples:**

- a) PIC12F752T - I/MF 301  
Tape and Reel, Industrial temperature, DFN 3x3 package, QTP pattern #301
- b) PIC12F752 - E/P  
Extended temperature PDIP package
- c) PIC12F752 - E/SN  
Extended temperature, SOIC package
- d) PIC12HV752 - E/MF  
Extended temperature, DFN 3x3 package

**Note 1:** Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELOQ, KEELOQ logo, Klear, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC<sup>32</sup> logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KlearNet, KlearNet logo, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICTail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2011-2015, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-63277-887-1

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*

---

**QUALITY MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
= ISO/TS 16949 =**



# MICROCHIP

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Cleveland**  
Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983  
Indianapolis

**Noblesville, IN**  
Tel: 317-773-8323  
Fax: 317-773-5453

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110

**Canada - Toronto**  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

**Asia Pacific Office**  
Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon

**Hong Kong**  
Tel: 852-2943-5100  
Fax: 852-2401-3431

**Australia - Sydney**  
Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

**China - Beijing**  
Tel: 86-10-8569-7000  
Fax: 86-10-8528-2104

**China - Chengdu**  
Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

**China - Chongqing**  
Tel: 86-23-8980-9588  
Fax: 86-23-8980-9500

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Hangzhou**  
Tel: 86-571-8792-8115  
Fax: 86-571-8792-8116

**China - Hong Kong SAR**  
Tel: 852-2943-5100  
Fax: 852-2401-3431

**China - Nanjing**  
Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

**China - Qingdao**  
Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

**China - Shanghai**  
Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

**China - Shenyang**  
Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

**China - Shenzhen**  
Tel: 86-755-8864-2200  
Fax: 86-755-8203-1760

**China - Wuhan**  
Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

**China - Xian**  
Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

### ASIA/PACIFIC

**China - Xiamen**  
Tel: 86-592-2388138  
Fax: 86-592-2388130

**China - Zhuhai**  
Tel: 86-756-3210040  
Fax: 86-756-3210049

**India - Bangalore**  
Tel: 91-80-3090-4444  
Fax: 91-80-3090-4123

**India - New Delhi**  
Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

**India - Pune**  
Tel: 91-20-3019-1500

**Japan - Osaka**  
Tel: 81-6-6152-7160  
Fax: 81-6-6152-9310

**Japan - Tokyo**  
Tel: 81-3-6880-3770  
Fax: 81-3-6880-3771

**Korea - Daegu**  
Tel: 82-53-744-4301  
Fax: 82-53-744-4302

**Korea - Seoul**  
Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

**Malaysia - Kuala Lumpur**  
Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

**Malaysia - Penang**  
Tel: 60-4-227-8870  
Fax: 60-4-227-4068

**Philippines - Manila**  
Tel: 63-2-634-9065  
Fax: 63-2-634-9069

**Singapore**  
Tel: 65-6334-8870  
Fax: 65-6334-8850

**Taiwan - Hsin Chu**  
Tel: 886-3-5778-366  
Fax: 886-3-5770-955

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7828

**Taiwan - Taipei**  
Tel: 886-2-2508-8600  
Fax: 886-2-2508-0102

**Thailand - Bangkok**  
Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Dusseldorf**  
Tel: 49-2129-3766400

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Pforzheim**  
Tel: 49-7231-424750

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Venice**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Poland - Warsaw**  
Tel: 48-22-3325737

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820

01/27/15