

# AD9625\* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

---

## COMPARABLE PARTS

View a parametric search of comparable parts.

## EVALUATION KITS

- 2 AD9625 ADC's running at 2.5GSPS with an effective sampling rate of 5GSPS
- AD9625 Evaluation and Synchronization
- AD9625 Evaluation Board
- ADA4961 & AD9625 Analog Signal Chain Evaluation and Converter Synchronization
- ADL5567 & AD9625 Analog Signal Chain Evaluation and ADF4355-2 Wideband Synthesizer with VCO

## DOCUMENTATION

### Data Sheet

- AD9625: 12-Bit, 2.6 GSPS/2.5 GSPS/2.0 GSPS, 1.3 V/2.5 V Analog-to-Digital Converter Data Sheet

### User Guides

- AD-FMCADC2-EBZ FMC Board User Guide

## TOOLS AND SIMULATIONS

- Visual Analog
- AD9625 AMI Model

## REFERENCE MATERIALS

### Informational

- JESD204 Serial Interface

### Press

- 2.6-GHz A/D Converter in High-Reliability Package Meets Specific Sample Rate and Dynamic Range Requirements of Aerospace/Defense Applications
- Analog Devices Unveils 2.5-GSPS A/D Converter, Driver Amplifier and Rapid Prototyping FMC Module
- Global Leader in Converter Technology Releases Industry's Highest Performing 2-GSPS Data Converter
- New PLLs Deliver Widest Frequency Range Coverage and Lowest VCO Phase Noise in a Single Device

### Technical Articles

- A Test Method for Synchronizing Multiple GSPS Converters
- Designing High Speed Analog Signal Chains from DC to Wideband
- MS-2660: Understanding Spurious-Free Dynamic Range in Wideband GSPS ADCs
- MS-2670-1: The Demand for Digital: Challenges and Solutions for High Speed Analog-to-Digital Converters and Radar Systems
- MS-2672: JESD204B Subclasses - Part 1: An Introduction to JESD204B Subclasses and Deterministic Latency
- MS-2677: JESD204B Subclasses - Part 2: Subclass 1 vs. Subclass 2 System Considerations
- MS-2702: Gigasample ADCs Run Fast to Solve New Challenges
- MS-2708: GSPS Data Converters to the Rescue for Electronics Surveillance and Warfare Systems
- MS-2714: Understanding Layers in the JESD204B Specification: A High Speed ADC Perspective, Part 1
- MS-2728: Demystifying the Conversion Error Rate of High Speed ADCs
- MS-2735: Maximizing the Dynamic Range of Software-Defined Radio
- Taming the Wideband Conundrum with RF Sampling ADCs

---

## DESIGN RESOURCES

- [AD9625 Material Declaration](#)
- [PCN-PDN Information](#)
- [Quality And Reliability](#)
- [Symbols and Footprints](#)

## DISCUSSIONS

[View all AD9625 EngineerZone Discussions.](#)

## SAMPLE AND BUY

[Visit the product page to see pricing options.](#)

## TECHNICAL SUPPORT

[Submit a technical question or find your regional support number.](#)

## DOCUMENT FEEDBACK

[Submit feedback for this data sheet.](#)

---

## TABLE OF CONTENTS

|                                                  |    |                                              |    |
|--------------------------------------------------|----|----------------------------------------------|----|
| Features .....                                   | 1  | Numerically Controlled Oscillator .....      | 33 |
| Applications .....                               | 1  | High Bandwidth Decimator .....               | 33 |
| Functional Block Diagram .....                   | 1  | Low Bandwidth Decimator .....                | 36 |
| General Description .....                        | 1  | Digital Outputs .....                        | 37 |
| Product Highlights .....                         | 1  | Introduction to the JESD204B Interface ..... | 37 |
| Revision History .....                           | 3  | Functional Overview .....                    | 37 |
| Specifications.....                              | 4  | JESD204B Link Establishment .....            | 39 |
| DC Specifications .....                          | 4  | Physical Layer Output.....                   | 43 |
| AC Specifications.....                           | 5  | Scrambler.....                               | 43 |
| Digital Specifications .....                     | 6  | Tail Bits .....                              | 43 |
| Switching Specifications .....                   | 7  | DDC Modes (Single and Dual) .....            | 43 |
| Timing Specifications .....                      | 7  | Checksum .....                               | 44 |
| Absolute Maximum Ratings.....                    | 9  | 8-Bit/10-Bit Encoder Control.....            | 44 |
| Thermal Characteristics .....                    | 9  | Initial Lane Alignment Sequence (ILAS).....  | 44 |
| ESD Caution.....                                 | 9  | Lane Synchronization .....                   | 45 |
| Pin Configuration and Function Descriptions..... | 10 | JESD204B Application Layers .....            | 48 |
| Typical Performance Characteristics .....        | 16 | Frame Alignment Character Insertion.....     | 51 |
| AD9625-2.0 .....                                 | 17 | Thermal Considerations.....                  | 51 |
| AD9625-2.5 .....                                 | 20 | Power Supply Considerations.....             | 51 |
| AD9625-2.6 .....                                 | 24 | Serial Port Interface (SPI).....             | 52 |
| Equivalent Test Circuits.....                    | 27 | Configuration Using the SPI.....             | 52 |
| Theory of Operation .....                        | 28 | Hardware Interface.....                      | 52 |
| ADC Architecture .....                           | 28 | Memory Map .....                             | 53 |
| Fast Detect.....                                 | 28 | Reading the Memory Map Register .....        | 53 |
| Gain Threshold Operation.....                    | 28 | Memory Map Registers .....                   | 53 |
| Test Modes.....                                  | 29 | Applications Information .....               | 71 |
| Analog Input Considerations.....                 | 30 | Design Guidelines .....                      | 71 |
| Differential Input Configurations .....          | 30 | Power and Ground Recommendations .....       | 71 |
| Using the ADA4961 .....                          | 30 | Clock Stability Considerations .....         | 71 |
| DC Coupling.....                                 | 32 | SPI Port .....                               | 71 |
| Clock Input Considerations .....                 | 32 | Outline Dimensions .....                     | 72 |
| Digital Downconverters (DDC) .....               | 33 | Ordering Guide .....                         | 72 |
| Frequency Synthesizer and Mixer .....            | 33 |                                              |    |

**REVISION HISTORY****9/2016—Rev. B to Rev. C**

|                                                                      |    |
|----------------------------------------------------------------------|----|
| Changes to ADC Output Control Bits on JESD204B Samples Section ..... | 45 |
| Changes to Table 94 .....                                            | 67 |
| Changes to Table 110 and Table 111 .....                             | 69 |
| Changes to Table 113 and Table 114 .....                             | 70 |
| Changes to the Clock Stability Considerations Section .....          | 71 |
| Changes to Ordering Guide .....                                      | 72 |

**5/2015—Rev. A to Rev. B**

|                                                                                     |            |
|-------------------------------------------------------------------------------------|------------|
| Added AD9625-2.6 .....                                                              | Throughout |
| Change to Figure 1 .....                                                            | 1          |
| Changes to Table 1 .....                                                            | 4          |
| Changes to Table 2 .....                                                            | 5          |
| Change to Figure 5 .....                                                            | 10         |
| Added Endnote 1, Table 8 .....                                                      | 11         |
| Added Endnote 2, Table 9 .....                                                      | 13         |
| Added AD9625-2.6 Section .....                                                      | 24         |
| Changes to Figure 61 and Figure 63 .....                                            | 27         |
| Changes to Table 11 .....                                                           | 30         |
| Added Using the ADA4961 Section .....                                               | 30         |
| Added Figure 77; Renumbered Sequentially, Figure 78, Figure 79, and Figure 80 ..... | 31         |
| Changes to Table 12 .....                                                           | 34         |
| Changes to Low Bandwidth Decimator Section and Table 13 .....                       | 36         |
| Changes to Table 28 .....                                                           | 54         |
| Changes to Table 107 .....                                                          | 69         |
| Changes to Ordering Guide .....                                                     | 72         |

**9/2014—Rev. 0 to Rev. A**

|                                                                                                            |            |
|------------------------------------------------------------------------------------------------------------|------------|
| Added AD9625-2.5 .....                                                                                     | Throughout |
| Changes to Features and General Description Sections .....                                                 | 1          |
| Changes to Table 1 .....                                                                                   | 4          |
| Changes to Table 2 .....                                                                                   | 5          |
| Changes to Table 3 .....                                                                                   | 6          |
| Changes to Table 4 .....                                                                                   | 7          |
| Changes to Figure 3 and Figure 4 .....                                                                     | 8          |
| Changes to Table 6 .....                                                                                   | 9          |
| Changes to Pin K4; Figure 5, Table 8, and Table 9 .....                                                    | 10         |
| Added Typical Performance Characteristics Summary and Changes to Typical Performance Characteristics ..... | 16         |

|                                                                                                                              |    |
|------------------------------------------------------------------------------------------------------------------------------|----|
| Changes to Figure 45, Figure 49, and Figure 50; Added Figure 51 to Figure 54 .....                                           | 23 |
| Changes to Gain Threshold Operation Section .....                                                                            | 24 |
| Changes to Analog Input Considerations Section .....                                                                         | 26 |
| Changes to Digital Downconverters (DDC) Section .....                                                                        | 28 |
| Added Figure 68 .....                                                                                                        | 32 |
| Changes to Data Streaming Section; Added Link Setup Parameters Section .....                                                 | 33 |
| Changes to Digital Outputs, Timing, and Controls Section and Table 15 .....                                                  | 34 |
| Changes to Table 16 and Table 17 .....                                                                                       | 35 |
| Added Table 18 .....                                                                                                         | 36 |
| Added Multichip Synchronization Using SYSREF± Timestamp, Six Lane Output Mode, and SYSREF± Setup and Hold IRQ Sections ..... | 39 |
| Added IRQ Guardband Delays (SYSREF± Setup and Hold) Section .....                                                            | 40 |
| Added Using Rising/Falling Edges of CLK to Latch SYSREF± Section .....                                                       | 41 |
| Changes to Configuration Using the SPI Section .....                                                                         | 46 |
| Changes to Transfer Register Map Section, Table 26, and Table 27 .....                                                       | 47 |
| Changes to Table 28, Table 29, and Table 30 .....                                                                            | 48 |
| Changes to Table 33 and Table 34 .....                                                                                       | 49 |
| Changes to Table 53 .....                                                                                                    | 52 |
| Changes to Table 54 .....                                                                                                    | 52 |
| Changes to Table 58 .....                                                                                                    | 54 |
| Changes to Table 71 .....                                                                                                    | 56 |
| Changes to Table 79 and Table 80 .....                                                                                       | 57 |
| Changes to Table 81, Table 82, Table 83, Table 84, Table 85, and Table 86 .....                                              | 58 |
| Changes to Table 89 .....                                                                                                    | 59 |
| Changes to Table 92 and Table 93 .....                                                                                       | 60 |
| Changes to Table 94, Table 97, and Table 98 .....                                                                            | 61 |
| Changes to Table 101 and Table 106 .....                                                                                     | 62 |
| Added Table 107 and Table 108 .....                                                                                          | 63 |
| Added Table 115 and Table 116 .....                                                                                          | 64 |
| Added Applications Information Section .....                                                                                 | 65 |
| Changes to Ordering Guide .....                                                                                              | 66 |

**5/2014—Revision 0: Initial Version**

## SPECIFICATIONS

## DC SPECIFICATIONS

AVDD1 = DVDD1 = DRVDD1 = 1.3 V, AVDD2 = DVDD2 = DRVDD2 = 2.5 V, specified maximum sampling rate, 1.2 V internal reference, AIN = −1.0 dBFS, default SPI settings, dc-coupled output data, unless otherwise noted.

Table 1.

| Parameter                                       | Test Conditions/<br>Comments      | Temperature <sup>1</sup> | AD9625-2.0 |      |      | AD9625-2.5 |      |       | AD9625-2.6 |      |       | Unit               |
|-------------------------------------------------|-----------------------------------|--------------------------|------------|------|------|------------|------|-------|------------|------|-------|--------------------|
|                                                 |                                   |                          | Min        | Typ  | Max  | Min        | Typ  | Max   | Min        | Typ  | Max   |                    |
| RESOLUTION                                      |                                   |                          | 12         |      |      | 12         |      |       | 12         |      |       | Bits               |
| ACCURACY                                        |                                   |                          |            |      |      |            |      |       |            |      |       |                    |
| No Missing Codes                                |                                   | Full                     | Guaranteed |      |      | Guaranteed |      |       | Guaranteed |      |       |                    |
| Offset Error                                    |                                   | Full                     | −7         | ±0.5 | +6.4 | −7         | ±0.5 | +6.4  | −8.5       | ±0.5 | +7.0  | LSB                |
| Gain Error                                      |                                   | Full                     | −8         |      | +8   | −10.8      |      | +14.2 | −13.8      |      | +20.9 | %FSR               |
| Differential Nonlinearity (DNL)                 |                                   | Full                     | −0.7       | ±0.3 | +0.7 | −0.5       | ±0.3 | +0.7  | −0.6       | ±0.3 | +0.7  | LSB                |
| Integral Nonlinearity (INL)                     |                                   | Full                     | −3.6       | ±0.9 | +3.6 | −2.1       | ±1.0 | +2.1  | −2.7       | ±1.0 | +2.3  | LSB                |
| ANALOG INPUTS                                   |                                   |                          |            |      |      |            |      |       |            |      |       |                    |
| Differential Input                              |                                   |                          |            |      |      |            |      |       |            |      |       |                    |
| Voltage Range                                   | Internal V <sub>REF</sub> = 1.2 V | Full                     |            | 1.1  |      |            | 1    |       |            | 1    |       | V p-p              |
| Resistance                                      |                                   | 25°C                     |            | 100  |      |            | 100  |       |            | 100  |       | Ω                  |
| Capacitance                                     |                                   | 25°C                     |            | 1.5  |      |            | 1.5  |       |            | 1.5  |       | pF                 |
| Internal Common-Mode Voltage (V <sub>CM</sub> ) |                                   | Full                     | 492        | 525  | 563  | 492        | 525  | 563   | 492        | 525  | 563   | mV                 |
| Analog Full-Power Bandwidth <sup>2</sup>        | Internal termination              | 25°C                     |            | 3.2  |      |            | 3.2  |       |            | 3.2  |       | GHz                |
| Input Referred Noise                            |                                   | 25°C                     |            | 2    |      |            | 2    |       |            | 2    |       | LSB <sub>RMS</sub> |
| POWER SUPPLIES                                  |                                   |                          |            |      |      |            |      |       |            |      |       |                    |
| AVDD1                                           |                                   | Full                     | 1.26       | 1.3  | 1.32 | 1.26       | 1.3  | 1.32  | 1.26       | 1.3  | 1.32  | V                  |
| AVDD2                                           |                                   | Full                     | 2.4        | 2.5  | 2.6  | 2.4        | 2.5  | 2.6   | 2.4        | 2.5  | 2.6   | V                  |
| DRVDD1                                          |                                   | Full                     | 1.26       | 1.3  | 1.32 | 1.26       | 1.3  | 1.32  | 1.26       | 1.3  | 1.32  | V                  |
| DRVDD2                                          |                                   | Full                     | 2.4        | 2.5  | 2.6  | 2.4        | 2.5  | 2.6   | 2.4        | 2.5  | 2.6   | V                  |
| DVDD1                                           |                                   | Full                     | 1.26       | 1.3  | 1.32 | 1.26       | 1.3  | 1.32  | 1.26       | 1.3  | 1.32  | V                  |
| DVDD2                                           |                                   | Full                     | 2.4        | 2.5  | 2.6  | 2.4        | 2.5  | 2.6   | 2.4        | 2.5  | 2.6   | V                  |
| DVDDIO                                          |                                   | Full                     | 2.4        | 2.5  | 3.3  | 2.4        | 2.5  | 3.3   | 2.4        | 2.5  | 3.3   | V                  |
| SPI_VDDIO                                       |                                   | Full                     | 2.4        | 2.5  | 3.3  | 2.4        | 2.5  | 3.3   | 2.4        | 2.5  | 3.3   | V                  |
| I <sub>AVDD1</sub>                              |                                   | Full                     |            | 1120 | 1222 |            | 1250 | 1351  |            | 1267 | 1390  | mA                 |
| I <sub>AVDD2</sub>                              |                                   | Full                     |            | 383  | 460  |            | 427  | 491   |            | 432  | 492   | mA                 |
| I <sub>DRVDD1</sub>                             |                                   | Full                     |            | 456  | 470  |            | 476  | 518   |            | 497  | 544   | mA                 |
| I <sub>DRVDD2</sub>                             |                                   | Full                     |            | 9    | 10   |            | 9    | 10    |            | 9    | 10    | mA                 |
| I <sub>DVDD1</sub>                              |                                   | Full                     |            | 410  | 430  |            | 425  | 473   |            | 441  | 503   | mA                 |
| I <sub>DVDD2</sub>                              |                                   | Full                     |            | <1   |      |            | <1   |       |            | <1   |       | mA                 |
| I <sub>DVDDIO</sub>                             |                                   | Full                     |            | <1   |      |            | <1   |       |            | <1   |       | mA                 |
| I <sub>SPI_VDDIO</sub>                          |                                   | Full                     |            | <1   |      |            | <1   |       |            | <1   |       | mA                 |
| Power Dissipation                               | Eight lane mode                   | Full                     |            | 3.48 | 3.8  |            | 3.90 | 4.2   |            | 4.0  | 4.3   | W                  |
| Power-Down Dissipation                          |                                   |                          |            | 125  | 3.8  |            | 125  |       |            | 125  |       | mW                 |

<sup>1</sup> Full temperature range is −40°C to +85°C measured at the case (T<sub>C</sub>).

<sup>2</sup> See Figure 75 and Figure 76 for networks.

## AC SPECIFICATIONS

AVDD1 = DVDD1 = DRVDD1 = 1.3 V, AVDD2 = DVDD2 = DRVDD2 = 2.5 V, specified maximum sampling, 1.2 V internal reference, AIN = -1.0 dBFS, sample clock input = 1.65 V p-p differential, default SPI settings, unless otherwise noted.

Table 2.

| Parameter                                      | Test Conditions/<br>Comments       | Temperature <sup>1</sup> | AD9625-2.0 |      |     | AD9625-2.5 |      |     | AD9625-2.6 |       |     | Unit    |
|------------------------------------------------|------------------------------------|--------------------------|------------|------|-----|------------|------|-----|------------|-------|-----|---------|
|                                                |                                    |                          | Min        | Typ  | Max | Min        | Typ  | Max | Min        | Typ   | Max |         |
| SPEED GRADE                                    |                                    |                          | 2.0        |      |     | 2.5        |      |     | 2.6        |       |     | GPS     |
| ANALOG INPUT                                   | Full scale                         | Full                     | 1.1        |      |     | 1.2        |      |     | 1.1        |       |     | V p-p   |
| NOISE DENSITY                                  |                                    | 25°C                     | -149.0     |      |     | -149.5     |      |     | -150.0     |       |     | dBFS/Hz |
| SIGNAL-TO-NOISE RATIO (SNR)                    |                                    |                          |            |      |     |            |      |     |            |       |     |         |
| $f_{IN} = 100$ MHz                             |                                    | 25°C                     | 59.5       |      |     | 58.3       |      |     | 58.1       |       |     | dBFS    |
| $f_{IN} = 500$ MHz                             |                                    | 25°C                     | 59.4       |      |     | 58.0       |      |     | 58.0       |       |     | dBFS    |
| $f_{IN} = 1000$ MHz                            |                                    | 25°C                     | 59.0       |      |     | 57.6       |      |     | 57.5       |       |     | dBFS    |
| $f_{IN} = 1800$ MHz                            |                                    | Full                     | 55.4       | 58.2 |     | 54.1       | 57.0 |     | 55.0       | 56.6  |     | dBFS    |
| SIGNAL-TO-NOISE AND DISTORTION (SINAD)         |                                    |                          |            |      |     |            |      |     |            |       |     |         |
| $f_{IN} = 100$ MHz                             |                                    | 25°C                     | 58.4       |      |     | 57.2       |      |     | 57.0       |       |     | dBc     |
| $f_{IN} = 500$ MHz                             |                                    | 25°C                     | 58.4       |      |     | 57.0       |      |     | 56.9       |       |     | dBc     |
| $f_{IN} = 1000$ MHz                            |                                    | 25°C                     | 58.0       |      |     | 56.5       |      |     | 56.4       |       |     | dBc     |
| $f_{IN} = 1800$ MHz                            |                                    | Full                     | 54.1       | 57.2 |     | 53.1       | 55.9 |     | 53.9       | 55.6  |     | dBc     |
| EFFECTIVE NUMBER OF BITS (ENOB)                |                                    |                          |            |      |     |            |      |     |            |       |     |         |
| $f_{IN} = 100$ MHz                             |                                    | 25°C                     | 9.4        |      |     | 9.2        |      |     | 9.2        |       |     | Bits    |
| $f_{IN} = 500$ MHz                             |                                    | 25°C                     | 9.4        |      |     | 9.2        |      |     | 9.2        |       |     | Bits    |
| $f_{IN} = 1000$ MHz                            |                                    | 25°C                     | 9.3        |      |     | 9.1        |      |     | 9.1        |       |     | Bits    |
| $f_{IN} = 1800$ MHz                            |                                    | 25°C                     | 9.2        |      |     | 9.0        |      |     | 8.9        |       |     | Bits    |
| SPURIOUS FREE DYNAMIC RANGE (SFDR)             | Including second or third harmonic |                          |            |      |     |            |      |     |            |       |     |         |
| $f_{IN} = 100$ MHz                             |                                    | 25°C                     | 80         |      |     | 77         |      |     | 80.5       |       |     | dBc     |
| $f_{IN} = 500$ MHz                             |                                    | 25°C                     | 81         |      |     | 76         |      |     | 79.6       |       |     | dBc     |
| $f_{IN} = 1000$ MHz                            |                                    | 25°C                     | 80         |      |     | 79         |      |     | 77.3       |       |     | dBc     |
| $f_{IN} = 1800$ MHz                            |                                    | Full                     | 67         | 76   |     | 70         | 77   |     | 65         | 75.4  |     | dBc     |
| WORST OTHER SPUR                               | Excluding second or third harmonic |                          |            |      |     |            |      |     |            |       |     |         |
| $f_{IN} = 100$ MHz                             |                                    | 25°C                     | -80        |      |     | -77        |      |     | -81        |       |     | dBc     |
| $f_{IN} = 500$ MHz                             |                                    | 25°C                     | -86        |      |     | -76        |      |     | -83        |       |     | dBc     |
| $f_{IN} = 1000$ MHz                            |                                    | 25°C                     | -83        |      |     | -82        |      |     | -80        |       |     | dBc     |
| $f_{IN} = 1800$ MHz                            |                                    | Full                     | -85        | -73  |     | -78        | -70  |     | -78.0      | -66.0 |     | dBc     |
| TWO-TONE INTERMODULATION DISTORTION (IMD)      | At -7 dBFS per tone                |                          |            |      |     |            |      |     |            |       |     |         |
| $f_{IN1} = 728.5$ MHz, $f_{IN2} = 731.5$ MHz   |                                    | 25°C                     | -82.8      |      |     | -81.2      |      |     | -78.3      |       |     | dBc     |
| $f_{IN1} = 1805.5$ MHz, $f_{IN2} = 1808.5$ MHz |                                    | 25°C                     | -77.6      |      |     | -76.3      |      |     | -77.7      |       |     | dBc     |

<sup>1</sup> Full temperature range is -40°C to +85°C measured at the case (T<sub>C</sub>).

**DIGITAL SPECIFICATIONS**

AVDD1 = DVDD1 = DRVDD1 = 1.3 V, AVDD2 = DVDD2 = DRVDD2 = 2.5 V, specified maximum sampling rate, 1.2 V internal reference, AIN = −1.0 dBFS, default SPI settings, unless otherwise noted.

**Table 3.**

| Parameter                                                   | Temperature <sup>1</sup> | Min              | Typ             | Max  | Unit   |
|-------------------------------------------------------------|--------------------------|------------------|-----------------|------|--------|
| CLOCK INPUTS (CLK+, CLK−)                                   |                          |                  |                 |      |        |
| Differential Input Voltage                                  | Full                     | 500              |                 | 1800 | mV p-p |
| Common-Mode Input Voltage                                   | Full                     |                  | 0.88            |      | V      |
| Input Resistance (Differential)                             | Full                     |                  | 40              |      | kΩ     |
| Input Capacitance                                           | Full                     |                  | 1.5             |      | pF     |
| SYSREF INPUTS (SYSREF+, SYSREF−)                            |                          |                  |                 |      |        |
| Differential Input Voltage                                  | Full                     | 500              |                 | 1800 | mV p-p |
| Common-Mode Input Voltage                                   | Full                     |                  | 0.88            |      | V      |
| Input Resistance (Differential)                             | Full                     |                  | 40              |      | kΩ     |
| Input Capacitance                                           | Full                     |                  | 1.5             |      | pF     |
| LOGIC INPUTS (SDIO, SCLK, CSB)                              |                          |                  |                 |      |        |
| Logic Compliance Voltage                                    |                          |                  | CMOS            |      |        |
| Logic 1                                                     | Full                     | 0.8 × SPI_DVDDIO |                 |      | V      |
| Logic 0                                                     | Full                     |                  |                 | 0.5  | V      |
| Input Resistance                                            | Full                     |                  | 30              |      | kΩ     |
| Input Capacitance                                           | Full                     |                  | 0.5             |      | pF     |
| SYNCB+/SYNCB− INPUT                                         |                          |                  |                 |      |        |
| Logic Compliance                                            | Full                     |                  | LVDS            |      |        |
| Input Voltage                                               |                          |                  |                 |      |        |
| Differential                                                | Full                     | 250              |                 | 1200 | mV p-p |
| Common Mode                                                 | Full                     |                  | 1.2             |      | V      |
| Input Resistance (Differential)                             | Full                     |                  | 100             |      | Ω      |
| Input Capacitance                                           | Full                     |                  | 2.5             |      | pF     |
| LOGIC OUTPUT (SDIO)                                         |                          |                  |                 |      |        |
| Logic Compliance Voltage                                    |                          |                  | CMOS            |      |        |
| Logic 1 (I <sub>OH</sub> = 800 μA)                          | Full                     |                  | 0.8 × SPI_VDDIO |      | V      |
| Logic 0 (I <sub>OL</sub> = 50 μA)                           | Full                     |                  | 0.3             |      | V      |
| DIGITAL OUTPUTS (SERDOUT[x]±)                               |                          |                  |                 |      |        |
| Compliance                                                  | Full                     |                  | CML             |      |        |
| Output Voltage                                              |                          |                  |                 |      |        |
| Differential                                                | Full                     | 360              | 700             | 800  | mV p-p |
| Offset                                                      | Full                     |                  | DRVDD/2         |      | mV p-p |
| Differential Return Loss (RL <sub>DIFF</sub> ) <sup>2</sup> | 25°C                     | 8                |                 |      | dB     |
| Common-Mode Return Loss (RL <sub>CM</sub> )                 | 25°C                     | 6                |                 |      | dB     |
| Differential Termination Impedance                          | 25°C                     |                  |                 | 100  | Ω      |
| RESET (RSTB)                                                |                          |                  |                 |      |        |
| Voltage                                                     |                          |                  |                 |      |        |
| Logic 1                                                     | Full                     | 0.8 × DVDDIO     |                 |      | V      |
| Logic 0                                                     | Full                     |                  |                 | 0.5  | V      |
| Input Resistance (Differential)                             | Full                     |                  | 20              |      | kΩ     |
| Input Capacitance                                           | Full                     |                  | 2.5             |      | pF     |
| FAST DETECT (FD), PWDN, AND INTERRUPT (IRQ)                 |                          |                  |                 |      |        |
| Logic Compliance                                            |                          |                  | CMOS            |      |        |
| Voltage                                                     |                          |                  |                 |      |        |
| Logic 1                                                     | Full                     | 0.8 × DVDDIO     |                 |      | V      |
| Logic 0                                                     | Full                     |                  |                 | 0.5  | V      |
| Input Resistance (Differential)                             | Full                     |                  | 20              |      | kΩ     |
| Input Capacitance                                           | Full                     |                  | 2.5             |      | pF     |

<sup>1</sup> Full temperature range is −40°C to +85°C measured at the case (T<sub>C</sub>).

<sup>2</sup> Differential and common-mode return loss measured from 100 MHz to 0.75 × baud rate.

**SWITCHING SPECIFICATIONS**

AVDD1 = DVDD1 = DRVDD1 = 1.3 V, AVDD2 = DVDD2 = DRVDD2 = 2.5 V, specified maximum sampling rate, 1.2 V internal reference, AIN = -1.0 dBFS, default SPI settings, unless otherwise noted.

**Table 4.**

| Parameter                                    | Test Conditions/Comments | Temperature <sup>1</sup> | Min              | Typ  | Max  | Unit               |
|----------------------------------------------|--------------------------|--------------------------|------------------|------|------|--------------------|
| CLOCK (CLK)                                  |                          |                          |                  |      |      |                    |
| Maximum Clock Rate                           |                          | Full                     |                  |      | 2600 | MSPS               |
| Minimum Clock Rate                           |                          | Full                     | 330 <sup>2</sup> |      |      | MSPS               |
| Clock Pulse Width High                       |                          | Full                     | 50 ± 5           |      |      | % duty cycle       |
| Clock Pulse Width Low                        |                          | Full                     | 50 ± 5           |      |      | % duty cycle       |
| SYSREF (SYSREF±) <sup>3</sup>                |                          |                          |                  |      |      |                    |
| Setup Time (t <sub>SU_SR</sub> )             |                          | 25°C                     |                  | +200 |      | ps                 |
| Hold Time (t <sub>H_SR</sub> )               |                          | 25°C                     |                  | -100 |      | ps                 |
| FAST DETECT OUTPUT (FD)                      |                          |                          |                  |      |      |                    |
| Latency                                      |                          | Full                     |                  | 82   |      | Clock cycles       |
| OUTPUT PARAMETERS (SERDOUT[x]±)              |                          |                          |                  |      |      |                    |
| Rise Time                                    | Eight lane mode          | 25°C                     |                  | 70   |      | ps                 |
| Fall Time                                    |                          | 25°C                     |                  | 70   |      | ps                 |
| Pipeline Latency                             |                          | 25°C                     |                  | 226  |      | Clock cycles       |
| SYNCB± Falling Edge to First K.28 Characters |                          | 25°C                     | 4                |      |      | Multiframes        |
| CGS Phase K.28 Characters Duration           |                          | 25°C                     | 1                |      |      | Multiframes        |
| Differential Termination Resistance          |                          | 25°C                     |                  | 100  |      | Ω                  |
| APERTURE                                     |                          |                          |                  |      |      |                    |
| Delay                                        |                          | Full                     |                  | 200  |      | ps                 |
| Uncertainty (Jitter)                         |                          | Full                     |                  | 80   |      | f <sub>s</sub> rms |
| Out-of-Range Recovery Time                   |                          | Full                     |                  | 2    |      | Clock cycles       |

<sup>1</sup> Full temperature range is -40°C to +85°C measured at the case (T<sub>C</sub>).

<sup>2</sup> Must use a two-lane, generic output lane configuration for minimum sample rate. For more information, see the lane table in the JESD204B specification document.

<sup>3</sup> SYSREF± setup and hold times are defined with respect to the rising SYSREF± edge and rising clock edge. Positive setup time leads the clock edge. Negative hold time also leads the clock edge.

**TIMING SPECIFICATIONS****Table 5.**

| Parameter               | Test Conditions/Comments                                                                              | Min | Typ | Max | Unit |
|-------------------------|-------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| SPI TIMING REQUIREMENTS |                                                                                                       |     |     |     |      |
| t <sub>DS</sub>         | Setup time between the data and the rising edge of SCLK                                               | 2   |     |     | ns   |
| t <sub>DH</sub>         | Hold time between the data and the rising edge of SCLK                                                | 2   |     |     | ns   |
| t <sub>CLK</sub>        | Period of the SCLK                                                                                    | 40  |     |     | ns   |
| t <sub>S</sub>          | Setup time between CSB and SCLK                                                                       | 2   |     |     | ns   |
| t <sub>H</sub>          | Hold time between CSB and SCLK                                                                        | 2   |     |     | ns   |
| t <sub>HIGH</sub>       | Minimum period that SCLK should be in a logic high state                                              | 10  |     |     | ns   |
| t <sub>LOW</sub>        | Minimum period that SCLK should be in a logic low state                                               | 10  |     |     | ns   |
| t <sub>EN_SDIO</sub>    | Time required for the SDIO pin to switch from an input to an output relative to the SCLK falling edge | 10  |     |     | ns   |
| t <sub>DIS_SDIO</sub>   | Time required for the SDIO pin to switch from an output to an input relative to the SCLK rising edge  | 10  |     |     | ns   |



Timing Diagrams

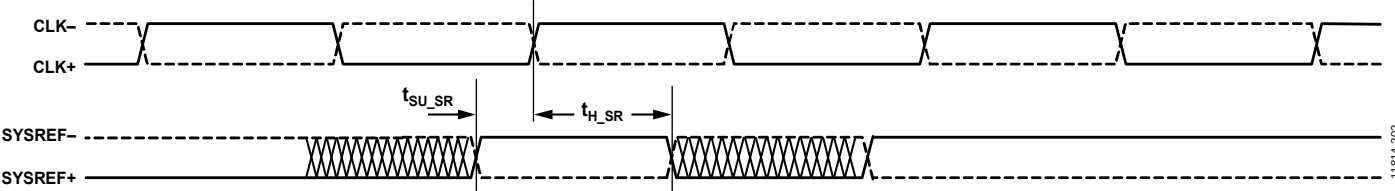


Figure 2. SYSREF± Setup and Hold Timing

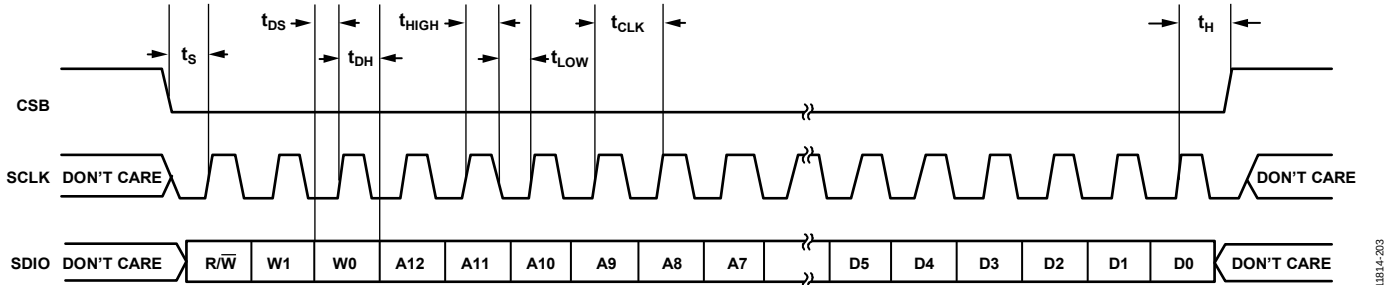


Figure 3. Serial Port Interface Timing Diagram (MSB First)

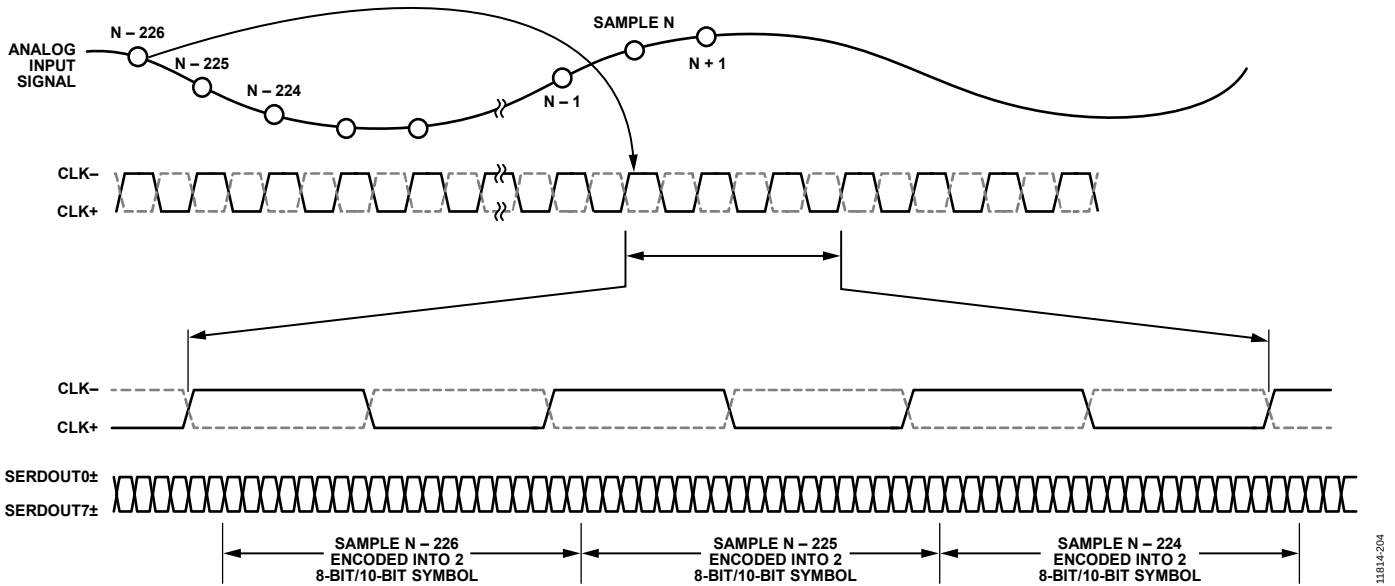


Figure 4. Data Output Timing for Eight Lane Mode

## ABSOLUTE MAXIMUM RATINGS

Table 6.

| Parameter                        | Rating                               |
|----------------------------------|--------------------------------------|
| Electrical                       |                                      |
| AVDD1 to AGND                    | −0.3 V to +1.32 V                    |
| AVDD2 to AGND                    | −0.3 V to +2.75 V                    |
| DRVDD1 to DRGND                  | −0.3 V to +1.32 V                    |
| DRVDD2 to DRGND                  | −0.3 V to +2.75 V                    |
| DVDD1 to DGND                    | −0.3 V to +1.32 V                    |
| DVDD2 to DGND                    | −0.3 V to +2.75 V                    |
| DVDDIO to DGND                   | −0.3 V to +3.63 V                    |
| SPI_VDDIO to DGND                | −0.3 V to +3.63 V                    |
| AGND to DRGND                    | −0.3 V to +0.3 V                     |
| VIN± to AGND                     | −0.3 V to AVDD1 + 0.2 V              |
| VCM to AGND                      | −0.3 V to AVDD1 + 0.2 V              |
| VMON to AGND                     | −0.3 V to AVDD1 + 0.2 V              |
| CLK± to AGND                     | −0.3 V to AVDD1 + 0.2 V              |
| SYSREF± to AGND                  | −0.3 V to AVDD1 + 0.2 V              |
| SYNCINB± to DRGND                | −0.3 V to DRVDD2 + 0.2 V             |
| SCLK to DRGND                    | −0.3 V to SPI_VDDIO + 0.2 V          |
| SDIO to DRGND                    | −0.3 V to SPI_VDDIO + 0.2 V          |
| IRQ to DRGND                     | −0.3 V to DVDDIO + 0.2 V             |
| RSTB to DRGND                    | −0.3 V to DVDDIO + 0.2 V             |
| CSB to DRGND                     | −0.3 V to SPI_VDDIO + 0.2 V          |
| FD to DRGND                      | −0.3 V to DVDDIO + 0.2 V             |
| DIVCLK± to DRGND                 | −0.3 V to DRVDD2 + 0.2 V             |
| SERDOUT[x]± to DRGND             | −0.3 V to DRVDD1 + 0.2 V             |
| Environmental                    |                                      |
| Storage Temperature Range        | −60°C to +150°C                      |
| Operating Case Temperature Range | −40°C to +85°C<br>(measured at case) |
| Maximum Junction Temperature     | 110°C                                |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### THERMAL CHARACTERISTICS

The following characteristics are for a 4-layer and 10-layer printed circuit board (PCB).

Table 7. Thermal Resistance

| PCB      | T <sub>A</sub> (°C) | θ <sub>JA</sub> (°C/W) | ψ <sub>JT</sub> (°C/W) | ψ <sub>JB</sub> (°C/W) | θ <sub>JC</sub> (°C/W) |
|----------|---------------------|------------------------|------------------------|------------------------|------------------------|
| 4-Layer  | 85.0                | 18.7                   | 0.61                   | 6.1                    | 1.4                    |
| 10-Layer | 85.0                | 11.5                   | 0.61                   | 4.1                    | N/A <sup>1</sup>       |

<sup>1</sup> N/A means not applicable.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

AD9625  
TOP VIEW  
(Not to Scale)

|   | 1      | 2               | 3               | 4               | 5               | 6         | 7               | 8               | 9               | 10              | 11     | 12     | 13      | 14      |
|---|--------|-----------------|-----------------|-----------------|-----------------|-----------|-----------------|-----------------|-----------------|-----------------|--------|--------|---------|---------|
| A | AGND   | AGND            | AGND            | AVDD1           | AGND            | AVDD2     | VCM             | AGND            | VIN+            | VIN-            | AGND   | VM_BYP | AVDD2   | AVDD2   |
| B | AGND   | AGND            | AGND            | AGND            | AVDD1           | AGND      | AVDD2           | AGND            | AGND            | AGND            | AGND   | AVDD2  | AGND    | AGND    |
| C | AGND   | AGND            | AGND            | AGND            | AGND            | AVDD1     | AGND            | AVDD2           | AGND            | AGND            | AVDD2  | AGND   | AGND    | AVDD1   |
| D | DVDD1  | DVDD1           | DVDD1           | DNC             | AGND            | AGND      | AVDD1           | AVDD2           | AGND            | AGND            | AVDD2  | AVDD1  | AVDD1   | AVDD1   |
| E | DGND   | DGND            | DGND            | DVDD2           | VMON            | AGND      | AVDD1           | AVDD2           | AGND            | AGND            | AVDD2  | AVDD1  | AGND    | AGND    |
| F | DVDD1  | DVDD1           | DVDD1           | SPI_VDDIO       | DVDDIO          | AGND      | AVDD1           | AVDD2           | AGND            | AGND            | AVDD2  | AVDD1  | AGND    | CLK+    |
| G | DGND   | DGND            | DGND            | CSB             | DVDDIO          | AGND      | AVDD1           | AVDD2           | AGND            | AGND            | AVDD2  | AVDD1  | AGND    | CLK-    |
| H | DVDD1  | DVDD1           | DVDD1           | SCLK            | IRQ             | AGND      | AVDD1           | AVDD2           | AGND            | AGND            | AVDD2  | AVDD1  | AGND    | AGND    |
| J | DGND   | DGND            | DGND            | SDIO            | FD              | RBIAS_EXT | AVDD1           | AVDD2           | AGND            | AGND            | AVDD2  | AVDD1  | AGND    | SYSREF+ |
| K | DVDD1  | DVDD1           | RSTB            | PWDN            | AGND            | AGND      | AGND            | AGND            | AGND            | AGND            | AGND   | AGND   | AGND    | SYSREF- |
| L | DGND   | DNC             | SYNCINB-        | SYNCINB+        | DGND            | DGND      | DGND            | DGND            | DGND            | DNC             | DNC    | DNC    | AGND    | AGND    |
| M | DRGND  | DRGND           | DRGND           | DRGND           | DRGND           | DRGND     | DRGND           | DRGND           | DRGND           | DRGND           | DRVDD1 | REXT   | DRGND   | DRGND   |
| N | DRVDD1 | SERDOUT<br>[7]+ | SERDOUT<br>[6]+ | SERDOUT<br>[5]+ | SERDOUT<br>[4]+ | DRVDD1    | SERDOUT<br>[3]+ | SERDOUT<br>[2]+ | SERDOUT<br>[1]+ | SERDOUT<br>[0]+ | DRVDD1 | VP_BYP | DRVDD2  | DRVDD2  |
| P | DRVDD1 | SERDOUT<br>[7]- | SERDOUT<br>[6]- | SERDOUT<br>[5]- | SERDOUT<br>[4]- | DRVDD1    | SERDOUT<br>[3]- | SERDOUT<br>[2]- | SERDOUT<br>[1]- | SERDOUT<br>[0]- | DRVDD1 | DRGND  | DIVCLK- | DIVCLK+ |

## NOTES

1. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN. LEAVE THIS PIN FLOATING.

Figure 5. Pin Configuration

11814-009

Table 8. Pin Function Descriptions (By Pin Number)

| Pin No.    | Mnemonic  | Type             | Description                                                                    |
|------------|-----------|------------------|--------------------------------------------------------------------------------|
| A1 to A3   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| A4         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| A5         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.               |
| A6         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| A7         | VCM       | Output           | Analog Input, Common Mode (0.525 V).                                           |
| A8         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.               |
| A9         | VIN+      | Input            | Differential Analog Input, True.                                               |
| A10        | VIN–      | Input            | Differential Analog Input, Complement.                                         |
| A11        | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.               |
| A12        | VM_BYP    | Input            | Voltage Bypass.                                                                |
| A13        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| A14        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| B1 to B4   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| B5         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| B6         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.               |
| B7         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| B8 to B11  | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| B12        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| B13, B14   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| C1 to C5   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| C6         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| C7         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.               |
| C8         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| C9, C10    | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| C11        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| C12, C13   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| C14        | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| D1 to D3   | DVDD1     | Power            | ADC Digital Power Supply (1.30 V).                                             |
| D4         | DNC       | N/A <sup>1</sup> | Do Not Connect. Do not connect to this pin. Leave this pin floating.           |
| D5, D6     | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| D7         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| D8         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| D9, D10    | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| D11        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| D12 to D14 | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| E1 to E3   | DGND      | Ground           | Digital Control Ground Supply. These pins connect to the digital ground plane. |
| E4         | DVDD2     | Power            | ADC Digital Power Supply (2.5 V).                                              |
| E5         | VMON      | Output           | CTAT Voltage Monitor Output.                                                   |
| E6         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.               |
| E7         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| E8         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| E9, E10    | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| E11        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| E12        | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| E13, E14   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |
| F1 to F3   | DVDD1     | Power            | ADC Digital Power Supply (1.30 V).                                             |
| F4         | SPI_VDDIO | Power            | SPI Digital Power Supply (2.50 V).                                             |
| F5         | DVDDIO    | Power            | Digital I/O Power Supply (2.50 V).                                             |
| F6         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.               |
| F7         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                              |
| F8         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                              |
| F9, F10    | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.              |

| Pin No.    | Mnemonic  | Type             | Description                                                                                   |
|------------|-----------|------------------|-----------------------------------------------------------------------------------------------|
| F11        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                                             |
| F12        | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                                             |
| F13        | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.                              |
| F14        | CLK+      | Input            | ADC Clock Input, True.                                                                        |
| G1 to G3   | DGND      | Ground           | Digital Control Ground Supply. These pins connect to the digital ground plane.                |
| G4         | CSB       | Input            | SPI Chip Select CMOS Input. Active low.                                                       |
| G5         | DVDDIO    | Power            | Digital I/O Power Supply (2.50 V).                                                            |
| G6         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.                              |
| G7         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                                             |
| G8         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                                             |
| G9, G10    | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.                             |
| G11        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                                             |
| G12        | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                                             |
| G13        | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.                              |
| G14        | CLK–      | Input            | ADC Clock Input, Complement.                                                                  |
| H1 to H3   | DVDD1     | Power            | ADC Digital Power Supply (1.30 V).                                                            |
| H4         | SCLK      | Input            | SPI Serial Clock CMOS Input.                                                                  |
| H5         | IRQ       | Output           | Interrupt Request Output Signal.                                                              |
| H6         | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.                              |
| H7         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                                             |
| H8         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                                             |
| H9, H10    | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.                             |
| H11        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                                             |
| H12        | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                                             |
| H13, H14   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.                             |
| J1 to J3   | DGND      | Ground           | Digital Control Ground Supply. These pins connect to the digital ground plane.                |
| J4         | SDIO      | I/O              | SPI Serial Data CMOS Input/Output; Scan Output 1.                                             |
| J5         | FD        | Output           | Fast Detect Output. This pin requires an external 10 k $\Omega$ resistor connected to ground. |
| J6         | RBIAS_EXT | Input            | Reference Bias. This pin requires an external 10 k $\Omega$ resistor connected to ground.     |
| J7         | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                                             |
| J8         | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                                             |
| J9, J10    | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.                             |
| J11        | AVDD2     | Power            | ADC Analog Power Supply (2.50 V).                                                             |
| J12        | AVDD1     | Power            | ADC Analog Power Supply (1.30 V).                                                             |
| J13        | AGND      | Ground           | ADC Analog Ground. This pin connects to the analog ground plane.                              |
| J14        | SYSREF+   | Input            | System Reference Chip Synchronization, True.                                                  |
| K1 to K2   | DVDD1     | Power            | ADC Digital Power Supply (1.30 V).                                                            |
| K3         | RSTB      | Input            | Chip Digital Reset, Active Low.                                                               |
| K4         | PWDN      | Input            | Power-down.                                                                                   |
| K5 to K13  | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.                             |
| K14        | SYSREF–   | Input            | System Reference Chip Synchronization, Complement.                                            |
| L1         | DGND      | Ground           | Digital Control Ground Supply. This pin connects to the digital ground plane.                 |
| L2         | DNC       | N/A <sup>1</sup> | Do Not Connect. Do not connect to this pin. Leave this pin floating.                          |
| L3         | SYNCINB–  | Input            | Synchronization, Complement.                                                                  |
| L4         | SYNCINB+  | Input            | Synchronization, True. SYNCINB LVDS input (active low, true).                                 |
| L5 to L9   | DGND      | Ground           | Digital Control Ground Supply. These pins connect to the digital ground plane.                |
| L10 to L12 | DNC       | N/A <sup>1</sup> | Do Not Connect. Do not connect to these pins. Leave these pins floating.                      |
| L13, L14   | AGND      | Ground           | ADC Analog Ground. These pins connect to the analog ground plane.                             |
| M1 to M10  | DRGND     | Ground           | Digital Driver Ground Supply. These pins connect to the digital driver ground plane.          |
| M11        | DRVDD1    | Power            | Power Supply (1.3 V) Reference Clock Divider, VCO, and Synthesizer.                           |
| M12        | REXT      | Input            | External Resistor, 10 k $\Omega$ to Ground.                                                   |
| M13, M14   | DRGND     | Ground           | Digital Driver Ground Supply. This pin connects to the digital driver ground plane.           |

| Pin No.  | Mnemonic    | Type   | Description                                                                         |
|----------|-------------|--------|-------------------------------------------------------------------------------------|
| N1       | DRVDD1      | Power  | Serial Digital Power Supply (1.3 V).                                                |
| N2       | SERDOUT[7]+ | Output | Lane 7 CML Output Data, True.                                                       |
| N3       | SERDOUT[6]+ | Output | Lane 6 CML Output Data, True.                                                       |
| N4       | SERDOUT[5]+ | Output | Lane 5 CML Output Data, True.                                                       |
| N5       | SERDOUT[4]+ | Output | Lane 4 CML Output Data, True.                                                       |
| N6       | DRVDD1      | Power  | Serial Digital Power Supply (1.3 V).                                                |
| N7       | SERDOUT[3]+ | Output | Lane 3 CML Output Data, True.                                                       |
| N8       | SERDOUT[2]+ | Output | Lane 2 CML Output Data, True.                                                       |
| N9       | SERDOUT[1]+ | Output | Lane 1 CML Output Data, True.                                                       |
| N10      | SERDOUT[0]+ | Output | Lane 0 CML Output Data, True.                                                       |
| N11      | DRVDD1      | Power  | Serial Digital Power Supply (1.3 V).                                                |
| N12      | VP_BYP      | Input  | Voltage Bypass.                                                                     |
| N13, N14 | DRVDD2      | Power  | Power Supply (2.5 V) Reference Clock Divider for SYNCINB±, DIVCLK±.                 |
| P1       | DRVDD1      | Power  | Serial Digital Power Supply (1.3 V).                                                |
| P2       | SERDOUT[7]– | Output | Lane 7 CML Output Data, Complement.                                                 |
| P3       | SERDOUT[6]– | Output | Lane 6 CML Output Data, Complement.                                                 |
| P4       | SERDOUT[5]– | Output | Lane 5 CML Output Data, Complement.                                                 |
| P5       | SERDOUT[4]– | Output | Lane 4 CML Output Data, Complement.                                                 |
| P6       | DRVDD1      | Power  | Serializer Digital Power Supply (1.30 V).                                           |
| P7       | SERDOUT[3]– | Output | Lane 3 CML Output Data, Complement.                                                 |
| P8       | SERDOUT[2]– | Output | Lane 2 CML Output Data, Complement.                                                 |
| P9       | SERDOUT[1]– | Output | Lane 1 CML Output Data, Complement.                                                 |
| P10      | SERDOUT[0]– | Output | Lane 0 CML Output Data, Complement.                                                 |
| P11      | DRVDD1      | Power  | Serializer Digital Power Supply (1.30 V).                                           |
| P12      | DRGND       | Ground | Digital Driver Ground Supply. This pin connects to the digital driver ground plane. |
| P13      | DIVCLK–     | Output | Divide-by-4 Reference Clock LVDS, Complement.                                       |
| P14      | DIVCLK+     | Output | Divide-by-4 Reference Clock LVDS, True.                                             |

<sup>1</sup> N/A means not applicable.

**Table 9. Pin Function Descriptions (By Function)<sup>1</sup>**

| Pin No.                                                                                                                                                                                                                         | Mnemonic  | Type   | Description                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|-----------------------------------------------------------------------------------|
| <b>General Power and Ground Supply Pins</b>                                                                                                                                                                                     |           |        |                                                                                   |
| A1 to A3, A5, A8, A11, B1 to B4, B6, B8 to B11, B13, B14, C1 to C5, C7, C9, C10, C12, C13, D5, D6, D9, D10, E6, E9, E10, E13, E14, F6, F9, F10, F13, G6, G9, G10, G13, H6, H9, H10, H13, H14, J9, J10, J13, K5 to K13, L13, L14 | AGND      | Ground | ADC Analog Ground. These pins connect to the analog ground plane.                 |
| J6                                                                                                                                                                                                                              | RBIAS_EXT | Input  | Reference Bias. This pin requires an external 10 kΩ resistor connected to ground. |
| <b>Clock Pins</b>                                                                                                                                                                                                               |           |        |                                                                                   |
| F14                                                                                                                                                                                                                             | CLK+      | Input  | ADC Clock Input, True.                                                            |
| G14                                                                                                                                                                                                                             | CLK–      | Input  | ADC Clock Input, Complement.                                                      |
| <b>ADC Analog Power and Ground Supplies Pins</b>                                                                                                                                                                                |           |        |                                                                                   |
| A6, A13, A14, B7, B12, C8, C11, D8, D11, E8, E11, F8, F11, G8, G11, H8, H11, J8, J11                                                                                                                                            | AVDD2     | Power  | ADC Analog Power Supply (2.50 V).                                                 |
| A4, B5, C6, C14, D7, D12 to D14, E7, E12, F7, F12, G7, G12, H7, H12, J7, J12                                                                                                                                                    | AVDD1     | Power  | ADC Analog Power Supply (1.30 V).                                                 |
| A12                                                                                                                                                                                                                             | VM_BYP    | Input  | Voltage Bypass.                                                                   |
| A1 to A3, A5, A8, A11, B1 to B4, B6, B8 to B11, B13, B14, C1 to C5, C7, C9, C10, C12, C13, D5, D6, D9, D10, E6, E9, E10, E13, E14, F6, F9, F10, F13, G6, G9, G10, G13, H6, H9, H10, H13, H14, J9, J10, J13, K5 to K13, L13, L14 | AGND      | Ground | ADC Analog Ground. These pins connect to the analog ground plane.                 |

| Pin No.                                    | Mnemonic    | Type             | Description                                                                          |
|--------------------------------------------|-------------|------------------|--------------------------------------------------------------------------------------|
| ADC Analog Input and Outputs Pins          |             |                  |                                                                                      |
| A9                                         | VIN+        | Input            | Differential Analog Input, True.                                                     |
| A10                                        | VIN–        | Input            | Differential Analog Input, Complement.                                               |
| A7                                         | VCM         | Output           | Analog Input, Common Mode (0.525 V).                                                 |
| E5                                         | VMON        | Output           | CTAT Voltage Monitor Output (Diode Temperature Sensor).                              |
| JESD204B High Speed Power and Ground Pins  |             |                  |                                                                                      |
| N1, N6, N11, P1, P6, P11                   | DRVDD1      | Power            | Serial Digital Power Supply (1.3 V).                                                 |
| M1 to M10, M13, M14, P12                   | DRGND       | Ground           | Digital Driver Ground Supply. These pins connect to the digital driver ground plane. |
| N13, N14                                   | DRVDD2      | Power            | Power Supply (2.5 V) Reference Clock Divider, SYNCINB±, DIVCLK±.                     |
| M11                                        | DRVDD1      | Power            | Power Supply (1.3 V) Reference Clock Divider, VCO, and Synthesizer.                  |
| N12                                        | VP_BYP      | Input            | Voltage Bypass.                                                                      |
| L2                                         | DNC         | N/A <sup>2</sup> | Do Not Connect. Do not connect to this pin.                                          |
| JESD204B High Speed Serial I/O Pins        |             |                  |                                                                                      |
| J14                                        | SYSREF+     | Input            | System Reference Chip Synchronization, True.                                         |
| K14                                        | SYSREF–     | Input            | System Reference Chip Synchronization, Complement.                                   |
| L4                                         | SYNCINB+    | Input            | Synchronization, True. SYNCINB LVDS input (active low, true).                        |
| L3                                         | SYNCINB–    | Input            | Synchronization, Complement. SYNCINB LVDS input (active low, complement).            |
| N10                                        | SERDOUT[0]+ | Output           | Lane 0 CML Output Data, True.                                                        |
| P10                                        | SERDOUT[0]– | Output           | Lane 0 CML Output Data, Complement.                                                  |
| N9                                         | SERDOUT[1]+ | Output           | Lane 1 CML Output Data, True.                                                        |
| P9                                         | SERDOUT[1]– | Output           | Lane 1 CML Output Data, Complement.                                                  |
| N8                                         | SERDOUT[2]+ | Output           | Lane 2 CML Output Data, True.                                                        |
| P8                                         | SERDOUT[2]– | Output           | Lane 2 CML Output Data, Complement.                                                  |
| N7                                         | SERDOUT[3]+ | Output           | Lane 3 CML Output Data, True.                                                        |
| P7                                         | SERDOUT[3]– | Output           | Lane 3 CML Output Data, Complement.                                                  |
| N5                                         | SERDOUT[4]+ | Output           | Lane 4 CML Output Data, True.                                                        |
| P5                                         | SERDOUT[4]– | Output           | Lane 4 CML Output Data, Complement.                                                  |
| N4                                         | SERDOUT[5]+ | Output           | Lane 5 CML Output Data, True.                                                        |
| P4                                         | SERDOUT[5]– | Output           | Lane 5 CML Output Data, Complement.                                                  |
| N3                                         | SERDOUT[6]+ | Output           | Lane 6 CML Output Data, True.                                                        |
| P3                                         | SERDOUT[6]– | Output           | Lane 6 CML Output Data, Complement.                                                  |
| N2                                         | SERDOUT[7]+ | Output           | Lane 7 CML Output Data, True.                                                        |
| P2                                         | SERDOUT[7]– | Output           | Lane 7 CML Output Data, Complement.                                                  |
| P14                                        | DIVCLK+     | Output           | Divide-by-4 Reference Clock LVDS, True.                                              |
| P13                                        | DIVCLK–     | Output           | Divide-by-4 Reference Clock LVDS, Complement.                                        |
| Digital Supply and Ground Pins             |             |                  |                                                                                      |
| D1 to D3, F1 to F3, H1 to H3, K1 to K2     | DVDD1       | Power            | ADC Digital Power Supply (1.3 V).                                                    |
| F5, G5                                     | DVDDIO      | Power            | Digital I/O Power Supply (2.5 V).                                                    |
| F4                                         | SPI_VDDIO   | Power            | SPI Digital Power Supply (2.5 V).                                                    |
| E4                                         | DVDD2       | Power            | ADC Digital Power Supply (2.5 V).                                                    |
| E1 to E3, G1 to G3, J1 to J3, L1, L5 to L9 | DGND        | Ground           | Digital Control Ground Supply. These pins connect to the digital ground plane.       |
| D4                                         | DNC         | N/A <sup>2</sup> | Do Not Connect. Do not connect to this pin. Leave this pin floating.                 |
| Digital Control Pins                       |             |                  |                                                                                      |
| K3                                         | RSTB        | Input            | Chip Digital Reset, Active Low.                                                      |
| K4                                         | PWDN        | Input            | Power-down for the <a href="#">AD9625</a> .                                          |
| M12                                        | REXT        | Input            | External Resistor, 10 kΩ to Ground.                                                  |
| G4                                         | CSB         | Input            | SPI Chip Select CMOS Input. Active low.                                              |
| H4                                         | SCLK        | Input            | SPI Serial Clock CMOS Input.                                                         |

| Pin No.    | Mnemonic | Type             | Description                                                                                   |
|------------|----------|------------------|-----------------------------------------------------------------------------------------------|
| J4         | SDIO     | I/O              | SPI Serial Data CMOS Input/Output.                                                            |
| J5         | FD       | Output           | Fast Detect Output. This pin requires an external 10 k $\Omega$ resistor connected to ground. |
| H5         | IRQ      | Output           | Interrupt Request Output Signal.                                                              |
| L10 to L12 | DNC      | N/A <sup>2</sup> | Do Not Connect. Do not connect to these pins. Leave these pins floating.                      |

<sup>1</sup> Note that when pins are relevant to multiple categories, they are repeated in Table 9. Pins may not appear in alphanumeric order within Table 9.

<sup>2</sup> N/A means not applicable.



## TYPICAL PERFORMANCE CHARACTERISTICS

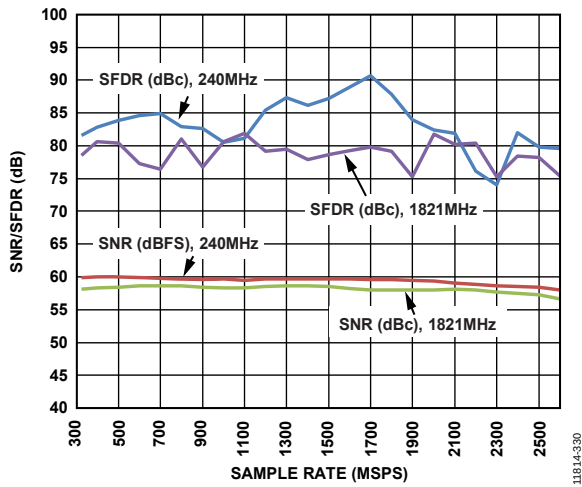


Figure 6. SNR/SFDR vs. Sample Rate

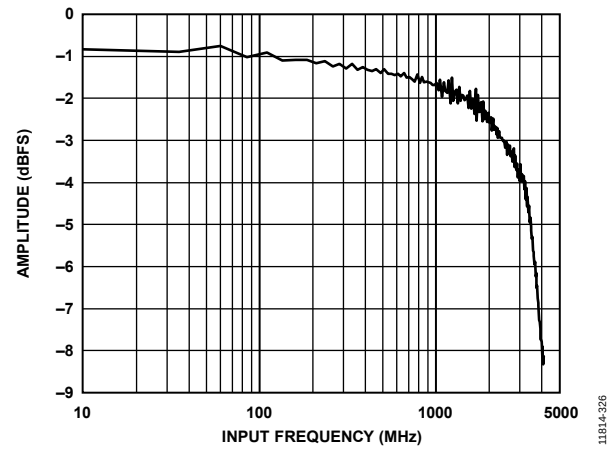


Figure 8. Full Power Input Bandwidth (Input Network in Figure 76 Used &gt;2 GHz, Input Network in Figure 75 Used &lt;2 GHz)

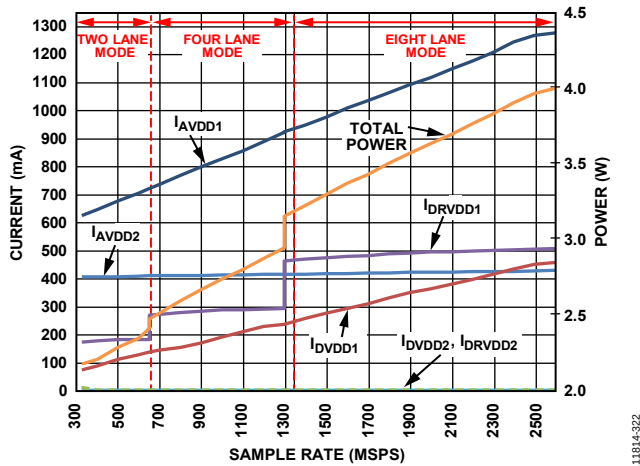
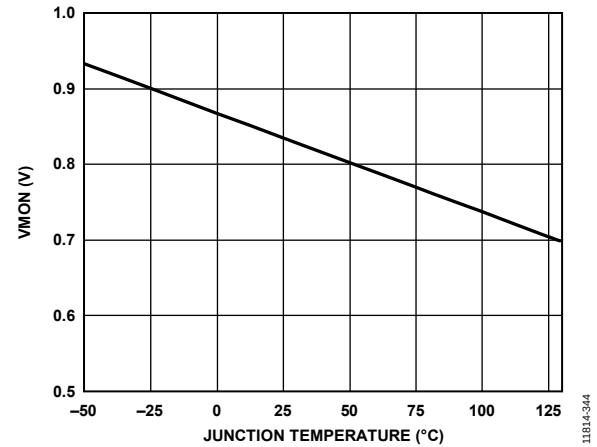


Figure 7. Current and Power vs. Sample Rate: Two Lane, Four Lane, and Eight Lane Output Modes

Figure 9. V\_MON Output Voltage vs. Junction Temperature  $V_{MON} (V) = -0.0013 \times TEMP(C) + 0.8675$

## AD9625-2.0

For the AD9625-2.0 model, the full-scale range used is 1.1 V.

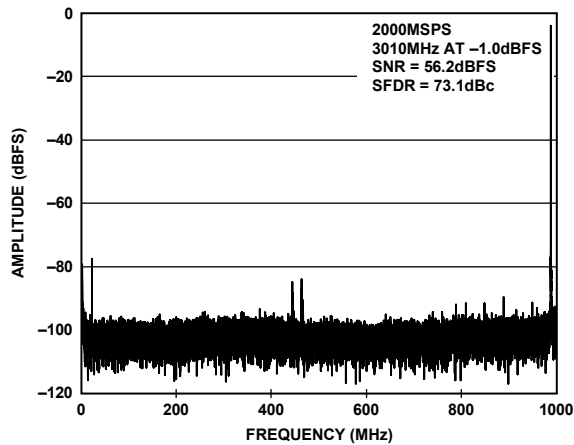


Figure 10. FFT Plot at 2.0 GSPS,  $f_{IN} = 3010$  MHz at AIN (SFDR = 73.1 dBc, SNR = 56.2 dBFS) (Input Network in Figure 76 Used)

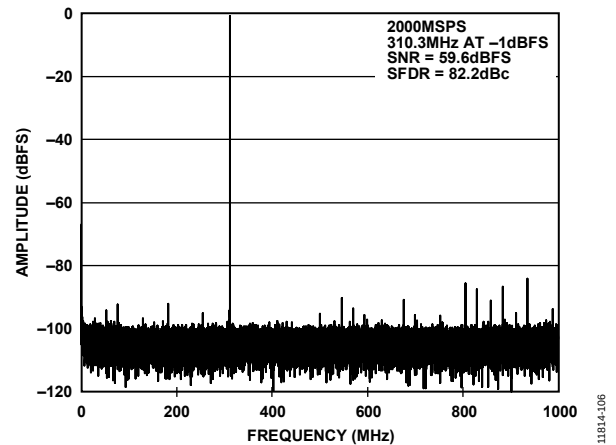


Figure 13. FFT Plot at 2.0 GSPS,  $f_{IN} = 310.3$  MHz at AIN (SFDR = 82.2 dBc, SNR = 59.6 dBFS)

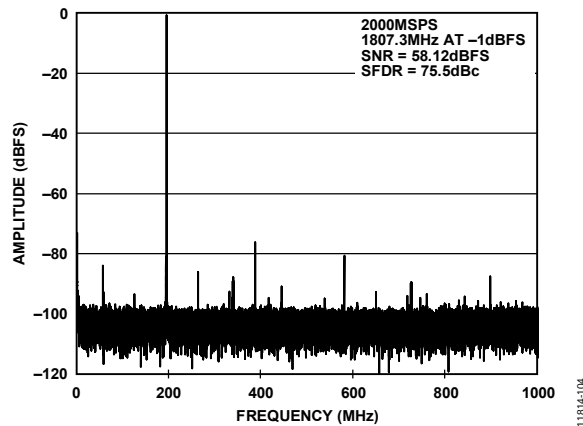


Figure 11. FFT Plot at 2.0 GSPS,  $f_{IN} = 1807.3$  MHz at AIN (SFDR = 75.5 dBc, SNR = 58.12 dBFS)

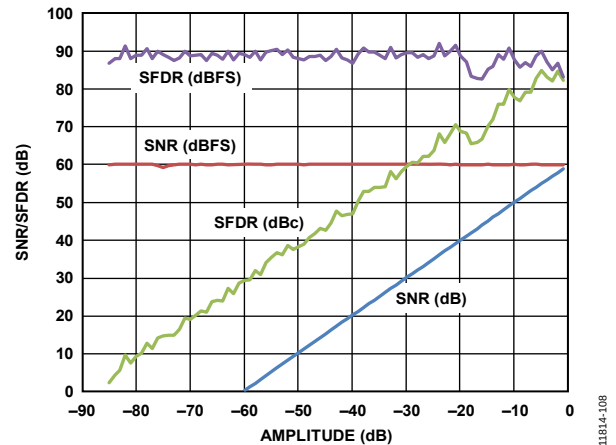


Figure 14. SNR/SFDR vs. Analog Input Amplitude at 2.0 GSPS,  $f_{IN} = 241.1$  MHz at AIN

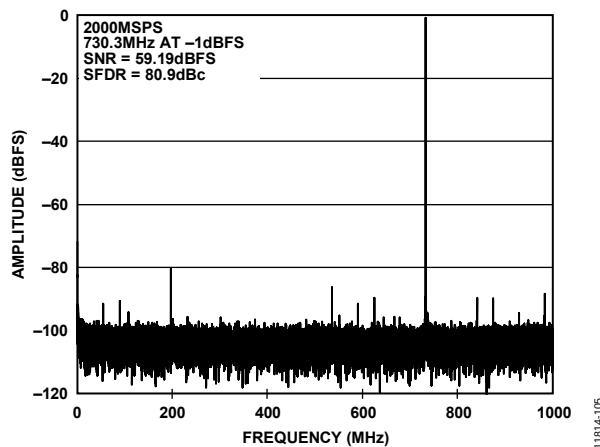


Figure 12. FFT Plot at 2.0 GSPS,  $f_{IN} = 730.3$  MHz at AIN (SFDR = 80.9 dBc, SNR = 59.19 dBFS)

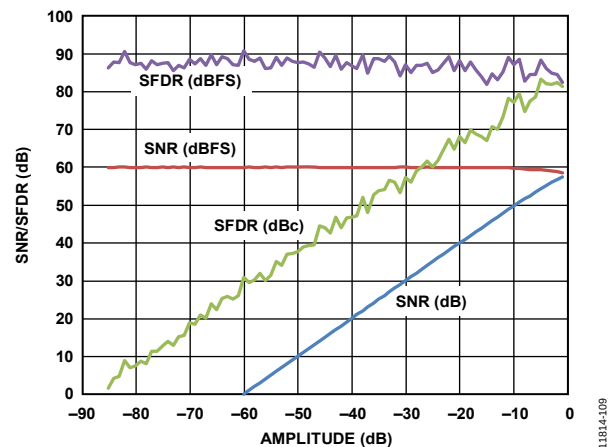


Figure 15. SNR/SFDR vs. Analog Input Amplitude at 2.0 GSPS,  $f_{IN} = 1811.3$  MHz at AIN

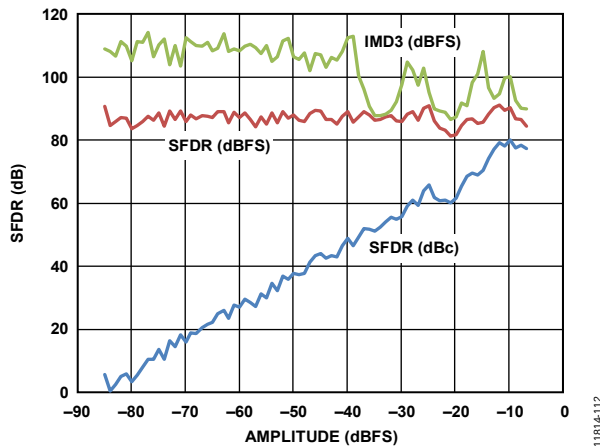


Figure 16. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.0 GSps at 1800 MHz AIN

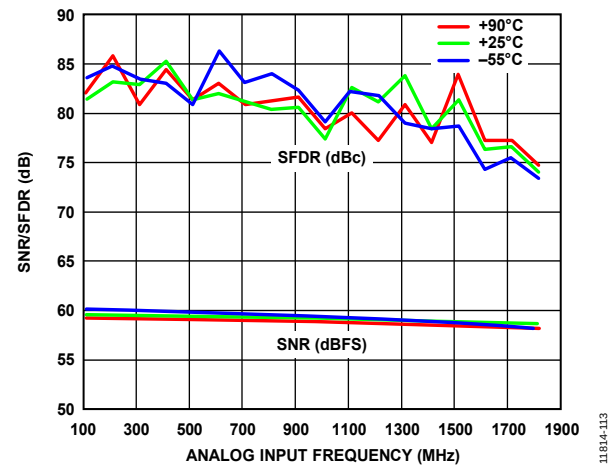


Figure 19. SNR/SFDR vs. Analog Input Frequency at Different Temperatures at 2.0 GSps

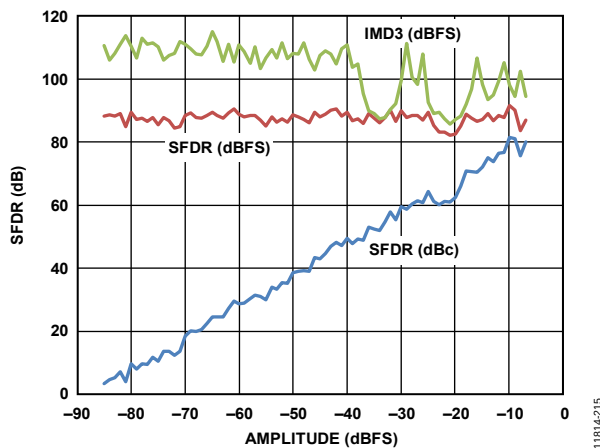


Figure 17. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.0 GSps at 230 MHz AIN

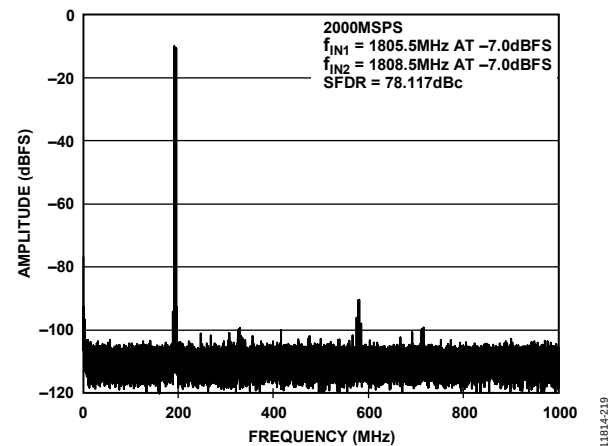


Figure 20. Two Tone FFT Plot at 2.0 GSps,  $f_{IN1} = 1805.5$  MHz and  $f_{IN2} = 1808.5$  MHz at AIN, -7.0 dBFS (SFDR = 78.117 dBc)

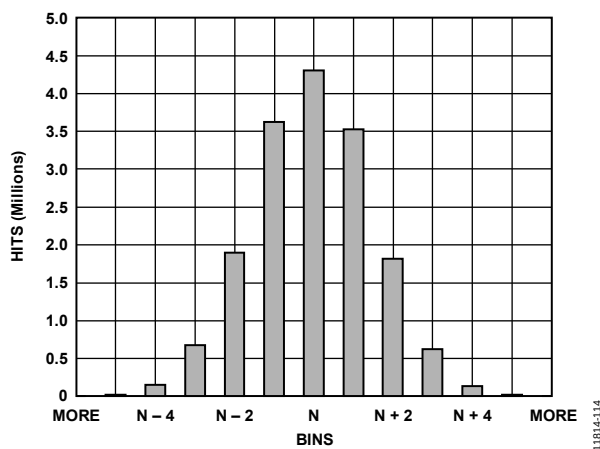


Figure 18. Input Referred Noise Histogram with 2.0 GSps

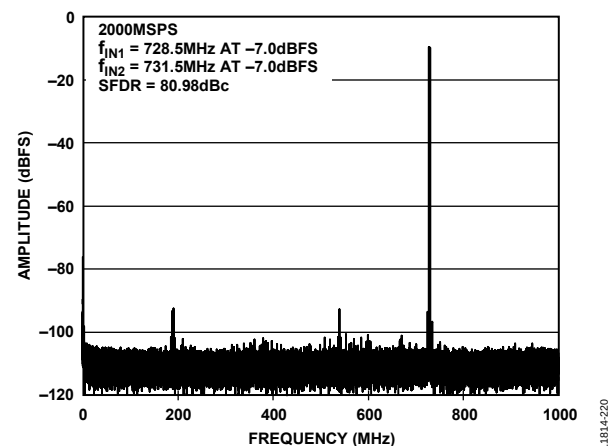


Figure 21. Two Tone FFT Plot at 2.0 GSps,  $f_{IN1} = 728.5$  MHz and  $f_{IN2} = 731.5$  MHz at AIN, -7.0 dBFS (SFDR = 80.98 dBc)

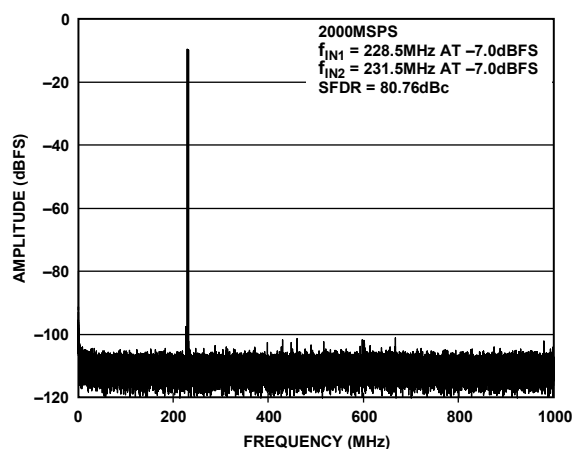


Figure 22. Two Tone FFT Plot at 2.0 GSPS,  $f_{IN1} = 228.5$  MHz and  $f_{IN2} = 231.5$  MHz at AIN,  $-7.0$  dBFS (SFDR = 80.76 dBc)

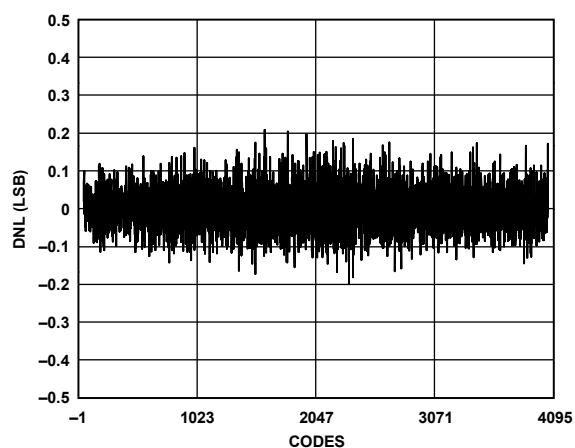


Figure 23. Differential Nonlinearity (DNL),  $\pm 0.2$  LSB at 2.0 GSPS

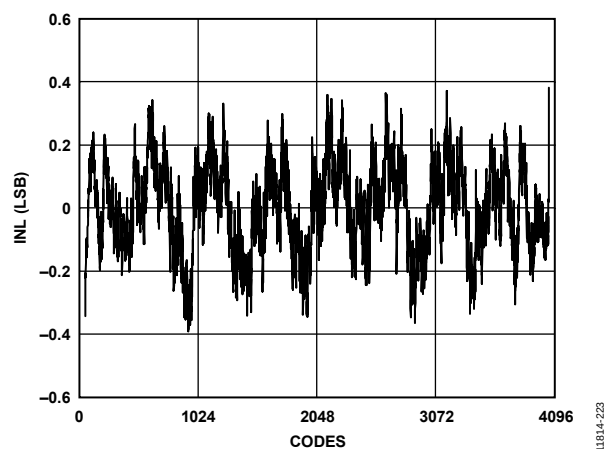


Figure 24. Integral Nonlinearity (INL),  $\pm 0.4$  LSB at 2.0 GSPS

## AD9625-2.5

For the AD9625-2.5 model, full-scale range used is 1.2 V.

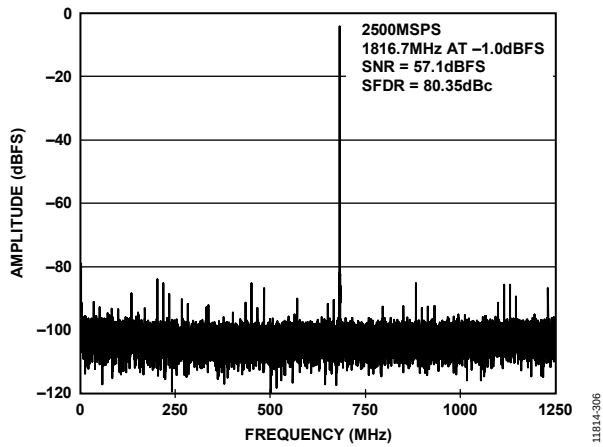


Figure 25. FFT Plot at 2.5 GSPS,  $f_{IN} = 1816.7$  MHz at AIN (SFDR = 80.35 dBc, SNR = 57.1 dBFS)

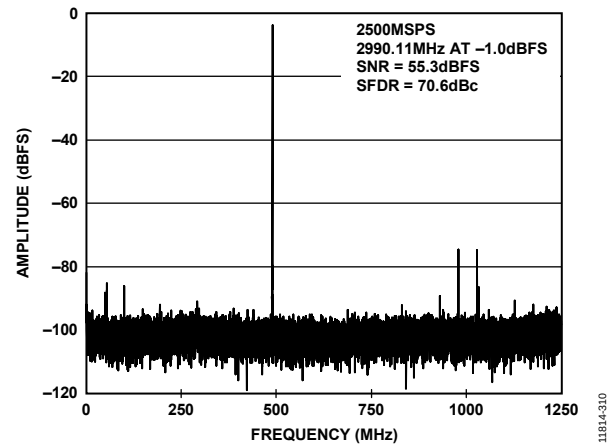


Figure 28. FFT Plot at 2.5 GSPS,  $f_{IN} = 2990.11$  MHz at AIN (SFDR = 70.6 dBc, SNR = 55.3 dBFS) (Input Network in Figure 75 Used)

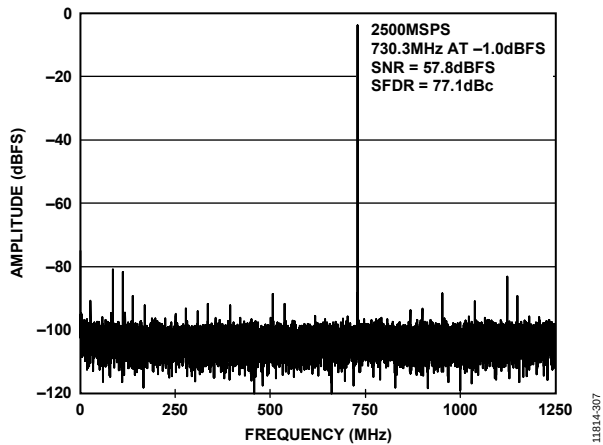


Figure 26. FFT Plot at 2.5 GSPS,  $f_{IN} = 730.3$  MHz at AIN (SFDR = 77.1 dBc, SNR = 57.8 dBFS)

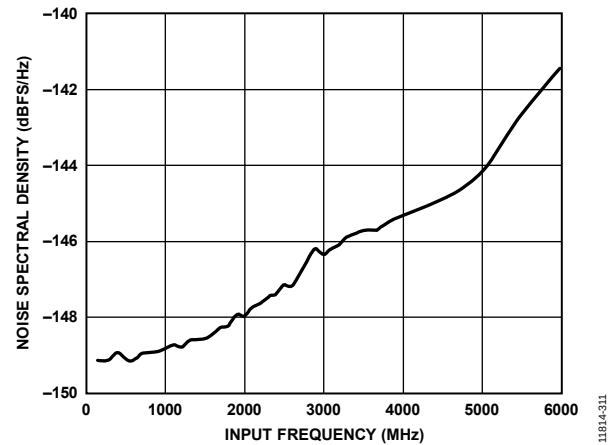


Figure 29. Noise Spectral Density (NSD) vs. AIN at 2.5 GSPS (Input Network in Figure 76 Used <2 GHz, Input Network in Figure 75 Used >2 GHz)

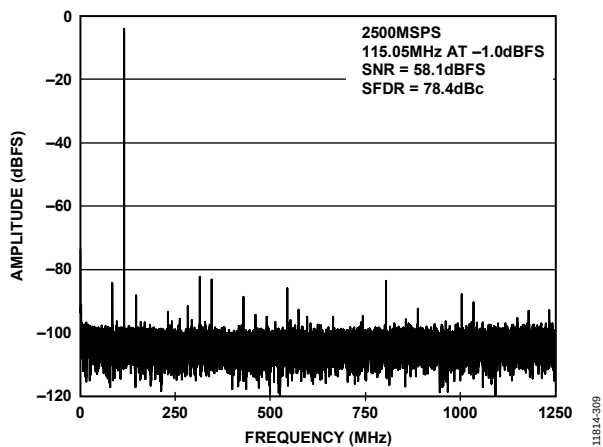


Figure 27. FFT Plot at 2.5 GSPS,  $f_{IN} = 115.05$  MHz at AIN (SFDR = 78.4 dBc, SNR = 58.1 dBFS)

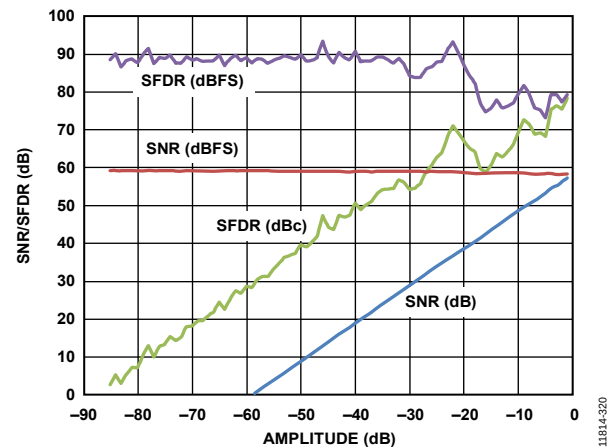


Figure 30. SNR/SFDR vs. Analog Input Amplitude at 2.5 GSPS,  $f_{IN} = 241$  MHz at AIN

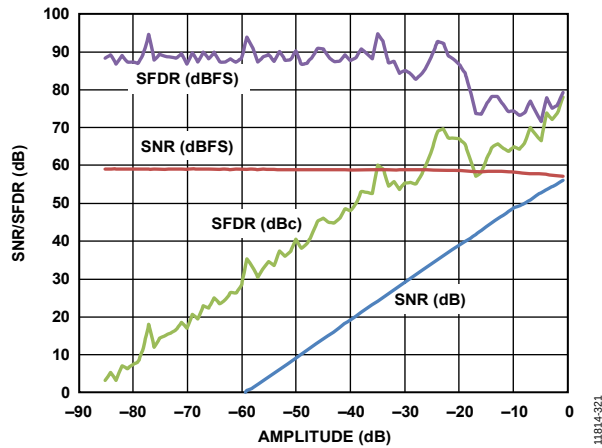


Figure 31. SNR/SFDR vs. Analog Input Amplitude at 2.5 GSPS,  $f_{IN} = 1811$  MHz at AIN

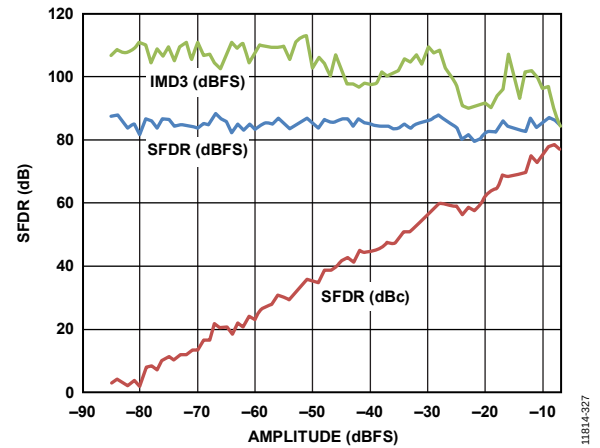


Figure 34. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.5 GSPS at 1800 MHz AIN

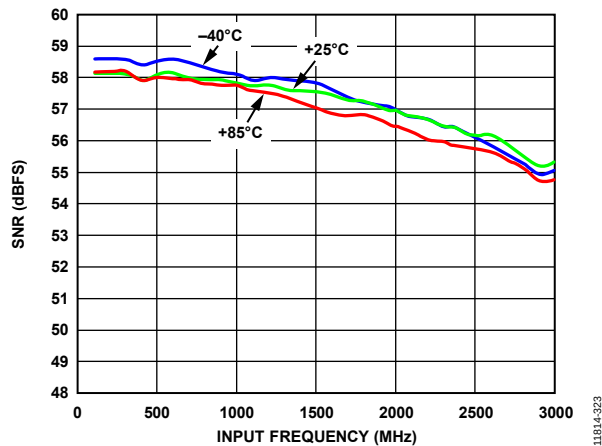


Figure 32. SNR at 2.5 GSPS vs. Temperature (Input Network in Figure 76 Used <2 GHz, Input Network in Figure 75 Used >2 GHz)

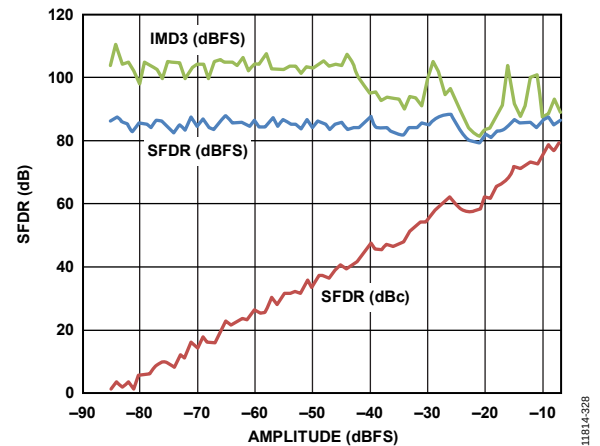


Figure 35. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.5 GSPS at 230 MHz AIN

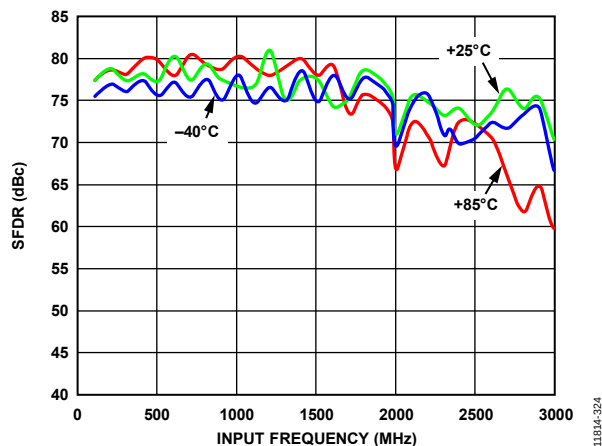


Figure 33. SFDR at 2.5 GSPS vs. Temperature (Input Network in Figure 76 Used <2 GHz, Input Network in Figure 75 Used >2 GHz)

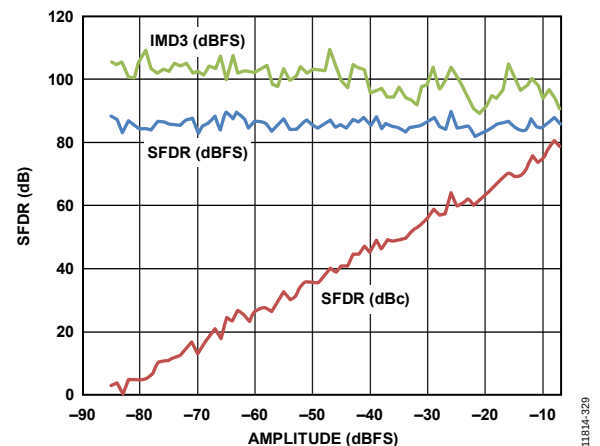


Figure 36. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.5 GSPS at 730 MHz AIN

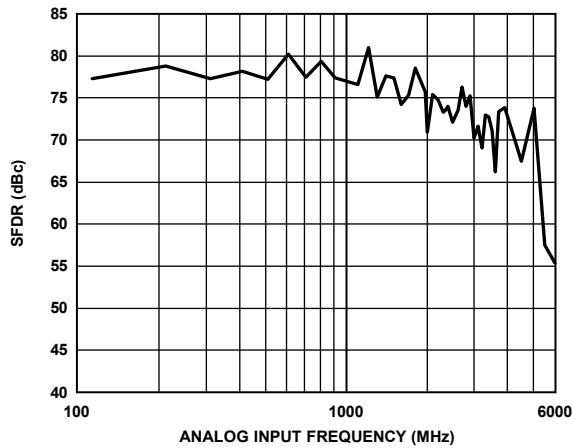


Figure 37. SFDR vs. AIN Frequency at 2.5 GSPS (Input Network in Figure 76 Used <2 GHz, Input Network in Figure 75 used >2 GHz)

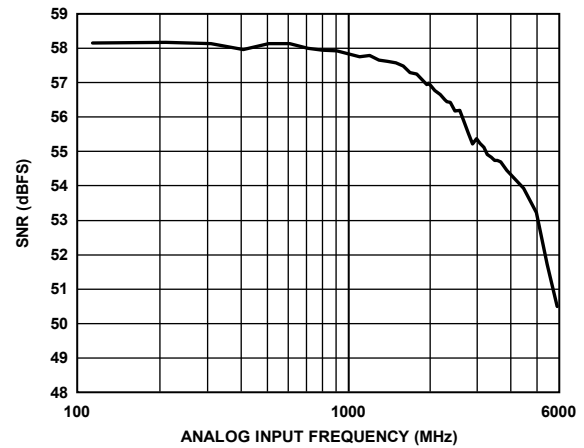


Figure 40. SNR vs. AIN Frequency at 2.5 GSPS (Input Network in Figure 76 Used <2 GHz, Input Network in Figure 75 Used >2 GHz)

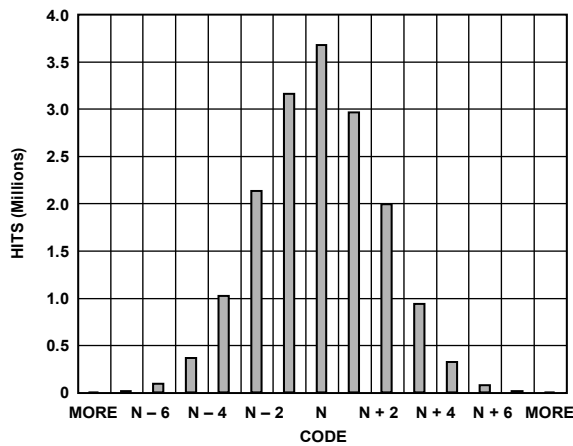


Figure 38. Input Referred Noise Histogram with 2.5 GSPS

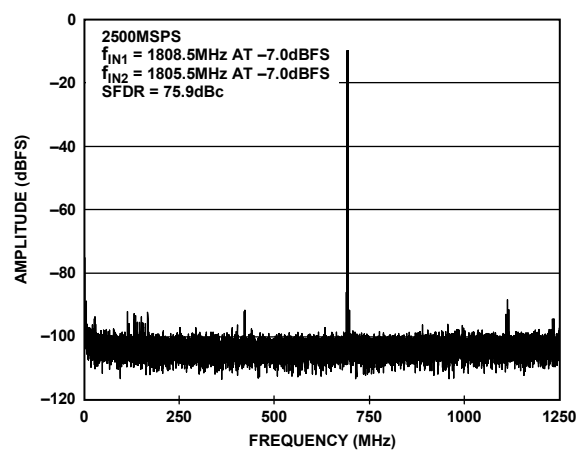


Figure 41. Two Tone FFT Plot at 2.5 GSPS,  $f_{IN1} = 1808.5$  MHz and  $f_{IN2} = 1805.5$  MHz at AIN, -7.0 dBFS (SFDR = 75.9 dBc)

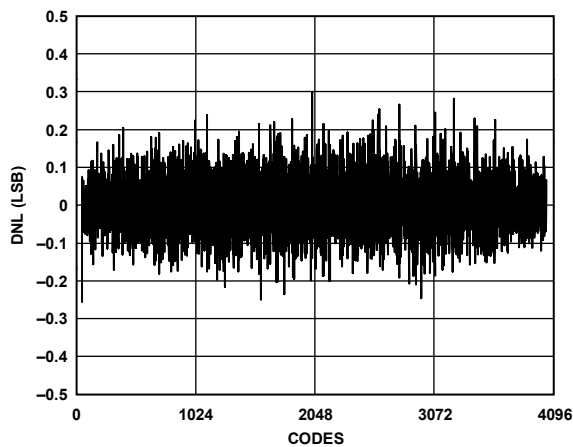


Figure 39. Differential Nonlinearity (DNL),  $\pm 0.3$  LSB at 2.5 GSPS

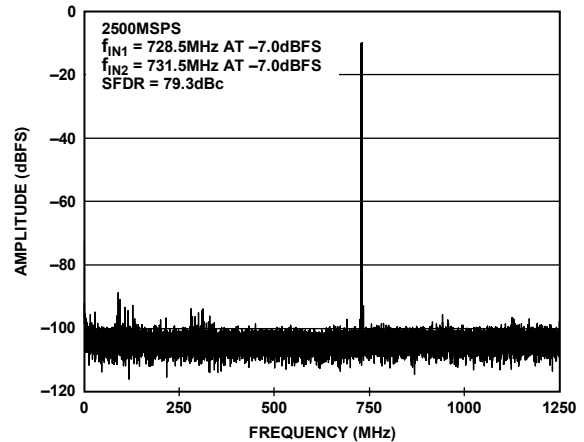


Figure 42. Two Tone FFT Plot at 2.5 GSPS,  $f_{IN1} = 728.5$  MHz and  $f_{IN2} = 731.5$  MHz at AIN, -7.0 dBFS (SFDR = 79.3 dBc)

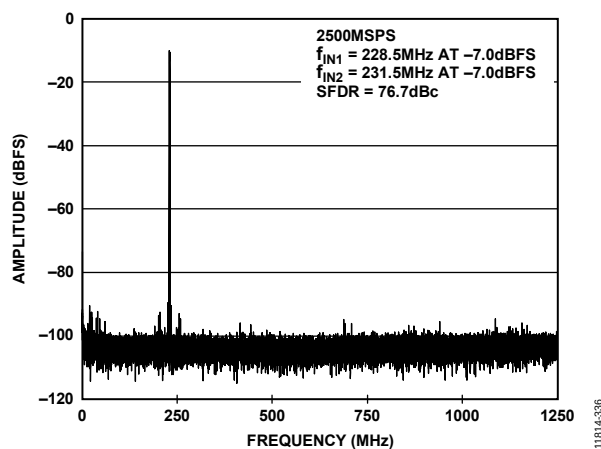


Figure 43. Two Tone FFT Plot at 2.5 GSPS,  $f_{IN1} = 228.5\text{ MHz}$  and  $f_{IN2} = 231.5\text{ MHz}$  at AIN,  $-7.0\text{ dBFS}$  (SFDR = 76.7 dBc)

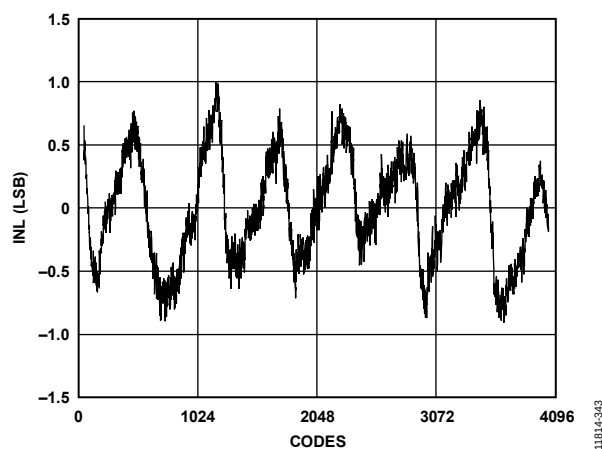


Figure 44. Integral Nonlinearity (INL),  $\pm 1.0\text{ LSB}$  at 2.5 GSPS



## AD9625-2.6

For the AD9625-2.6 model, full-scale range used is 1.1 V.

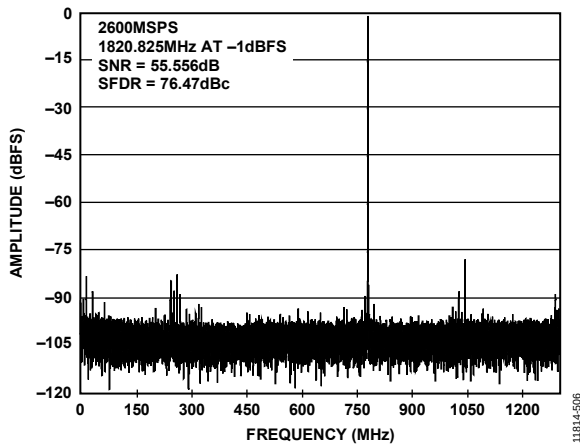


Figure 45. FFT Plot at 2.6 GSPS,  $f_{IN} = 1820.825$  MHz at AIN (SFDR = 76.47 dBc, SNR = 55.556 dB)

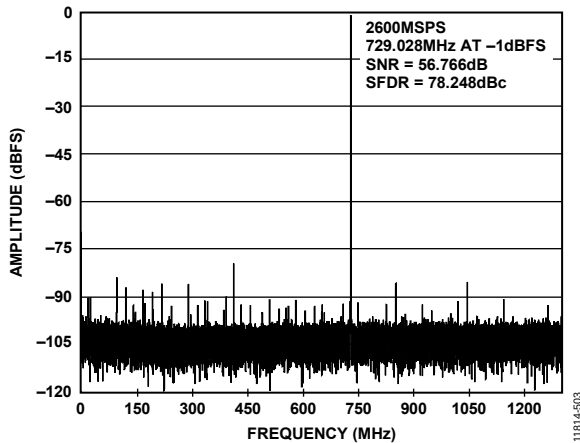


Figure 46. FFT Plot at 2.6 GSPS,  $f_{IN} = 729.028$  MHz at AIN (SFDR = 78.248 dB, SNR = 56.766)

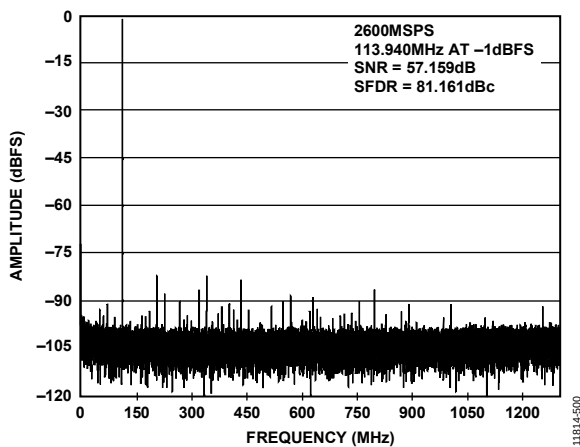


Figure 47. FFT Plot at 2.6 GSPS,  $f_{IN} = 113.940$  MHz at AIN (SFDR = 81.161, SNR = 57.159)

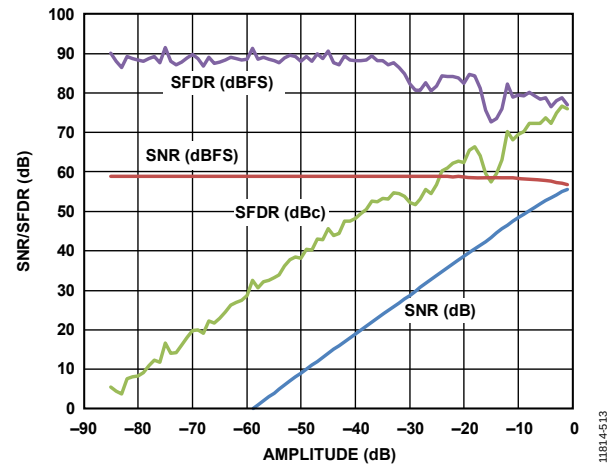


Figure 48. SNR/SFDR vs. Analog Input Amplitude at 2.6 GSPS,  $f_{IN} = 1811$  MHz at AIN

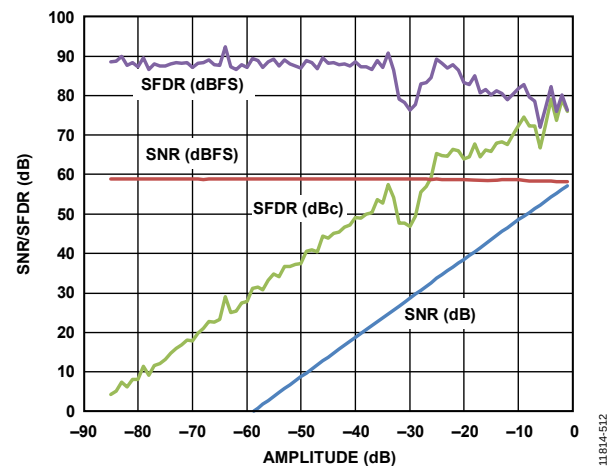


Figure 49. SNR/SFDR vs. Analog Input Amplitude at 2.6 GSPS,  $f_{IN} = 241$  MHz at AIN

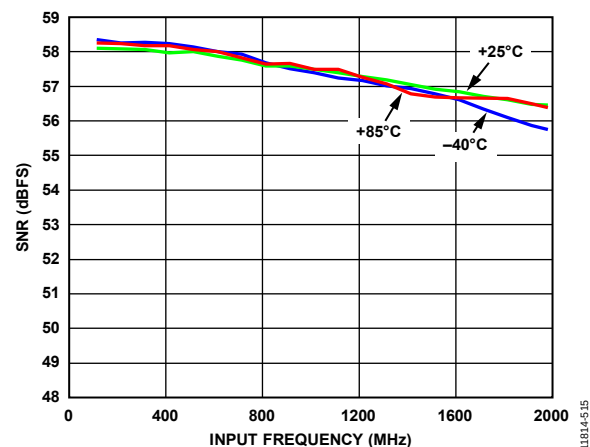


Figure 50. SNR vs. Temperature at 2.6 GSPS

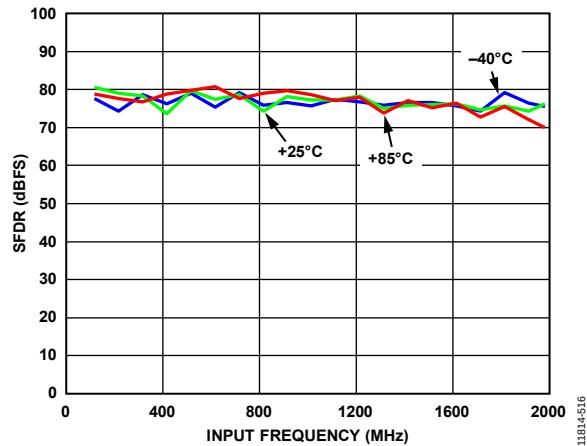


Figure 51. SFDR vs. Temperature at 2.6 GSPS

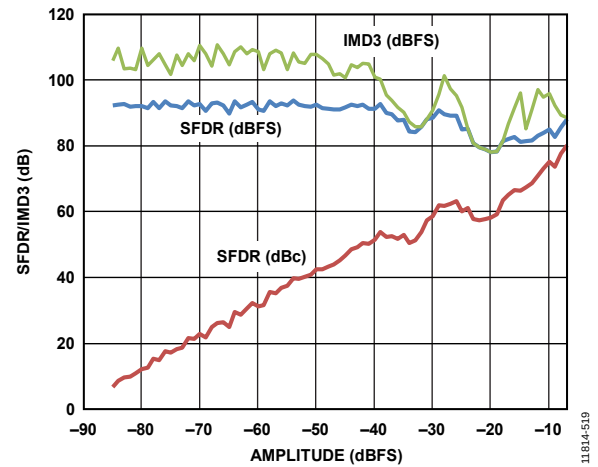


Figure 54. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.6 GSPS at 1807 MHz AIN

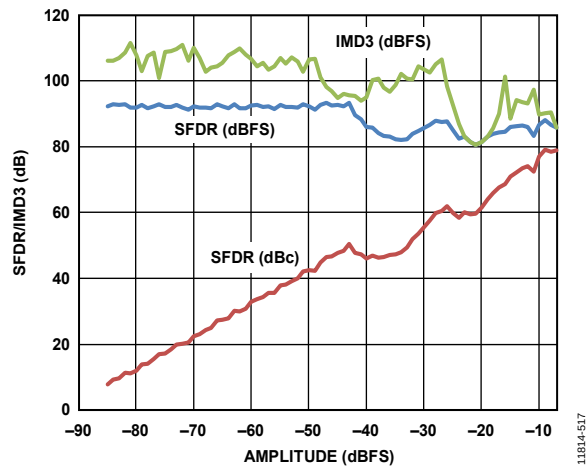


Figure 52. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.6 GSPS at 230 MHz AIN

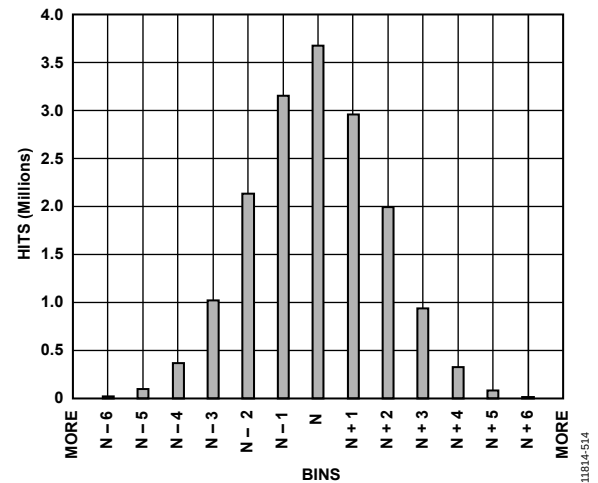


Figure 55. Input Referred Noise Histogram with 2.6 GSPS

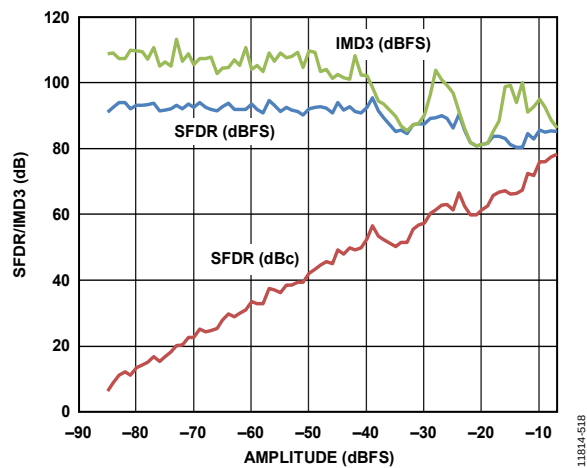


Figure 53. Two Tone SFDR and IMD3 vs. Analog Input Amplitude at 2.6 GSPS at 730 MHz AIN

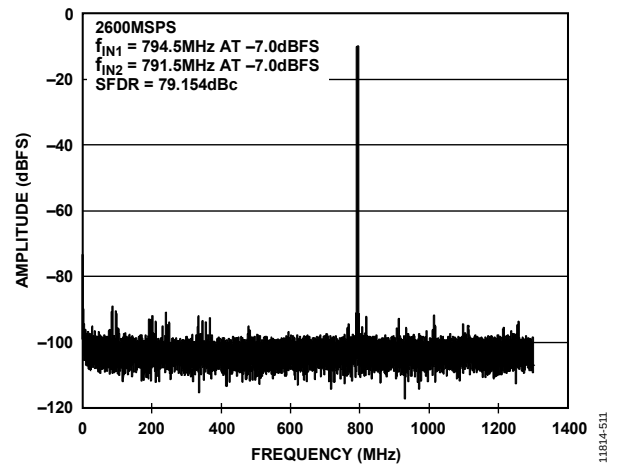


Figure 56. Two Tone FFT Plot at 2.6 GSPS AIN = 1807 MHz

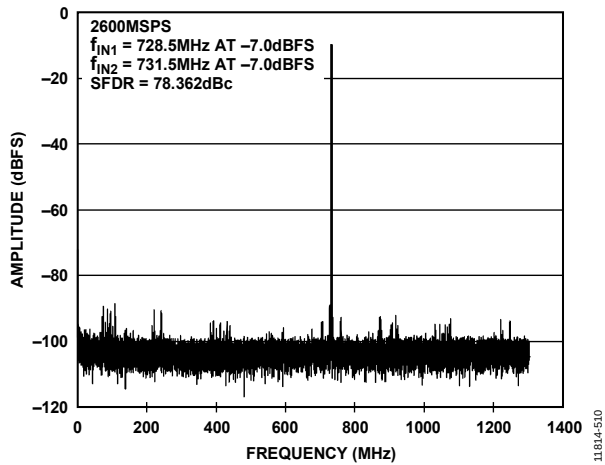


Figure 57. Two Tone FFT Plot at 2.6 GSPS AIN = 730 MHz

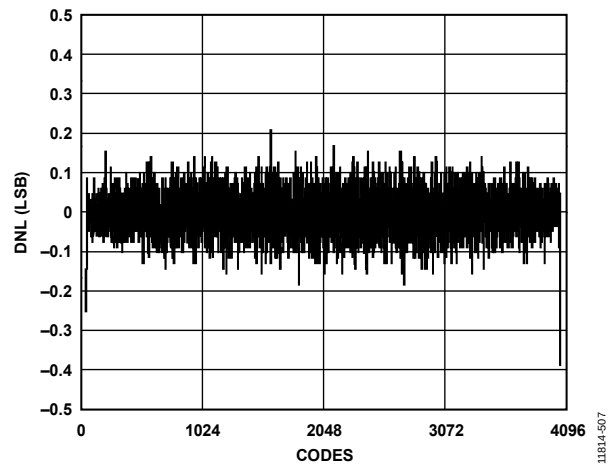


Figure 59. Differential Nonlinearity (DNL) at 2.6 GSPS

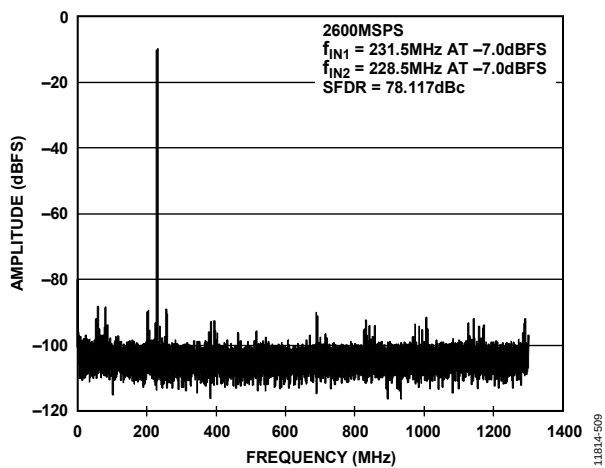


Figure 58. Two Tone FFT Plot at 2.6 GSPS AIN = 230 MHz

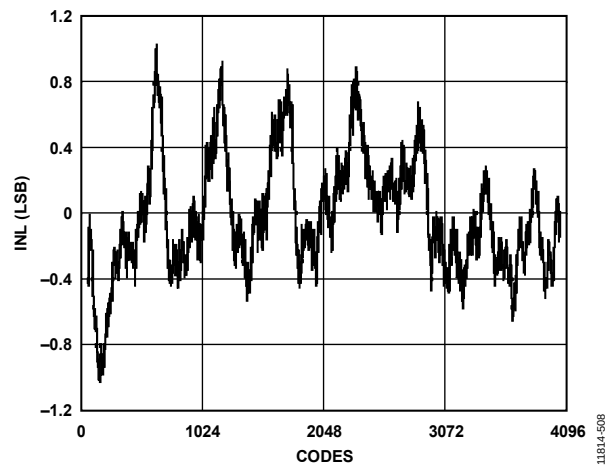


Figure 60. Integral Nonlinearity (INL) at 2.6 GSPS

## EQUIVALENT TEST CIRCUITS

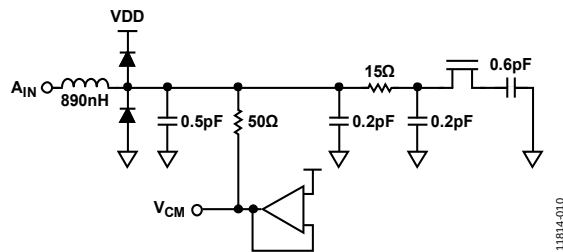


Figure 61. Equivalent Analog Input Circuit




Figure 62. Equivalent SCLK Circuit




Figure 63. Equivalent VMON Temperature Sensor Circuit (DVDD)

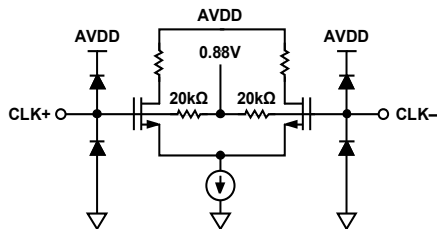


Figure 64. Equivalent Clock Input Circuit

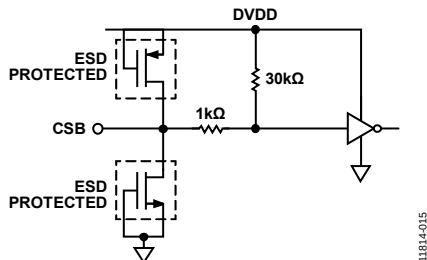


Figure 65. Equivalent CSB/PWDN Input Circuit




Figure 66. Equivalent DIVCLK Output Circuit (DRVDD)

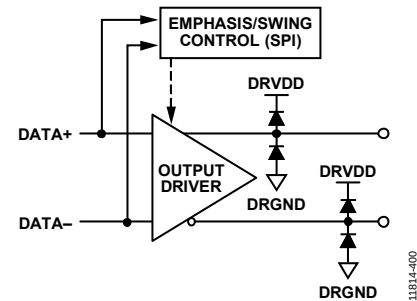


Figure 67. Digital Outputs

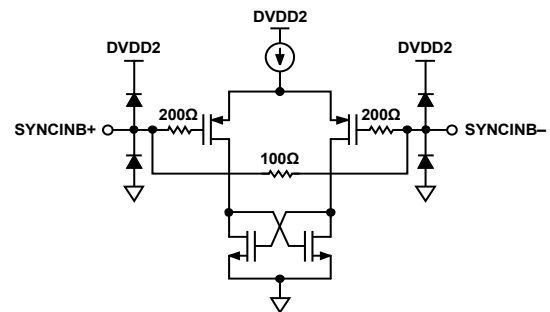


Figure 68. Equivalent SYNCINB± Input

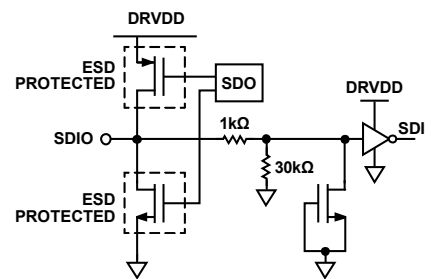


Figure 69. Equivalent SDIO Circuit

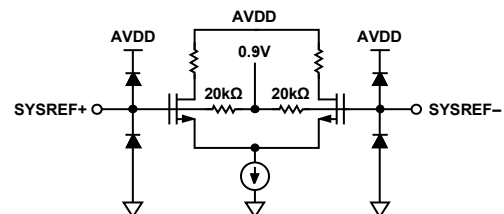


Figure 70. Equivalent SYSREF± Input Circuit

## THEORY OF OPERATION

### ADC ARCHITECTURE

The AD9625 is a pipelined ADC. The pipelined architecture permits the first stage to operate on a new input sample and the remaining stages to operate on the preceding samples. Sampling occurs on the rising edge of the clock.

Each stage of the pipeline, excluding the last, consists of a low resolution flash ADC connected to a switched capacitor digital-to-analog converter (DAC) and an interstage residue amplifier (MDAC). The residue amplifier magnifies the difference between the reconstructed DAC output and the flash input for the next stage in the pipeline. One bit of redundancy is used in each stage to facilitate digital correction of flash errors. The last stage simply consists of a flash ADC.

The input stage contains a differential sampling circuit that can be ac- or dc-coupled in differential or single-ended modes. The output staging block aligns the data, corrects errors, and passes the data to the output buffers. The output buffers are powered from a separate supply, allowing adjustment of the output drive current.

Synchronization capability is provided to allow synchronized timing between multiple devices.

### FAST DETECT

The fast detect block within the AD9625 generates a fast detection bit (FD), which, when used with variable gain amplifier front-end blocks, reduces the gain and prevents the ADC input signal levels from exceeding the converter range.

Figure 71 shows the rapidity by which the detection bit is programmable using an upper threshold, lower threshold, and dwell time.

The FD bit is set when the absolute value of the input signal exceeds the programmable upper threshold level. The FD bit clears only when the absolute value of the input signal drops below the lower threshold level for greater than the programmable dwell time, thereby providing hysteresis and preventing the FD bit from excessive toggling.

### GAIN THRESHOLD OPERATION

For best performance, the AD9625 needs an input signal to perform internal calibration. This signal needs to exceed a set threshold that is established through register settings. The threshold prohibits background calibration updates for small signal amplitudes. The threshold for gain calibration is enabled by default.

#### Threshold Operation

The absolute value of every sample is accumulated to produce an average voltage estimate.

When the calibration has run for its predetermined number of samples, the voltage estimate is compared to the data set threshold. If the voltage estimate is greater than the threshold, the calibration coefficients update; otherwise, no update occurs.

#### Threshold Format

The threshold registers are all 16-bit registers loaded via the SPI one byte at a time. The threshold values range from 0 to 16,384, corresponding to a voltage range of 0.0 V to 1.2 V (full scale).

The calibration threshold range is 0 to 16,384 (0x00 to 0x4000, hexadecimal) and represents the average magnitude of the input. For example, to set the threshold so that a -6 dBFS input sine wave sits precisely at the threshold requires a threshold setting of

$$16,384 \times 10^{\frac{-6}{20}} \times \frac{2}{\pi} \geq 5228$$

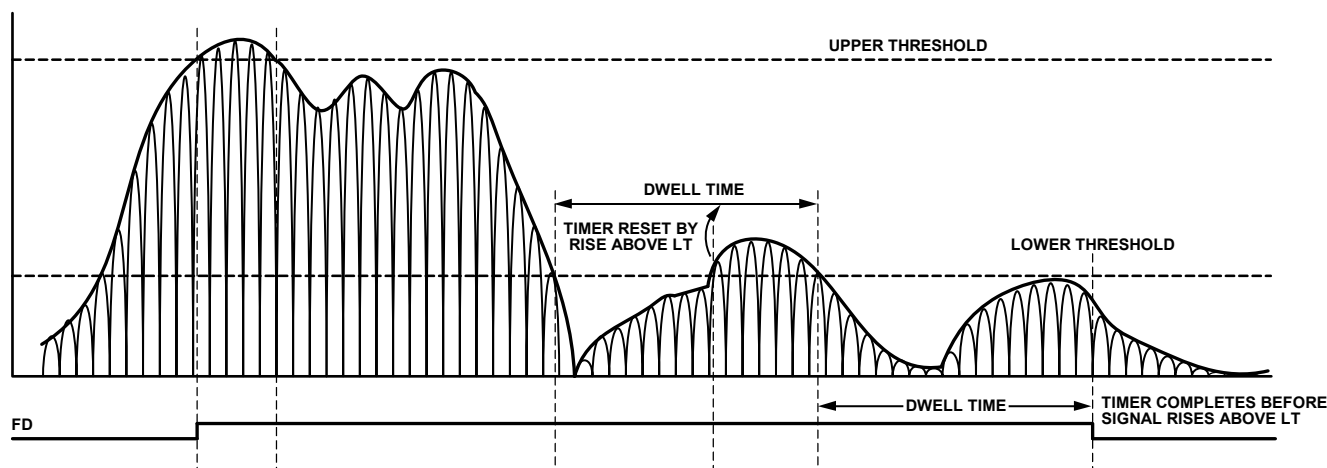


Figure 71. Fast Detection Bit

## TEST MODES

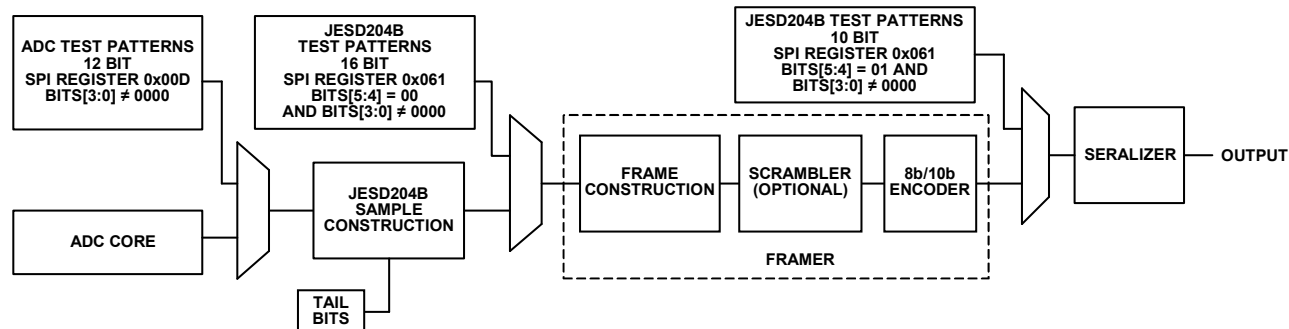


Figure 72. Test Modes

Table 10. Flexible Output Test Modes from SPI Register 0x00D

| Output Test Mode Bit Sequence | Pattern Name             | Digital Output Word 1 (Default Twos Complement Format) | Digital Output Word 2 (Default Twos Complement Format) | Subject to Data Format Select |
|-------------------------------|--------------------------|--------------------------------------------------------|--------------------------------------------------------|-------------------------------|
| 0000                          | Off (default)            | Not applicable                                         | Not applicable                                         | Yes                           |
| 0001                          | Midscale short           | 0000 0000 0000                                         | = Word 1                                               | Yes                           |
| 0010                          | Positive full scale      | 0111 1111 1111                                         | = Word 1                                               | Yes                           |
| 0011                          | Negative full scale      | 1000 0000 0000                                         | = Word 1                                               | Yes                           |
| 0100                          | Alternating checkerboard | 1010 1010 1010                                         | 0101 0101 0101                                         | No                            |
| 0101                          | PN sequence long         | Not applicable                                         | Not applicable                                         | Yes                           |
| 0111                          | One-/zero-word toggle    | 1111 1111 1111                                         | 0000 0000 0000                                         | No                            |
| 1000                          | User test mode           | User data from Register 0x019 to Register 0x020        | User data from Register 0x019 to Register 0x020        | Yes                           |
| 1111                          | Ramp output              | N                                                      | N + 1                                                  | No                            |

## ANALOG INPUT CONSIDERATIONS

The AD9625 has a differential analog input, which is optimized to provide superior wideband performance and must be driven differentially. For best dynamic performance, the source impedances driving VIN+ and VIN− should be matched such that common-mode settling errors are symmetrical. Mismatch between VIN+ and VIN− introduces undesired distortion. A wideband transformer, balun, or amplifier can provide the differential analog inputs for applications that require a single-ended to differential conversion.

## DIFFERENTIAL INPUT CONFIGURATIONS

Optimum performance is achieved while driving the AD9625 in a differential input configuration. A passive input configuration can be used with a single to differential balun at the analog input to the AD9625. Because the AD9625 does not make use of an internal input buffer, an external network needs to be designed to reduce bandwidth peaking and minimize kickback from the ADC sampling capacitor.

Small series resistors (R3 and R4) limit input bandwidth, but can be installed to further improve performance. Choose the input network components such that its equivalent impedance, in parallel with the 100  $\Omega$  input impedance of the AD9625, is matched to the output impedance of the balun or amplifier.

Using a larger value for R3 and R4 suppresses the input kickback from the sampling capacitor seen at the input to the AD9625. However, the tradeoff is a lower usable input bandwidth and an increase in the amount of signal power needed to drive into the network for the AD9625 to sample a full-scale signal.

Series isolation resistors (R5 and R6) are recommended to reduce bandwidth peaking and minimize kickback from the ADC sampling capacitor. Table 11 lists the front-end requirements.

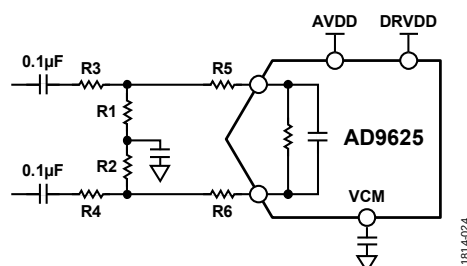


Figure 73. Recommended Front-End Network

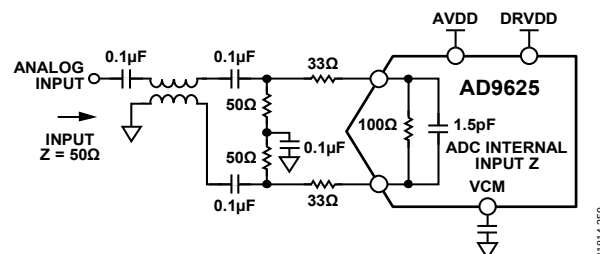


Figure 74. Input Network Example for Passive Balun with High Bandwidth

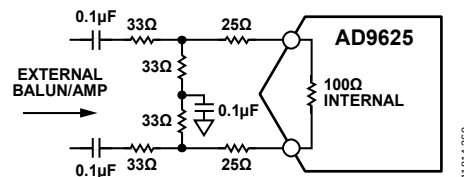


Figure 75. Input Network Example for Passive Balun and >2 GHz ADC Bandwidth

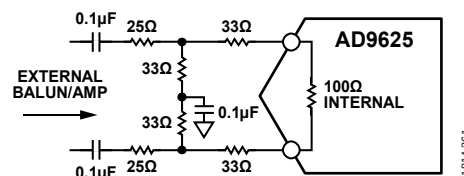


Figure 76. Input Network Example for Passive Balun and <2 GHz ADC Bandwidth

## USING THE ADA4961

As an alternative to using only a passive differential balun input for wideband applications, the ADA4961 differential amplifier driver can be used (see Figure 80).

The ADA4961 is a high performance BiCMOS RF differential gain amplifier (DGA) optimized for driving heavy loads out to 2.0 GHz and beyond. It typically achieves −90 dBc IMD3 performance at 500 MHz and −85 dBc at 1.5 GHz. The device also exhibits very low output noise (6.8 nV/√Hz). Together, these performance numbers result in an SFDR of 133 dB/Hz at 1.5 GHz.

The ADA4961 has an internal differential input impedance of 100  $\Omega$  and a differential dynamic output impedance of 50  $\Omega$ , eliminating the need for external termination resistors. The digital adjustability provides for 1 dB resolution, thus optimizing SNR for input levels spanning 21 dB.

Table 11. Recommended Front-End Components

| Component | Component Value                                        |
|-----------|--------------------------------------------------------|
| R1        | 33 $\Omega$ to 50 $\Omega$ (termination)               |
| R2        | 33 $\Omega$ to 50 $\Omega$ (termination)               |
| R3        | 0 $\Omega$ to 33 $\Omega$ (lower for higher bandwidth) |
| R4        | 0 $\Omega$ to 33 $\Omega$ (lower for higher bandwidth) |
| R5        | 33 $\Omega$                                            |
| R6        | 33 $\Omega$                                            |

Figure 80 uses a 1:2 impedance transformer to provide the 100  $\Omega$  input impedance of the ADA4961 with a matched input. The open collector outputs of the ADA4961 are biased through the two 560 nH inductors. The two 0.1  $\mu$ F capacitors on the outputs decouple the 5 V inductor voltage from the input common-mode voltage of the ADA4961. The two 50  $\Omega$  resistors in parallel with the 100  $\Omega$  input impedance of the AD9625 provide the 50  $\Omega$  load to the ADA4961, whose gain is load dependent. The 2 nH inductors and the 1.5 pF internal capacitance of the AD9625 constitute a 1 GHz low-pass filter to -1 dB. The two 10  $\Omega$  isolation resistors suppress any switching currents from the AD9625 sample-and-hold circuitry. The circuit depicted in Figure 80 provides variable gain, isolation, filtering and source matching for the AD9625. By using this circuit with the ADA4961 in a gain of 15 dB (maximum gain) an SNRFS of 55 dB and an SFDR performance of 77 dBc are achieved with a 1 GHz input as shown in Figure 80.

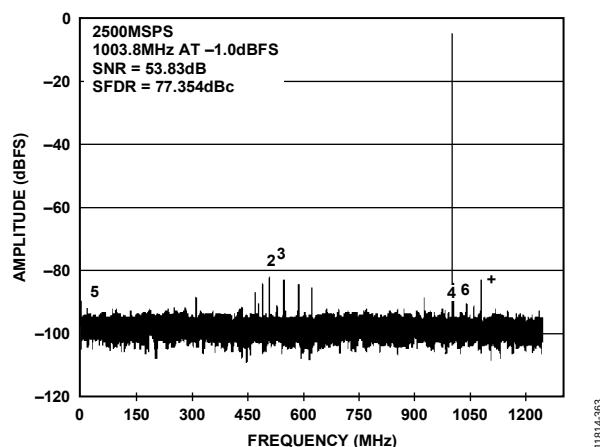


Figure 77. Measured Single-Tone Performance of the Circuit Shown in Figure 80 for a 1 GHz Input Signal Using Maximum Gain (15 dB)

The two-tone 1 GHz IMD of two 0.55 V p-p signals have an SFDR of greater than 75 dBc, as shown in Figure 78.

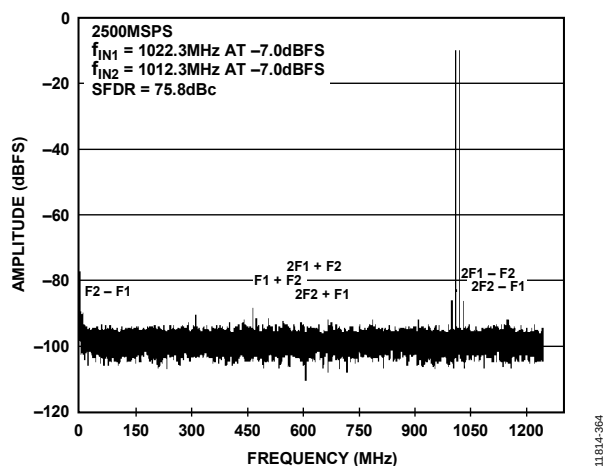


Figure 78. Measured Two-Tone Performance of the Circuit Shown in Figure 80 for a 1 GHz input Signal Using Maximum Gain (15 dB)

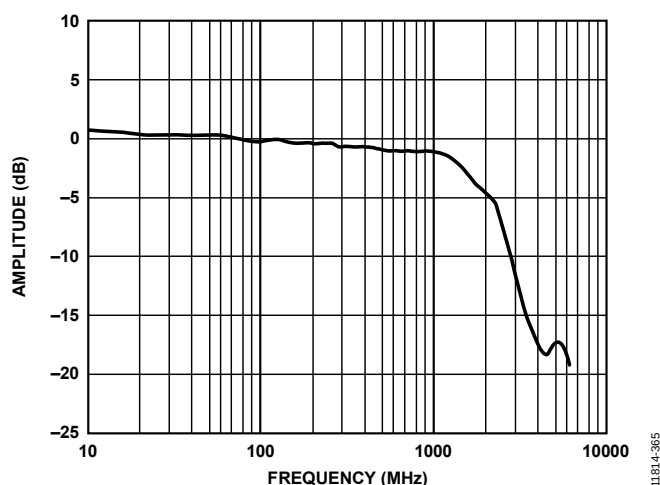


Figure 79. Measured Frequency Response of the AD9625 Interface with ADA4961 Depicted in Figure 80

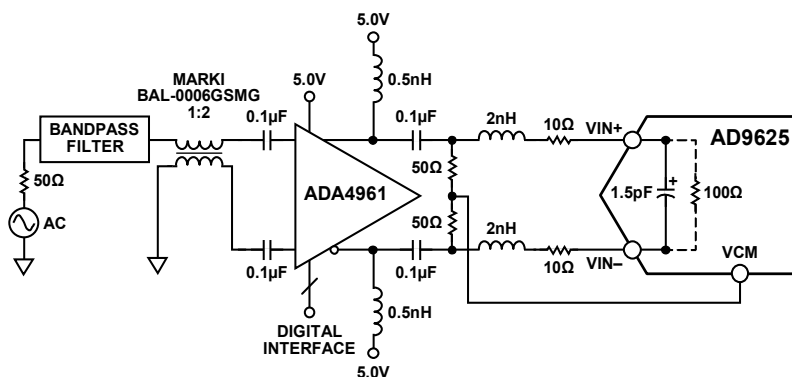


Figure 80. Configuration for Driving the AD9625 with ADA4961



## DC COUPLING

The AD9625 can operate using a dc-coupled input configuration. The differential analog common-mode input signal would need to be referenced to the  $V_{CM}$  output of the AD9625.

## CLOCK INPUT CONSIDERATIONS

For optimum performance, drive the AD9625 sample clock inputs (CLK+ and CLK-) with a differential signal. This signal is typically ac-coupled to the CLK+ and CLK- pins via a transformer or capacitors. These pins are biased internally and require no additional biasing.

### Clock Jitter Considerations

High speed, high resolution ADCs are sensitive to the quality of the clock input. The degradation in SNR at a given input frequency ( $f_A$ ) due only to aperture jitter ( $t_j$ ) can be calculated by

$$SNR = 20 \times \log_{10}(1/(2 \times \pi \times f_A \times t_j))$$

In this equation, the rms aperture jitter represents the root-mean-square of all jitter sources, including the clock input, analog input signal, and ADC aperture jitter specifications. IF undersampling applications are particularly sensitive to jitter (see Figure 81).

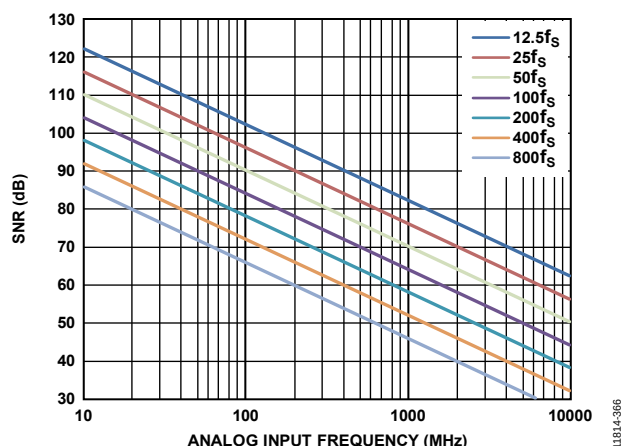


Figure 81. Ideal SNR vs. Analog Input Frequency and Jitter

In cases where aperture jitter may affect the dynamic range of the AD9625, treat the clock input as an analog signal. To avoid modulating the clock signal with digital noise, separate power supplies for clock drivers from the ADC output driver supplies. Low jitter, crystal-controlled oscillators make the best clock sources. If the clock is generated from another type of source (by gating, dividing, or other methods), it should be retimed by the original clock at the last step. Refer to the AN-501 Application Note and the AN-756 Application Note for more information about jitter performance as it relates to ADCs.

### Clock Duty Cycle Considerations

Typical high speed ADCs use both clock edges to generate a variety of internal timing signals. As a result, these ADCs may be sensitive to clock duty cycle. Commonly, a 5% tolerance is required on the clock duty cycle to maintain dynamic performance characteristics.

## DIGITAL DOWNCONVERTERS (DDC)

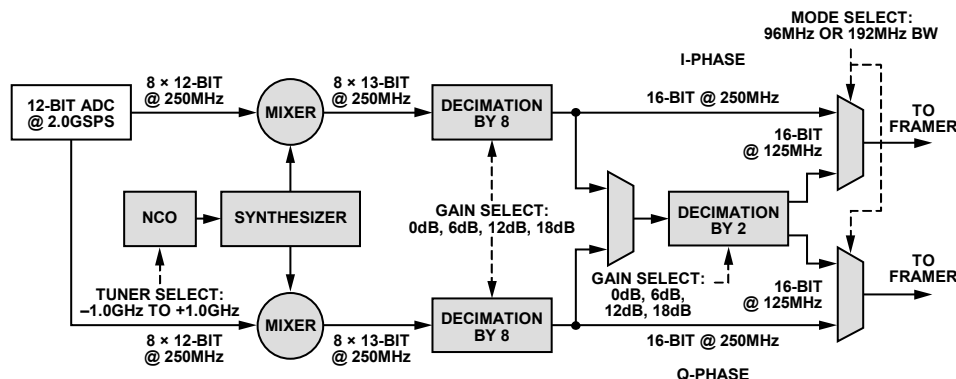


Figure 82. Digital Downconverter Block Diagram Operating at 2.0 GSps

The AD9625 architecture includes two DDCs, each designed to extract a portion of the full digital spectrum captured by the ADC. Each tuner consists of an independent frequency synthesizer and quadrature mixer; a chain of low-pass filters for rate conversion follows these components. Assuming a sampling frequency of 2.500 GSps, the frequency synthesizer (10-bit NCO) allows for 1024 discrete tuning frequencies, ranging from  $-1.249$  GHz to  $+1.2500$  GHz, in steps of  $2500/1024 = 2.44$  MHz. The low-pass filters allow for two modes of decimation.

- A high bandwidth mode, 240 MHz wide (from  $-120$  MHz to  $+120$  MHz), sampled at  $2.5 \text{ GHz}/8 = 312.5$  MHz for the I and Q branches separately. The 16-bit samples from the I and Q branches are transmitted through a dedicated JESD204B interface.
- A low bandwidth mode, 120 MHz wide (from  $-60$  MHz to  $+60$  MHz), sampled at  $2.5 \text{ GHz}/16 = 156.25$  MHz for the I and Q branches separately. The 16-bit samples from the I and Q branches are transmitted through a dedicated JESD204B interface.

By design, all of the blocks operate at a single clock frequency of  $2.5 \text{ GHz}/8 = 312.5$  MHz.

Each filter stage includes a gain control block that is programmable by the user. The gain varies from 0 dB to 18 dB, in steps of 6 dB, and the gain is applied before final scaling and rounding. The gain control feature may be useful in cases where the tuner filters out a strong out-of-band interferer, leaving a weak in-band signal.

### FREQUENCY SYNTHESIZER AND MIXER

For a sampling rate of 2.500 GHz, the synthesizer (10-bit NCO) outputs one of 1024 possible complex frequencies from  $-1.249$  GHz to  $+1.250$  GHz. The synthesizer employs the direct digital synthesis technique, using look-up sine tables and a phase accumulator. The user specifies the tuner frequency by writing to a 10-bit phase increment register.

### NUMERICALLY CONTROLLED OSCILLATOR

Each DDC has a 10-bit oscillator that is synthesized and mixed with the ADC output data. The 10-bit phase can be tuned for each DDC based on the value used in its NCO registers. The phase for DDC0 is located with Register 0x132 and Register 0x131. The phase for DDC1 is located with Register 0x13A and Register 0x139. The NCO output frequency for DDC0 =  $(\text{decimal}(\text{Register } 0x132[1:0]; \text{Register } 0x131[7:0]) \times f_s)/1024$ . The NCO output frequency for DDC1 =  $(\text{decimal}(\text{Register } 0x13A[1:0]; \text{Register } 0x139[7:0]) \times f_s)/1024$ .

### HIGH BANDWIDTH DECIMATOR

The first filter stage is designed for a rate reduction factor of 8, yielding a sample rate of  $2.500 \text{ GHz}/8 = 312.5$  MHz. To achieve a combination of low complexity and low clock rate, the DDC employs a decimate-by-8 polyphase filter that receives eight 13-bit samples from the mixer block at every clock cycle.

The block design provides user specified gain control, from 0 dB to 18 dB in steps of 6 dB. The gain is applied before final scaling and rounding to 16 bits.

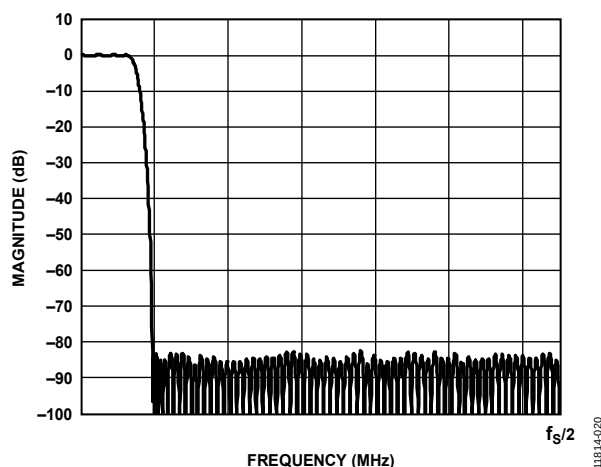


Figure 83. Magnitude Response of the Decimate-by-8 Polyphase Fuse Filter

Filter performance is shown in Figure 83 and Figure 84. The filter yields an effective bandwidth of 120 MHz, with a transition band of  $156.5 \text{ MHz} - 120 \text{ MHz} = 36.5 \text{ MHz}$ . Therefore, the two-sided complex bandwidth of the filter is 240 MHz.

A rejection ratio of 85 dB ensures that the seven aliases that fold back into the pass band yield an SNR of  $85 \text{ dB} - 10\log_{10}(7) = 76.5 \text{ dB}$ , which ensures that the aliases remain sufficiently below the noise floor of the input signal. The pass-band ripple is  $\pm 0.05 \text{ dB}$ , as shown in Figure 84.

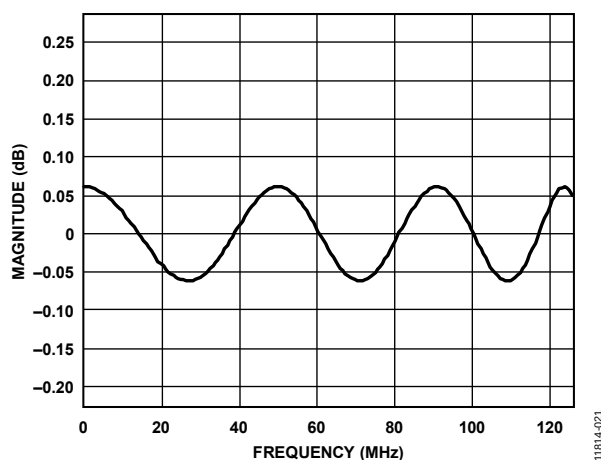


Figure 84. Magnitude Ripple in the High Bandwidth Pass Band

The high bandwidth decimator has a filter architecture that consists of a 142 tap delay line. The coefficients are 17 bits each and are listed in Table 12.

Table 12. Filter Tap Coefficients for High Bandwidth Decimator

| Tap Number | Coefficient |
|------------|-------------|
| 1          | -38         |
| 2          | -57         |
| 3          | -92         |
| 4          | -132        |
| 5          | -172        |
| 6          | -204        |
| 7          | -219        |
| 8          | -207        |
| 9          | -162        |
| 10         | -79         |
| 11         | +43         |
| 12         | +196        |
| 13         | +369        |
| 14         | +540        |
| 15         | +685        |
| 16         | +780        |
| 17         | +800        |
| 18         | +727        |
| 19         | +554        |
| 20         | +289        |
| 21         | -48         |
| 22         | -420        |
| 23         | -778        |
| 24         | -1069       |
| 25         | -1238       |
| 26         | -1242       |
| 27         | -1055       |
| 28         | -677        |
| 29         | -135        |
| 30         | +513        |
| 31         | +1186       |
| 32         | +1785       |
| 33         | +2210       |
| 34         | +2372       |
| 35         | +2209       |
| 36         | +1698       |
| 37         | +869        |
| 38         | -200        |
| 39         | -1382       |
| 40         | -2516       |
| 41         | -3425       |
| 42         | -3945       |
| 43         | -3944       |
| 44         | -3353       |
| 45         | -2179       |
| 46         | -519        |
| 47         | +1446       |
| 48         | +3467       |
| 49         | +5250       |
| 50         | +6496       |
| 51         | +6945       |

| Tap Number | Coefficient | Tap Number | Coefficient |
|------------|-------------|------------|-------------|
| 52         | +6412       | 105        | -200        |
| 53         | +4831       | 106        | +869        |
| 54         | +2276       | 107        | +1698       |
| 55         | -1031       | 108        | +2209       |
| 56         | -4725       | 109        | +2372       |
| 57         | -8330       | 110        | +2210       |
| 58         | -11304      | 111        | +1785       |
| 59         | -13098      | 112        | +1186       |
| 60         | -13222      | 113        | +513        |
| 61         | -11306      | 114        | -135        |
| 62         | -7160       | 115        | -677        |
| 63         | -808        | 116        | -1055       |
| 64         | +7498       | 117        | -1242       |
| 65         | +17281      | 118        | -1238       |
| 66         | +27882      | 119        | -1069       |
| 67         | +38515      | 120        | -778        |
| 68         | +48340      | 121        | -420        |
| 69         | +56550      | 122        | -48         |
| 70         | +62451      | 123        | +289        |
| 71         | +65536      | 124        | +554        |
| 72         | +65536      | 125        | +727        |
| 73         | +62451      | 126        | +800        |
| 74         | +56550      | 127        | +780        |
| 75         | +48340      | 128        | +685        |
| 76         | +38515      | 129        | +540        |
| 77         | +27882      | 130        | +369        |
| 78         | +17281      | 131        | +196        |
| 79         | +7498       | 132        | +43         |
| 80         | -808        | 133        | -79         |
| 81         | -7160       | 134        | -162        |
| 82         | -11306      | 135        | -207        |
| 83         | -13222      | 136        | -219        |
| 84         | -13098      | 137        | -204        |
| 85         | -11304      | 138        | -172        |
| 86         | -8330       | 139        | -132        |
| 87         | -4725       | 140        | -92         |
| 88         | -1031       | 141        | -57         |
| 89         | +2276       | 142        | -38         |
| 90         | +4831       |            |             |
| 91         | +6412       |            |             |
| 92         | +6945       |            |             |
| 93         | +6496       |            |             |
| 94         | +5250       |            |             |
| 95         | +3467       |            |             |
| 96         | +1446       |            |             |
| 97         | -519        |            |             |
| 98         | -2179       |            |             |
| 99         | -3353       |            |             |
| 100        | -3944       |            |             |
| 101        | -3945       |            |             |
| 102        | -3425       |            |             |
| 103        | -2516       |            |             |
| 104        | -1382       |            |             |

## LOW BANDWIDTH DECIMATOR

Use the second filter stage in the optional low bandwidth mode only. It achieves an additional rate reduction factor of 2, yielding a final sample rate of  $2.500 \text{ GHz}/16 = 156.25 \text{ MHz}$ . The internal architecture of the low bandwidth decimation filter is similar to that of a high bandwidth decimator. Moreover, for ease of physical design, the block operates at 312.5 MHz, a result of which both the I- and Q-phases can share the filter engine.

The performance of the low bandwidth decimation filter is shown in Figure 85 and Figure 86. The filter yields an effective bandwidth of 60 MHz, with a transition band of  $81.25 \text{ MHz} - 60 \text{ MHz} = 21.25 \text{ MHz}$ . Thus, the two sided, complex bandwidth of the filter is 120 MHz. A rejection ratio of 85 dB ensures that the alias region folds back well below the noise floor of the input signal.

As with the high bandwidth filter, this block provides user specified gain control, from 0 dB to 18 dB, in steps of 6 dB. The gain is applied before final quantization at the output of the low bandwidth decimation filter to 16 bits.

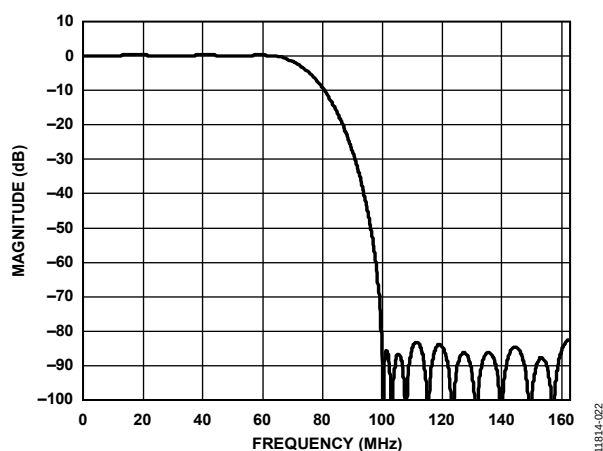


Figure 85. Magnitude Response of Decimate-by-2 Filter

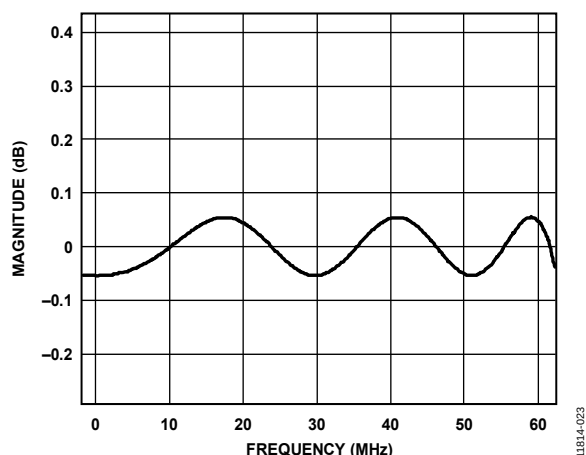


Figure 86. Magnitude Ripple in the Low Bandwidth Pass Band

The low bandwidth decimator has a filter architecture that consists of a 31 tap delay line. The coefficients are 17 bits each and are listed in Table 13.

Table 13. Filter Tap Coefficients for Low Bandwidth Decimator

| Tap Number | Coefficient |
|------------|-------------|
| 1          | +126        |
| 2          | +312        |
| 3          | -16         |
| 4          | -859        |
| 5          | -628        |
| 6          | +1217       |
| 7          | +1428       |
| 8          | -1944       |
| 9          | -3227       |
| 10         | +2511       |
| 11         | +6302       |
| 12         | -3099       |
| 13         | -13075      |
| 14         | +3441       |
| 15         | +43442      |
| 16         | +65536      |
| 17         | +43442      |
| 18         | +3441       |
| 19         | -13075      |
| 20         | -3099       |
| 21         | +6302       |
| 22         | +2511       |
| 23         | -3227       |
| 24         | -1944       |
| 25         | +1428       |
| 26         | +1217       |
| 27         | -628        |
| 28         | -859        |
| 29         | -16         |
| 30         | +312        |
| 31         | +126        |

## DIGITAL OUTPUTS

### INTRODUCTION TO THE JESD204B INTERFACE

The AD9625 digital output complies with the JEDEC Standard No. JESD204B, *Serial Interface for Data Converters*. JESD204B is a protocol to link the AD9625 to a digital processing device over a serial interface up to and above 6.5 Gbps link speeds. The benefits of the JESD204B interface over LVDS include a reduction in required board area for data interface routing, and enabling smaller packages for converter and logic devices. The AD9625 supports one, two, four, six, or eight output lanes.

The JESD204B data transmit block assembles the parallel data from the ADC into frames and uses 8-bit/10-bit encoding as well as optional scrambling to form serial output data. Lane synchronization is supported using special characters during the initial establishment of the link. Additional data that is used to maintain synchronization is embedded in the data stream thereafter. A JESD204B receiver is required to complete the serial link. For additional details on the JESD204B interface, users are encouraged to refer to the JESD204B standard.

The AD9625 JESD204B transmit block maps to two digital down converters for the outputs of the ADC over a link. A link can be configured to use up to eight JESD204B lanes. The JESD204B specification refers to a number of parameters to define the link, and these parameters must match between the JESD204B transmitter (AD9625 output) and receiver (FPGA, ASIC, or logic device).

Table 14 describes the JESD204B interface nomenclature (the terms, converter device and link, are used interchangeably in the specification).

**Table 14. JESD204B Interface Nomenclature**

| Symbol | Description                                                               |
|--------|---------------------------------------------------------------------------|
| S      | Samples transmitted per single converter per frame cycle                  |
| M      | Number of converters per converter device (link)                          |
| L      | Number of lanes per converter device (link)                               |
| N      | Converter resolution                                                      |
| N'     | Total number of bits per sample                                           |
| CF     | Number of control words per frame clock cycle per converter device (link) |
| CS     | Number of control bits per conversion sample                              |
| K      | Number of frames per multiframe                                           |
| HD     | High density mode                                                         |
| F      | Octets per frame                                                          |
| C      | Control bit (overflow, timestamp)                                         |
| T      | Tail bit                                                                  |

The AD9625 adheres to the JESD204B draft specification, which provides a high speed, serial, embedded clock interface standard for data converters and logic devices. It is designed as an MCDA-ML, Subclass 1 device that uses the SYSREF± input signal for multichip synchronization and deterministic latency. This design adheres to the following basic JESD204B link configuration parameters:

- M = 1 (single converter, always for AD9625)
- L = 1 to 8 (up to eight lanes)
- S = 4 (four samples per JESD204B frame)
- F = 1, 2, 4, 8 (up to 8 octets per frame)
- N' = 12, 16 (12- or 16-bit JESD204B word size)
- HD = 0, 1 (high density mode, sample span multiple lanes)

### FUNCTIONAL OVERVIEW

The block diagram in Figure 87 shows the flow of data through the JESD204B hardware from the sample input to the physical output. The processing can be divided into layers that are derived from the OSI model widely used to describe the abstraction layers of communications systems. These are the transport layer, data link layer, and physical layer (serializer). Each of these layers are described in detail in the following sections.

#### Transport Layer

The transport layer handles packing the data (consisting of samples and optional control bits) into 8-bit words that are sent to the data link layer. The transport layer is controlled by rules derived from the link configuration data. It packs data according to the rules, adding tail bits to fill gaps when required.

#### Data Link Layer

The data link layer is responsible for the low level functions of passing data across the link. These include optionally scrambling the data, handling the synchronization process for characters, frames, and lanes across the links, encoding 8-bit data-words into 10-bit characters, and inserting appropriate control characters into the data output. The data link layer is also responsible for sending the initial lane alignment sequence (ILAS), which contains the link configuration data, used by the receiver (Rx) to verify the settings in the transport layer.

#### Physical Layer

The physical layer consists of the high speed circuitry clocked at the serial clock rate. The physical layer includes the serialization circuits and the high speed drivers.

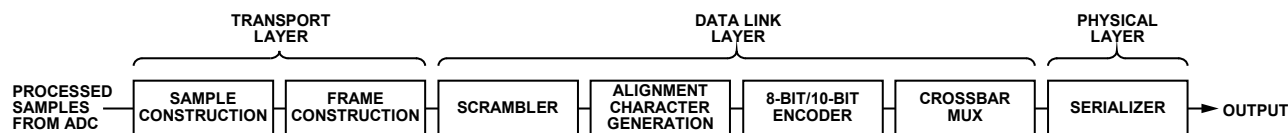


Figure 87. Data Flow

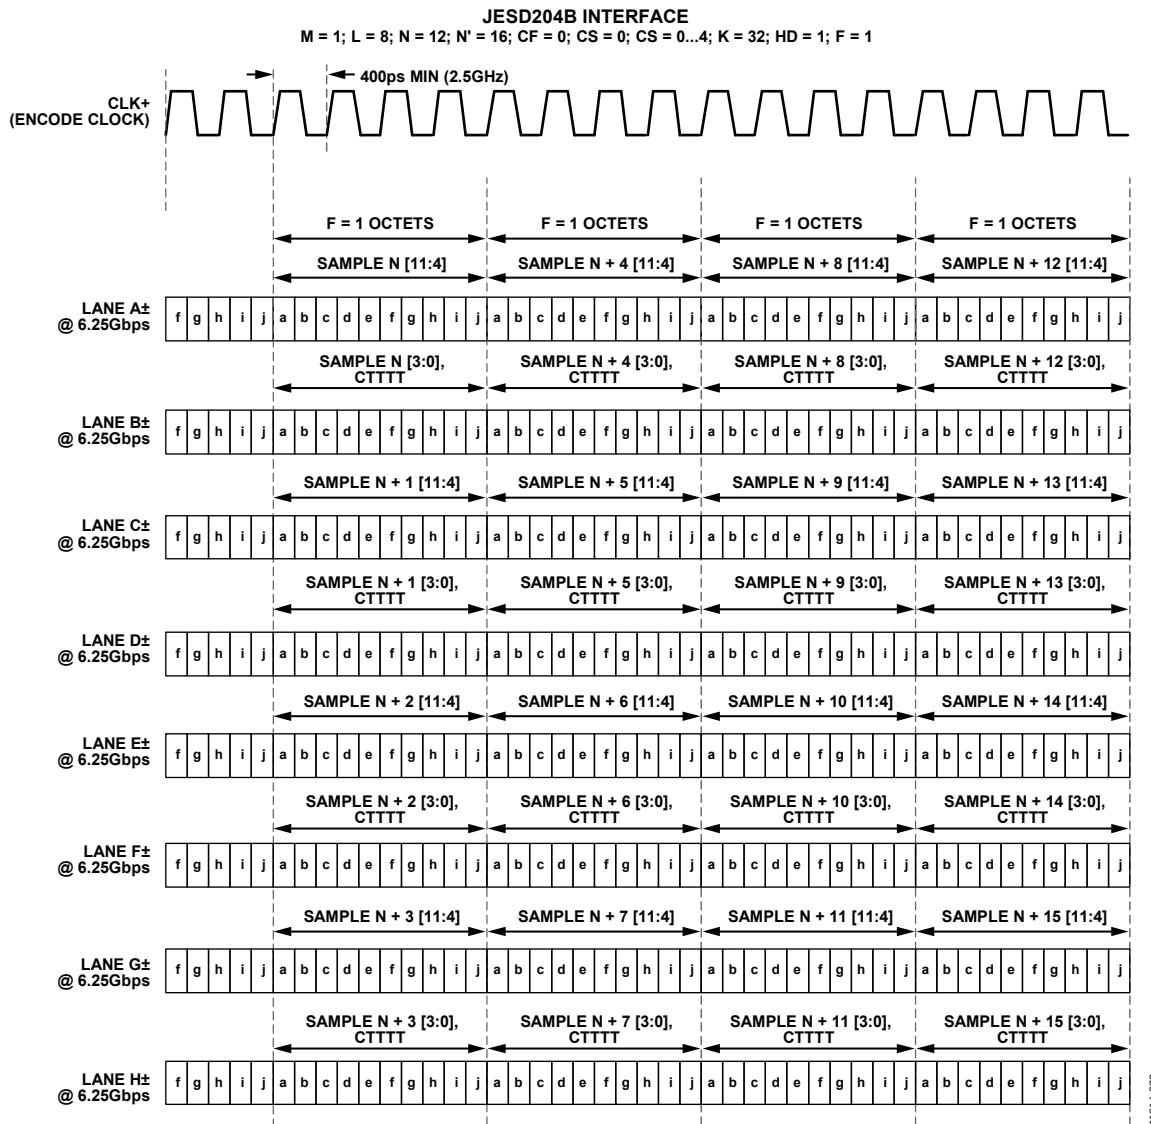


Figure 88. JESD204B Lane Data Mapping



## JESD204B LINK ESTABLISHMENT

The [AD9625](#) JESD204B Tx interface operates in Subclass 1 as defined in the JEDEC Standard No. 204B-July 2011 specification. It is divided into the following steps: code group synchronization, initial lane alignment sequence, and data streaming.

### Code Group Synchronization (CGS) and SYNCINB±

CGS is the process where the JESD204B receiver finds the boundaries between the 10-bit characters in the stream of data. During the CGS phase, the JESD204B transmit block transmits /K28.5/ characters. The receiver (external logic device) must locate the /K28.5/ characters in its input data stream using clock and data recovery (CDR) techniques.

The receiver issues a synchronization request by activating the SYNCINB± pins of the [AD9625](#). The JESD204B Tx begins sending /K28.5/ characters until the next LMFC boundary. When the receiver has synchronized, it waits for the correct reception of at least four consecutive /K28.5/ symbols. It then deactivates SYNCINB±. The [AD9625](#) then transmits an initial lane alignment sequence (ILAS) on the following LMFC boundary.

For more information on the code group synchronization phase, refer to the JEDEC Standard No. 204B-July 2011, Section 5.3.3.1.

The SYNCINB± pin operation can be controlled by SPI. The SYNCINB± signal is a differential LVDS mode signal by default, but it can also be driven single ended. For more information on configuring the SYNCINB± pin operation, refer to the Memory Map section.

### Initial Lane Alignment Sequence (ILAS)

The ILAS phase follows the CGS phase and begins on the next LMFC boundary. The ILAS consists of four multiframe, with an /R/ character marking the beginning and an /A/ character marking the end. The ILAS begins by sending an /R/ character followed by 0 to 255 ramp data for one multiframe. On the second multiframe, the link configuration data is sent starting with the third character. The second character is a /Q/ character to confirm that the link configuration data follows. All undefined data slots are filled with ramp data. The ILAS sequence is never scrambled.

The ILAS sequence construction is shown in Figure 90. The four multiframe include the following:

- Multiframe 1: begins with an /R/ character (K28.0) and ends with an /A/ character (K28.3).
- Multiframe 2: begins with an /R/ character followed by a /Q/ [K28.4] character, followed by link configuration parameters over 14 configuration octets and ends with an /A/ character. Many of the parameter values are of the notation of the value, -1.
- Multiframe 3: this is the same as Multiframe 1.
- Multiframe 4: this is the same as Multiframe 1.

## Data Streaming

After the initial lane alignment sequence is complete, the user data is sent. In a usual frame, all characters are user data. However, to monitor the frame clock and multiframe clock synchronization, there is a mechanism for replacing characters with /F/ or /A/ alignment characters when the data meets certain conditions. These conditions are different for unscrambled and scrambled data. The scrambling operation is enabled by default but may be disabled using SPI.

For scrambled data, any 0xFC character at the end of a frame is replaced by an /F/, and any 0x7C character at the end of a multiframe is replaced with an /A/. The JESD204B Rx checks for /F/ and /A/ characters in the received data stream and verifies that they only occur in the expected locations. If an unexpected /F/ or /A/ character is found, the receiver handles the situation by using dynamic realignment or activating the SYNCINB± signal for more than four frames to initiate a resynchronization. For unscrambled data, if the final character of two subsequent frames is equal, the second character is replaced with an /F/ if it is at the end of a frame, and an /A/ if it is at the end of a multiframe.

Insertion of alignment characters may be modified using SPI. The frame alignment character insertion is enabled by default. More information on the link controls is available in the Memory Map section, Register 0x062.

### Link Setup Parameters

The following steps demonstrate how to configure the [AD9625](#) JESD204B interface and the output:

1. Disable the lanes before changing configuration.
2. Select one quick configuration option.
3. Configure the detailed options.
4. Check FCHK, checksum of JESD204B interface parameters.
5. Set additional digital output configuration options.
6. Reenable the required lane(s).
7. Before modifying the JESD204B link parameters, disable the link and hold it in reset.

### 8-Bit/10-Bit Encoder

The 8-bit/10-bit encoder converts 8-bit octets into 10-bit characters and inserts control characters into the stream when needed. The control characters used in JESD204B are shown in Table 15. The 8-bit/10-bit encoding allows the signal to be dc balanced by using the same number of ones and zeros.

The 8-bit/10-bit interface has options that may be controlled via SPI. These operations include bypass, invert or mirror. These options are intended to be a troubleshooting tool for the verification of the digital front end (DFE).



### Digital Outputs, Timing, and Controls

The AD9625 physical layer consists of drivers that are defined in the JEDEC Standard No. 204B-July 2011. The differential digital outputs are powered up by default. The drivers utilize a dynamic 100  $\Omega$  internal termination to reduce unwanted reflections.

Place a 100  $\Omega$  differential termination resistor at each receiver input to result in a nominal 300 mV p-p swing at the receiver (see Figure 89). Alternatively, single-ended 50  $\Omega$  termination can be used. When single-ended termination is used, the termination voltage should be  $DRVDD/2$ ; otherwise, 0.1  $\mu F$  ac coupling capacitors can be used to terminate to any single-ended voltage.

The AD9625 digital outputs can interface with custom ASICs and FPGA receivers, providing superior switching performance in noisy environments. Single point-to-point network topologies are recommended with a single differential 100  $\Omega$  termination resistor placed as close to the receiver inputs as possible.

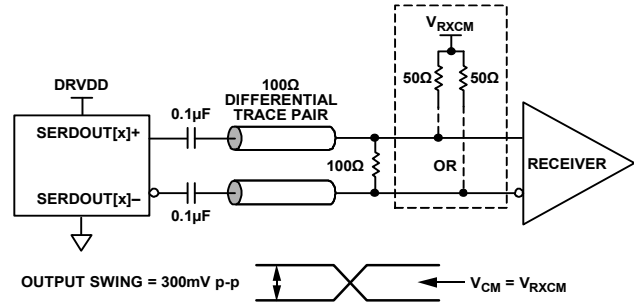


Figure 89. AC-Coupled Digital Output Termination Example

If there is no far end receiver termination, or if there is poor differential trace routing, timing errors may result. To avoid such timing errors, it is recommended that the trace length be less than six inches, and that the differential output traces be close together and at equal lengths.

### De-Emphasis

De-emphasis enables the receiver eye diagram mask to be met in conditions where the interconnect insertion loss does not meet the JESD204B specification. The de-emphasis feature should only be used when the receiver is unable to recover the clock due to excessive insertion loss. Under normal conditions, it is disabled to conserve power. Additionally, enabling and setting too high a de-emphasis value on a short link may cause the receiver eye diagram to fail. Using the de-emphasis setting may increase EMI. See the Memory Map section for details.

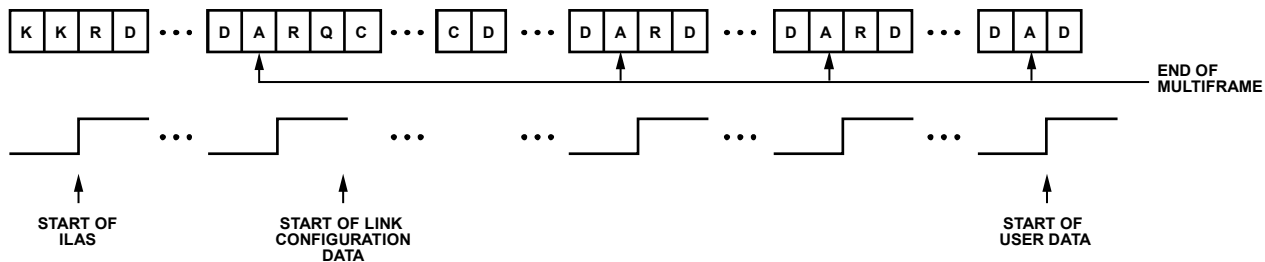


Figure 90. Initial Lane Alignment Sequence

Table 15. AD9625 Control Characters Used in JESD204B

| Abbreviation | Control Symbol | 8-Bit Value | 10-Bit Value RD (Running Disparity) = -1 | 10-Bit Value RD (Running Disparity) = +1 | Description                      |
|--------------|----------------|-------------|------------------------------------------|------------------------------------------|----------------------------------|
| /R/          | /K28.0/        | 000 11100   | 001111 0100                              | 110000 1011                              | Start of multiframe              |
| /A/          | /K28.3/        | 011 11100   | 001111 0011                              | 110000 1100                              | Lane alignment                   |
| /Q/          | /K28.4/        | 100 11100   | 001111 0010                              | 110000 1101                              | Start of link configuration data |
| /K/          | /K28.5/        | 101 11100   | 001111 1010                              | 110000 0101                              | Group synchronization            |
| /F/          | /K28.7/        | 111 11100   | 001111 1000                              | 110000 0111                              | Frame alignment                  |

Table 16. JESD204B Mode of Operation (M = 1, S = 4, N' = 16, Unless Otherwise Noted)

| Quick Configuration Value | Description <sup>1</sup> | Lanes (L) | Octets/ Frame (F) | Sample Clock Rate |              | Sample Clock Multiplier | JESD204B Lane Rate |              |
|---------------------------|--------------------------|-----------|-------------------|-------------------|--------------|-------------------------|--------------------|--------------|
|                           |                          |           |                   | Minimum MSPS      | Maximum MSPS |                         | Minimum Mbps       | Maximum Mbps |
| 0x02                      | Generic                  | 2         | 4                 | 330               | 650          | 10                      | 3300               | 6500         |
| 0x04                      | Generic                  | 4         | 2                 | 650               | 1300         | 5                       | 3250               | 6500         |
| 0x06                      | Generic (N' = 12)        | 6         | 1                 | 1300              | 2500         | 2.5                     | 3250               | 6250         |
| 0x08                      | Generic                  | 8         | 1                 | 1300              | 2500         | 2.5                     | 3250               | 6250         |
| 0x42                      | $f_s \times 8$           | 2         | 4                 | 406               | 813          | 8                       | 3250               | 6500         |
| 0x44                      | $f_s \times 4$           | 4         | 2                 | 813               | 1625         | 4                       | 3250               | 6500         |
| 0x48                      | $f_s \times 2$           | 8         | 1                 | 1625              | 2500         | 2                       | 3250               | 5000         |
| 0x81                      | Single DDC, high BW      | 1         | 8                 | 650               | 1300         | 5                       | 3250               | 6500         |
| 0x82                      | Single DDC, high BW      | 2         | 4                 | 1300              | 2500         | 2.5                     | 3250               | 6250         |
| 0x91                      | Single DDC, low BW       | 1         | 8                 | 1300              | 2500         | 2.5                     | 3250               | 6250         |
| 0xC1                      | Dual DDC, high BW        | 1         | 8                 | 330               | 650          | 10                      | 3300               | 6500         |
| 0xC2                      | Dual DDC, high BW        | 2         | 4                 | 650               | 1300         | 5                       | 3250               | 6500         |
| 0xC4                      | Dual DDC, high BW        | 4         | 2                 | 1300              | 2500         | 2.5                     | 3250               | 6250         |
| 0xE1                      | Dual DDC, mixed BW       | 1         | 8                 | 330               | 650          | 10                      | 3300               | 6500         |
| 0xE2                      | Dual DDC, mixed BW       | 2         | 4                 | 650               | 1300         | 5                       | 3250               | 6500         |
| 0xE4                      | Dual DDC, mixed BW       | 4         | 2                 | 1300              | 2500         | 2.5                     | 3250               | 6250         |
| 0xD1                      | Dual DDC, low BW         | 1         | 8                 | 650               | 1300         | 5                       | 3250               | 6500         |
| 0xD2                      | Dual DDC, low BW         | 2         | 4                 | 1300              | 2500         | 2.5                     | 3250               | 6250         |

<sup>1</sup> DDC means digital downconverter, BW means bandwidth,  $f_s \times x$  means sample rate multiplied by an integer (where x is an integer: 2, 4, 8).


Table 17. JESD204B Logical Lane Mapping

| Quick Configuration Value | Description         | Lanes (L) | Logical Lane 0                                                                                                                                                                                                              | Logical Lane 1           | Logical Lane 2   | Logical Lane 3   | Logical Lane 4   | Logical Lane 5   | Logical Lane 6   | Logical Lane 7   |
|---------------------------|---------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| 0x02                      | Generic             | 2         | S[N], S[N + 1]                                                                                                                                                                                                              | S[N + 2], S[N + 3]       | Off              | Off              | Off              | Off              | Off              | Off              |
| 0x04                      | Generic             | 4         | S[N]                                                                                                                                                                                                                        | S[N + 1]                 | S[N + 2]         | S[N + 3]         | Off              | Off              | Off              | Off              |
| 0x06                      | Generic (N' = 12)   | 6         | $S_{MSB}[N], S_{LSB}[N], S_{MSB}[N + 1], S_{LSB}[N + 1], S_{MSB}[N + 2], S_{LSB}[N + 2], S_{MSB}[N + 3], S_{LSB}[N + 3]$                                                                                                    |                          |                  |                  |                  |                  | Off              | Off              |
| 0x08                      | Generic             | 8         | $S_{MSB}[N]$                                                                                                                                                                                                                | $S_{LSB}[N]$             | $S_{MSB}[N + 1]$ | $S_{LSB}[N + 1]$ | $S_{MSB}[N + 2]$ | $S_{LSB}[N + 2]$ | $S_{MSB}[N + 3]$ | $S_{LSB}[N + 3]$ |
| 0x42                      | $f_s \times 8$      | 2         | See Figure 104, $f_s \times 2$ mode application layer (transmit)                                                                                                                                                            |                          |                  |                  |                  |                  |                  |                  |
| 0x44                      | $f_s \times 4$      | 4         | See Figure 104, $f_s \times 2$ mode application layer (transmit)                                                                                                                                                            |                          |                  |                  |                  |                  |                  |                  |
| 0x48                      | $f_s \times 2$      | 8         | $S_{MSB}[N], S_{LSB}[N], S_{MSB}[N + 1], S_{LSB}[N + 1], S_{MSB}[N + 2], S_{LSB}[N + 2], S_{MSB}[N + 3], S_{LSB}[N + 3], S_{MSB}[N + 4], S_{LSB}[N + 4]$ ; see Figure 104, $f_s \times 2$ mode application layer (transmit) |                          |                  |                  |                  |                  |                  |                  |
| 0x81                      | Single DDC, high BW | 1         | $I_0[N], Q_0[N], I_0[N + 1], Q_0[N + 1]$                                                                                                                                                                                    | Off                      | Off              | Off              | Off              | Off              | Off              | Off              |
| 0x82                      | Single DDC, high BW | 2         | $I_0[N], Q_0[N]$                                                                                                                                                                                                            | $I_0[N + 1], Q_0[N + 1]$ | Off              | Off              | Off              | Off              | Off              | Off              |
| 0x91                      | Single DDC, low BW  | 1         | $I_0[N], Q_0[N], I_0[N + 1], Q_0[N + 1]$                                                                                                                                                                                    | Off                      | Off              | Off              | Off              | Off              | Off              | Off              |
| 0xC1                      | Dual DDC, high BW   | 1         | $I_0[N], Q_0[N], I_1[N], Q_1[N]$                                                                                                                                                                                            | Off                      | Off              | Off              | Off              | Off              | Off              | Off              |
| 0xC2                      | Dual DDC, high BW   | 2         | $I_0[N], Q_0[N]$                                                                                                                                                                                                            | $I_1[N], Q_1[N]$         | Off              | Off              | Off              | Off              | Off              | Off              |
| 0xC4                      | Dual DDC, high BW   | 4         | $I_0[N]$                                                                                                                                                                                                                    | $Q_0[N]$                 | $I_1[N]$         | $Q_1[N]$         | Off              | Off              | Off              | Off              |
| 0xE1                      | Dual DDC, mixed BW  | 1         | $I_0[N], Q_0[N], I_1[N], Q_1[N]$                                                                                                                                                                                            | Off                      | Off              | Off              | Off              | Off              | Off              | Off              |
| 0xE2                      | Dual DDC, mixed BW  | 2         | $I_0[N], Q_0[N]$                                                                                                                                                                                                            | $I_1[N], Q_1[N]$         | Off              | Off              | Off              | Off              | Off              | Off              |

| Quick Configuration Value | Description        | Lanes (L) | Logical Lane 0                                                                          | Logical Lane 1                            | Logical Lane 2     | Logical Lane 3     | Logical Lane 4 | Logical Lane 5 | Logical Lane 6 | Logical Lane 7 |
|---------------------------|--------------------|-----------|-----------------------------------------------------------------------------------------|-------------------------------------------|--------------------|--------------------|----------------|----------------|----------------|----------------|
| 0xE4                      | Dual DDC, mixed BW | 4         | I <sub>0</sub> [N]                                                                      | Q <sub>0</sub> [N]                        | I <sub>1</sub> [N] | Q <sub>1</sub> [N] | Off            | Off            | Off            | Off            |
| 0xD1                      | Dual DDC, low BW   | 1         | I <sub>0</sub> [N],<br>Q <sub>0</sub> [N],<br>I <sub>1</sub> [N],<br>Q <sub>1</sub> [N] | Off                                       | Off                | Off                | Off            | Off            | Off            | Off            |
| 0xD2                      | Dual DDC, low BW   | 2         | I <sub>0</sub> [N],<br>Q <sub>0</sub> [N]                                               | I <sub>1</sub> [N],<br>Q <sub>1</sub> [N] | Off                | Off                | Off            | Off            | Off            | Off            |

Table 18. Typical Current Consumption per ADC Mode (Unused Output Lanes are Powered Down)

| Quick Configuration Value | Mode                         | Lanes (L) | Sample Rate (MSPS) | Typical Current Consumption (A) |                    |                     |                     |                    |                    |                 |
|---------------------------|------------------------------|-----------|--------------------|---------------------------------|--------------------|---------------------|---------------------|--------------------|--------------------|-----------------|
|                           |                              |           |                    | I <sub>AVDD1</sub>              | I <sub>AVDD2</sub> | I <sub>DRVDD1</sub> | I <sub>DRVDD2</sub> | I <sub>DVDD1</sub> | I <sub>DVDD2</sub> | Total Power (W) |
| 0x02                      | Generic, two lane            | 2         | 650                | 0.7                             | 0.3                | 0.2                 | 0.0                 | 0.1                | 0.0                | 2.1             |
| 0x04                      | Generic, four lane           | 4         | 1300               | 0.9                             | 0.3                | 0.3                 | 0.0                 | 0.2                | 0.0                | 2.6             |
| 0x06                      | Generic, six lane            | 6         | 2600               | 1.2                             | 0.4                | 0.4                 | 0.0                 | 0.4                | 0.0                | 3.4             |
| 0x08                      | Generic, eight lane          | 8         | 2600               | 1.2                             | 0.4                | 0.5                 | 0.0                 | 0.4                | 0.0                | 3.9             |
| 0x42                      | f <sub>S</sub> × 8           | 2         | 813                | 0.7                             | 0.4                | 0.2                 | 0.0                 | 0.2                | 0.0                | 2.3             |
| 0x44                      | f <sub>S</sub> × 4           | 4         | 1625               | 1.0                             | 0.4                | 0.3                 | 0.0                 | 0.3                | 0.0                | 3.0             |
| 0x48                      | f <sub>S</sub> × 2           | 8         | 2600               | 1.2                             | 0.4                | 0.5                 | 0.0                 | 0.4                | 0.0                | 3.8             |
| 0x81                      | Single DDC high BW, one lane | 1         | 1300               | 0.9                             | 0.4                | 0.1                 | 0.0                 | 0.3                | 0.0                | 2.7             |
| 0x82                      | Single DDC high BW, two lane | 2         | 2600               | 1.2                             | 0.4                | 0.2                 | 0.0                 | 0.6                | 0.0                | 3.6             |
| 0x91                      | Single DDC low BW, one lane  | 1         | 2600               | 1.2                             | 0.4                | 0.1                 | 0.0                 | 0.6                | 0.0                | 3.5             |
| 0xC1                      | Dual DDC high BW, one lane   | 1         | 650                | 0.7                             | 0.4                | 0.1                 | 0.0                 | 0.2                | 0.0                | 2.3             |
| 0xC2                      | Dual DDC high BW, two lane   | 2         | 1300               | 0.9                             | 0.4                | 0.2                 | 0.0                 | 0.5                | 0.0                | 2.9             |
| 0xC4                      | Dual DDC high BW, four lane  | 4         | 2600               | 1.2                             | 0.4                | 0.3                 | 0.0                 | 0.8                | 0.0                | 4.0             |
| 0xE1                      | Dual DDC mixed BW, one lane  | 1         | 650                | 0.7                             | 0.4                | 0.1                 | 0.0                 | 0.2                | 0.0                | 2.3             |
| 0xE2                      | Dual DDC mixed BW, two lane  | 2         | 1300               | 0.9                             | 0.4                | 0.2                 | 0.0                 | 0.5                | 0.0                | 2.9             |
| 0xE4                      | Dual DDC mixed BW, four lane | 4         | 2600               | 1.2                             | 0.4                | 0.3                 | 0.0                 | 0.8                | 0.0                | 4.0             |
| 0xD1                      | Dual DDC low BW, one lane    | 1         | 1300               | 0.9                             | 0.4                | 0.1                 | 0.0                 | 0.4                | 0.0                | 2.8             |
| 0xD2                      | Dual DDC low BW, two lane    | 2         | 2600               | 1.2                             | 0.4                | 0.2                 | 0.1                 | 0.8                | 0.0                | 4.0             |

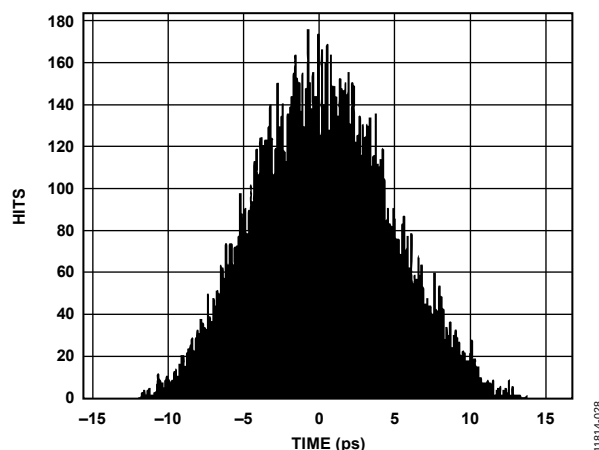

## SCRAMBLER

- Setting Bit 7 to 0 disables the scrambler.
- Setting Bit 7 to 1 enables the scrambler.

The tail bit, PN generator, is located in Register 0x05F[6].

- Setting Bit 6 to 0 disables the tail bit generator.
- Setting Bit 6 to 1 enables the tail bit generator.

The AD9625 contains two separate DDCs that can digitally downconvert real ADC output data into I/Q decimated data at a reduced bandwidth. This feature is useful when the full bandwidth supplied by the 2.6 GSPS converter is not needed.

Figure 94 shows a simplified block diagram of the DDC blocks as they traverse through the [AD9625](#). Because all JESD204B frames contain four samples ( $S = 4$ ), the output from the DDCs must also output four samples. Table 19 shows the remapping of I/Q samples to converter samples for the JESD204B interface, specific to the [AD9625](#).

When in mixed bandwidth mode, DDC 0 is always in high bandwidth mode and DDC 1 is always in low bandwidth mode. To match the data throughput of the high bandwidth mode, the low bandwidth samples are repeated twice in mixed bandwidth mode. Table 20 lists the four frames of data for both DDC 0 (high bandwidth mode) and DDC 1 (low bandwidth mode).

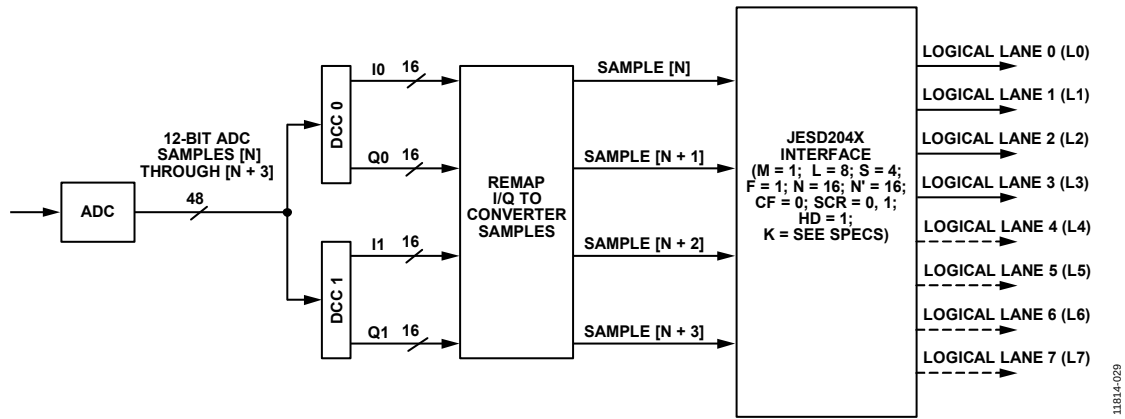


Figure 94. DDC Mapping

Table 19. DDC Remap I/Q to Converter Samples

| Application Mode | Sample[N]          | Sample[N + 1]      | Sample[N + 2]          | Sample[N + 3]          |
|------------------|--------------------|--------------------|------------------------|------------------------|
| Single DDC       | I <sub>0</sub> [N] | Q <sub>0</sub> [N] | I <sub>0</sub> [N + 1] | Q <sub>0</sub> [N + 1] |
| Dual DDCs        | I <sub>0</sub> [N] | Q <sub>0</sub> [N] | I <sub>1</sub> [N]     | Q <sub>1</sub> [N]     |

Table 20. DDC Mixed Bandwidth Mode

| JESD204B Frame Number | Sample[N]              | Sample[N + 1]          | Sample[N + 2]          | Sample[N + 3]          |
|-----------------------|------------------------|------------------------|------------------------|------------------------|
| Frame 0               | I <sub>0</sub> [N]     | Q <sub>0</sub> [N]     | I <sub>1</sub> [N]     | Q <sub>1</sub> [N]     |
| Frame 1               | I <sub>0</sub> [N + 1] | Q <sub>0</sub> [N + 1] | I <sub>1</sub> [N]     | Q <sub>1</sub> [N]     |
| Frame 2               | I <sub>0</sub> [N + 2] | Q <sub>0</sub> [N + 2] | I <sub>1</sub> [N + 1] | Q <sub>1</sub> [N + 1] |
| Frame 3               | I <sub>0</sub> [N + 3] | Q <sub>0</sub> [N + 3] | I <sub>1</sub> [N + 1] | Q <sub>1</sub> [N + 1] |

## CHECKSUM

The JESD204B checksum value is sent with the configuration parameters during the initial lane alignment sequence. Disabling the checksum is primarily for debug purposes only.

## 8-BIT/10-BIT ENCODER CONTROL

The 8-bit/10-bit encoder must be controlled in the following manner:

- The bypass 8-bit/10-bit encoder is controlled by Register 0x60, Bit 2 (0 = 8-bit/10-bit enabled; 1 = 8-bit/10-bit bypassed).
- The invert 10-bit encoder is controlled by Register 0x060, Bit 1 (0 = normal; 1 = invert).
- The mirror 10-bit encoder is controlled by Register 0x060, Bit 0 (0 = normal; 1 = mirrored).

The inversion of the 10-bit values allows the user to swap the true/complement differential pins swapped on the boards. For details about Register 0x060, see the Memory Map Register section.

## INITIAL LANE ALIGNMENT SEQUENCE (ILAS)

The AD9625 must support three different ILAS modes that are controlled using Bits[3:2] in Register 0x05F as follows:

- 00: disabled
- 01: enabled
- 10: reserved
- 11: always on test mode

When enabled, the device must also support the capability to repeat the ILAS using Bits[7:0] in Register 0x062 to determine the number of times ILAS is repeated (0 = repeat 0 times, ILAS runs one time only, 1 = repeat one time, ILAS runs twice, and so forth). Because the number of frames per multiframe is determined by the value of K, the total number of frames transmitted during the initial lane alignment sequence is

$$4 \times (K + 1) \times (ILAS\_COUNT + 1)$$

where the value of K is defined in Register 0x070, Bits[4:0]. Note that only values divisible by four can be used.

For details about Register 0x05F and Register 0x062, see the Memory Map Register section.

## LANE SYNCHRONIZATION

Lane synchronization is defined by Register 0x05F, Bit 4 (0 = disabled, 1 = enabled). For more information, see the Memory Map Register section.

### Multichip Synchronization Using SYSREF± Timestamp

The SYSREF± pin in the AD9625 can also be used as a timestamp of data as it passes through the ADC and out the JESD204B interface. This can be accomplished in two ways:

- Replace the least significant converter bit with the synchronous low to high captured SYSREF± signal. If the AD9625 were configured as a 12-bit converter, this would effectively reduce it to a 11-bit converter. This is accomplished by setting Register 0x03A[7] = 1 in the register map.
- Use the extra output JESD204B control bits to insert the synchronous low to high captured SYSREF± signal. These extra control bits are only available while in the JESD204B generic two, four, and eight lane modes. The generic six lane mode does not support control bits as both N and N' = 12.

### Six Lane Output Mode

The full data output bandwidth of the eight lane mode can alternately be output using a six lane mode. This is achieved by using an N' = 12 in the six lane mode vs. N' = 16 in the eight lane mode for N = 12 ADC data.

The benefit of using the six lane mode is that only six lanes of output data are needed instead of eight lanes and two output data lanes can be powered down. A drawback of the six lane mode is that because there is full efficiency of the link for N = N' = 12, there is no spare bandwidth available for control bits. Therefore, control bit timestamping using SYSREF± cannot be used in the six lane mode. The LSB of the 12-bit ADC data can be substituted to output the SYSREF± timestamp.

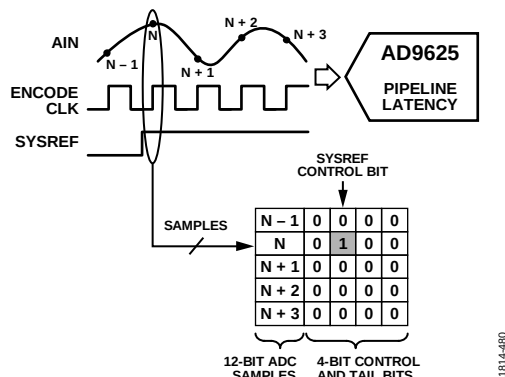


Figure 95. A SYSREF± Control Bit Can Be Used to Mark the Same Analog Sample that is Coincident with a Sampled SYSREF± Edge by CLK±

### ADC Output Control Bits on JESD204B Samples

When N' = 16 and the ADC resolution is 12, there are four spare bits available per sample. Two of these spare bits can be used as control bits, depending on the configuration options. The control bits are set in Register 0x072, Bits[7:6]. (CS means control bits per sample.)

- 00: no control bits sent per sample (CS = 0).
- 01: one control bit sent per sample, overrange bit enabled, (CS = 1).
- 10: two control bits sent per sample, overrange and time stamped SYSREF± control bit (marks the sample of a rising edge seen on the SYSREF± pin), (CS = 2). Use of the SYSREF± control bit (CS = 2) time stamps a particular analog sample that is seen coincident with a rising signal on the SYSREF± pins. See the Register 0x08A description to disable the LMFC JESD204B alignment for timestamping.

### SYSREF± Setup and Hold IRQ

The differential SYSREF± inputs to AD9625 are critical for JESD204B deterministic latency and sample timestamping. At a 2.5 GSPS sample rate, the clock period is only 400 ps in duration from which to accurately latch a SYSREF± edge to meet setup and hold time to the sample clock. Therefore, it is important to know the location of the SYSREF± edge relative to the sampling edge of the encode clock. To help identify the SYSREF± edge location within the clock period, the AD9625 provides a setup and hold time edge detector circuit to provide feedback to the system for SYSREF± timing skew and other alignment procedures. This is a fine timing detector (<1 clock cycle) and does not provide useful information if coarse timing (>1 clock cycle) skew adjustment is needed on SYSREF±.

The AD9625 provides an interrupt request (IRQ) bit that identifies either a setup or a hold time error for the SYSREF± edge relative to the sampling clock. The error indicates that the SYSREF± edge is present within the designated time window. There is a default detector window for both the actual setup and hold time, with each being nominally 35 ps in time. This error flag can be identified internal to the AD9625 IRQ register or the status can be sent externally via the IRQ pin, provided that the appropriate interrupts are masked or enabled as desired.

A SYSREF± edge located in either the setup or hold violation window causes ambiguity as to whether the event latches on CLK±[N] or CLK±[N + 1]. As a best practice, the SYSREF± edge must be earlier than both the setup and hold violation windows so that a deterministic clock can be used to latch SYSREF±.

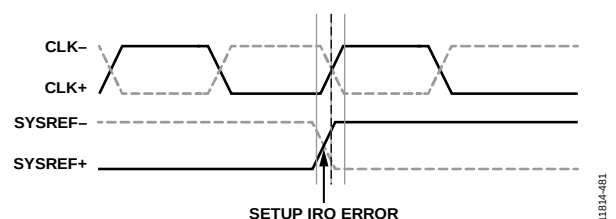


Figure 96. SYSREF± Edge Falls Within the Actual Setup Time Window and Triggers an IRQ Error

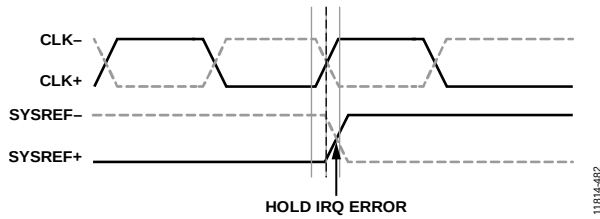


Figure 97. SYSREF± Edge Falls Within the Actual Hold Time Window and Triggers an IRQ Error

#### IRQ Guardband Delays (SYSREF± Setup and Hold)

Additional guardband delays can be added to each of the default setup and hold time windows. This yields more information to the system about the placement of the SYSREF± edge within the clock period and help identify the proximity of the SYSREF± edge to the actual setup and hold time windows. With a default setting of 00b for both setup and hold, each has seven additional settings to increase the guardband timing feedback information.

There are 3 bits that define the SYSREF± setup time guardband located in Register 0x13C[7:5]. There are 3 bits that define the SYSREF± hold time guardband located in Register 0x13B[7:5]. A setting of 000b for either is the default of no additional timing guardband, with just the actual setup and hold time window used as the IRQ.

The IRQ flag for the SYSREF± setup window is in Register 0x100[2], while the IRQ flag for the SYSREF± hold window is in Register 0x100[3]. The IRQ flag mask for the SYSREF± setup window is in Register 0x101[2], while the IRQ flag mask for the SYSREF± hold window is in Register 0x101[3].

After each IRQ alert, the status needs to be cleared, as it does not automatically clear itself, even if the alert conditions are no longer valid. For either the SYSREF± setup or hold IRQ alert, the status is cleared using Register 0x03A[6]. Setting Register 0x03A[6] = 1 clears and hold the IRQ in a reset value of 0. To allow IRQ flags pertaining to SYSREF± again, set Register 0x03A[6] = 0.

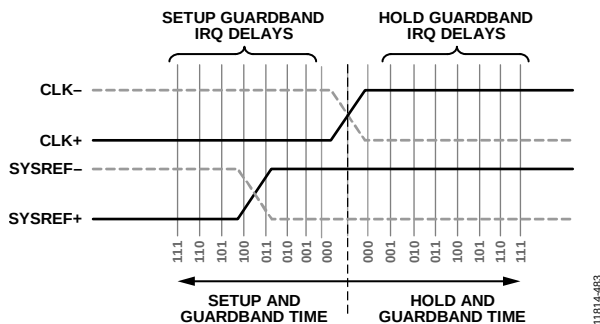


Figure 98. SYSREF± Edge Falls Within the Guardbanded Setup Time Window and Triggers an IRQ Error

In Figure 98, the SYSREF± edge meets the default setup and hold time of the clock, but would trigger an IRQ event only if certain setup time guardband delays were used. For this figure, all of the setup guardband delays that would place the SYSREF± crossing edge between it and the dotted black line would incur

an IRQ event equal to 1. All other settings would be 0. Because there is no edge in the hold guardband delays, those would all be 0 if they were set.

Table 21. IRQ Outcomes for All Setup or Hold Guardband Settings for the Case in Figure 98

| Setting/IRQ | Setup | Hold |
|-------------|-------|------|
| 000         | 0     | 0    |
| 001         | 0     | 0    |
| 010         | 0     | 0    |
| 011         | 0     | 0    |
| 100         | 1     | 0    |
| 101         | 1     | 0    |
| 110         | 1     | 0    |
| 111         | 1     | 0    |

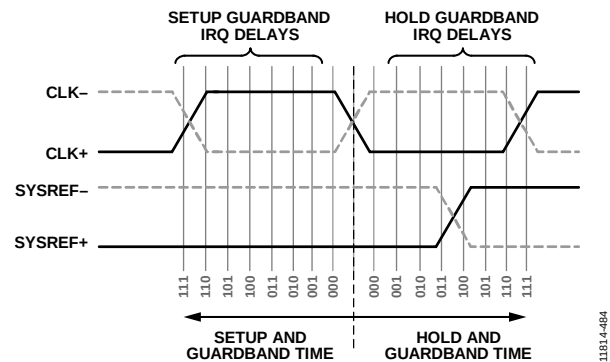


Figure 99. SYSREF± Edge Falls Within the Guardbanded Hold Time Window and Triggers an IRQ Error

In Figure 99, the SYSREF± edge misses the default setup and hold time of the clock, but would trigger an IRQ event only if certain hold time guardband delays were used. For this figure, all of the hold guardband delays that would place the SYSREF± crossing edge between it and the dotted black line would incur an IRQ event equal to 1. All other settings would be 0. Because there is no edge in the setup guardband delays, those would all be 0 if they were set.

Table 22. IRQ Outcomes for All Setup or Hold Guardband Settings Using the Case in Figure 99

| Setting/IRQ | Setup | Hold |
|-------------|-------|------|
| 000         | 0     | 0    |
| 001         | 0     | 0    |
| 010         | 0     | 0    |
| 011         | 0     | 0    |
| 100         | 0     | 1    |
| 101         | 0     | 1    |
| 110         | 0     | 1    |
| 111         | 0     | 1    |



In the case where the encode clock used for the AD9625 is sufficiently fast ( $>1.75$  GSPS), the guardband delays for the earliest setup and latest hold condition starts to overlap in time due to the fast clock period. This case occurs when the encode clock period is smaller than  $16 \times$  the nominal delay guardband window of 35 ps or ( $1/f_s < 16 \times 35$  ps). The earliest setup guardband delays from clock N can overlap with the latest guardband delays from  $\text{CLK} \pm [N + 1]$ . When this is the case, a  $\text{SYSREF} \pm$  edge located in one of these overlapped guardband delays triggers an IRQ event for both the setup and hold detection. While it is possible to make use of this information, it is suggested to limit the number of valid settings to no more than 5 (100b) and below when sampling above 1.75 GSPS to avoid this situation.

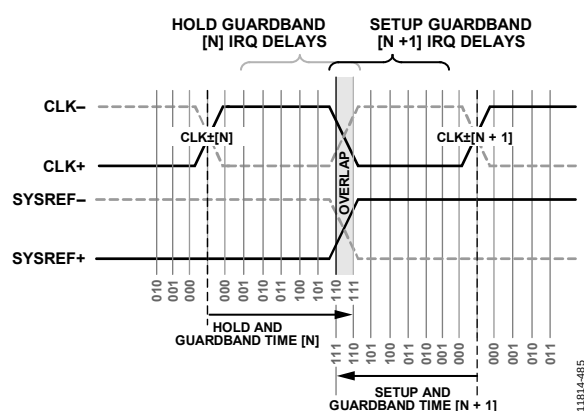


Figure 100.  $\text{SYSREF} \pm$  Edge Falls Within Both the Latest Hold Time Guardband of  $\text{CLK} \pm [N]$  and the Earliest Setup Time Guardband of  $\text{CLK} \pm [N + 1]$  and Triggers an IRQ Error

Table 23. IRQ Outcomes for All Setup or Hold Guardband Settings Using the Case in Figure 100

| Setting/IRQ | Setup | Hold |
|-------------|-------|------|
| 000         | 0     | 0    |
| 001         | 0     | 0    |
| 010         | 0     | 0    |
| 011         | 0     | 0    |
| 100         | 0     | 0    |
| 101         | 0     | 0    |
| 110         | 0     | 0    |
| 111         | 1     | 1    |

As a secondary use, the  $\text{SYSREF} \pm$  edge detector can also alert the system about phase shift drift between  $\text{SYSREF} \pm$  and CLK due to temperature or supply changes. For example, a conservative guardband setting could be used, such that an IRQ status of 0 would be seen in ideal conditions. If timing drifts were significant enough to trigger the IRQ, the system would take action to adjust the skew of the  $\text{SYSREF} \pm$  to CLK accordingly to reestablish an IRQ of 0.

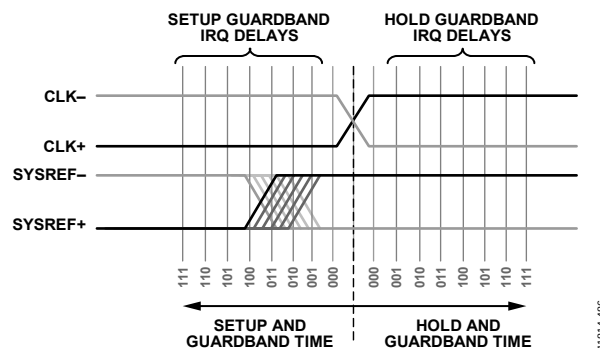


Figure 101.  $\text{SYSREF} \pm$  Edge Changes Phase Relative to the Encode Clock, Which can be Detected When the Edge Crosses Through the Guardband Setup Time

Table 24. IRQ Outcomes for all Setup or Hold Guardband Settings Using the Case in Figure 101

| Setting/IRQ | Setup | Hold | Setting/IRQ | Setup | Hold |
|-------------|-------|------|-------------|-------|------|
| 000         | 0     | 0    | 000         | 0     | 0    |
| 001         | 0     | 0    | 001         | 0     | 0    |
| 010         | 0     | 0    | 010         | 1     | 0    |
| 011         | 0     | 0    | 011         | 1     | 0    |
| 100         | 1     | 0    | 100         | 1     | 0    |
| 101         | 1     | 0    | 101         | 1     | 0    |
| 110         | 1     | 0    | 110         | 1     | 0    |
| 111         | 1     | 0    | 111         | 1     | 0    |

#### Using Rising/Falling Edges of the CLK to Latch $\text{SYSREF} \pm$

The  $\text{SYSREF} \pm$  signal can be latched on either the rising or falling edge of the encode clock, based on the value of register 0x03A[3] = 0 (latch on rising edge) or 0x03A[3] = 1 (latch on falling edge). This does not impact the analog input, which is always sampled on the rising edge of the encode clock. For sampling  $\text{SYSREF} \pm$ , the falling edge encode capture of  $\text{CLK} \pm [N]$  precedes the rising edge encode capture of  $\text{CLK} \pm [N]$ , both corresponding to the same analog sample.



For synchronous sampling of multiple converters using SYSREF±, it may be possible to have a scenario shown in Figure 102. This case uses a SYSREF± capture with the falling edge of the encode clock first to test the SYSREF± position using the edge detection window. The three ADC's each receive a SYSREF± input that may be skewed in time due to board trace length or source variance. For ADC[0] SYSREF± meets setup/hold to CLK±[N], ADC[1] misses setup/hold to CLK±[N], and ADC[2] is indeterminate as it falls within the setup/hold window and may be latched by either CLK±[N] or CLK±[N + 1].

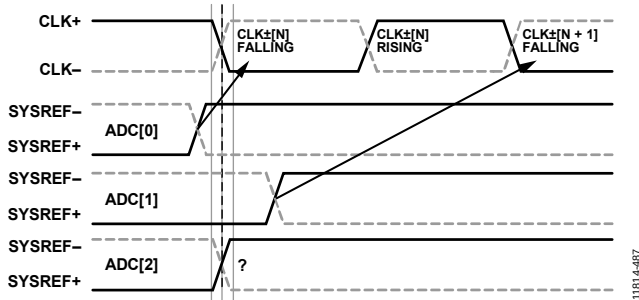


Figure 102. SYSREF± Case From Three ADCs Having Various Phase Delays Relative to the Falling Edge of the Encode Clock and is Latched on Different Sample Clock Edges CLK±[N] or CLK±[N + 1]

As a solution to this case, the SYSREF± capture edge can be changed from falling to rising, which is still captured to the analog sample from CLK±[N]. When this is done, all three ADC's now meet the setup/hold time for the rising edge capture of CLK±[N].

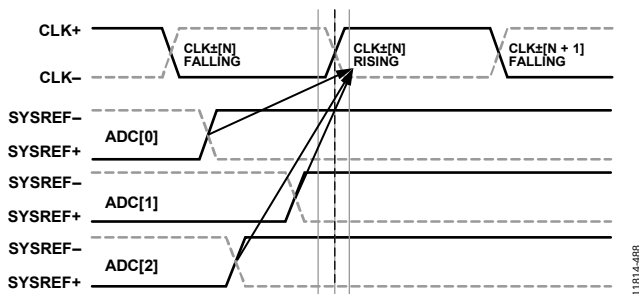


Figure 103. Changing the Latching Edge to Rising for All Three ADCs, SYSREF± Can Now be Aligned to CLK±[N]

### Test Modes

Bits[5:4] in Register 0x061 control the JESD204B interface test injection points.

- 00: 16-bit test generation data injected at the sample input to the link.
- 01: 10-bit test generation data injected at the output of the 8-bit/10-bit encoder (at the input to PHY).
- 10: 8-bit test generation data injected at the input of the scrambler.
- 11: reserved.

Bits[3:0] in Register 0x061 determine the type of test patterns that are injected, as follows:

- 0000: normal operation (test mode disabled).
- 0001: alternating checkerboard.
- 0010: 1/0 word toggle.
- 0011: PN sequence: long ( $x^{23} + x^{18} + 1$ ).
- 0101: continuous/repeat user test mode; most significant bits from 16-bit user pattern (1, 2, 3, 4) are placed on the output for one clock cycle and then repeated. (Output user pattern: 1, 2, 3, 4, 1, 2, 3, 4, 1, 2, 3, 4, ...)
- 0110: single user test mode; most significant bits from the 16-bit user pattern (1, 2, 3, 4) placed on the output for one clock cycle and then outputs all zeros. (Output user pattern: 1, 2, 3, 4, then output all zeros.)
- 0111: Ramp output (dependent on test injection point and number of bits, N).
- 1000: modified RPAT test sequence.
- 1001: unused.
- 1010: JSPAT test sequence.
- 1011: JTSPAT test sequence.
- 1100 to 1111: unused.

### JESD204B APPLICATION LAYERS

The AD9625 supports the following application layer modes via Register 0x063[3:0]:

- 0100:  $f_s \times x$  mode which supports line rates at integer multiples of the sample rates
- 1000: single DDC mode, high bandwidth mode (only DDC 0 used)
- 1001: single DDC mode, low bandwidth mode (only DDC 0 used)
- 1010 to 1011: unused
- 1100: dual DDC mode, high bandwidth mode (both DDC 0 and DDC 1 used)
- 1101: dual DDC mode, low bandwidth mode (both DDC 0 and DDC 1 used)
- 1110: dual DDC mode, mixed bandwidth mode (DDC 0 high bandwidth mode, DDC 1 low bandwidth mode, samples repeated)

**$f_s \times 2$ ,  $f_s \times 4$ ,  $f_s \times 8$  Modes**

The JESD204B low multiplier mode application layer adds a rate conversion on top of a JESD204B transmitter/receiver with the following configuration parameters:  $M = 1$ ;  $L = 8$ ;  $S = 4$ ;  $F = 1$ ;  $N = 16$ ;  $N' = 16$ ;  $CS = 0$ ;  $CF = 0$ ;  $SCR = 0, 1$ ;  $HD = 1$ ;  $K =$  reference JESD204B specification.

In this mode, there are five actual samples per frame and scrambling can be optionally enabled in the JESD204B interface. The transmit portion of the low multiplier mode JESD204B application layer is shown in Figure 104.

The first step in this application layer is where 12-bit ADC samples are divided into six bytes.

To allow the line rate of the JESD204B interface to map directly into an integer of the converter sample rate, a four to five rate conversion takes place to group the 12-bit ADC samples into blocks of five samples. During this rate conversion, for every five 12-bit ADC sample, an extra user defined, 4-bit nibble is appended to create a 64-bit frame. Next, the 64-bit low multiplier frame maps into the four 16-bit JESD204B samples. The most significant 16-bits of the 64-bit low multiplier frame map to the oldest 16-bit JESD204B sample and the least significant 16-bits of the 64-bit low multiplier frame map to the most recent 16-bit JESD204B sample.

The receive portion of the  $f_s \times 2$  JESD204B application layer is shown in Figure 105.

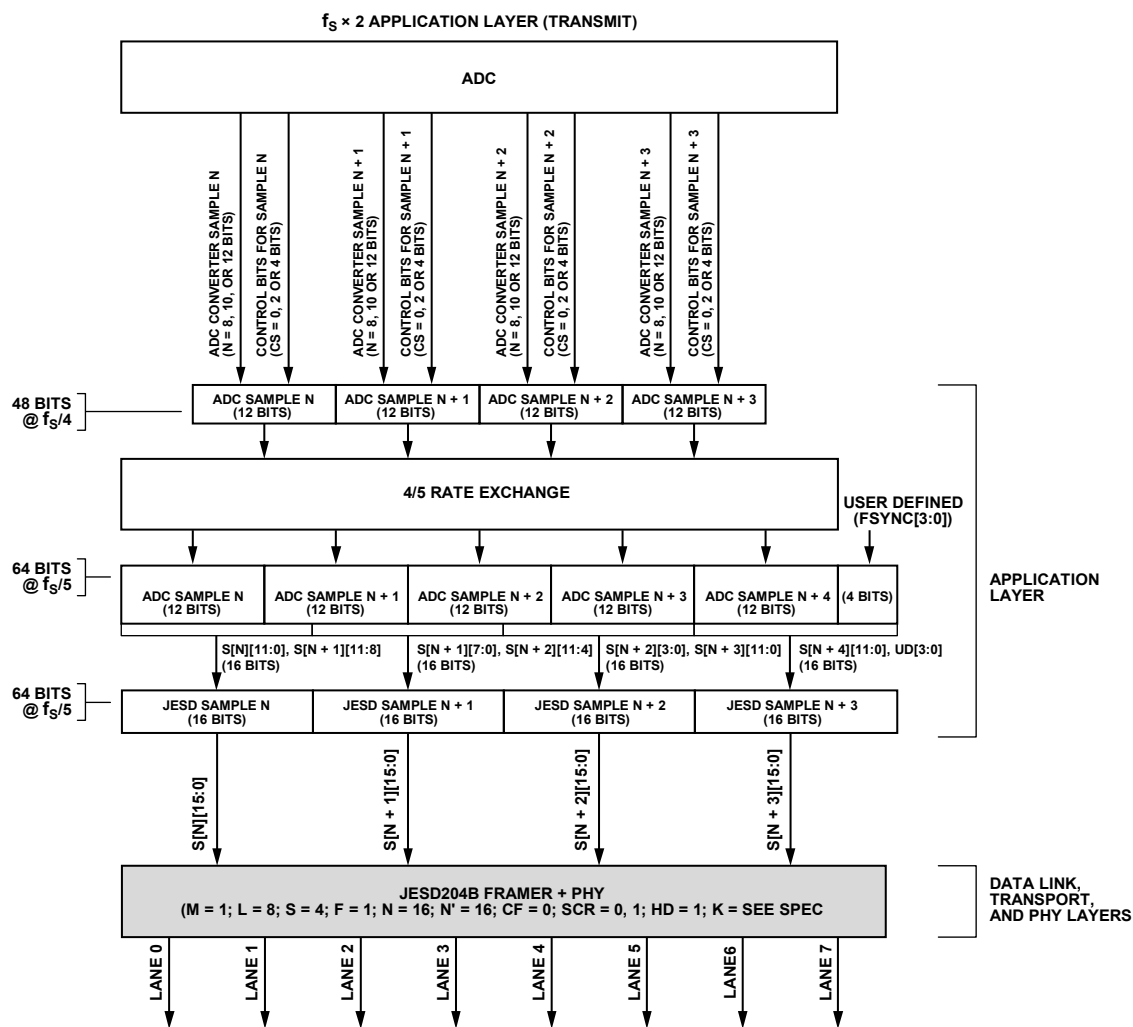
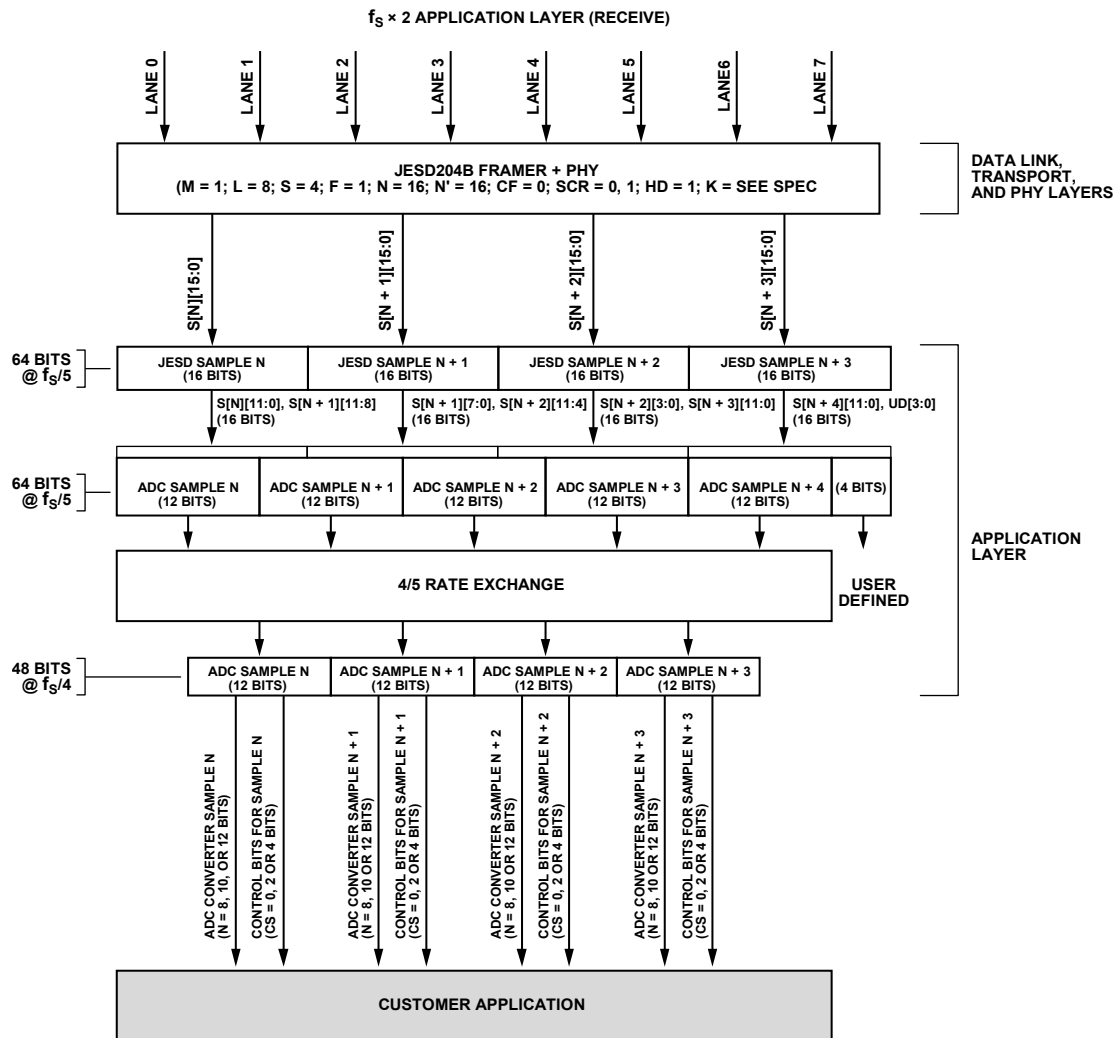


Figure 104.  $f_s \times 2$  Mode Application Layer (Transmit)

11814-032

Figure 105.  $f_s \times 2$  Application Layer (Receive)

11814-033

## FRAME ALIGNMENT CHARACTER INSERTION

Frame alignment character insertion (FACI) is defined in the register map (see the Memory Map Register section). Disable FACI only when it is used as a test feature.

The FACI disable bit is located in Register 0x05F, Bit 1. Use the following settings:

- Setting Bit 1 to 0 = FACI enabled
- Setting Bit 1 to 1 = FACI disabled

## THERMAL CONSIDERATIONS

Because of the high power nature of the device, it is critical to provide airflow and/or install a heat sink when operating at a high temperature. This ensures that the maximum case temperature does not exceed 85°C.

## POWER SUPPLY CONSIDERATIONS

The AD9625 must be powered by the following two supplies: AVDD1 = DVDD1 = DRVDD1 = 1.3 V, AVDD2 = DVDD2 = DRVDD2 = 2.5 V. An optional DVDDIO and SPI\_DVDDIO may be required at 2.5 V.

For applications requiring an optimal high power efficiency and low noise performance, it is recommended that ADP2386 switching regulator is used to convert the 12 V input rail into two intermediate rails (2.1 V and 3.6 V). These intermediate rails are then postregulated by very low noise, low dropout (LDO) regulators (ADP1740, ADP7104, and ADP125). Figure 106 shows the recommended method.

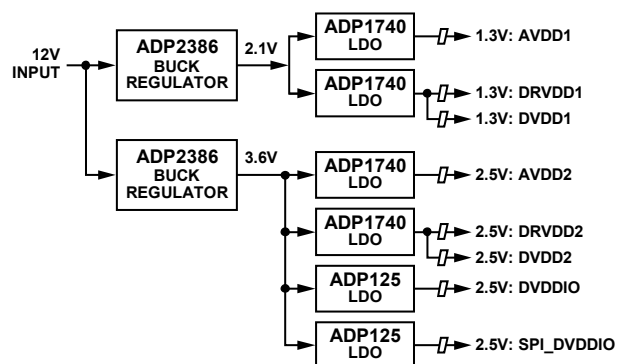


Figure 106. Power Supply Recommendation

11814-054

SERIAL PORT INTERFACE (SPI)

The AD9625 SPI allows the user to configure the converter for specific functions or operations through a structured register space provided inside the ADC. The SPI gives the user added flexibility and customization, depending on the application. Addresses are accessed via the serial port and can be written to or read from via the port. Memory is organized into bytes that can be further divided into fields. These fields are documented in the Memory Map section.

CONFIGURATION USING THE SPI

Three pins define the SPI of this ADC: the SCLK pin, the SDIO pin, and the CSB pin (see Table 25). The SCLK (serial clock) pin is used to synchronize the read and write data presented from/to the ADC. The SDIO (serial data input/output) pin is a dual-purpose pin that allows data to be sent and read from the internal ADC memory map registers. The CSB (chip select bar) pin is an active low control that enables or disables the read and write cycles.

Table 25. Serial Port Interface Pins

| Pin  | Function                                                                                                                                                                            |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCLK | Serial Clock. The serial shift clock input, which is used to synchronize serial interface, reads and writes.                                                                        |
| SDIO | Serial Data Input/Output. A dual-purpose pin that typically serves as an input or an output, depending on the instruction being sent and the relative position in the timing frame. |
| CSB  | Chip Select Bar. An active low control that gates the read and write cycles.                                                                                                        |

The falling edge of CSB, in conjunction with the rising edge of SCLK, determines the start of the framing.

Other modes involving the CSB pin are available. The CSB pin can be held low indefinitely, which permanently enables the device; this is called streaming. The CSB pin can stall high between bytes to allow for additional external timing. When CSB is tied high, SPI functions are placed in a high impedance mode. This mode turns on any SPI pin secondary functions.

All data is composed of 8-bit words. The first bit of each individual byte of serial data indicates whether a read or write command is issued. This allows the SDIO pin to change direction from an input to an output.

In addition to word length, the instruction phase determines whether the serial frame is a read or write operation, allowing the serial port to be used both to program the chip and to read the contents of the on-chip memory. If the instruction is a read operation, performing a read causes the SDIO pin to change direction from an input to an output at the appropriate point in the serial frame.

Data can be sent in MSB first mode or in LSB first mode. MSB first is the default on power-up and can be changed via the SPI port configuration register.

HARDWARE INTERFACE

The pins described in Table 25 comprise the physical interface between the user programming device and the serial port of the AD9625. The SCLK pin and the CSB pin function as inputs when using the SPI interface. The SDIO pin is bidirectional, functioning as an input during write phases and as an output during read.

The SPI interface is flexible enough to be controlled by either FPGAs or microcontrollers. One method for SPI configuration is described in detail in the AN-812 Application Note, *Microcontroller-Based Serial Port Interface (SPI) Boot Circuit*.

Do not activate the SPI port during periods when the full dynamic performance of the converter is required. Because the SCLK signal, the CSB signal, and the SDIO signal are typically asynchronous to the ADC clock, noise from these signals can degrade converter performance. If the on-board SPI bus is used for other devices, it may be necessary to provide buffers between this bus and the AD9625 to prevent these signals from transitioning at the converter inputs during critical sampling periods.

## MEMORY MAP

### READING THE MEMORY MAP REGISTER

Each row in the memory map register contains eight bit locations. The memory map is roughly divided into three sections: the chip configuration registers (Address 0x000 to Address 0x002); the transfer register (Address 0x0FF); and the ADC functions registers, including setup, control, and test (Address 0x008 to Address 0x13A).

The memory map register tables provide the default hexadecimal value for each hexadecimal address that is listed.

The column with the heading, Bit 7 (MSB), is the start of the default hexadecimal value given. For example, Address 0x14, the output mode register, has a hexadecimal default value of 0x01. This means that Bit 0 = 1, and the remaining bits are 0s. This setting is the default output format value, which is twos complement. For more information on this function and others, see the [AN-877 Application Note, Interfacing to High Speed ADCs via SPI](#).

### Open and Reserved Locations

All address and bit locations are not currently supported for this device. Unused bits of a valid address location should be written with 0s. Writing to these locations is required only when a portion of an address location is open. If the entire address location is open, this address location should not be written.

### Default Values

After the AD9625 is reset, critical registers are loaded with default values. The default values for the registers are given in the memory map register tables.

### Logic Levels

An explanation of logic level terminology follows:

- “Bit is set” is synonymous with “bit is set to Logic 1” or “writing Logic 1 for the bit.”
- “Clear a bit” is synonymous with “bit is set to Logic 0” or “writing Logic 0 for the bit.”

### Transfer Register Map

Register addresses for the AD9625 are shadowed. Register writes do not affect device operation until a transfer command is issued by writing 0x01 to Address 0x0FF, thereby setting the transfer bit. This allows the registers to update internally and simultaneously when the transfer bit is set. The internal update occurs when the transfer bit is set, and then the bit automatically clears.

### MEMORY MAP REGISTERS

Address and bit locations that are not included in Table 26 through Table 116 are not currently supported for this device.

**Table 26. SPI Configuration Register, Address 0x000 (Default = 0x18)**

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                             |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Unused.                                                                                                                                                                                                                                                                                                     |
| 6       | RW     | SPI least significant bit (LSB) first.<br>1: LSB shifted first for all SPI operations. For multibyte SPI operations, the addressing increments automatically.<br>0: most significant bit (MSB) shifted first for all SPI operations. For multibyte SPI operations, the addressing decrements automatically. |
| 5       | RW     | Self clearing soft reset.<br>1: reset the SPI registers (self clearing).<br>0: do nothing.                                                                                                                                                                                                                  |
| 4       | R      | 13-bit addressing enabled.                                                                                                                                                                                                                                                                                  |
| 3       | R      | 13-bit addressing enabled.                                                                                                                                                                                                                                                                                  |
| 2       | RW     | Self clearing soft reset.<br>1: reset the SPI registers(self clearing).<br>0: do nothing.                                                                                                                                                                                                                   |
| 1       | RW     | SPI LSB first.<br>1: LSB shifted first for all SPI operations. For multibyte SPI operations, the addressing increments automatically.<br>0: MSB shifted first for all SPI operations. For multibyte SPI operations, the addressing decrements automatically.                                                |
| 0       | Unused | Unused.                                                                                                                                                                                                                                                                                                     |

**Table 27. Chip ID Register, Address 0x001 (Default = 0x41)**

| Bit No. | Access | Bit Description |
|---------|--------|-----------------|
| [7:0]   | R      | Chip ID.        |

Table 28. Chip Grade Register, Address 0x002 (Default = 0x14)

| Bit No. | Access | Bit Description                                                         |
|---------|--------|-------------------------------------------------------------------------|
| [7:6]   |        | Unused.                                                                 |
| [5:4]   | R      | Chip ID/speed grade.<br>11: 2.6 GSPS.<br>10: 2.5 GSPS.<br>01: 2.0 GSPS. |
| [3:0]   |        | Unused.                                                                 |

Table 29. Power Control Mode Register, Address 0x008 (Default = 0x80)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                   |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Reserved.                                                                                                                                                                                                                                                                                                                         |
| 6       |        | Reserved.                                                                                                                                                                                                                                                                                                                         |
| 5       |        | Reserved.                                                                                                                                                                                                                                                                                                                         |
| [4:2]   |        | Reserved.                                                                                                                                                                                                                                                                                                                         |
| [1:0]   | RW     | Chip power modes.<br>00: normal mode (power-up).<br>01: Power-down.<br>10: standby mode; digital datapath clocks disabled, JESD204B interface enabled, outputs enabled.<br>11: digital datapath reset mode; digital data path clocks enabled, digital data path held in reset, JESD204B interface held in reset, outputs enabled. |

Table 30. PLL Status Register, Address 0x00A (Default = 0x00)

| Bit No. | Access | Bit Description                                                    |
|---------|--------|--------------------------------------------------------------------|
| 7       | RO     | PLL locked status bit.<br>0: PLL is unlocked.<br>1: PLL is locked. |
| [6:0]   |        | Reserved.                                                          |

Table 31. ADC Test Control Register, Address 0x00D (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       | RW     | ADC datapath user test mode control. Note that these bits are only used when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000); otherwise, they are ignored.<br>0: continuous/repeat pattern mode. Place each user pattern (1, 2, 3, 4) on the output for one clock cycle and then repeat. (Output user pattern: 1, 2, 3, 4, 1, 2, 3, 4, 1, 2, 3, 4, ...)<br>1: single pattern mode. Place each user pattern (1, 2, 3, 4) on the output for one clock cycle and then output all zeros. (Output user pattern: 1, 2, 3, 4, then output all zeros.) |
| 6       |        | Unused.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 5       | RW     | ADC long psuedo random number test generator reset.<br>0: long PN enabled.<br>1: long PN held in reset.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 4       | RW     | Unused.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| [3:0]   | RW     | ADC data output test generation mode.<br>0000: off, normal operation.<br>0001: midscale short.<br>0010: positive full scale.<br>0011: negative full scale.<br>0100: alternating checkerboard.<br>0101: PN sequence, long.<br>0110: unused.<br>0111: one-/zero-word toggle.<br>1000: user test mode. Used with Register 0x00D[7] and user pattern (1, 2, 3, 4) registers.<br>1001 to 1110: unused.<br>1111: ramp output.                                                                                                                                                     |

Table 32. Data Path Customer Offset Register, Address 0x010 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                               |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6]   |        | Unused.                                                                                                                                                                                                                       |
| [5:0]   | RW     | Digital datapath offset. Twos complement offset adjustment aligned with least converter resolution.<br>011111: +31.<br>011110: +30.<br>...<br>000001: +1.<br>000000: 0.<br>111111: -1.<br>...<br>100001: -31.<br>100000: -32. |

Table 33. Output Mode Register, Address 0x014 (Default = 0x01)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                         |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   |        | Unused.                                                                                                                                                                                                                                                 |
| 4       | RW     | Chip output disable. Bit 4 enables and disables the digital outputs from the ADC.<br>0: enable.<br>1: disable.                                                                                                                                          |
| 3       |        | Unused.                                                                                                                                                                                                                                                 |
| 2       | RW     | Digital ADC sample invert.<br>0: ADC sample data is not inverted.<br>1: ADC sample data is inverted.                                                                                                                                                    |
| [1:0]   | RW     | Digital ADC data format select (DFS). Note that the use of the muxed SDIO pin to control Register 0x014[1:0] is not supported on the <a href="#">AD9625</a> .<br>00: offset binary.<br>01: twos complement (default).<br>10: reserved.<br>11: reserved. |

Table 34. Serializer Output Adjust, Register, Address 0x015 (Default = 0x54)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                               |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       | RW     | Serializer output polarity selection.<br>0: normal, not inverted.<br>1: output driver polarity inverted.                                                                                                                                                      |
| [6:5]   | RW     | Serializer output emphasis amplitude control.<br>00: 0 mV de-emphasis differential peak to peak.<br>01: 160 mV de-emphasis differential peak to peak.<br>10: 80 mV de-emphasis differential peak to peak.<br>11: 40 mV de-emphasis differential peak to peak. |
| [4:0]   | RW     | Reserved.                                                                                                                                                                                                                                                     |

Table 35. User Test Pattern 1 LSB Register, Address 0x019 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                       |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 1 least significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000), or when Register 0x061, Bits[3:0] is in the scrambler or 10-bit test modes (Register 0x061[3:0] = 0100 to 0111). Otherwise, these bits are ignored. |

Table 36. User Test Pattern 1 MSB Register, Address 0x01A (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                     |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 1 most significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000). Otherwise, these bits are ignored. |



Table 37. User Test Pattern 2 LSB Register, Address 0x01B (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                      |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 2 least significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000). Otherwise, these bits are ignored. |

Table 38. User Test Pattern 2 MSB Register, Address 0x01C (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                     |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 2 most significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000). Otherwise, these bits are ignored. |

Table 39. User Test Pattern 3 LSB Register, Address 0x01D (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                      |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 3 least significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000). Otherwise, these bits are ignored. |

Table 40. User Test Pattern 3 MSB Register, Address 0x01E (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                     |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 3 most significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000). Otherwise, these bits are ignored. |

Table 41. User Test Pattern 4 LSB Register, Address 0x01F (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                      |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 4 least significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000). Otherwise, these bits are ignored. |

Table 42. User Test Pattern 4 MSB Register, Address 0x020 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                     |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | User Test Pattern 4 most significant byte. Note that these bits are used only when Register 0x00D, Bits[3:0] is in user input mode (Register 0x00D[3:0] = 1000). Otherwise, these bits are ignored. |

Table 43. Synthesizer PLL Control Register, Address 0x021 (Default = 0x00)

| Bit No. | Access | Bit Description                 |
|---------|--------|---------------------------------|
| [7:5]   |        | Unused.                         |
| 4       | RW     | 1: force power-down of VCO LDO. |
| 3       | RW     | Reserved for future use.        |
| [2:0]   |        | Unused.                         |

Table 44. ADC Analog Input Control Register, Address 0x02C (Default = 0x00)

| Bit No. | Access | Bit Description                                                                      |
|---------|--------|--------------------------------------------------------------------------------------|
| [7:3]   |        | Unused.                                                                              |
| 2       | RW     | Set function on VMON pin.<br>0: unused.<br>1: allows external reference on VMON pin. |
| [1:0]   |        | Unused.                                                                              |

Table 45. SYSREF± Control Register, Address 0x03A (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                        |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       | RW     | SYSREF± status bit replaces the LSB from the converter.<br>0: normal mode.<br>1: SYSREF± status bit replaces the LSB.                                                  |
| 6       | RW     | SYSREF± status bit flag reset. To use the flags, Register 0x03A, Bit 1 must be set to high.<br>0: normal flag operation.<br>1: SYSREF± status bit flags held in reset. |
| 5       |        | Unused.                                                                                                                                                                |

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4       | RW     | SYSREF± transition selection.<br>0: SYSREF± is valid on low to high transitions using selected CLK edge.<br>1: SYSREF± is valid on high to low transitions using selected CLK edge.                                                            |
| 3       | RW     | SYSREF± capture edge selection.<br>0: captured on rising edge of CLK input.<br>1: captured on falling edge of CLK input.                                                                                                                       |
| 2       | RW     | SYSREF± next mode.<br>0: continuous mode.<br>1: next SYSREF± mode: uses the next valid edge only of the SYSREF± pin. Subsequent edges of the SYSREF± pin are ignored. When the next system reference is found, Bit 1 of Register 0x03A clears. |
| 1       | RW     | SYSREF± pins enable.<br>0: SYSREF± disabled.<br>1: SYSREF± enabled. When Register 0x03A, Bit 2 = 1, only the next valid edge of the SYSREF± pins is used. Subsequent edges of the SYSREF± pin are ignored.                                     |
| 0       |        | Unused.                                                                                                                                                                                                                                        |

Table 46. Fast Detect Control Register, Address 0x045 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                              |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:4]   |        | Unused.                                                                                                                                                      |
| 3       | RW     | Force the fast detect output pin.<br>0: normal operation of fast detect pin.<br>1: force a value on the fast detect pin (see Bit 2 in this table, Table 46). |
| 2       | RW     | The fast detect output pin is set to the value in this bit (Register 0x045[2]) when the output is forced.                                                    |
| 1       |        | Unused.                                                                                                                                                      |
| 0       | RW     | Enable fast detect on the corrected ADC data.<br>0: fine fast detect disabled.<br>1: fine fast detect enabled.                                               |

Table 47. Fast Detect Upper Threshold Register, Address 0x047 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                 |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | These bits are the LSBs of the fast detect upper threshold. These eight LSBs of the programmable 12-bit upper threshold are compared to the fine ADC magnitude. |

Table 48. Fast Detect Upper Threshold Register, Address 0x048 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                |
|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:4]   |        | Unused.                                                                                                                                                        |
| [3:0]   | RW     | These bits are the MSBs of the fast detect upper threshold. These four MSBs of the programmable 12-bit upper threshold are compared to the fine ADC magnitude. |

Table 49. Fast Detect Lower Threshold Register, Address 0x049 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                 |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | These bits are the LSBs of the fast detect lower threshold. These eight LSBs of the programmable 12-bit lower threshold are compared to the fine ADC magnitude. |

Table 50. Fast Detect Lower Threshold Register, Address 0x04A (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                             |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------|
| [7:4]   |        | Unused.                                                                                                                                     |
| [3:0]   | RW     | MSBs of the fast detect lower threshold. These four MSBs of the programmable 12-bit lower threshold are compared to the fine ADC magnitude. |

Table 51. Fast Detect Dwell Time Counter Threshold Register, Address 0x04B (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                       |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | These bits are the LSBs of the fast detect dwell time counter target. This is the value for a 16-bit counter that determines the length of time that the ADC data must remain below the lower threshold before the FD pin reset to 0. |

Table 52. Fast Detect Dwell Time Counter Threshold Register, Address 0x04C (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                              |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | These bits are the MSBs of the fast detect dwell time counter target. This is the value for a 16-bit counter that determines the length of time that the ADC data must remain below the lower threshold before the FD pin resets to 0. Note that the fast detect (FD) pin deasserts after the ADC codes stay below the lower target for the number of samples indicated by the value in Register 0x04C[7:0]. |

Table 53. JESD204B Quick Configuration Register, Address 0x05E (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | <p>JESD204B serial quick configuration (self clearing). This register is self clearing and does not control anything in the <a href="#">AD9625</a> directly; it only changes the value of the other JESD204B registers that control the chip. Because this register is self clearing, it always returns to 000 after each write. To use the quick configuration feature, write to this register first, then, if there are any changes that need to be made to any of the following settings, write to the other JESD204B registers.</p> <p>0x00: configuration determined by other registers. Because the register is self clearing, it always returns to this value after each write.</p> <p>0x01: reserved.</p> <p>0x02: Generic Two Lane Configuration Register 0x063[3:0] = 0x0; Register 0x06E[4:0] = 0x1; Register 0x072[4:0] = 0xB; Register 0x073[4:0] = 0xF.</p> <p>0x04: Generic Four Lane Configuration Register 0x063[3:0] = 0x0; Register 0x06E[4:0] = 0x3; Register 0x072[4:0] = 0xB; Register 0x073[4:0] = 0xF.</p> <p>0x06: Generic Six Lane Configuration Register 0x063[3:0] = 0x0; Register 0x06E[4:0] = 0x5; Register 0x072[4:0] = 0xB; Register 0x073[4:0] = 0xB.</p> <p>0x08: Generic Eight Lane Configuration Register 0x063[3:0] = 0x0; Register 0x06E[4:0] = 0x7; Register 0x072[4:0] = 0xB; Register 0x073[4:0] = 0xF.</p> <p>0x42: reserved.</p> <p>0x44: reserved.</p> <p>0x48: <math>f_s \times 2</math> mode, eight lanes. Register 0x063[3:0] = 0x4; Register 0x06E[4:0] = 0x7; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0x81: 1 DDC (high BW), one lane. Register 0x063[3:0] = 0x8; Register 0x06E[4:0] = 0x0; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0x82: 1 DDC (high BW), two lanes. Register 0x063[3:0] = 0x8; Register 0x06E[4:0] = 0x1; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0x91: 1 DDC (low BW), one lane. Register 0x063[3:0] = 0x9; Register 0x06E[4:0] = 0x0; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xC1: 2 DDCs (high BW), one lane. Register 0x063[3:0] = 0xC; Register 0x06E[4:0] = 0x0; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xC2: 2 DDCs (high BW), two lanes. Register 0x063[3:0] = 0xC; Register 0x06E[4:0] = 0x1; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xC4: 2 DDCs (high BW), four lanes. Register 0x063[3:0] = 0xC; Register 0x06E[4:0] = 0x3; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xD1: 2 DDCs (low BW), one lane. Register 0x063[3:0] = 0xD; Register 0x06E[4:0] = 0x0; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xD2: 2 DDCs (low BW), two lanes. Register 0x063[3:0] = 0xD; Register 0x06E[4:0] = 0x1; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xE1: 2 DDCs (mixed BW), one lane. Register 0x063[3:0] = 0xE; Register 0x06E[4:0] = 0x0; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xE2: 2 DDCs (mixed BW), two lanes. Register 0x063[3:0] = 0xE; Register 0x06E[4:0] = 0x1; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>0xE4: 2 DDCs (mixed BW), four lanes. Register 0x063[3:0] = 0xE; Register 0x06E[4:0] = 0x3; Register 0x072[4:0] = 0xF; Register 0x073[4:0] = 0xF.</p> <p>All other values have no effect.</p> |

Table 54. JESD204B Link Control Register 1, Address 0x05F (Default = 0x14)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Unused.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 6       | RW     | JESD204B serial tail bit, PN, enable. Note that the following equation can be used to determine the number of PN bits sent per sample = $N' - N - CS$ (the number of control bits per sample).<br>0: serial tail bit, PN, disabled. Unused extra tail bits are padded with zeros.<br>1: serial tail bit, PN, enabled. Unused extra tail bits are padded with a pseudo random number sequence from a 31-bit LFSR (see JESD204B 5.1.4).                                                                                                |
| 5       | RW     | JESD204B serial test sample enable.<br>0: JESD204B test samples disabled.<br>1: JESD204B test samples enabled. The transport layer test sample sequence (as specified in JESD204B Section 5.1.6.2) is sent on all link lanes.                                                                                                                                                                                                                                                                                                        |
| 4       | RW     | JESD204B serial lane synchronization enable. Note that the frame character insertion must be enabled (Register 0x05F[1] = 0) to enable lane synchronization.<br>0: lane synchronization disabled. Both sides do not perform lane synchronization; frame alignment character insertion always uses /K28.7/ control characters (see JESD204B 5.3.3.4).<br>1: lane synchronization enabled. Both sides perform lane sync; frame alignment character insertion uses either /K28.3/ or /K28.7/ control characters (see JESD204B 5.3.3.4). |
| [3:2]   | RW     | JESD204B serial initial lane alignment sequence mode.<br>00: initial lane alignment sequence disabled (JESD204B 5.3.3.5).<br>01: initial lane alignment sequence enabled (JESD204B 5.3.3.5).<br>10: reserved.<br>11: initial lane alignment sequence always on test mode; the JESD204B data link layer test mode (where repeated lane alignment sequence, as specified in JESD204B section 5.3.3.9.2) is sent on all lanes.                                                                                                          |
| 1       | RW     | JESD204B serial frame alignment character insertion (FACI) disable.<br>0: frame alignment character insertion enabled (JESD204B 5.3.3.4).<br>1: frame alignment character insertion disabled. Note that this is for debug only (JESD204B 5.3.3.4).                                                                                                                                                                                                                                                                                   |
| 0       | RW     | JESD204B serial transmit link power-down (active high). Note that the JESD204B transmitter link must be powered down while changing any of the link configuration bits.<br>0: JESD204B serial transmit link enabled. Transmission of the /K28.5/ characters for code group synchronization is controlled by the SYNCINB± pins.<br>1: JESD204B serial transmit link powered down (held in reset and clock gated).                                                                                                                     |

Table 55. JESD204B Link Control Register 2, Address 0x060 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                              |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6]   | RW     | JESD204B serial synchronization mode.<br>00: normal mode.<br>01: reserved.<br>10: SYNCINB± active mode. SYNCINB± pins are active: force code group synchronization.<br>11: SYNCINB± pins disabled.                                                                           |
| 5       | RW     | JESD204B serial synchronization pin invert.<br>0: SYNCINB± pins not inverted.<br>1: SYNCINB± pins inverted.                                                                                                                                                                  |
| [4:3]   |        | Unused.                                                                                                                                                                                                                                                                      |
| 2       | RW     | JESD204B Serial 8-bit/10-bit bypass (test mode only).<br>0: 8-bit/10-bit enabled.<br>1: 8-bit/10-bit bypassed (most significant two bits are 0).                                                                                                                             |
| 1       | RW     | JESD204B 10-bit serial transmit bit invert. Note that in the event that the CML signals are reversed in a system board layout, this bit effectively inverts the differential outputs from the PHY.<br>0: normal.<br>1: invert the a, b, c, d, e, f, g, h, i, j bits.         |
| 0       | RW     | JESD204B 10-bit serial transmit bit mirror.<br>0: 10-bit serial bits are not mirrored. Transmit bit order is alphabetical: a, b, c, d, e, f, g, h, i, j.<br>1: 10-bit serial bits are mirrored. Transmit bit order is alphabetically reversed: j, i, h, g, f, e, d, c, b, a. |

Table 56. JESD204B Link Control Register 3, Address 0x061 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       | RW     | JESD204B checksum disable.<br>0: checksum enabled in the link configuration parameter. Normal operation.<br>1: checksum disabled in the link configuration parameter (set to zero). For testing purposes only.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 6       | RW     | JESD204B checksum mode.<br>0: checksum is the sum of all 8-bit registers in the link configuration fields.<br>1: checksum is the sum of all individual link configuration fields (LSB aligned).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| [5:4]   | RW     | JESD204B serial test generation input selection.<br>00: 16-bit test generation data injected at the sample input to the link.<br>01: 10-bit test generation data injected at the output of the 8-bit/10-bit encoder (at the input to PHY).<br>10: 8-bit test generation data injected at the input of the scrambler.<br>11: reserved.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| [3:0]   | RW     | JESD204B serial test generation mode.<br>0000: normal operation (test mode disabled).<br>0001: alternating checkerboard.<br>0010: 1/0 word toggle.<br>0011: PN sequence (long).<br>0100: unused.<br>0101: continuous/repeat user test mode. The most significant bits from the user pattern (1, 2, 3, 4) are placed on the output for one clock cycle and then repeated (the output user pattern is 1, 2, 3, 4, 1, 2, 3, 4, 1, 2, 3, 4, ...).<br>0110: single user test mode. The most significant bits from the user pattern (1, 2, 3, 4) are placed on the output for one clock cycle and then output all zeros (the output user pattern is 1, 2, 3, 4, and then outputs all zeros).<br>0111: ramp output.<br>1000: modified RPAT test sequence (10-bit value).<br>1001: unused.<br>1010: JSPAT test sequence (10-bit value).<br>1011: JTSPAT test sequence (10-bit value).<br>1100 to 1111: unused. |

Table 57. JESD204B Link Control Register 4, Address 0x062 (Default 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | Initial lane alignment sequence repeat count. Bits[7:0] specify the number of times the initial lane alignment sequence repeats. For ADCs, the JESD204B specification states that the initial lane alignment sequence always spans four multiframe (JESD204B 5.3.3.5). Because Register 0x070, Bits[4:0] determine the number of frames per multiframe, the total number of frames transmitted during the initial lane alignment sequence = $4 \times (\text{Register } 0x070[4:0] + 1) \times (\text{Register } 0x062[7:0] + 1)$ . |

Table 58. JESD204B Link Control Register 5, Address 0x063 (Default = 0x80)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| [6:4]   |        | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| [3:0]   | RW     | JESD204B application layer mode. DDC bandwidth modes are as follows: high bandwidth, decimate by 8 (effective output bandwidth = $f_s/10$ ) and low bandwidth, decimate by 16 (effective output bandwidth = $f_s/20$ ).<br>0000: generic (no application layer used).<br>0001: unused.<br>0010: unused.<br>0011: unused.<br>0100: $f_s \times x$ mode (where x is an integer: 2, 4, 8).<br>0101 to 0111: unused.<br>1000: single DDC mode (high bandwidth mode (only DDC0 used)).<br>1001: single DDC mode (low bandwidth mode (only DDC0 used)).<br>1010 to 1011: unused.<br>1100: dual DDC mode, high bandwidth mode (both DDC 0 and DDC 1 used).<br>1101: dual DDC mode, low bandwidth mode (both DDC 0 and DDC 1 used).<br>1110: dual DDC mode, mixed bandwidth mode (DDC 0 high bandwidth mode, DDC 1 low bandwidth mode, samples repeated).<br>1111: unused. |

Table 59. JESD204B Configuration Register, Address 0x064 (Default = 0x00)

| Bit No. | Access | Bit Description                                     |
|---------|--------|-----------------------------------------------------|
| [7:0]   | RW     | JESD204B serial device identification (DID) number. |

Table 60. JESD204B Configuration Register, Address 0x065 (Default = 0x00)

| Bit No. | Access | Bit Description                                                      |
|---------|--------|----------------------------------------------------------------------|
| [7:4]   |        | Unused.                                                              |
| [3:0]   | RW     | JESD204B serial bank identification (BID) number (extension to DID). |

Table 61. JESD204B Configuration Register, Address 0x066 (Default = 0x00)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 0. |

Table 62. JESD204B Configuration Register, Address 0x067 (Default = 0x01)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 1. |

Table 63. JESD204B Configuration Register, Address 0x068 (Default = 0x02)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 2. |

Table 64. JESD204B Configuration Register, Address 0x069 (Default = 0x03)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 3. |

Table 65. JESD204B Configuration Register, Address 0x06A (Default = 0x04)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 4. |

Table 66. JESD204B Configuration Register, Address 0x06B (Default = 0x05)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 5. |

Table 67. JESD204B Configuration Register, Address 0x06C (Default = 0x06)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 6. |

Table 68. JESD204B Configuration Register, Address 0x06D (Default = 0x07)

| Bit No. | Access | Bit Description                                              |
|---------|--------|--------------------------------------------------------------|
| [7:5]   |        | Unused.                                                      |
| [4:0]   | RW     | JESD204B serial lane identification (LID) number for Lane 7. |

Table 69. JESD204B Configuration Register, Address 0x06E (Default = 0x87)

| Bit No. | Access | Bit Description                                                                                                          |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------|
| 7       | RW     | JESD204B serial scrambler mode.<br>0: JESD204B scrambler disabled (SCR = 0).<br>1: JESD204B scrambler enabled (SCR = 1). |
| [6:5]   |        | Unused.                                                                                                                  |

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                       |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [4:0]   | RW     | JESD204B serial lane control (L = Register 0x06E[4:0] + 1).<br>0: one lane per link (L = 1).<br>1: two lanes per link (L = 2).<br>2: unused.<br>3: four lanes per link (L = 4).<br>4: unused.<br>5: six lanes per link (L = 6).<br>6: unused.<br>7: eight lanes per link (L = 8).<br>8 to 31: unused. |

Table 70. JESD204B Configuration Register, Address 0x06F (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                |
|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B number of octets per frame (F = Register 0x06F[7:0] + 1). These bits are calculated using the following equation:<br>$F = (N') / (2 \times L)$ The following are valid values of F:<br>M = 1, S = 4, N' = 16, L = 1, F = 8.<br>M = 1, S = 4, N' = 16, L = 2, F = 4.<br>M = 1, S = 4, N' = 16, L = 4, F = 2.<br>M = 1, S = 4, N' = 12, L = 6, F = 1.<br>M = 1, S = 4, N' = 16, L = 8, F = 1 (default). |

Table 71. JESD204B Configuration Register, Address 0x070 (Default = 0x1F)

| Bit No. | Access | Bit Description                                                                                                                   |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   |        | Unused.                                                                                                                           |
| [4:0]   | RW     | JESD204B number of frames per multiframe (K = Register 0x070[4:0] + 1). Only those values that are divisible by four can be used. |

Table 72. JESD204B Configuration Register, Address 0x071 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                              |
|---------|--------|--------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B number of converters per link/device.<br>0: link connected to one ADC (M = 1).<br>1 to 255: unused. |

Table 73. JESD204B Configuration Register, Address 0x072 (Default = 0x0B)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                     |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6]   | RW     | JESD204B number of control bits per sample (CS, based on the JESD204B specification).<br>00: no control bits sent per sample (CS = 0).<br>01: one control bit sent per sample, overrange bit enabled (CS = 1).<br>10: two control bits sent per sample, overrange + timestamp SYSREF bit (CS = 2).<br>11: reserved. |
| 5       |        | Unused.                                                                                                                                                                                                                                                                                                             |
| [4:0]   | RW     | JESD204B converter resolution (N = Register 0x072[4:0] + 1).<br>0x00 to 0x06: reserved.<br>0x07 to 0x09: reserved.<br>0x0A: reserved.<br>0x0B: N = 12-bit ADC converter resolution.<br>0x0C to 0x0E: reserved.<br>0x0F: N = 16-bit ADC converter resolution.<br>0x10 to 0x1F: reserved.                             |

Table 74. JESD204B Configuration Register, Address 0x073 (Default = 0x2F)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                    |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   | RW     | JESD204B device subclass version.<br>0x0: Subclass 0.<br>0x1: Subclass 1 (default).<br>0x2: Subclass 2 (not supported).<br>0x3: undefined.                                                                                         |
| [4:0]   | RW     | JESD204B total number of bits per sample ( $N' = \text{Register } 0x073[4:0] + 1$ ).<br>0x0 to 0xA: unused.<br>0xB: $N' = 12$ (L must be equal to 6).<br>0xC to 0xE: unused.<br>0xF: $N' = 16$ (L must be equal to 1, 2, 4, or 8). |

Table 75. JESD204B Configuration Register, Address 0x074 (Default = 0x23)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   | RW     | JESD204B version.<br>0x0: JESD204A. SYNCINB± pins input are internally gated by the frame clock. SYNCINB± must be low for at least two frame clock cycles to be interpreted as a synchronization request.<br>0x1: JESD204B. SYNCINB± pins input are internally gated by the local multiframe clock. SYNCINB± must be low for at least four frame clock cycles to be interpreted as a synchronization request.<br>0x2 to 0x7: undefined. |
| [4:0]   | RO     | JESD204B samples per converter frame cycle ( $S = \text{Register } 0x074[4:0] + 1$ ). These are read-only bits. For the AD9625, S must be equal to 4 (Register 0x074[4:0] = 3).                                                                                                                                                                                                                                                         |

Table 76. JESD204B Configuration Register, Address 0x075 (Default = 0x80)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                              |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       | RO     | JESD204B high density (HD) format. This is a read-only bit.<br>0: HD format disabled.<br>1: HD format enabled. High density mode is automatically enabled based on the values of N' and L.<br>The values of HD for the AD9625 are as follows:<br>$N' = 16, L = 1, HD = 0$ .<br>$N' = 16, L = 2, HD = 0$ .<br>$N' = 16, L = 4, HD = 0$ .<br>$N' = 12, L = 6, HD = 1$ .<br>$N' = 16, L = 8, HD = 1$ (default). |
| [6:5]   |        | Unused.                                                                                                                                                                                                                                                                                                                                                                                                      |
| [4:0]   | RO     | JESD204B Number of control words per frame clock cycle per link (CF). These are read-only bits. For the AD9625, CF must equal 0 (Register 0x075[4:0] = 0).                                                                                                                                                                                                                                                   |

Table 77. JESD204B Configuration Register, Address 0x076 (Default = 0x00)

| Bit No. | Access | Bit Description                   |
|---------|--------|-----------------------------------|
| [7:0]   | RW     | JESD204B Serial Reserved Field 1. |

Table 78. JESD204B Configuration Register, Address 0x077 (Default = 0x00)

| Bit No. | Access | Bit Description                   |
|---------|--------|-----------------------------------|
| [7:0]   | RW     | JESD204B Serial Reserved Field 2. |

Table 79. JESD204B Configuration Register, Address 0x078 (Default = 0xC3)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 0. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 0) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |

Table 80. JESD204B Configuration Register, Address 0x079 (Default = 0xC4)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 1. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 1) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |



Table 81. JESD204B Configuration Register, Address 0x07A (Default = 0xC5)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 2. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 2) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |

Table 82. JESD204B Configuration Register, Address 0x07B (Default = 0xC6)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 3. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 3) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |

Table 83. JESD204B Configuration Register, Address 0x07C (Default = 0xC7)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 4. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 4) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |

Table 84. JESD204B Configuration Register, Address 0x07D (Default = 0xC8)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 5. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 5) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |

Table 85. JESD204B Configuration Register, Address 0x07E (Default = 0xC9)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 6. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 6) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |

Table 86. JESD204B Configuration Register, Address 0x07F (Default = 0xCA)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RO     | JESD204B serial checksum value for Lane 6. This value is automatically calculated. The value = (the sum of all link configuration parameters for Lane 6) Modulus 256. Checksum is enabled/disabled using Register 0x061, Bit 7. |

Table 87. JESD204B Lane Power-Down Register, Address 0x080 (Default = 0x00)

| Bit No. | Access | Bit Description                                                              |
|---------|--------|------------------------------------------------------------------------------|
| 7       | RW     | Physical Lane H power-down.<br>0: Lane H enabled.<br>1: Lane H powered down. |
| 6       | RW     | Physical Lane G power-down.<br>0: Lane G enabled.<br>1: Lane G powered down. |
| 5       | RW     | Physical Lane F power-down.<br>0: Lane F enabled.<br>1: Lane F powered down. |
| 4       | RW     | Physical Lane E power-down.<br>0: Lane E enabled.<br>1: Lane E powered down. |
| 3       | RW     | Physical Lane D power-down.<br>0: Lane D enabled.<br>1: Lane D powered down. |
| 2       | RW     | Physical Lane C power-down.<br>0: Lane C enabled.<br>1: Lane C powered down. |
| 1       | RW     | Physical Lane B power-down.<br>0: Lane B enabled.<br>1: Lane B powered down. |
| 0       | RW     | Physical Lane A power-down.<br>0: Lane A enabled.<br>1: Lane A powered down. |

Table 88. JESD204B Lane Control Register 1, Address 0x082 (Default = 0x10)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                       |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Unused.                                                                                                                                                                                                                               |
| [6:4]   | RW     | Physical Lane B assignment.<br>000: Logical Lane 0.<br>001: Logical Lane 1 (default).<br>010: Logical Lane 2.<br>011: Logical Lane 3.<br>100: Logical Lane 4.<br>101: Logical Lane 5.<br>110: Logical Lane 6.<br>111: Logical Lane 7. |
| 3       |        | Unused.                                                                                                                                                                                                                               |
| [2:0]   | RW     | Physical Lane A assignment.<br>000: Logical Lane 0 (default).<br>001: Logical Lane 1.<br>010: Logical Lane 2.<br>011: Logical Lane 3.<br>100: Logical Lane 4.<br>101: Logical Lane 5.<br>110: Logical Lane 6.<br>111: Logical Lane 7. |

Table 89. JESD204B Lane Control Register 2, Address 0x083 (Default = 0x32)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                       |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Unused.                                                                                                                                                                                                                               |
| [6:4]   | RW     | Physical Lane D assignment.<br>000: Logical Lane 0.<br>001: Logical Lane 1.<br>010: Logical Lane 2.<br>011: Logical Lane 3 (default).<br>100: Logical Lane 4.<br>101: Logical Lane 5.<br>110: Logical Lane 6.<br>111: Logical Lane 7. |
| 3       |        | Unused.                                                                                                                                                                                                                               |
| [2:0]   | RW     | Physical Lane C assignment.<br>000: Logical Lane 0.<br>001: Logical Lane 1.<br>010: Logical Lane 2 (default).<br>011: Logical Lane 3.<br>100: Logical Lane 4.<br>101: Logical Lane 5.<br>110: Logical Lane 6.<br>111: Logical Lane 7. |

Table 90. JESD204B Lane Control Register 3, Address 0x084 (Default = 0x54)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                       |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Unused.                                                                                                                                                                                                                               |
| [6:4]   | RW     | Physical Lane F assignment.<br>000: Logical Lane 0.<br>001: Logical Lane 1.<br>010: Logical Lane 2.<br>011: Logical Lane 3.<br>100: Logical Lane 4.<br>101: Logical Lane 5 (default).<br>110: Logical Lane 6.<br>111: Logical Lane 7. |
| 3       |        | Unused.                                                                                                                                                                                                                               |
| [2:0]   | RW     | Physical Lane E assignment.<br>000: Logical Lane 0.<br>001: Logical Lane 1.<br>010: Logical Lane 2.<br>011: Logical Lane 3.<br>100: Logical Lane 4 (default).<br>101: Logical Lane 5.<br>110: Logical Lane 6.<br>111: Logical Lane 7. |

Table 91. JESD204B Lane Control Register 4, Address 0x085 (Default = 0x76)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                       |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       |        | Unused.                                                                                                                                                                                                                               |
| [6:4]   | RW     | Physical Lane H assignment.<br>000: Logical Lane 0.<br>001: Logical Lane 1.<br>010: Logical Lane 2.<br>011: Logical Lane 3.<br>100: Logical Lane 4.<br>101: Logical Lane 5.<br>110: Logical Lane 6.<br>111: Logical Lane 7 (default). |
| 3       |        | Unused.                                                                                                                                                                                                                               |
| [2:0]   | RW     | Physical Lane G assignment.<br>000: Logical Lane 0.<br>001: Logical Lane 1.<br>010: Logical Lane 2.<br>011: Logical Lane 3.<br>100: Logical Lane 4.<br>101: Logical Lane 5.<br>110: Logical Lane 6 (default).<br>111: Logical Lane 7. |

Table 92. Unused, Address 0x088 (Default = 0x67)

| Bit No. | Access | Bit Description |
|---------|--------|-----------------|
| [7:0]   | RW     | Unused.         |

Table 93. Unused, Address 0x089 (Default = 0xF0)

| Bit No. | Access | Bit Description |
|---------|--------|-----------------|
| [7:0]   | RW     | Unused.         |

Table 94. Control Register, Address 0x08A (Default = 0x20)

| Bit No. | Access | Bit Description                                                                                                                                 |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6]   |        | Unused.                                                                                                                                         |
| [5:4]   | RW     | Reserved; Bits[5:4] must be set to 10.                                                                                                          |
| [3:2]   |        | Unused.                                                                                                                                         |
| [1:0]   | RW     | Bits[1:0] must be set to 00 for LMFC JESD204B alignment with SYSREF±.<br>Bits[1:0] must be set to 10 for control bit timestamping with SYSREF±. |

Table 95. JESD204B Local Multiframe Clock Offset Control Register, Address 0x08B (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   |        | Unused.                                                                                                                                                                                        |
| [4:0]   | RW     | Local multiframe clock (LMFC) phase offset value. These bits provide the reset value for LMFC phase counter when SYSREF± pins are asserted; this is used for deterministic delay applications. |

Table 96. JESD204B Local Frame Clock Offset Control Register, Address 0x08C (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                        |
|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | Local frame clock phase offset value. Reset value for frame clock phase counter when SYSREF± pins are asserted. For the <a href="#">AD9625</a> , only values from 0 to 7 are valid. This is used for deterministic delay applications. |

Table 97. DIVCLK± Register, Address 0x0F8 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                              |
|---------|--------|--------------------------------------------------------------------------------------------------------------|
| [7:1]   | RW     | Spare customer register.                                                                                     |
| 0       | RW     | Register control to set the ratio between ADC sampling clock and DIVCLK±.<br>0: divide by 4.<br>1: not used. |

Table 98. Reserved Register, Address 0x0F9

| Bit No. | Access | Bit Description |
|---------|--------|-----------------|
| [7:0]   | RW     | Reserved.       |

Table 99. Customer Spare Register, Address 0x0FF (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                   |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:1]   |        | Unused.                                                                                                                                                                                                                                                           |
| 0       | RW     | Register map master/slave transfer bit. Self-clearing bit used to synchronize the transfer of data from the master to the slave registers.<br>0: no effect.<br>1: transfers data from the master registers, written by the register maps, to the slave registers. |

Table 100. Interrupt Request (IRQ) Status Register, Address 0x100 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                            |
|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       | RO     | Interrupt request PLL lock error.<br>1: the PLL is unlocked.                                                                                                               |
| 6       |        | Unused.                                                                                                                                                                    |
| 5       | RO     | Unused.                                                                                                                                                                    |
| 4       | RO     | Unused.                                                                                                                                                                    |
| 3       | RO     | Interrupt request SYSREF± hold error.<br>1: a hold error has occurred with the last SYSREF± signal received. To clear this error, set and clear Bit 6 in Register 0x03A.   |
| 2       | RO     | Interrupt request SYSREF± setup error.<br>1: a setup error has occurred with the last SYSREF± signal received. To clear this error, set and clear Bit 6 in Register 0x03A. |
| 1       |        | Unused.                                                                                                                                                                    |
| 0       | RO     | Interrupt request clock error.                                                                                                                                             |

Table 101. Interrupt Request (IRQ) Mask Control Register, Address 0x101 (Default = 0xBC)

| Bit No. | Access | Bit Description                                                                                                                                                                              |
|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7       | RW     | Interrupt request PLL lock error masked.<br>1: PLL unlocked events are masked.                                                                                                               |
| 6       |        | Unused.                                                                                                                                                                                      |
| 5       | RW     | Must be set to 1.                                                                                                                                                                            |
| 4       | RW     | Must be set to 1.                                                                                                                                                                            |
| 3       | RW     | Interrupt request SYSREF± hold error.<br>1: a hold error has occurred with the last SYSREF± signal received. To clear this error, set and clear Bit 6 in Register 0x03A.                     |
| 2       | RW     | Interrupt request SYSREF± setup error.<br>1: a setup error has occurred with the last SYSREF± signal received. To clear this error, set and clear Bit 6 in Register 0x03A.                   |
| 1       |        | Unused.                                                                                                                                                                                      |
| 0       | RW     | Interrupt request clock error mask.<br>1: clock error has occurred and the validity of the output data cannot be guaranteed. The only way to recover from this error is to reset the device. |

Table 102. Digital Control Register, Address 0x105 (Default = 0x00)

| Bit No. | Access | Bit Description   |
|---------|--------|-------------------|
| [7:5]   |        | Unused.           |
| 4       | RW     | Must be set to 0. |
| 3       | RW     | Must be set to 0. |
| 2       | RW     | Must be set to 0. |
| 1       | RW     | Must be set to 0. |
| 0       | RW     | Must be set to 0. |

Table 103. Digital Calibration Threshold Control Register, Address 0x10A (Default = 0x10)

| Bit No. | Access | Bit Description                                      |
|---------|--------|------------------------------------------------------|
| [7:5]   |        | Unused.                                              |
| 4       | RW     | Enable data set threshold logic for background gain. |
| [0:3]   |        | Unused.                                              |

Table 104. Digital Calibration Data Set Threshold Register, Address 0x10D (Default = 0x3D)

| Bit No. | Access | Bit Description                                     |
|---------|--------|-----------------------------------------------------|
| [7:0]   | RW     | Data set threshold for background gain calibration. |

Table 105. Digital Calibration Data Set Threshold Register, Address 0x10E (Default = 0x14)

| Bit No. | Access | Bit Description                                     |
|---------|--------|-----------------------------------------------------|
| [7:0]   | RW     | Data set threshold for background gain calibration. |

Table 106. DIVCLK± Output Control Register, Address 0x120 (Default = 0x11)

| Bit No. | Access | Bit Description                                                                                                                                                                        |
|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   |        | Unused.                                                                                                                                                                                |
| 4       | RW     | DIVCLK± output disable. DIVCLK± is 1/4 <sup>th</sup> of the sample clock frequency.<br>0: DIVCLK± output is disabled.<br>1: DIVCLK± output is enabled.                                 |
| 3       | RW     | DIVCLK± output termination selection.<br>0: DIVCLK± output uses an external 100 Ω resistive termination.<br>1: DIVCLK± output uses no external resistive termination.                  |
| 2       |        | Unused.                                                                                                                                                                                |
| [1:0]   | RW     | Control the differential swing for the DIVCLK± output.<br>00: 100 mV p-p differential.<br>01: 200 mV p-p differential.<br>10: 300 mV p-p differential.<br>11: 400 mV p-p differential. |

**Table 107. Trim Setting Control Register, Address 0x121 (Default = 0x00 for AD9625-2.5 and AD9625-2.6; Default = 0x03 for AD9625-2.0)**

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:2]   |        | Reserved.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| [1:0]   | RW     | <p>Select trim setting, based on sample rate (AD9625-2.0 and AD9625-2.5):</p> <p>00: Trim 0: for 2.5 GSPS encode rate (default for AD9625-2.5) (not available for AD9625-2.0).</p> <p>01: Trim 1: for 2.4 GSPS to 2.5 GSPS encode rate (not available for AD9625-2.0).</p> <p>10: Trim 2: for 2.2 GSPS to 2.4 GSPS encode rate (not available for AD9625-2.0).</p> <p>11: Trim 3: for 330 MSPS to 2.2 GSPS encode rate (default for AD9625-2.0).</p> <p>Select trim setting, based on sample rate (AD9625-2.6):</p> <p>00: Trim 0: for 2.55 GSPS to 2.6 GSPS encode rate (default for AD9625-2.6).</p> <p>01: Trim 1: for 2.4 GSPS to 2.55 GSPS encode rate.</p> <p>10: Trim 2: for 2.2 GSPS to 2.4 GSPS encode rate.</p> <p>11: Trim 3: for 330 MSPS to 2.2 GSPS encode rate.</p> |

**Table 108. Unused Register, Address 0x12A (Default = 0x05)**

| Bit No. | Access | Bit Description                             |
|---------|--------|---------------------------------------------|
| [7:0]   | RW     | Reserved; maintain default setting of 0x05. |

**Table 109. DDC 0 Gain Control Register, Address 0x130 (Default = 0x00)**

| Bit No. | Access | Bit Description                                                                                                                                         |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6]   |        | Unused.                                                                                                                                                 |
| [5:4]   | RW     | <p>DDC 0 polyphase (decimate by 2) gain in units of 6 dB.</p> <p>00: 0 dB gain.</p> <p>01: 6 dB gain.</p> <p>10: 12 dB gain.</p> <p>11: 18 dB gain.</p> |
| [3:2]   |        | Unused.                                                                                                                                                 |
| [1:0]   | RW     | <p>DDC 0 polyphase (decimate by 8) gain in units of 6 dB.</p> <p>00: 0 dB gain.</p> <p>01: 6 dB gain.</p> <p>10: 12 dB gain.</p> <p>11: 18 dB gain.</p> |

**Table 110. DDC 0 Phase Increment Least Significant Bits Register, Address 0x131 (Default = 0x00)**

| Bit No. | Access | Bit Description                                                                                                                                                                                       |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | <p>DDC 0 NCO phase increment value. Phase increment for the NCO within DDC 0 (Bits[7:0]).</p> <p>The output frequency = (decimal(Register 0x132[1:0]; Register 0x131[7:0]) × f<sub>s</sub>)/1024.</p> |

**Table 111. DDC 0 Phase Increment Most Significant Bits Register, Address 0x132 (Default = 0x00)**

| Bit No. | Access | Bit Description                                                                        |
|---------|--------|----------------------------------------------------------------------------------------|
| [7:2]   |        | Unused.                                                                                |
| [1:0]   | RW     | DDC 0 NCO phase increment value. Phase increment for the NCO within DDC 0 (Bits[9:8]). |

**Table 112. DDC 1 Gain Control Register, Address 0x138 (Default = 0x00)**

| Bit No. | Access | Bit Description                                                                                                                                         |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6]   |        | Unused.                                                                                                                                                 |
| [5:4]   | RW     | <p>DDC 1 polyphase (decimate by 2) gain in units of 6 dB.</p> <p>00: 0 dB gain.</p> <p>01: 6 dB gain.</p> <p>10: 12 dB gain.</p> <p>11: 18 dB gain.</p> |
| [3:2]   |        | Unused.                                                                                                                                                 |

| Bit No. | Access | Bit Description                                                                                                                 |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------|
| [1:0]   | RW     | DDC 1 polyphase (decimate by 8) gain in units of 6 dB.<br>00: 0 dB gain.<br>01: 6 dB gain<br>10: 12 dB gain.<br>11: 18 dB gain. |

Table 113. DDC 1 Phase Increment Least Significant Bits Register, Address 0x139 (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                          |
|---------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0]   | RW     | DDC 1 NCO phase increment value. Phase increment for the NCO within DDC 1 (Bits[7:0]).<br>The output frequency = (decimal(Register 0x13A[1:0]; Register 0x139[7:0]) $\times f_s$ )/1024. |

Table 114. DDC 1 Phase Increment Most Significant Bits Register, Address 0x13A (Default = 0x00)

| Bit No. | Access | Bit Description                             |
|---------|--------|---------------------------------------------|
| [7:2]   |        | Unused.                                     |
| [1:0]   | RW     | DDC1 NCO phase increment value (Bits[9:8]). |

Table 115. SYSREF±Hold Time Guardband Register, Address 0x13B (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   | RW     | These bits increase the SYSREF± hold time guardband that is used to assert the SYSREF± hold IRQ flag in register 0x100[3]. This time is informational only and does not change the actual hold time for SYSREF±.<br>000: No additional guardband hold time.<br>001: 35 ps of additional hold time guardband for 0x100[3].<br>010: 70 ps of additional hold time guardband for 0x100[3].<br>011: 105 ps of additional hold time guardband for 0x100[3].<br>100: 140 ps of additional hold time guardband for 0x100[3].<br>101: 175 ps of additional hold time guardband for 0x100[3].<br>110: 210 ps of additional hold time guardband for 0x100[3].<br>111: 245 ps of additional hold time guardband for 0x100[3]. |
| [4:0]   | RW     | Reserved.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 116. SYSREF± Setup Time Guardband Register, Address 0x13C (Default = 0x00)

| Bit No. | Access | Bit Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:5]   | RW     | These bits increase the SYSREF± setup time guardband that is used to assert the SYSREF± setup IRQ flag in register 0x100[2]. This time is informational only and does not change the actual setup time for SYSREF±.<br>000: No additional guardband setup time.<br>001: 35 ps of additional setup time guardband for 0x100[2].<br>010: 70 ps of additional setup time guardband for 0x100[2].<br>011: 105 ps of additional setup time guardband for 0x100[2].<br>100: 140 ps of additional setup time guardband for 0x100[2].<br>101: 175 ps of additional setup time guardband for 0x100[2].<br>110: 210 ps of additional setup time guardband for 0x100[2].<br>111: 245 ps of additional setup time guardband for 0x100[2]. |
| [4:0]   | RW     | Reserved.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## APPLICATIONS INFORMATION

### DESIGN GUIDELINES

Before starting system level design and layout of the [AD9625](#), it is recommended that the designer become familiar with these guidelines, which discuss the special circuit connections and layout requirements needed for certain pins.

### POWER AND GROUND RECOMMENDATIONS

When connecting power to the [AD9625](#), it is recommended that separate supplies are used: one supply for the analog output (AVDD), and a separate supply for the digital outputs (DRVDD and DVDD). The designer can use several different decoupling capacitors to cover both high and low frequencies. Locate these capacitors close to the point of entry at the PCB level and close to the pins of the part with minimal trace length.

When using the [AD9625](#), a single PCB ground plane is sufficient. With proper decoupling and smart partitioning of the PCB analog, digital, and clock sections, optimum performance is easily achieved.

### CLOCK STABILITY CONSIDERATIONS

When powered on, the [AD9625](#) enters an initialization phase during which an internal state machine sets up the biases and the registers for proper operation. During the initialization process, the [AD9625](#) needs a stable clock. If the ADC clock source is not present or not stable during ADC power-up, it disrupts the state machine and causes the ADC to start up in a less than optimum state. To correct this, an initialization sequence must be invoked after the ADC clock is stable or any change in the sampling clock frequency is made. By issuing a digital reset via Register 0x00. The pseudo code sequence for a digital reset is as follows:

#Stable Clock at the input to the [AD9625](#)

SPI\_Write (0x00, 0x3C); # Reset

SPI\_Write (0x080 0xFF) #SPI register transfer

SPI\_Write (0x00, 0x00); # Clear Reset

SPI\_Write (0x080 0xFF) #SPI register transfer


#Write further configurations

### SPI PORT

When the full dynamic performance of the converter is required, do not activate the SPI port. Because the SCLK, CSB, and SDIO signals are typically asynchronous to the ADC clock, noise from these signals can degrade converter performance. If the on-board SPI bus is used for other devices, it may be necessary to provide buffers between this bus and the [AD9625](#) to keep these signals from transitioning at the converter input pins during critical sampling periods.



## OUTLINE DIMENSIONS

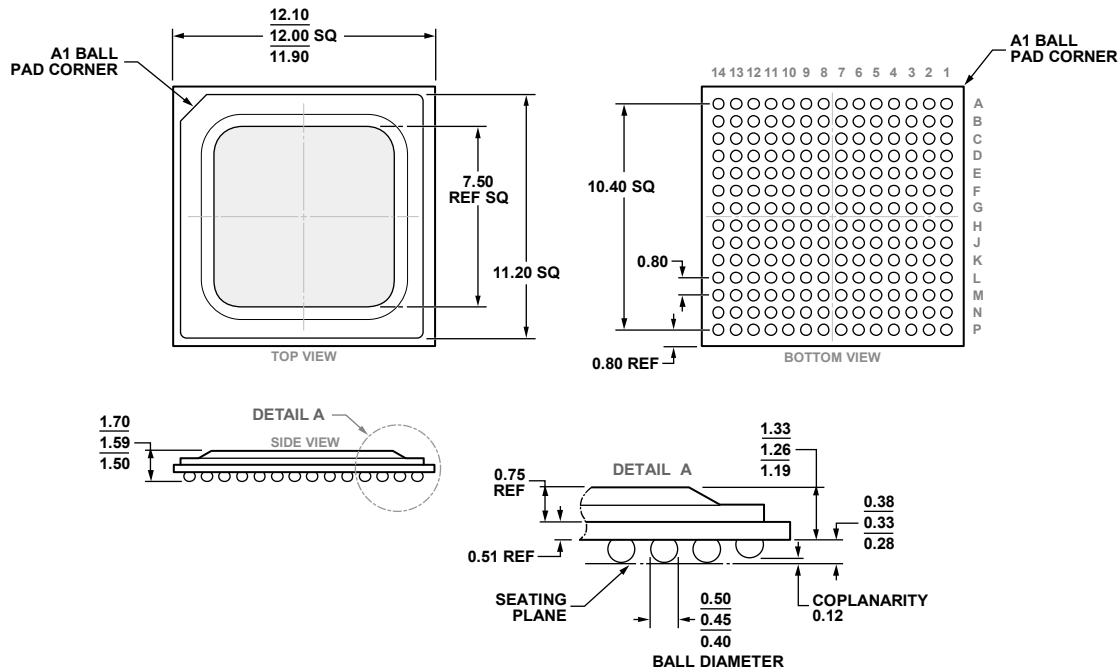

COMPLIANT TO JEDEC STANDARDS MO-275-GGAB-1.

Figure 107. 196-Ball Ball Grid Array, Thermally Enhanced [BGA\_ED]  
(BP-196-2)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description                                                      | Package Option |
|--------------------|-------------------|--------------------------------------------------------------------------|----------------|
| AD9625BBPZ-2.5     | -40°C to +85°C    | 196-Ball Ball Grid Array, Thermally Enhanced [BGA_ED]                    | BP-196-2       |
| AD9625BBPZ-2.0     | -40°C to +85°C    | 196-Ball Ball Grid Array, Thermally Enhanced [BGA_ED]                    | BP-196-2       |
| AD9625BBPZ-2.6     | -40°C to +85°C    | 196-Ball Ball Grid Array, Thermally Enhanced [BGA_ED]                    | BP-196-2       |
| AD9625BBP-2.6      | -40°C to +85°C    | 196-Ball Ball Grid Array, PbSn, Thermally Enhanced [BGA_ED]              | BP-196-2       |
| AD9625BBP-2.5      | -40°C to +85°C    | 196-Ball Ball Grid Array, PbSn, Thermally Enhanced [BGA_ED]              | BP-196-2       |
| AD9625BBPZRL-2.5   | -40°C to +85°C    | 196-Ball Ball Grid Array, Thermally Enhanced [BGA_ED], 13" Tape and Reel | BP-196-2       |
| AD9625BBPZRL-2.0   | -40°C to +85°C    | 196-Ball Ball Grid Array, Thermally Enhanced [BGA_ED], 13" Tape and Reel | BP-196-2       |
| AD9625BBPRL-2.5    | -40°C to +85°C    | 196-Ball BGA, PbSn, Thermally Enhanced [BGA_ED], 13" Tape and Reel       | BP-196-2       |
| AD9625BBPRL-2.6    | -40°C to +85°C    | 196-Ball BGA, PbSn, Thermally Enhanced [BGA_ED], 13" Tape and Reel       | BP-196-2       |
| AD9625-2.6EB       |                   | Evaluation Board with AD9625                                             |                |
| AD9625-2.5EBZ      |                   | Evaluation Board with AD9625                                             |                |
| AD9625-2.0EBZ      |                   | Evaluation Board with AD9625                                             |                |

<sup>1</sup> Z = RoHS Compliant Part.