


	title AirMax VS R.A. Receipt Ass'y, 5 pair, 150pos, 2mm, 101MLA, 85 Ohm	dwg no 10095504	Rev. C
	catalog no -	CUSTOMER	sheet 2 of 3

PART NUMBER	PRESS FIT TAIL PLATING TYPE
10095504-101	TIN/LEAD ALLOY OVER NICKEL
10095504-101LF	LEAD FREE

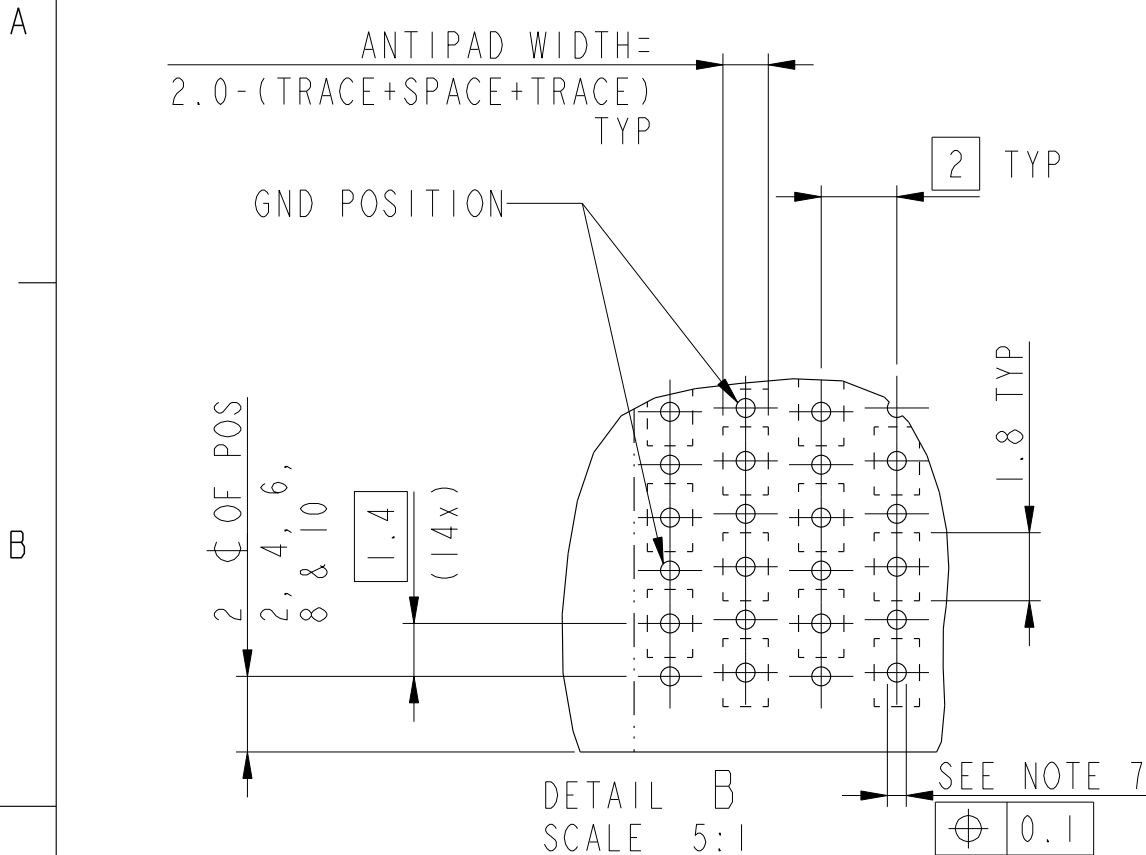


NOTES:

1. CONNECTOR MATERIALS:
HOUSING & RETAINER: HIGH TEMP THERMOPLASTIC, NATURAL, UL94V-0
IMLA PLASTIC: HIGH TEMP PLASTIC, GREY, UL94V-0
CONTACT: COPPER ALLOY.
2. CONTACT PLATING:
SEPARABLE INTERFACE : PERFORMANCE BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-239, INCLUDING TELCORDIA GR-1217-CORE (NOV 1995) CENTRAL OFFICE TEST SEQUENCE.
PRESS-FIT TAILS: SEE TABLE
3. PRODUCT SPECIFICATION: GS-12-239
4. APPLICATION SPECIFICATION: GS-20-035
5. PRODUCT MARKING, (PARTNUMBER & LOT CODE) AND "85 OHM", ON THIS SURFACE
6. THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR SYSTEM.
7. SEE CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE DIAMETER AND PLATING OPTIONS
8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 °C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
10. PACKAGING MEETS GS-14-920 LEAD FREE LABELLING SPECIFICATION.
11. A $\triangle C$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

SEE DETAIL B

B

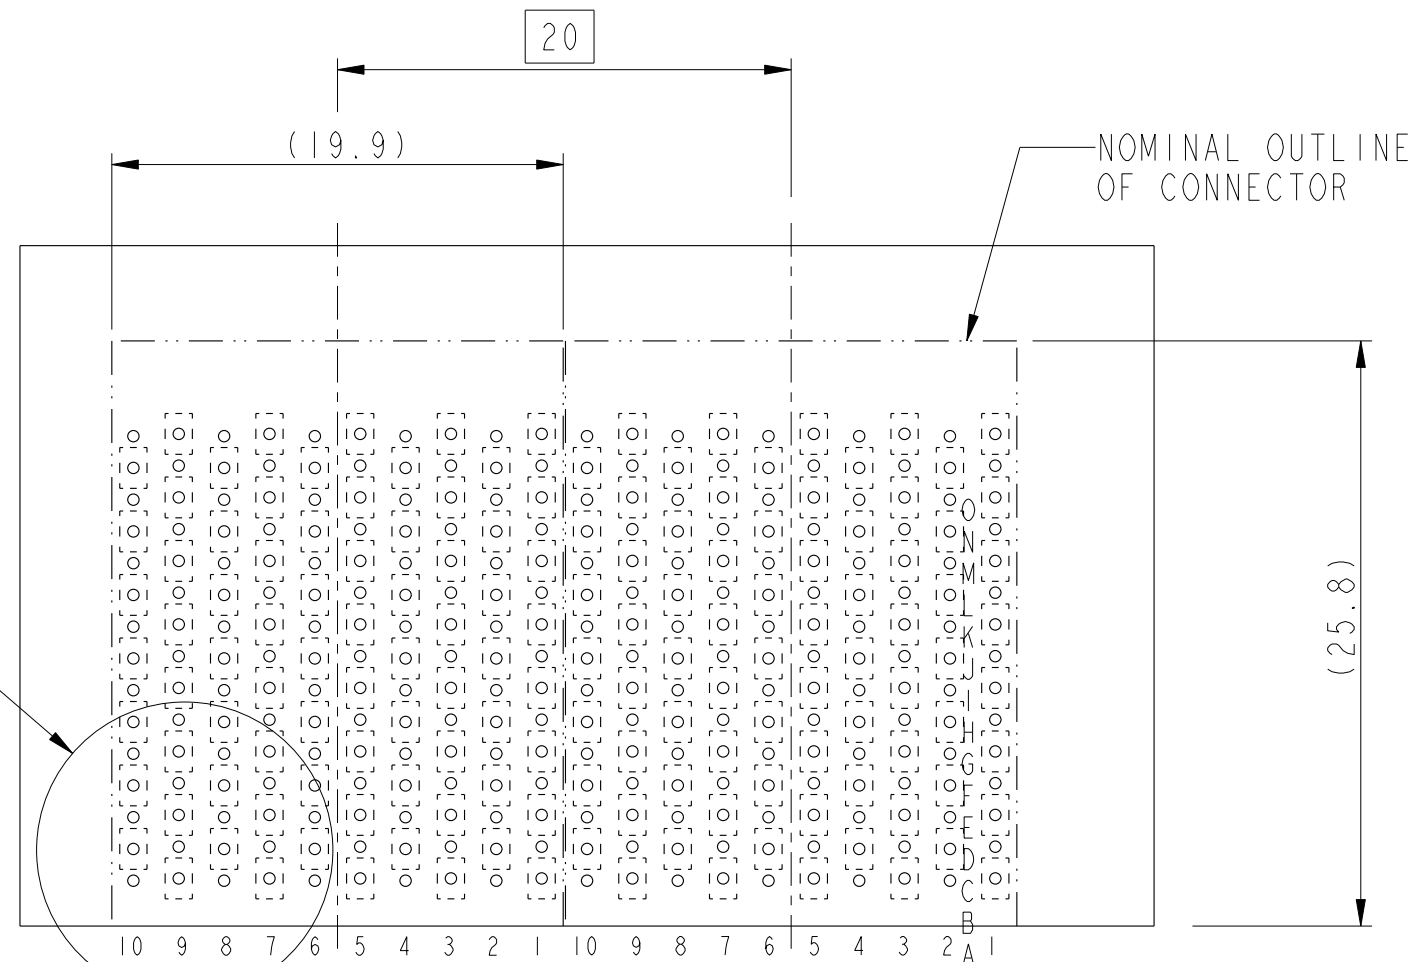

title	AirMax VS R.A. Receipt
Ass'y, 5 pair, 150pos, 2mm, 10IMLA, 85 Ohm	
catalog no	-

dwg no	10095504	Rev.	C
CUSTOMER	sheet 3 of 3		