

## TABLE OF CONTENTS

|                                           |   |                                                             |    |
|-------------------------------------------|---|-------------------------------------------------------------|----|
| Features .....                            | 1 | Terminology .....                                           | 15 |
| Applications .....                        | 1 | Theory of Operation .....                                   | 16 |
| Pin Configuration .....                   | 1 | Power Dissipation Considerations .....                      | 16 |
| General Description .....                 | 1 | Input Capacitor .....                                       | 16 |
| Revision History .....                    | 2 | Output Capacitor .....                                      | 16 |
| Specifications .....                      | 3 | Applications Information .....                              | 17 |
| ADR121 Electrical Characteristics .....   | 3 | Basic Voltage Reference Connection .....                    | 17 |
| ADR125 Electrical Characteristics .....   | 4 | Stacking Reference ICs for Arbitrary Outputs .....          | 17 |
| ADR127 Electrical Characteristics .....   | 5 | Negative Precision Reference Without Precision Resistors .. | 17 |
| Absolute Maximum Ratings .....            | 6 | General-Purpose Current Source .....                        | 17 |
| Thermal Resistance .....                  | 6 | Outline Dimensions .....                                    | 18 |
| ESD Caution .....                         | 6 | Ordering Guide .....                                        | 18 |
| Typical Performance Characteristics ..... | 7 |                                                             |    |

## REVISION HISTORY

### 1/08—Rev. A to Rev. B

|                                 |    |
|---------------------------------|----|
| Changes to Table 1 .....        | 3  |
| Changes to Table 2 .....        | 4  |
| Changes to Table 3 .....        | 5  |
| Changes to Figure 52 .....      | 17 |
| Changes to Ordering Guide ..... | 18 |

### 5/07—Rev. 0 to Rev. A

|                                         |    |
|-----------------------------------------|----|
| Changes to Table 1 .....                | 3  |
| Changes to Table 2 .....                | 4  |
| Changes to Table 3 .....                | 5  |
| Added Thermal Hysteresis Equation ..... | 7  |
| Changes to Ordering Guide .....         | 18 |

### 6/06—Revision 0: Initial Version

# SPECIFICATIONS

## ADR121 ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_{IN} = 2.8\text{ V}$  to  $18\text{ V}$ ,  $I_{OUT} = 0\text{ mA}$ , unless otherwise noted.

Table 1.

| Parameter                       | Symbol      | Conditions/Comments                                                                                                  | Min   | Typ       | Max       | Unit                                        |
|---------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------|-------|-----------|-----------|---------------------------------------------|
| OUTPUT VOLTAGE                  | $V_{OUT}$   |                                                                                                                      |       |           |           |                                             |
| B Grade                         |             |                                                                                                                      | 2.497 | 2.5       | 2.503     | V                                           |
| A Grade                         |             |                                                                                                                      | 2.494 | 2.5       | 2.506     | V                                           |
| INITIAL ACCURACY ERROR          | $V_{OERR}$  |                                                                                                                      |       |           |           |                                             |
| B Grade                         |             |                                                                                                                      | -0.12 |           | +0.12     | %                                           |
| A Grade                         |             |                                                                                                                      | -0.24 |           | +0.24     | %                                           |
| TEMPERATURE COEFFICIENT         | $TCV_{OUT}$ | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |       |           |           |                                             |
| B Grade                         |             |                                                                                                                      |       | 3         | 9         | ppm/ $^\circ\text{C}$                       |
| A Grade                         |             |                                                                                                                      |       | 15        | 25        | ppm/ $^\circ\text{C}$                       |
| DROPOUT ( $V_{OUT} - V_{IN}$ )  | $V_{DO}$    | $I_{OUT} = 0\text{ mA}$                                                                                              | 300   |           |           | mV                                          |
| LOAD REGULATION                 |             | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ ; $V_{IN} = 5.0\text{ V}$ ,<br>$0\text{ mA} < I_{OUT} < 5\text{ mA}$  |       | 80        | 300       | ppm/mA                                      |
|                                 |             | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ ; $V_{IN} = 5.0\text{ V}$ ,<br>$-2\text{ mA} < I_{OUT} < 0\text{ mA}$ |       | 50        | 300       | ppm/mA                                      |
| LINE REGULATION                 |             | $2.8\text{ V}$ to $18\text{ V}$ , $I_{OUT} = 0\text{ mA}$                                                            | -50   | +3        | +50       | ppm/V                                       |
| PSRR                            |             | $f = 60\text{ Hz}$                                                                                                   |       | -90       |           | dB                                          |
| QUIESCENT CURRENT               | $I_Q$       | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ , no load<br>$V_{IN} = 18\text{ V}$<br>$V_{IN} = 2.8\text{ V}$        |       | 95<br>80  | 125<br>95 | $\mu\text{A}$<br>$\mu\text{A}$              |
| SHORT-CIRCUIT CURRENT TO GROUND |             | $V_{IN} = 2.8\text{ V}$<br>$V_{IN} = 18\text{ V}$                                                                    |       | 18<br>40  |           | mA<br>mA                                    |
| VOLTAGE NOISE                   |             | $f = 10\text{ kHz}$<br>$f = 0.1\text{ Hz}$ to $10\text{ Hz}$                                                         |       | 500<br>18 |           | nV/ $\sqrt{\text{Hz}}$<br>$\mu\text{V p-p}$ |
| TURN-ON SETTLING TIME           |             | To 0.1%, $C_L = 0.2\text{ }\mu\text{F}$                                                                              |       | 100       |           | $\mu\text{s}$                               |
| LONG-TERM STABILITY             |             | 1000 hours @ $25^\circ\text{C}$                                                                                      |       | 150       |           | ppm/1000 hrs                                |
| OUTPUT VOLTAGE HYSTERESIS       |             | See the Terminology section                                                                                          |       | 300       |           | ppm                                         |

# ADR121/ADR125/ADR127

## ADR125 ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_{IN} = 5.3\text{ V}$  to  $18\text{ V}$ ,  $I_{OUT} = 0\text{ mA}$ , unless otherwise noted.

Table 2.

| Parameter                       | Symbol      | Conditions/Comments                                                                                                  | Min   | Typ | Max   | Unit                   |
|---------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------|-------|-----|-------|------------------------|
| OUTPUT VOLTAGE                  | $V_{OUT}$   |                                                                                                                      | 4.994 | 5.0 | 5.006 | V                      |
| B Grade                         |             |                                                                                                                      | 4.988 | 5.0 | 5.012 | V                      |
| INITIAL ACCURACY ERROR          | $V_{OERR}$  |                                                                                                                      | -0.12 |     | +0.12 | %                      |
| B Grade                         |             |                                                                                                                      | -0.24 |     | +0.24 | %                      |
| TEMPERATURE COEFFICIENT         | $TCV_{OUT}$ | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |       | 3   | 9     | ppm/ $^\circ\text{C}$  |
| B Grade                         |             |                                                                                                                      |       | 15  | 25    | ppm/ $^\circ\text{C}$  |
| DROPOUT ( $V_{OUT} - V_{IN}$ )  | $V_{DO}$    | $I_{OUT} = 5\text{ mA}$                                                                                              | 300   |     |       | mV                     |
| LOAD REGULATION                 |             | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ ; $V_{IN} = 6.0\text{ V}$ ,<br>$0\text{ mA} < I_{OUT} < 5\text{ mA}$  |       | 35  | 200   | ppm/mA                 |
|                                 |             | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ ; $V_{IN} = 6.0\text{ V}$ ,<br>$-2\text{ mA} < I_{OUT} < 0\text{ mA}$ |       | 35  | 200   | ppm/mA                 |
| LINE REGULATION                 |             | $5.3\text{ V}$ to $18\text{ V}$ , $I_{OUT} = 0\text{ mA}$                                                            |       |     | 30    | ppm/V                  |
| PSRR                            |             | $f = 60\text{ Hz}$                                                                                                   |       | -90 |       | dB                     |
| QUIESCENT CURRENT               | $I_Q$       | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ , no load<br>$V_{IN} = 18\text{ V}$<br>$V_{IN} = 5.3\text{ V}$        |       | 95  | 125   | $\mu\text{A}$          |
|                                 |             |                                                                                                                      |       | 80  | 95    | $\mu\text{A}$          |
| SHORT-CIRCUIT CURRENT TO GROUND |             | $V_{IN} = 5.3\text{ V}$                                                                                              |       | 25  |       | mA                     |
|                                 |             | $V_{IN} = 18\text{ V}$                                                                                               |       | 40  |       | mA                     |
| VOLTAGE NOISE                   |             | $f = 10\text{ kHz}$                                                                                                  |       | 900 |       | nV/ $\sqrt{\text{Hz}}$ |
|                                 |             | $f = 0.1\text{ Hz}$ to $10\text{ Hz}$                                                                                |       | 36  |       | $\mu\text{V p-p}$      |
| TURN-ON SETTLING TIME           |             | To 0.1%, $C_L = 0.2\text{ }\mu\text{F}$                                                                              |       | 100 |       | $\mu\text{s}$          |
| LONG-TERM STABILITY             |             | 1000 hours @ $25^\circ\text{C}$                                                                                      |       | 150 |       | ppm/1000 hrs           |
| OUTPUT VOLTAGE HYSTERESIS       |             | See the Terminology section                                                                                          |       | 300 |       | ppm                    |

## ADR127 ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_{IN} = 2.7\text{ V}$  to  $18\text{ V}$ ,  $I_{OUT} = 0\text{ mA}$ , unless otherwise noted.

Table 3.

| Parameter                       | Symbol      | Conditions/Comments                                                                                                  | Min    | Typ      | Max       | Unit                                        |
|---------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------|--------|----------|-----------|---------------------------------------------|
| OUTPUT VOLTAGE                  | $V_{OUT}$   |                                                                                                                      |        |          |           |                                             |
| B Grade                         |             |                                                                                                                      | 1.2485 | 1.25     | 1.2515    | V                                           |
| A Grade                         |             |                                                                                                                      | 1.2470 | 1.25     | 1.2530    | V                                           |
| INITIAL ACCURACY ERROR          | $V_{OERR}$  |                                                                                                                      |        |          |           |                                             |
| B Grade                         |             |                                                                                                                      | -0.12  |          | +0.12     | %                                           |
| A Grade                         |             |                                                                                                                      | -0.24  |          | +0.24     | %                                           |
| TEMPERATURE COEFFICIENT         | $TCV_{OUT}$ | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |        |          |           |                                             |
| B Grade                         |             |                                                                                                                      |        | 3        | 9         | ppm/ $^\circ\text{C}$                       |
| A Grade                         |             |                                                                                                                      |        | 15       | 25        | ppm/ $^\circ\text{C}$                       |
| DROPOUT ( $V_{OUT} - V_{IN}$ )  | $V_{DO}$    | $I_{OUT} = 0\text{ mA}$                                                                                              | 1.45   |          |           | V                                           |
| LOAD REGULATION                 |             | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ ; $V_{IN} = 3.0\text{ V}$ ,<br>$0\text{ mA} < I_{OUT} < 5\text{ mA}$  |        | 85       | 400       | ppm/mA                                      |
|                                 |             | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ ; $V_{IN} = 3.0\text{ V}$ ,<br>$-2\text{ mA} < I_{OUT} < 0\text{ mA}$ |        | 65       | 400       | ppm/mA                                      |
| LINE REGULATION                 |             | $2.7\text{ V}$ to $18\text{ V}$ , $I_{OUT} = 0\text{ mA}$                                                            |        | 30       | 90        | ppm/V                                       |
| PSRR                            |             | $f = 60\text{ Hz}$                                                                                                   |        | -90      |           | dB                                          |
| QUIESCENT CURRENT               | $I_Q$       | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ , no load<br>$V_{IN} = 18\text{ V}$<br>$V_{IN} = 2.7\text{ V}$        |        | 95<br>80 | 125<br>95 | $\mu\text{A}$<br>$\mu\text{A}$              |
| SHORT-CIRCUIT CURRENT TO GROUND |             | $V_{IN} = 2.7\text{ V}$<br>$V_{IN} = 18\text{ V}$                                                                    |        | 15<br>30 |           | mA<br>mA                                    |
| VOLTAGE NOISE                   |             | $f = 10\text{ kHz}$<br>$f = 0.1\text{ Hz}$ to $10\text{ Hz}$                                                         |        | 300<br>9 |           | nV/ $\sqrt{\text{Hz}}$<br>$\mu\text{V p-p}$ |
| TURN-ON SETTLING TIME           |             | To 0.1%, $C_L = 0.2\text{ }\mu\text{F}$                                                                              |        | 80       |           | $\mu\text{s}$                               |
| LONG-TERM STABILITY             |             | 1000 hours @ $25^\circ\text{C}$                                                                                      |        | 150      |           | ppm/1000 hrs                                |
| OUTPUT VOLTAGE HYSTERESIS       |             | See the Terminology section                                                                                          |        | 300      |           | ppm                                         |

## ABSOLUTE MAXIMUM RATINGS

Table 4.

| Parameter                                           | Rating          |
|-----------------------------------------------------|-----------------|
| V <sub>IN</sub> to GND                              | 20 V            |
| Internal Power Dissipation<br>TSOT (UJ-6)           | 40 mW           |
| Storage Temperature Range                           | –65°C to +150°C |
| Operating Temperature Range                         | –40°C to +125°C |
| Lead Temperature, Soldering<br>Vapor Phase (60 sec) | 215°C           |
| Infrared (15 sec)                                   | 220°C           |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 5.

| Package Type       | $\theta_{JA}$ | $\theta_{JC}$ | Unit |
|--------------------|---------------|---------------|------|
| 6-Lead TSOT (UJ-6) | 230           | 146           | °C/W |

## ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TYPICAL PERFORMANCE CHARACTERISTICS

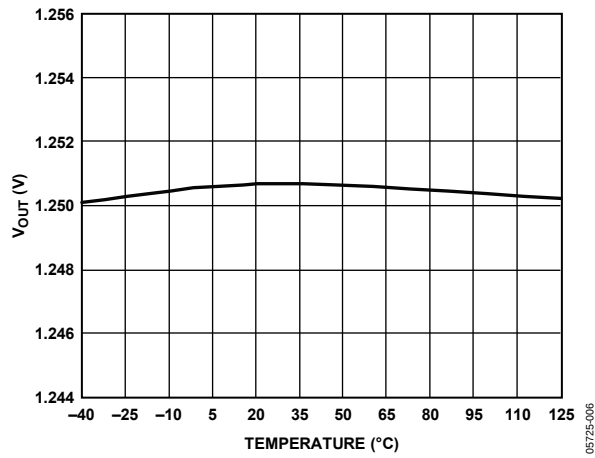


Figure 2. ADR127  $V_{OUT}$  vs. Temperature

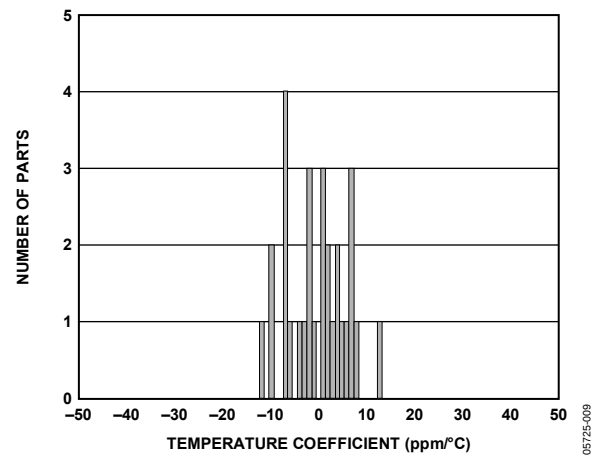


Figure 5. ADR127 Temperature Coefficient

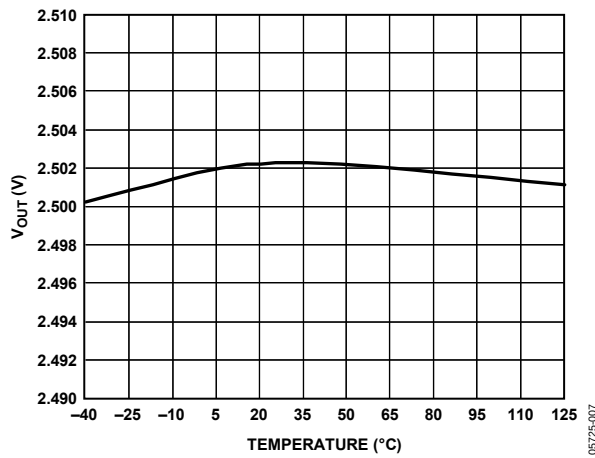


Figure 3. ADR121  $V_{OUT}$  vs. Temperature

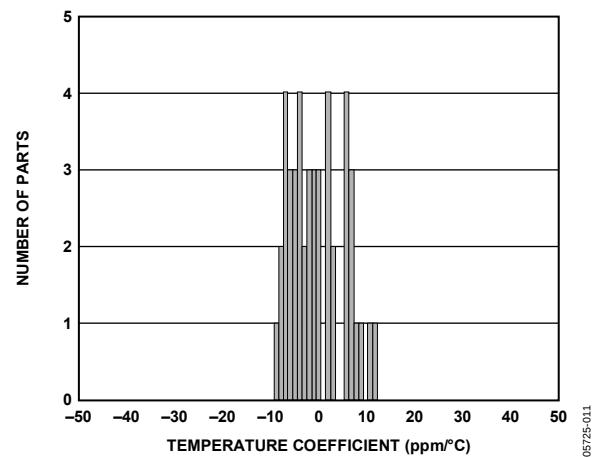


Figure 6. ADR121 Temperature Coefficient

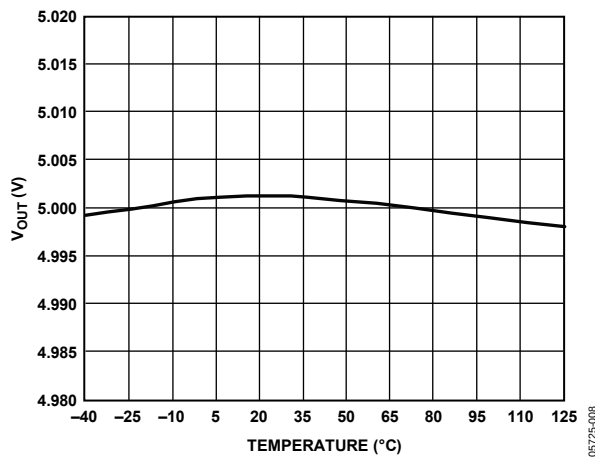


Figure 4. ADR125  $V_{OUT}$  vs. Temperature

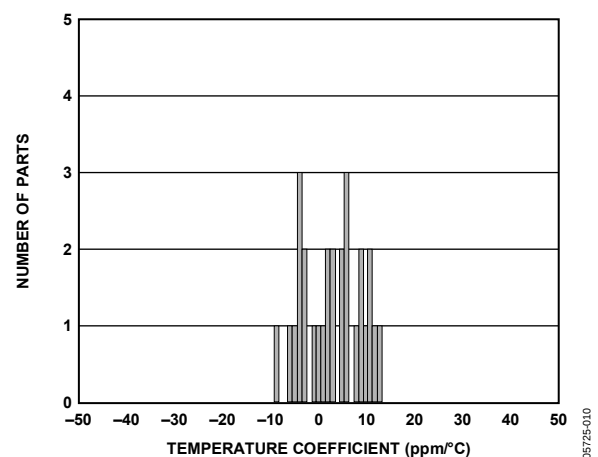


Figure 7. ADR125 Temperature Coefficient

# ADR121/ADR125/ADR127

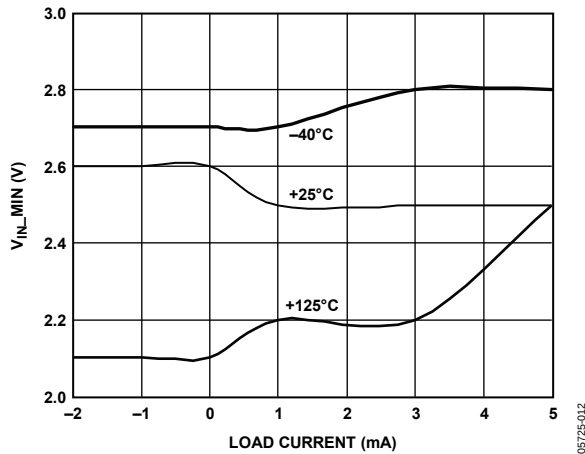


Figure 8. ADR127 Minimum Input Voltage vs. Load Current

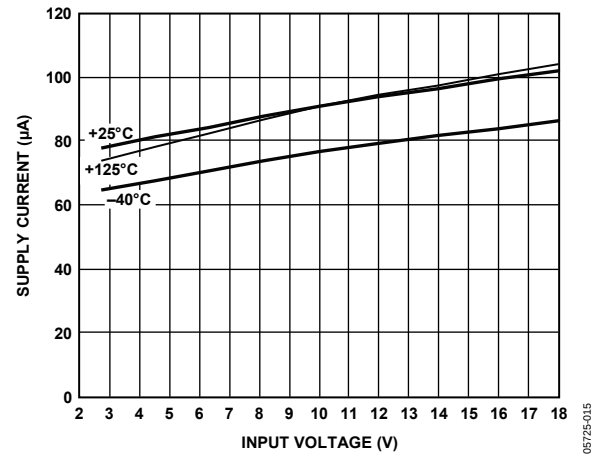


Figure 11. ADR127 Supply Current vs. Input Voltage

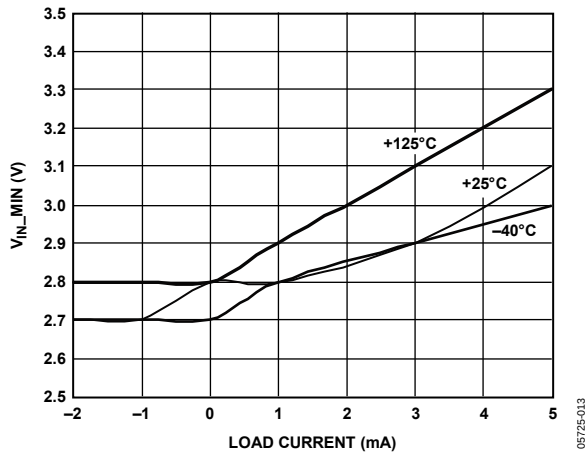


Figure 9. ADR121 Minimum Input Voltage vs. Load Current

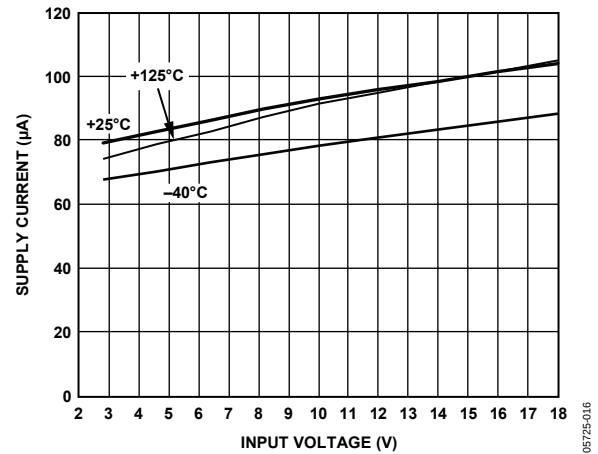


Figure 12. ADR121 Supply Current vs. Input Voltage

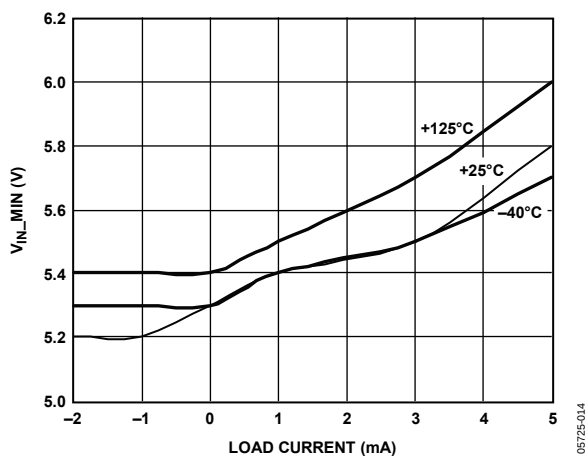


Figure 10. ADR125 Minimum Input Voltage vs. Load Current

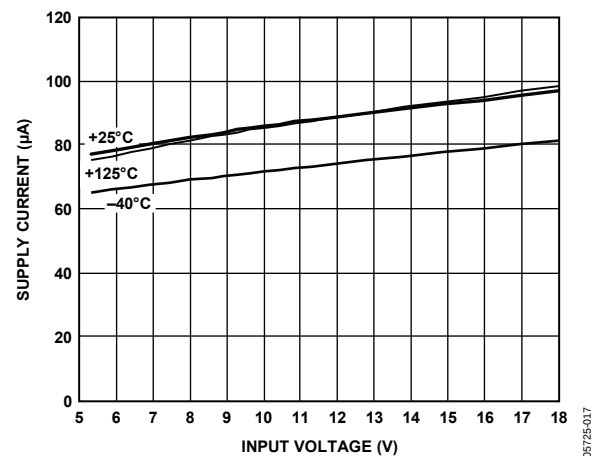


Figure 13. ADR125 Supply Current vs. Input Voltage

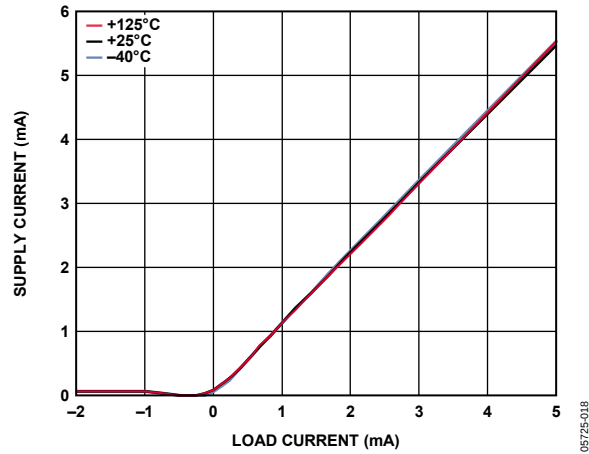


Figure 14. ADR127 Supply Current vs. Load Current

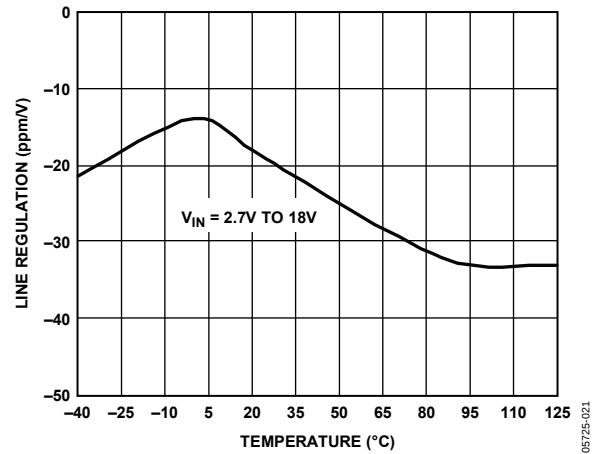


Figure 17. ADR127 Line Regulation vs. Temperature

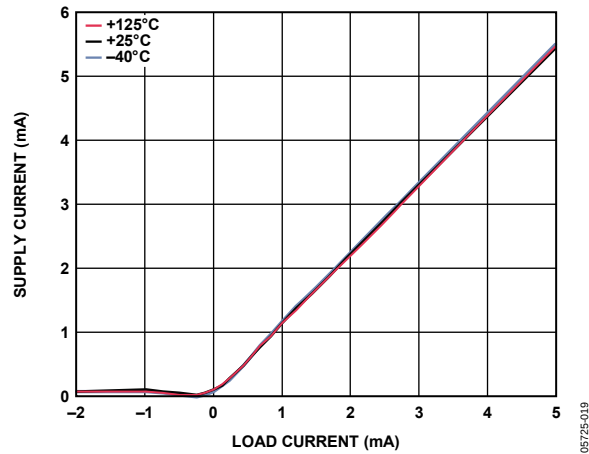


Figure 15. ADR121 Supply Current vs. Load Current

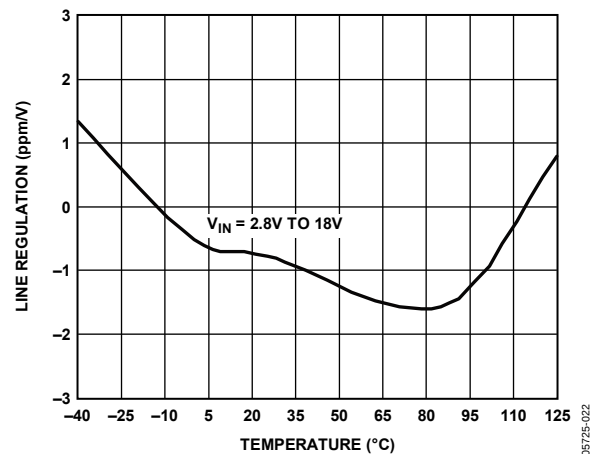


Figure 18. ADR121 Line Regulation vs. Temperature

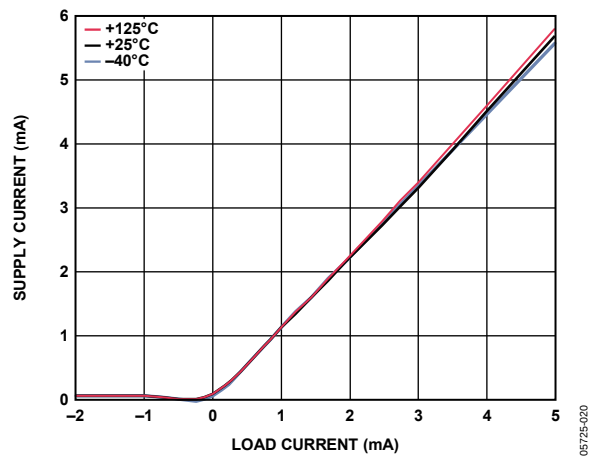


Figure 16. ADR125 Supply Current vs. Load Current

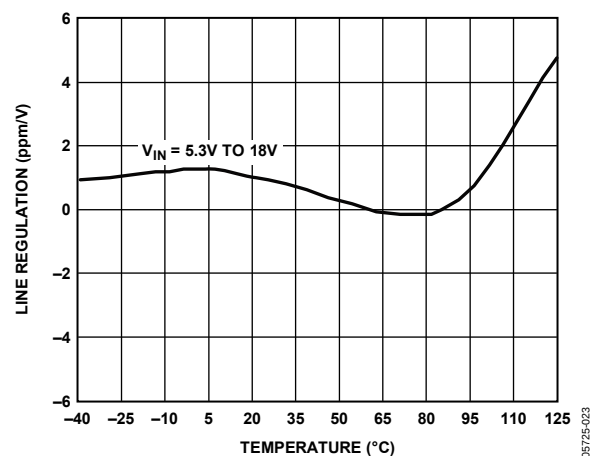


Figure 19. ADR125 Line Regulation vs. Temperature

# ADR121/ADR125/ADR127

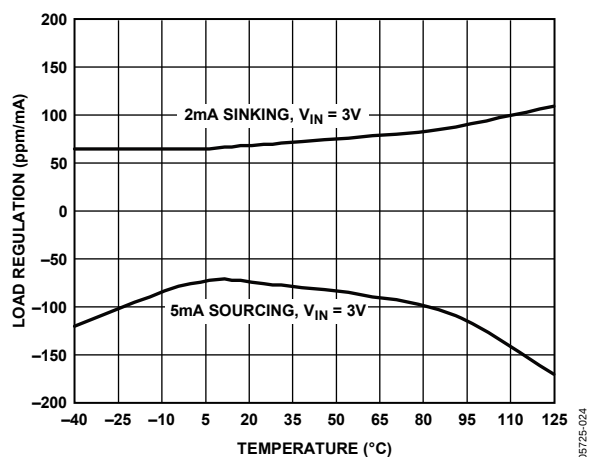


Figure 20. ADR127 Load Regulation vs. Temperature

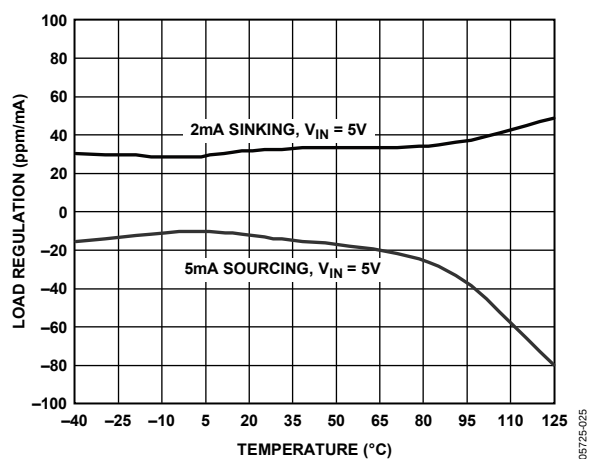


Figure 21. ADR121 Load Regulation vs. Temperature

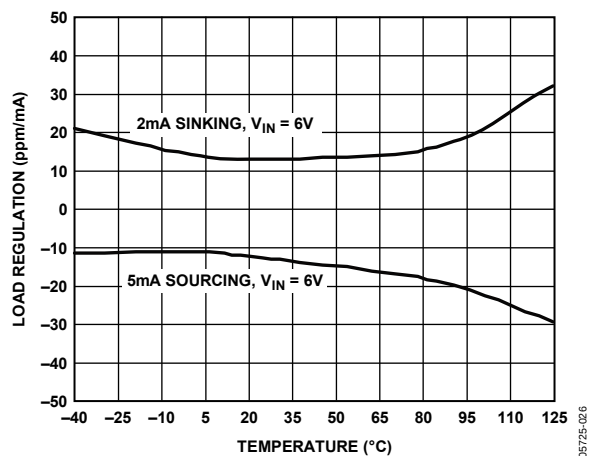


Figure 22. ADR125 Load Regulation vs. Temperature

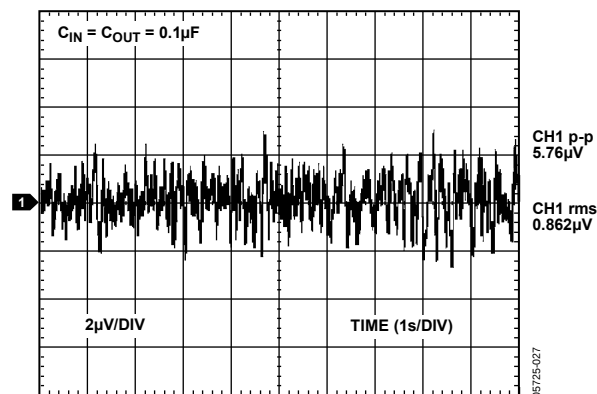


Figure 23. ADR127 0.1 Hz to 10 Hz Noise

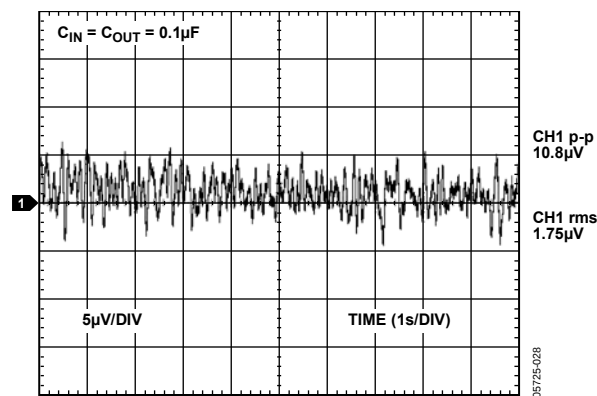


Figure 24. ADR121 0.1 Hz to 10 Hz Noise

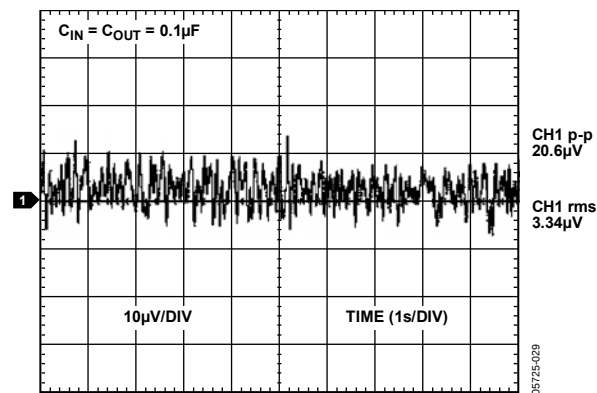


Figure 25. ADR125 0.1 Hz to 10 Hz Noise

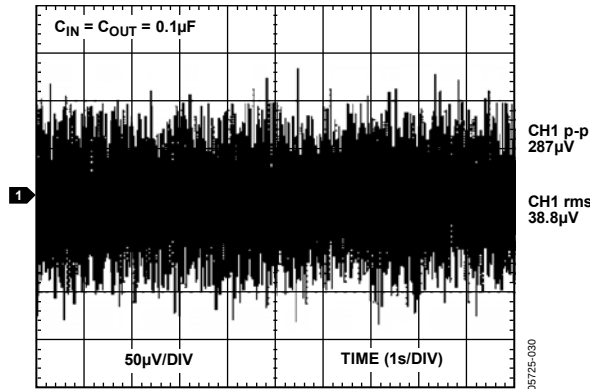


Figure 26. ADR127 10 Hz to 10 kHz Noise

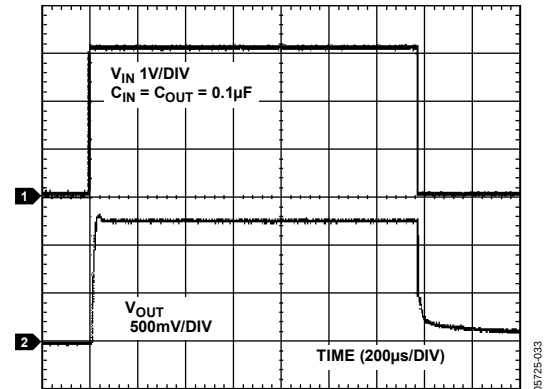


Figure 29. ADR127 Turn-On Response

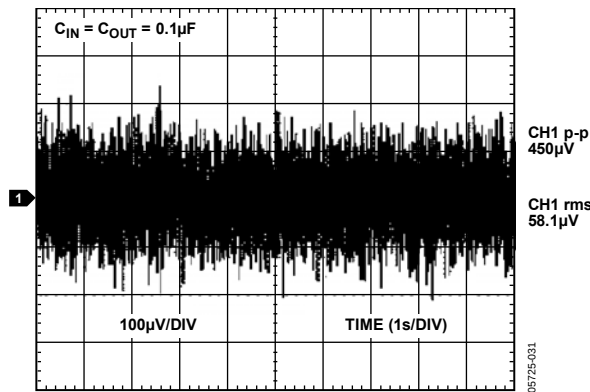


Figure 27. ADR121 10 Hz to 10 kHz Noise

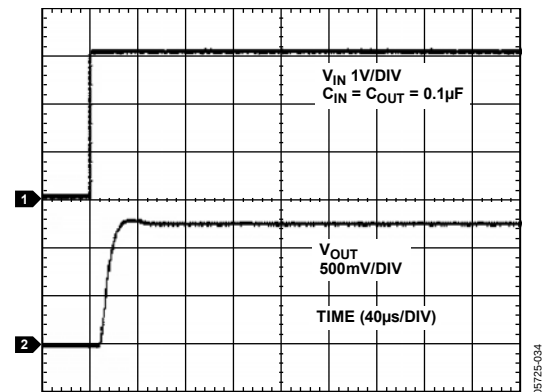


Figure 30. ADR127 Turn-On Response

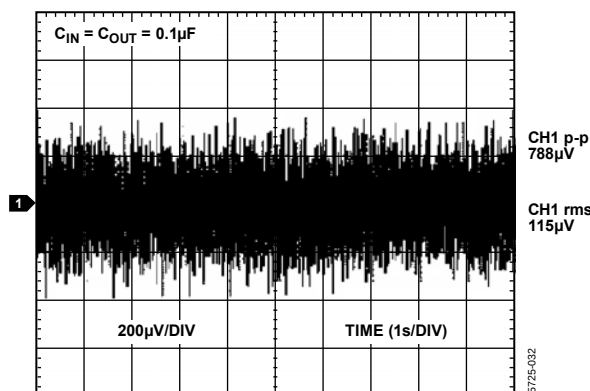


Figure 28. ADR125 10 Hz to 10 kHz Noise

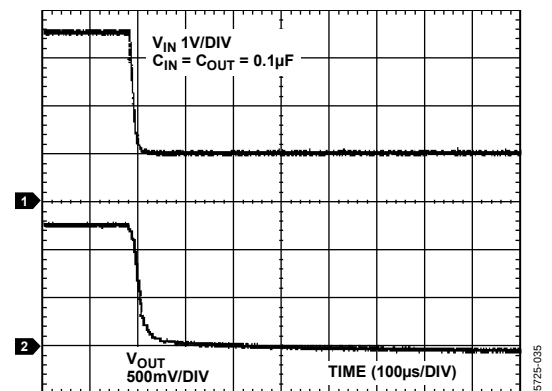


Figure 31. ADR127 Turn-Off Response

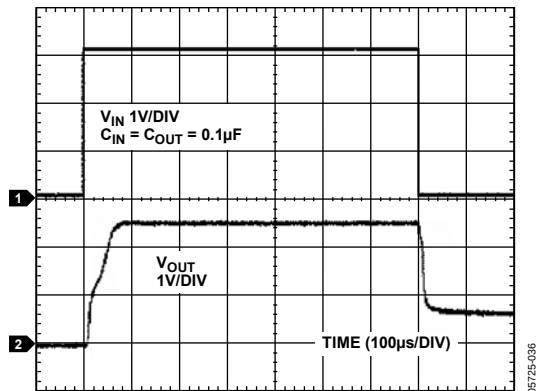


Figure 32. ADR121 Turn-On Response

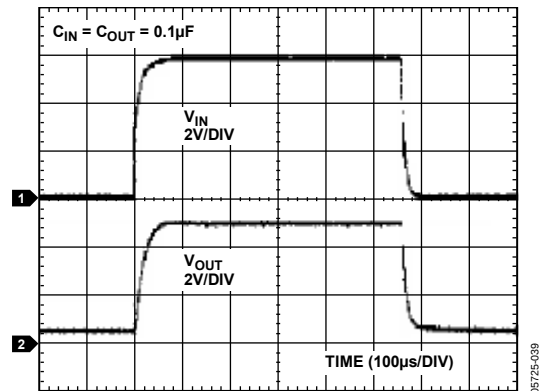


Figure 35. ADR125 Turn-On Response

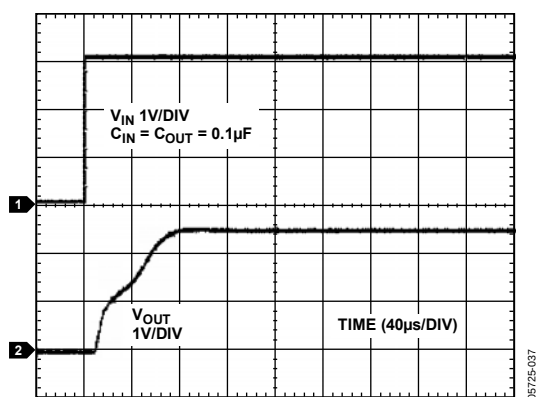


Figure 33. ADR121 Turn-On Response

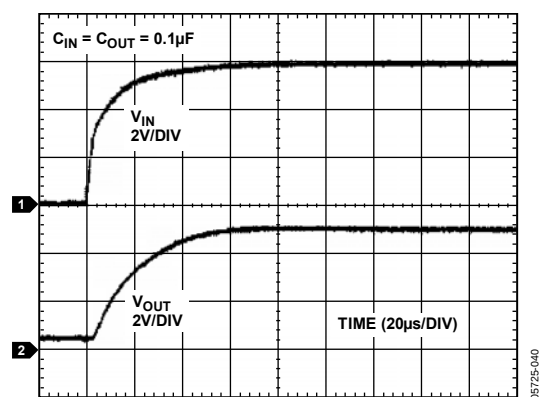


Figure 36. ADR125 Turn-On Response

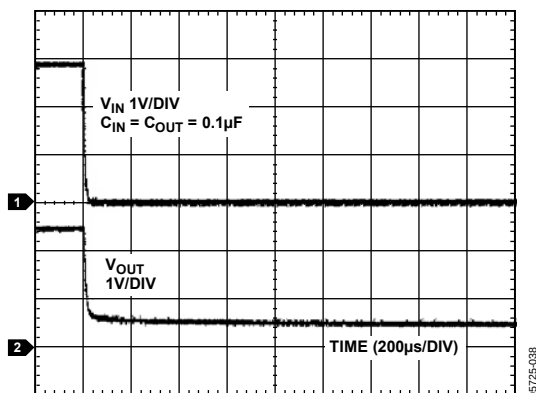


Figure 34. ADR121 Turn-Off Response

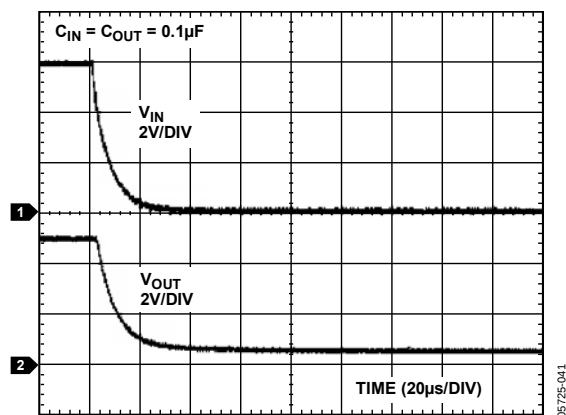


Figure 37. ADR125 Turn-Off Response

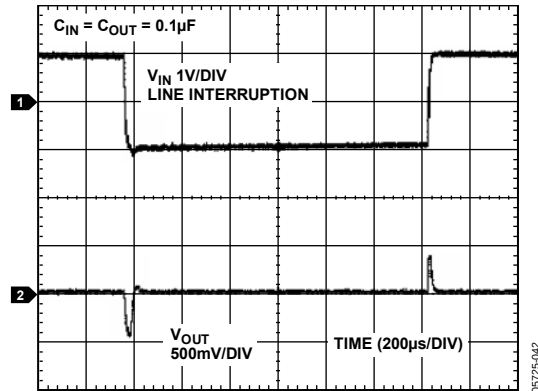


Figure 38. ADR127 Line Transient Response

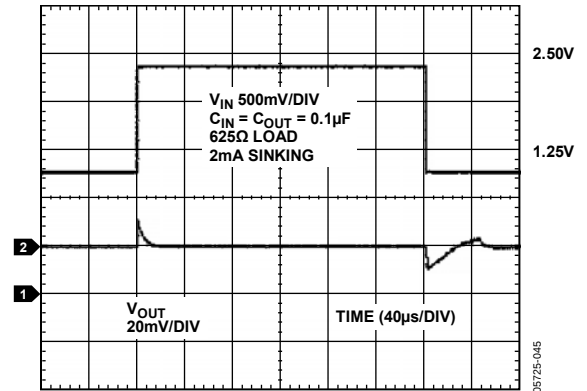


Figure 41. ADR127 Load Transient Response (Sinking)

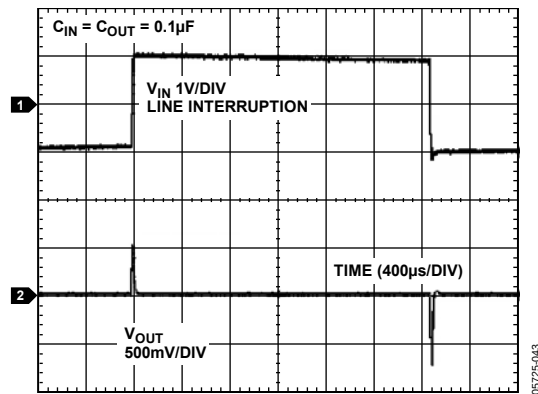


Figure 39. ADR121 Line Transient Response

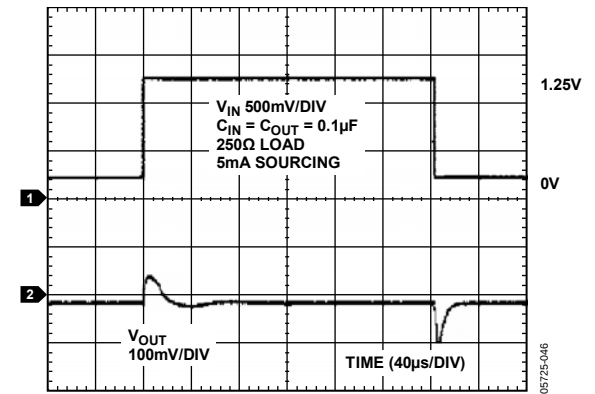


Figure 42. ADR127 Load Transient Response (Sourcing)

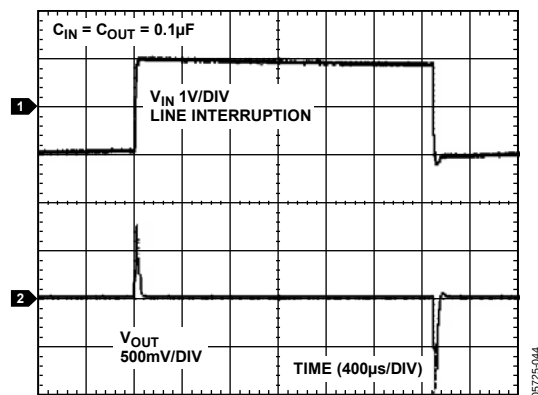


Figure 40. ADR125 Line Transient Response

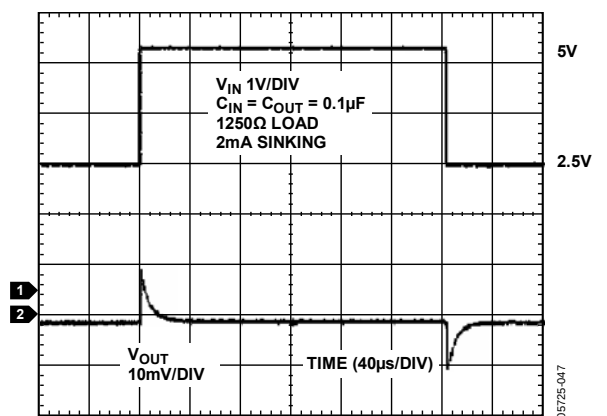


Figure 43. ADR121 Load Transient Response (Sinking)

# ADR121/ADR125/ADR127

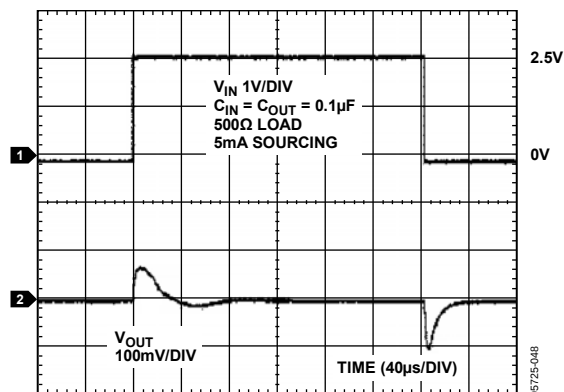


Figure 44. ADR121 Load Transient Response (Sourcing)

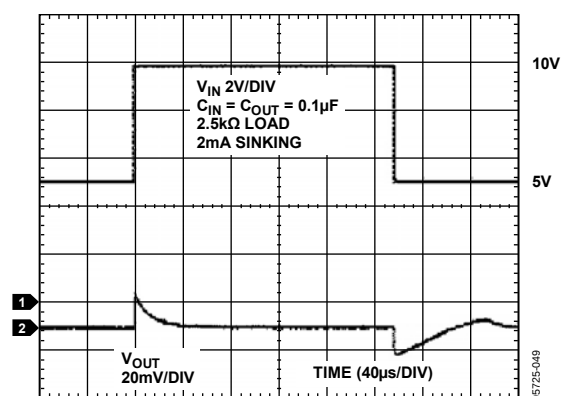


Figure 45. ADR125 Load Transient Response (Sinking)

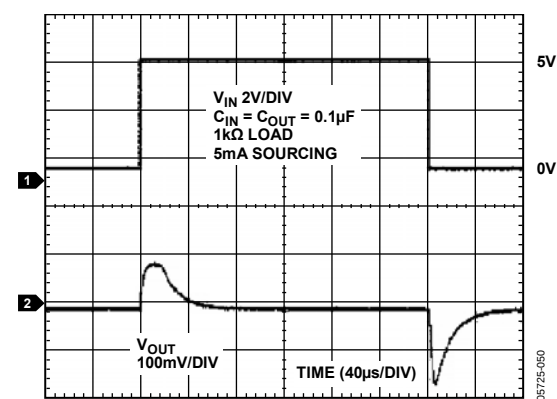


Figure 46. ADR125 Load Transient Response (Sourcing)

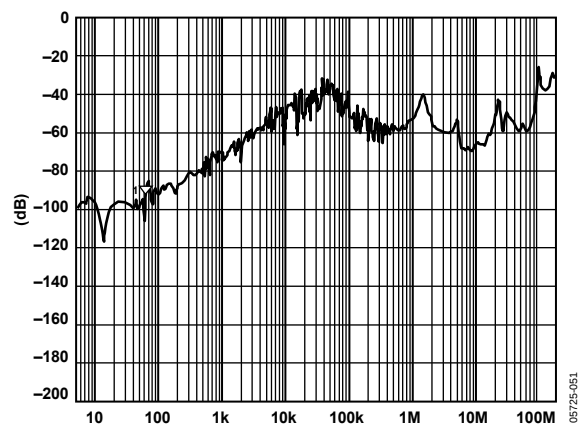


Figure 47. ADR121/ADR125/ADR127 PSRR

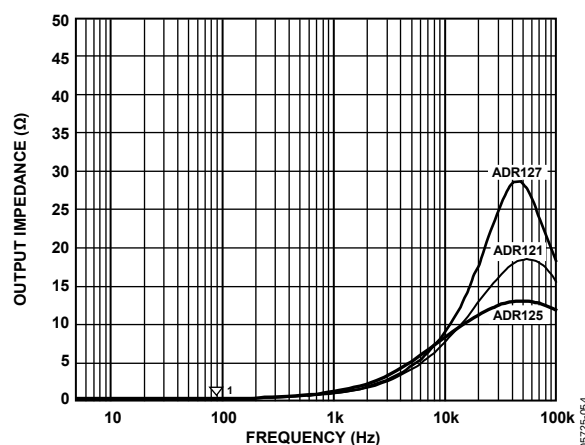


Figure 48. ADR121/ADR125/ADR127 Output Impedance vs. Frequency

## TERMINOLOGY

### Temperature Coefficient

The change in output voltage with respect to operating temperature change normalized by the output voltage at 25°C. This parameter is expressed in ppm/°C and can be determined as follows:

$$TCV_{OUT} [ppm/^{\circ}C] = \frac{V_{OUT}(T_2) - V_{OUT}(T_1)}{V_{OUT}(25^{\circ}C) \times (T_2 - T_1)} \times 10^6 \quad (1)$$

where:

$V_{OUT}(25^{\circ}C) = V_{OUT}$  at 25°C.

$V_{OUT}(T_1) = V_{OUT}$  at Temperature 1.

$V_{OUT}(T_2) = V_{OUT}$  at Temperature 2.

### Line Regulation

The change in the output voltage due to a specified change in input voltage. This parameter accounts for the effects of self-heating. Line regulation is expressed in percent per volt, parts-per-million per volt, or microvolts per voltage change in input voltage.

### Load Regulation

The change in output voltage due to a specified change in load current. This parameter accounts for the effects of self-heating. Load regulation is expressed in microvolts per milliampere, parts-per-million per milliampere, or ohms of dc output resistance.

### Long-Term Stability

Typical shift of output voltage at 25°C on a sample of parts subjected to a test of 1000 hours at 25°C.

$$\Delta V_{OUT} = V_{OUT}(t_0) - V_{OUT}(t_1) \quad (2)$$

$$\Delta V_{OUT} [ppm] = \frac{V_{OUT}(t_0) - V_{OUT}(t_1)}{V_{OUT}(t_0)} \times 10^6$$

where:

$V_{OUT}(t_0) = V_{OUT}$  at 25°C at Time 0.

$V_{OUT}(t_1) = V_{OUT}$  at 25°C after 1000 hours operating at 25°C.

### Thermal Hysteresis

The change in output voltage after the device is cycled through temperatures from +25°C to -40°C to +125°C and back to +25°C. This is a typical value from a sample of parts put through such a cycle.

$$V_{OUT\_HYS} = V_{OUT}(25^{\circ}C) - V_{OUT\_TC} \quad (3)$$

$$V_{OUT\_HYS} [ppm] = \frac{V_{OUT}(25^{\circ}C) - V_{OUT\_TC}}{V_{OUT}(25^{\circ}C)} \times 10^6$$

where:

$V_{OUT}(25^{\circ}C) = V_{OUT}$  at 25°C.

$V_{OUT\_TC} = V_{OUT}$  at 25°C after temperature cycle at +25°C to -40°C to +125°C and back to +25°C.

## THEORY OF OPERATION

The ADR12x band gap references are the high performance solution for low supply voltage and low power applications. The uniqueness of these products lies in their architecture.

### POWER DISSIPATION CONSIDERATIONS

The ADR12x family is capable of delivering load currents up to 5 mA with an input range from 3.0 V to 18 V. When this device is used in applications with large input voltages, care must be taken to avoid exceeding the specified maximum power dissipation or junction temperature because this could result in premature device failure.

Use the following formula to calculate a device's maximum junction temperature or dissipation:

$$P_D = \frac{T_J - T_A}{\theta_{JA}} \quad (4)$$

where:

$T_J$  is the junction temperature.

$T_A$  is the ambient temperature.

$P_D$  is the device power dissipation.

$\theta_{JA}$  is the device package thermal resistance.

### INPUT CAPACITOR

Input capacitors are not required on the ADR12x. There is no limit for the value of the capacitor used on the input, but a 1  $\mu$ F to 10  $\mu$ F capacitor on the input may improve transient response in applications where there is a sudden supply change. An additional 0.1  $\mu$ F capacitor in parallel also helps reduce noise from the supply.

### OUTPUT CAPACITOR

The ADR12x requires a small 0.1  $\mu$ F capacitor for stability. Additional 0.1  $\mu$ F to 10  $\mu$ F capacitance in parallel can improve load transient response. This acts as a source of stored energy for a sudden increase in load current. The only parameter affected with the additional capacitance is turn-on time.

## APPLICATIONS INFORMATION

### BASIC VOLTAGE REFERENCE CONNECTION

The circuit in Figure 49 illustrates the basic configuration for the ADR12x family voltage reference.

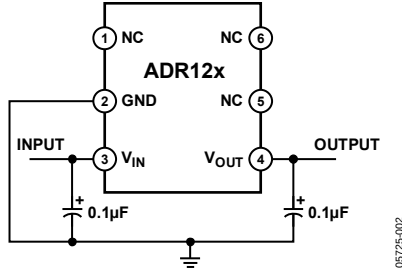


Figure 49. Basic Configuration for the ADR12x Family

### STACKING REFERENCE ICs FOR ARBITRARY OUTPUTS

Some applications may require two reference voltage sources that are a combined sum of the standard outputs. Figure 50 shows how this stacked output reference can be implemented.

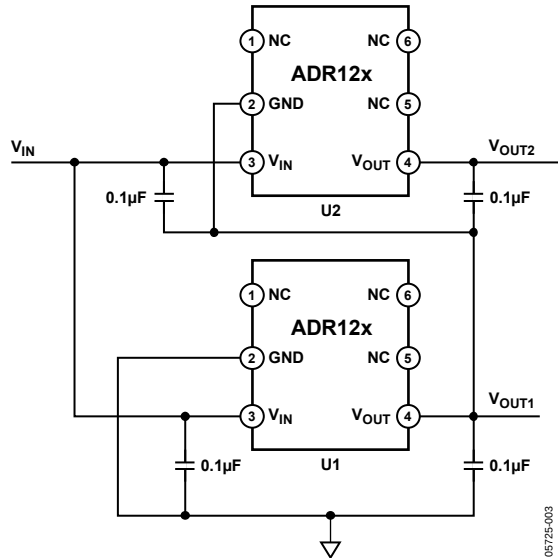


Figure 50. Stacking References with the ADR12x

Two reference ICs are used and fed from an unregulated input,  $V_{IN}$ . The outputs of the individual ICs are connected in series, which provides two output voltages,  $V_{OUT1}$  and  $V_{OUT2}$ .  $V_{OUT1}$  is the terminal voltage of U1, whereas  $V_{OUT2}$  is the sum of this voltage and the terminal of U2. U1 and U2 are chosen for the two voltages that supply the required outputs (see Table 6). For example, if U1 and U2 are ADR127s and  $V_{IN} \geq 3.95$  V,  $V_{OUT1}$  is 1.25 V and  $V_{OUT2}$  is 2.5 V.

Table 6. Required Outputs

| U1/U2         | $V_{OUT2}$ | $V_{OUT1}$ |
|---------------|------------|------------|
| ADR127/ADR121 | 1.25 V     | 3.75 V     |
| ADR127/ADR125 | 1.25 V     | 6.25 V     |
| ADR121/ADR125 | 2.5 V      | 7.5 V      |

### NEGATIVE PRECISION REFERENCE WITHOUT PRECISION RESISTORS

A negative reference is easily generated by adding an op amp, for example, the AD8603, and is configured as shown in Figure 51.  $V_{OUT}$  is at virtual ground and, therefore, the negative reference can be taken directly from the output of the op amp. The op amp must be dual-supply, low offset, and rail-to-rail if the negative supply voltage is close to the reference output.

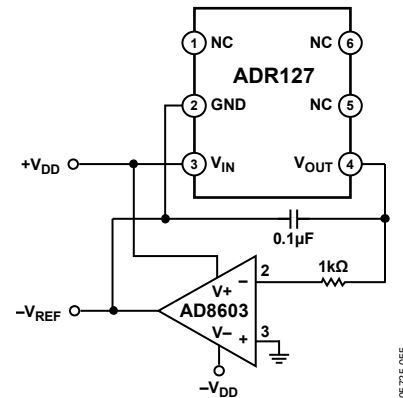


Figure 51. Negative Reference

### GENERAL-PURPOSE CURRENT SOURCE

In low power applications, the need can arise for a precision current source that can operate on low supply voltages. The ADR12x can be configured as a precision current source (see Figure 52). The circuit configuration shown is a floating current source with a grounded load. The reference's output voltage is bootstrapped across  $R_{SET}$ , which sets the output current into the load. With this configuration, circuit precision is maintained for load currents ranging from the reference's supply current, typically 85  $\mu$ A, to approximately 5 mA.


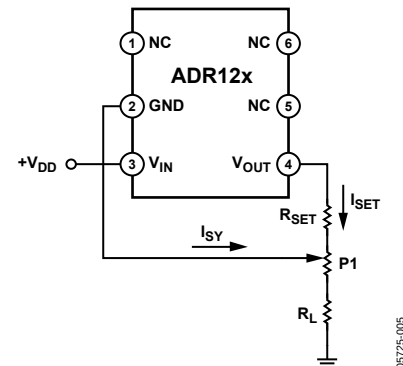


Figure 52. ADR12x Trim Configuration

## OUTLINE DIMENSIONS

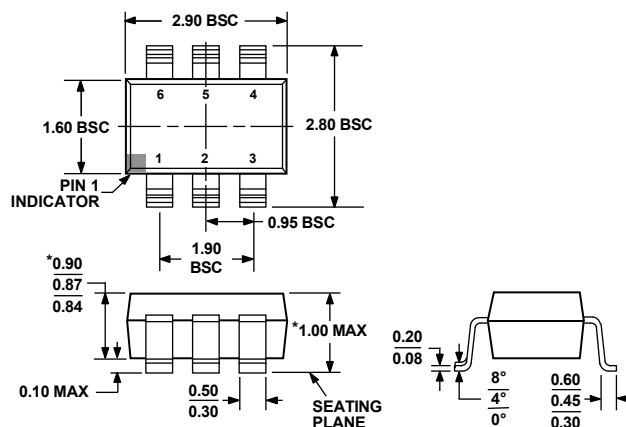

\*COMPLIANT TO JEDEC STANDARDS MO-193-AA WITH THE EXCEPTION OF PACKAGE HEIGHT AND THICKNESS.

Figure 53. 6-Lead Thin Small Outline Transistor Package [TSOT]  
(UJ-6)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model                         | Output Voltage (V <sub>OUT</sub> ) | Initial Accuracy |      | Temperature Coefficient (ppm/°C) | Temperature Range | Package Description | Package Option | Ordering Quantity | Branding |
|-------------------------------|------------------------------------|------------------|------|----------------------------------|-------------------|---------------------|----------------|-------------------|----------|
|                               |                                    | mV               | ±%   |                                  |                   |                     |                |                   |          |
| ADR121AUJZ-REEL7 <sup>1</sup> | 2.5                                | 2.5              | 0.24 | 25                               | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 3,000             | R0N      |
| ADR121AUJZ-R2 <sup>1</sup>    | 2.5                                | 2.5              | 0.24 | 25                               | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 250               | R0N      |
| ADR121BUJZ-REEL7 <sup>1</sup> | 2.5                                | 2.5              | 0.12 | 9                                | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 3,000             | R0P      |
| ADR125AUJZ-REEL7 <sup>1</sup> | 5.0                                | 5.0              | 0.24 | 25                               | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 3,000             | R0Q      |
| ADR125AUJZ-R2 <sup>1</sup>    | 5.0                                | 5.0              | 0.24 | 25                               | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 250               | R0Q      |
| ADR125BUJZ-REEL7 <sup>1</sup> | 5.0                                | 5.0              | 0.12 | 9                                | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 3,000             | R0R      |
| ADR127AUJZ-REEL7 <sup>1</sup> | 1.25                               | 3                | 0.24 | 25                               | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 3,000             | R0S      |
| ADR127AUJZ-R2 <sup>1</sup>    | 1.25                               | 3                | 0.24 | 25                               | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 250               | R0S      |
| ADR127BUJZ-REEL7 <sup>1</sup> | 1.25                               | 1.5              | 0.12 | 9                                | −40°C to +125°C   | 6-Lead TSOT         | UJ-6           | 3,000             | R0T      |

<sup>1</sup> Z = RoHS Compliant Part.

## NOTES

## **NOTES**