

RATING AND CHARACTERISTIC CURVES (BAT52A - BAT52M)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

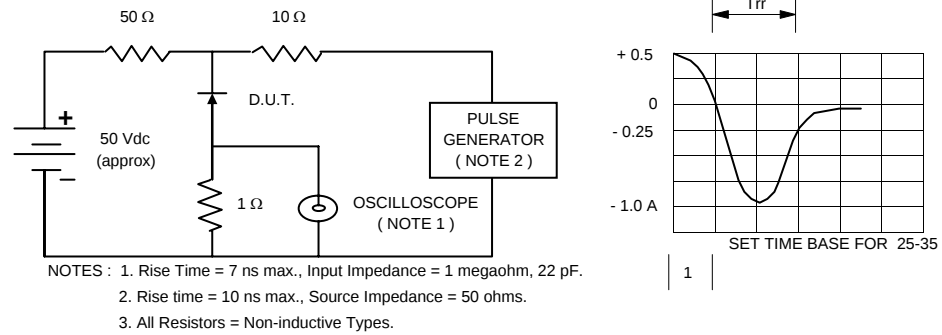


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

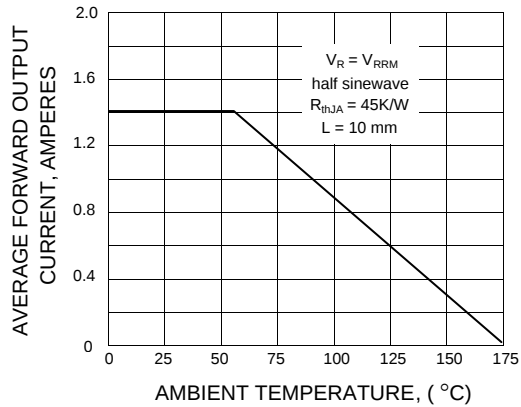


FIG.3 - MAXIMUM THERMAL RESISTANCE vs. LEAD LENGTH

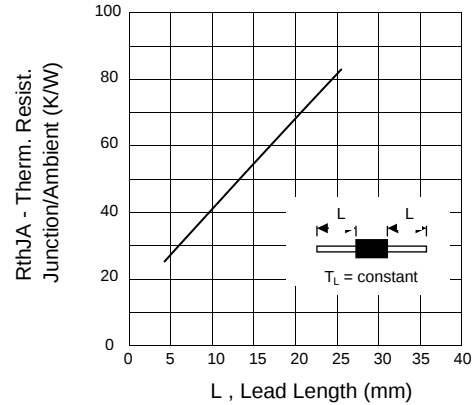


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

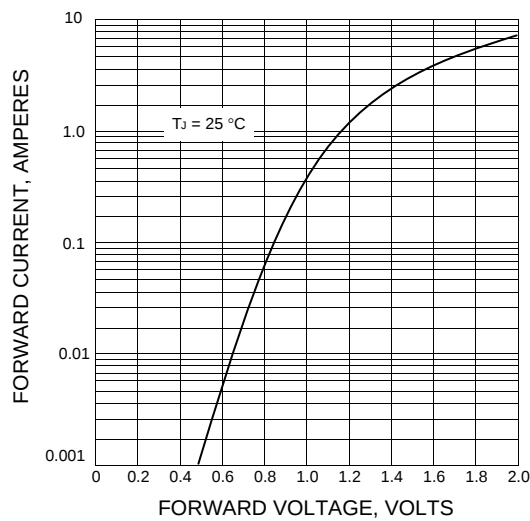


FIG.5 - REVERSE CURRENT vs. JUNCTION TEMPERATURE

