

# LB11851MC

## Specifications

### Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V <sub>CC</sub> max		18	V
OUTN pin maximum output current	I <sub>OUTN</sub> max		20	mA
OUTP pin maximum output current	I <sub>OUTP</sub> max		20	mA
OUT pin voltage handling capacity	V <sub>OUT</sub> max		18	V
5VREG maximum output current	I <sub>5VREG</sub> max		20	mA
Allowable power dissipation	P <sub>d</sub> max	When mounted on the specified circuit board *1	0.75	W
Operating temperature	T <sub>opr</sub>	*2	-30 to +90	°C
Storage temperature	T <sub>stg</sub>		-55 to +150	°C

\*1 Specified substrate : 114.3mm × 76.1mm × 1.6mm, glass epoxy board.

\*2 Do not exceed T<sub>j</sub> max = 150°C

Caution 1) Absolute maximum ratings represent the value which cannot be exceeded for any length of time.

Caution 2) Even when the device is used within the range of absolute maximum ratings, as a result of continuous usage under high temperature, high current, high voltage, or drastic temperature change, the reliability of the IC may be degraded. Please contact us for the further details.

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

### Recommended Operating Ranges at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage - V <sub>CC</sub>	V <sub>CC</sub>		6 to 16	V
PWM high-level input voltage range	V <sub>PWMINH</sub>		2.1 to 5	V
PWM low-level input voltage range	V <sub>PWMINL</sub>		0 to 0.4	V
FGIN high-level input voltage range	V <sub>FGINH</sub>		2.1 to 5	V
FGIN low-level input voltage range	V <sub>FGINL</sub>		0 to 0.3	V
SENSE input voltage range	V <sub>SENop</sub>		0 to 5	V

### Electrical Characteristics at Ta = 25°C, V<sub>DD</sub> = 12V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Circuit current	I <sub>CC1</sub>	With no load	3.5	5	6.5	mA
5VREG voltage	5VREG	5VREG = 10mA	4.8	5	5.2	V
SENSE pin detection voltage	V <sub>SENth</sub>		0.15	0.19	0.23	V
FGIN high-level input current	I <sub>FGIhi</sub>	V <sub>IN</sub> = 3V	60	80	100	μA
FGIN low-level input current	I <sub>FGIlow</sub>	V <sub>IN</sub> = 0V	-27	-21	-15	μA
PWMIN high-level current	I <sub>PWMIhi</sub>	V <sub>IN</sub> = 3V	35	45	55	μA
PWMIN low-level current	I <sub>PWMIlow</sub>	V <sub>IN</sub> = 0V	-27	-21	-14	μA
OUT1P, OUT2P high-level output voltage	V <sub>O12PH</sub>	I <sub>O</sub> = 10mA *2	10	11	11.9	V
OUT1P, OUT2P low-level output voltage	V <sub>O12PL</sub>	I <sub>O</sub> = 10mA *2	3	4	5	V
OUT1N, OUT2N high-level output voltage	V <sub>O12NH</sub>	I <sub>O</sub> = 10mA *1	9	10	11.9	V
OUT1N, OUT2N low-level output voltage	V <sub>O12NL</sub>	I <sub>O</sub> = 10mA *1	0.1	1	2	V

\*1 : There is a built-in 100Ω gate protection resistor.

\*2 : There is a built-in 300Ω gate protection resistor.

## Truth Table

FGIN	PWMIN	SENSE	OUT1P	OUT1N	OUT2P	OUT2N	Mode
L	L	L	L	L	H	H	OUT1 → 2 drive
H			H	H	L	L	OUT2 → 1 drive
L	H	L	H	L	H	H	Regeneration mode (low side regeneration)
H			H	H	H	L	
L	L	H	H	L	H	H	Current limiter (low side regeneration)
H			H	H	H	L	



Note 1 : For the SENSE pin, the "H" state is 0.2V or higher.

Note 2 : The IC goes to regeneration mode (no motor drive applied) when the microcontroller is reset (the output high-impedance state).


## Package Dimensions

unit : mm (typ)

3426A

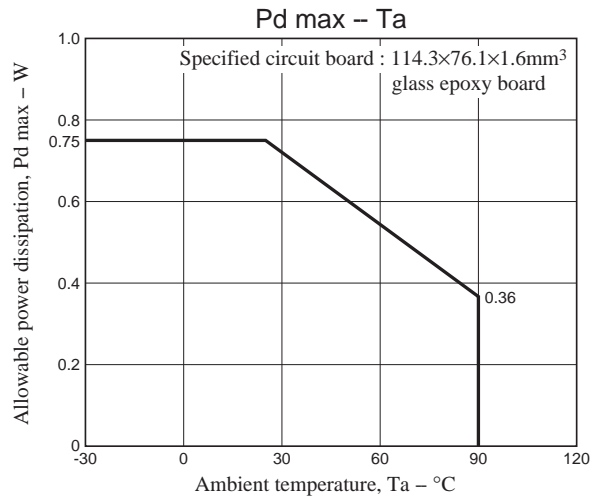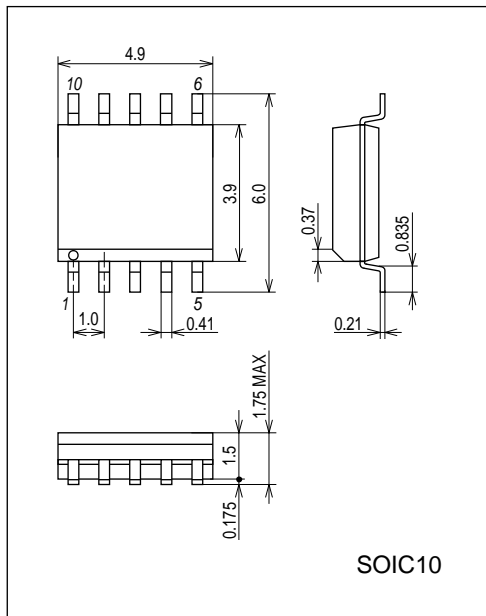

## Pin Assignment

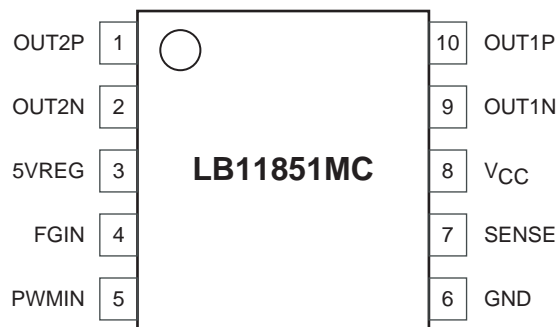

### 1. Power supply (V<sub>CC</sub> and V<sub>M</sub>) and ground

The wiring is separated into the control IC side (V<sub>CC</sub> line) and the motor output side (V<sub>M</sub> line) by the diode DI, which protects the IC from destruction on reverse connection. The application circuit uses 1μF capacitors to prevent line oscillation when kickback occurs. Similarly, 1μF capacitors are also used on the V<sub>CC</sub> line for power supply line stabilization.

### 2. PWMIN

The LB11851M accepts an open-drain output signal from the microcontroller with this pin and controls the on/off states of the PMOS transistor (OUT1P and OUT2P) outputs accordingly. A constant-current bias is provided from 5VREG internally to the IC.

### 3. FGIN

The LB11851M accepts a CMOS output from the microcontroller with this pin and determines the drive phase output (OUT1P, OUT2P, OUT1N, or OUT2N).

### 4. 5VREG


This is the power supply for the microcontroller, Hall effect sensors, and other circuits. A capacitor with a value of 1μF is used for output stabilization. This pin has an output current capacity of 20mA.

### 5. SENSE


A sensing resistor is used for current detection. If the SENSE pin voltage exceeds 0.2V, the PMOS transistors are turned off and only low side regeneration is performed.

# LB11851MC

## Application Circuit Example (12V)

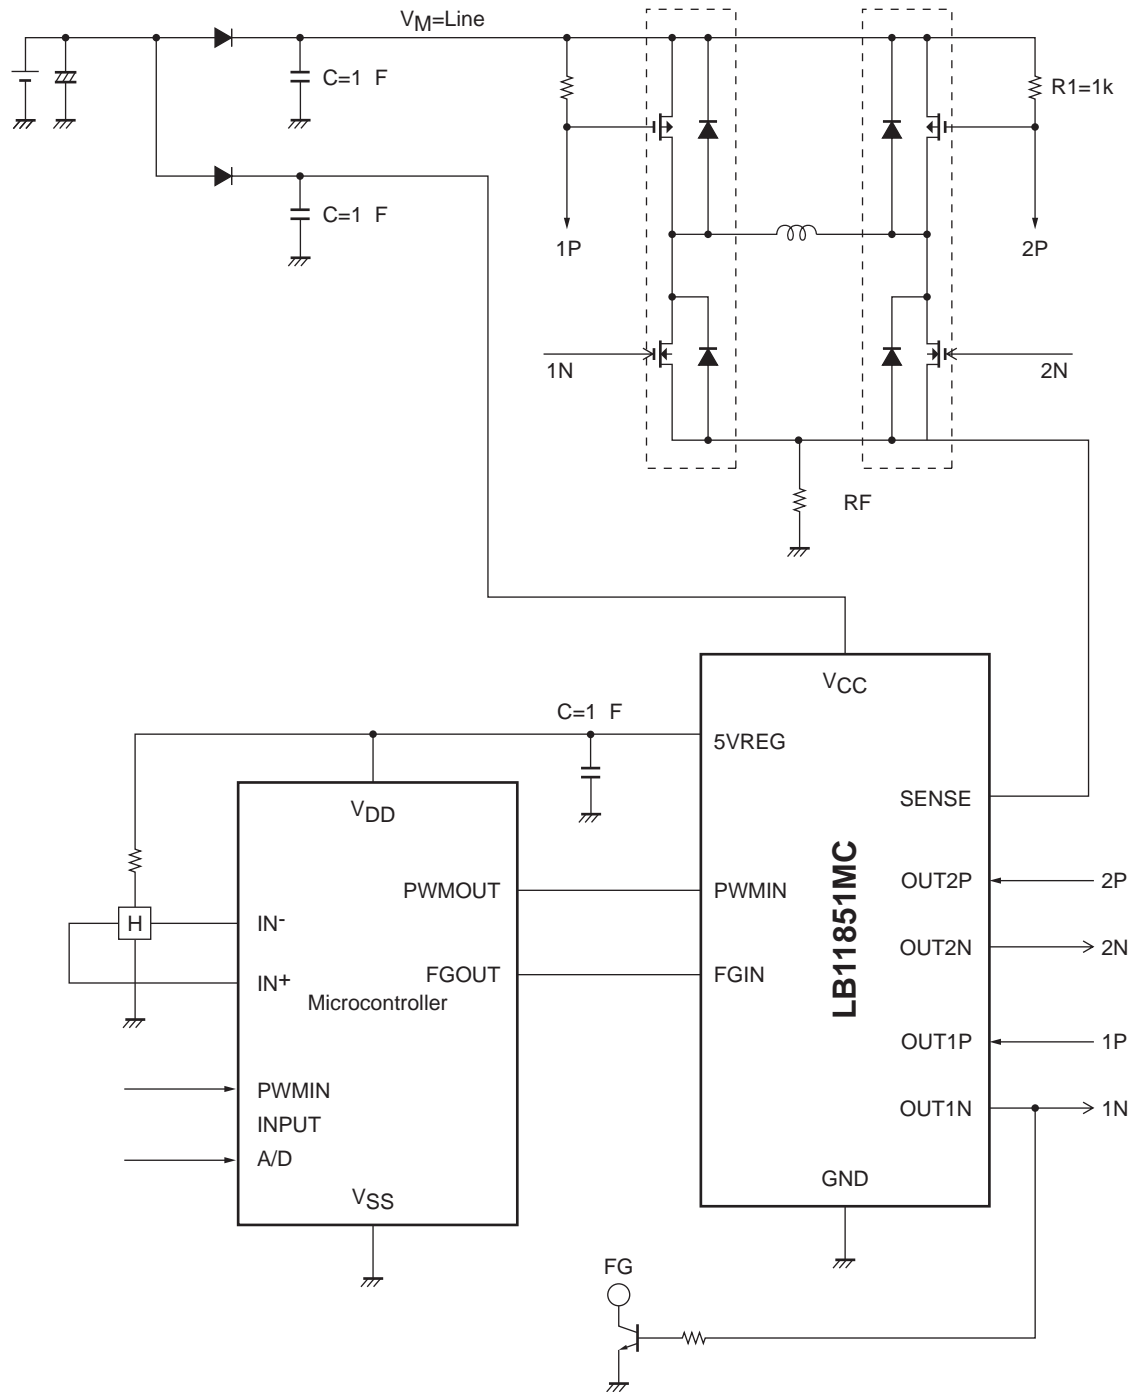

## Block Diagram

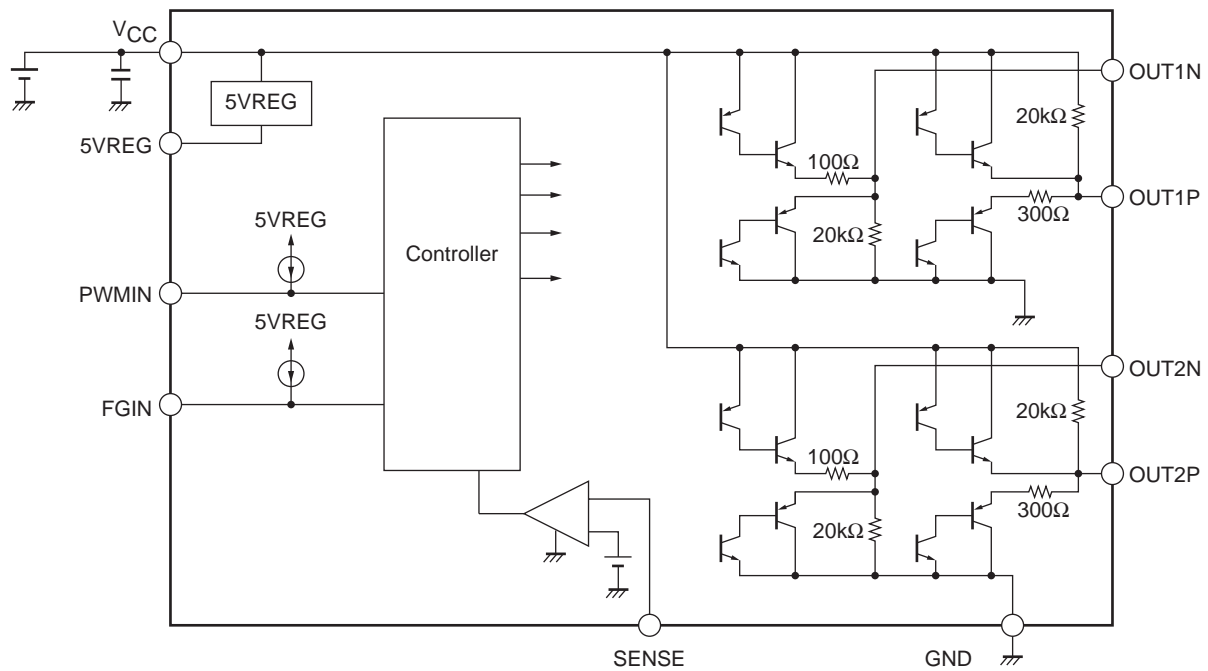

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.