




FORWARD VOLTAGE vs. FORWARD CURRENT

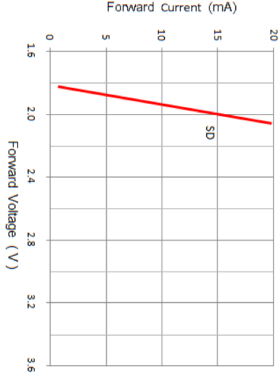

PROFILE

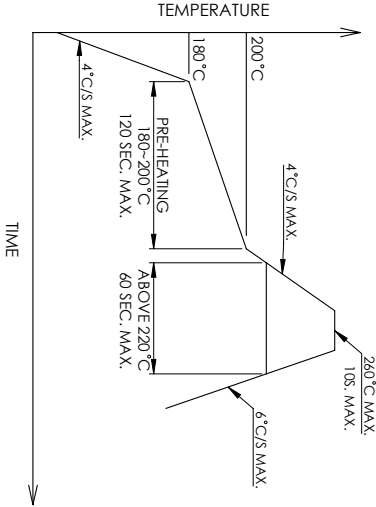

CARRIER TAPE DIMENSION

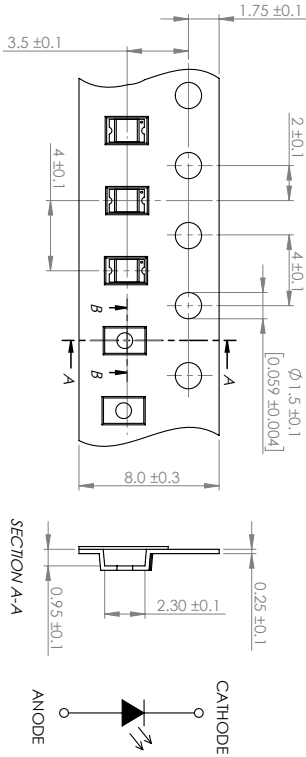

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=.11 (40.039), X.X=.10.5 (40.020), X.XX=.10.25 (40.010), X.XXX=.10.127 (40.005), LEAD SIZE=.1005 (40.002), LEAD LENGTH=.10.75 (40.030), MIN=.1005 (40.002), MAX=.1005 (40.002)

LUMEX
Creating LED and LCD Solutions Together™
425 N. GARY AVE.
CAROL STREAM, IL 60188
PHONE : 800/278-9666
FAX : 630/315-2150
WEB : WWW.LUMEX.COM

2(L1) 3(W) 0.8(H)mm, SURFACE MOUNT TOP VIEW LED, GAASP RED, MILKY WHITE DIFFUSED, TAPE & REEL

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE : 2017.06.02

PAGE : 2 OF 2

SCALE : NTF

UNIT : mm (INCH)

DRAWN BY : C.C.

CHKD BY : G.Y.

APPRD BY : R.C.

(P)