

## TABLE OF CONTENTS

|   |   |
|---|---|
| Features .....                                    | 1 |
| Applications .....                                | 1 |
| Functional Block Diagram .....                    | 1 |
| General Description .....                         | 1 |
| Revision History .....                            | 2 |
| Electrical Specifications .....                   | 3 |
| 35 GHz to 40 GHz Frequency Range .....            | 3 |
| 40 GHz to 50 GHz Frequency Range .....            | 3 |
| 50 GHz to 70 GHz Frequency Range .....            | 4 |
| Absolute Maximum Ratings .....                    | 5 |
| ESD Caution.....                                  | 5 |
| Pin Configuration and Function Descriptions ..... | 6 |

## REVISION HISTORY

### 9/2020—Rev. C to Rev. D

|                                 |    |
|---------------------------------|----|
| Updated Outline Dimensions..... | 16 |
|---------------------------------|----|

### 7/2017—Rev. B to Rev. C

|  |    |
|--|----|
| Changes to Title and General Description Section ..... | 1  |
| Added Table 1; Renumbered Sequentially.....            | 3  |
| Changes to Figure 10 to Figure 15 .....                | 7  |
| Changes to Figure 16 to Figure 21 .....                | 8  |
| Changes to Figure 22 to Figure 27 .....                | 9  |
| Added Figure 28; Renumbered Sequentially .....         | 10 |
| Changes to Figure 32 .....                             | 10 |

|  |    |
|--|----|
| Interface Schematics .....   | 6  |
| Typical Performance Characteristics .....                              | 7  |
| Theory of Operation .....  | 11 |
| Applications Information .....   | 12 |
| Alternate Biasing Configuration.....                                   | 12 |
| Mounting and Bonding Techniques for Millimeterwave<br>GaAs MMICs ..... | 13 |
| Typical Application Circuit .....                                      | 14 |
| Assembly Diagram.....  | 15 |
| Outline Dimensions.....  | 16 |
| Ordering Guide .....   | 16 |

### 10/2016—Rev. A to Rev. B

|  |    |
|--|----|
| Change to Features Section.....  | 1  |
| Changes to Mounting and Bonding Techniques for<br>Millimeterwave GaAs MMICs Section, Figure 35,<br>and Figure 36 ..... | 12 |
| Updated Outline Dimensions .....   | 15 |
| Changes to Ordering Guide.....   | 15 |

### 1/2016—Rev. 0 to Rev. A

|  |   |
|--|---|
| Changes to Table 3 .....                                   | 4 |
| Added Figure 28 to Figure 32; Renumbered Sequentially..... | 8 |

### 10/2015—Revision 0: Initial Version

## ELECTRICAL SPECIFICATIONS

### 35 GHz TO 40 GHz FREQUENCY RANGE

$T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{DD1A} = V_{DD2A} = V_{DD3A} = V_{DD4A} = 4\text{ V}$ ,  $I_{DD} = I_{DD1A} + I_{DD2A} + I_{DD3A} + I_{DD4A} = 320\text{ mA}$ , unless otherwise stated. Adjust  $V_{GG1B}$  from  $-2\text{ V}$  to  $0\text{ V}$  to achieve  $I_{DD} = 320\text{ mA}$  typical.

Table 1.

| Parameter                         | Symbol    | Test Conditions/Comments                                   | Min | Typ   | Max | Unit  |
|-----------------------------------|-----------|--|-----|-------|-----|-------|
| FREQUENCY RANGE                   |           |  | 35  |       | 40  | GHz   |
| GAIN                              |           |  |     | 19    |     | dB    |
| Gain Variation Over Temperature   |           |  |     | 0.022 |     | dB/°C |
| RETURN LOSS                       |           |  |     |       |     |       |
| Input                             |           |  |     | 33    |     | dB    |
| Output                            |           |  |     | 16    |     | dB    |
| OUTPUT                            |           |  |     |       |     |       |
| Output Power for 1 dB Compression | P1dB      |  |     | 19    |     | dBm   |
| Saturated Output Power            | $P_{SAT}$ |  |     | 21    |     | dBm   |
| Output Third-Order Intercept      | IP3       | Measurement taken at $P_{OUT}/\text{tone} = 10\text{ dBm}$ |     | 28    |     | dBm   |
| SUPPLY CURRENT                    |           |  |     |       |     |       |
| Total Supply Current              | $I_{DD}$  |  |     | 320   |     | mA    |
| Total Supply Current vs. $V_{DD}$ |           |  |     |       |     |       |
| $I_{DD} = 290\text{ mA}$          |           |  |     | 4     |     | V     |
| $I_{DD} = 320\text{ mA}$          |           |  |     | 4     |     | V     |
| $I_{DD} = 350\text{ mA}$          |           |  |     | 4     |     | V     |

### 40 GHz TO 50 GHz FREQUENCY RANGE

$T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{DD1A} = V_{DD2A} = V_{DD3A} = V_{DD4A} = 4\text{ V}$ ,  $I_{DD} = I_{DD1A} + I_{DD2A} + I_{DD3A} + I_{DD4A} = 320\text{ mA}$ , unless otherwise stated. Adjust  $V_{GG1B}$  from  $-2\text{ V}$  to  $0\text{ V}$  to achieve  $I_{DD} = 320\text{ mA}$  typical.

Table 2.

| Parameter                         | Symbol    | Test Conditions/Comments                                   | Min | Typ   | Max | Unit  |
|-----------------------------------|-----------|--|-----|-------|-----|-------|
| FREQUENCY RANGE                   |           |  | 40  |       | 50  | GHz   |
| GAIN                              |           |  | 17  | 19    |     | dB    |
| Gain Variation Over Temperature   |           |  |     | 0.023 |     | dB/°C |
| RETURN LOSS                       |           |  |     |       |     |       |
| Input                             |           |  |     | 35    |     | dB    |
| Output                            |           |  |     | 16    |     | dB    |
| OUTPUT                            |           |  |     |       |     |       |
| Output Power for 1 dB Compression | P1dB      |  | 17  | 19.5  |     | dBm   |
| Saturated Output Power            | $P_{SAT}$ |  |     | 21.5  |     | dBm   |
| Output Third-Order Intercept      | IP3       | Measurement taken at $P_{OUT}/\text{tone} = 10\text{ dBm}$ |     | 28    |     | dBm   |
| SUPPLY CURRENT                    |           |  |     |       |     |       |
| Total Supply Current              | $I_{DD}$  |  |     | 320   |     | mA    |
| Total Supply Current vs. $V_{DD}$ |           |  |     |       |     |       |
| $I_{DD} = 290\text{ mA}$          |           |  |     | 4     |     | V     |
| $I_{DD} = 320\text{ mA}$          |           |  |     | 4     |     | V     |
| $I_{DD} = 350\text{ mA}$          |           |  |     | 4     |     | V     |

**50 GHz TO 70 GHz FREQUENCY RANGE**

$T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{DD1A} = V_{DD2A} = V_{DD3A} = V_{DD4A} = 4\text{ V}$ ,  $I_{DD} = I_{DD1A} + I_{DD2A} + I_{DD3A} + I_{DD4A} = 320\text{ mA}$ , unless otherwise stated. Adjust  $V_{GG1B}$  from  $-2\text{ V}$  to  $0\text{ V}$  to achieve  $I_{DD} = 320\text{ mA}$  typical.

**Table 3.**

| Parameter                         | Symbol    | Test Conditions/Comments                                   | Min | Typ   | Max | Unit  |
|-----------------------------------|-----------|--|-----|-------|-----|-------|
| FREQUENCY RANGE                   |           |  | 50  |       | 70  | GHz   |
| GAIN                              |           |  | 17  | 19    |     | dB    |
| Gain Variation Over Temperature   |           |  |     | 0.016 |     | dB/°C |
| RETURN LOSS                       |           |  |     |       |     |       |
| Input                             |           |  |     | 22    |     | dB    |
| Output                            |           |  |     | 25    |     | dB    |
| OUTPUT                            |           |  |     |       |     |       |
| Output Power for 1 dB Compression | P1dB      |  | 19  | 21    |     | dBm   |
| Saturated Output Power            | $P_{SAT}$ |  |     | 22    |     | dBm   |
| Output Third-Order Intercept      | IP3       | Measurement taken at $P_{OUT}/\text{tone} = 10\text{ dBm}$ |     | 32    |     | dBm   |
| SUPPLY CURRENT                    |           |  |     |       |     |       |
| Total Supply Current              | $I_{DD}$  |  |     | 320   |     | mA    |
| Total Supply Current vs. $V_{DD}$ |           |  |     |       |     |       |
| $I_{DD} = 290\text{ mA}$          |           |  |     | 4     |     | V     |
| $I_{DD} = 320\text{ mA}$          |           |  |     | 4     |     | V     |
| $I_{DD} = 350\text{ mA}$          |           |  |     | 4     |     | V     |

## ABSOLUTE MAXIMUM RATINGS

Table 4.

| Parameter   | Rating           |
|---|------------------|
| Drain Bias Voltage ( $V_{DD1A}$ to $V_{DD4A}$ )   | 4.5 V            |
| Gate Bias Voltage ( $V_{GG1B}$ )  | –2 V to 0 V dc   |
| RF Input Power (RFIN)   | 22 dBm           |
| Channel Temperature   | 175°C            |
| Continuous Power Dissipation ( $P_{DISS}$ ,<br>$T_A = 85^\circ\text{C}$ (Derate 19.2 mW/°C Above 85°C)) | 1.770 W          |
| Thermal Resistance, $\theta_{JA}$ (Channel to<br>Bottom Die)  | 50.83°C/W        |
| Storage Temperature Range   | –65°C to +150°C  |
| Operating Temperature Range   | –55°C to +85°C   |
| ESD Sensitivity, Human Body Model (HBM)   | ±125 V, Class 0B |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### ESD CAUTION



#### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

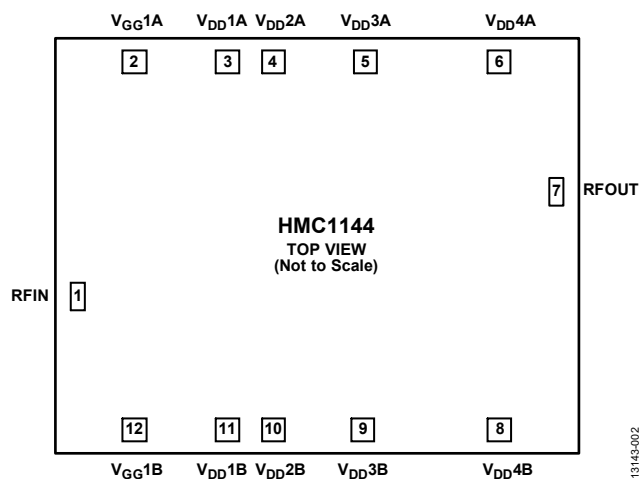


Figure 2. Pad Configuration

Table 5. Pad Function Descriptions

| Pad No.    | Mnemonic                               | Description   |
|------------|--|---|
| 1          | RFIN                                   | RF Input. This pad is ac-coupled and matched to 50 $\Omega$ . See Figure 3 for the interface schematic.   |
| 2          | V <sub>GG1A</sub>                      | Gate Control Pad for Alternate Bias Configuration. See Figure 4 for the interface schematic..   |
| 3 to 6     | V <sub>DD1A</sub> to V <sub>DD4A</sub> | Drain Bias Voltage Pads for the Amplifier. External bypass capacitors of 100 pF and 0.1 $\mu$ F are required. See Figure 5 for the interface schematic.                               |
| 7          | RFOUT                                  | RF Output. This pad is ac-coupled and matched to 50 $\Omega$ . See Figure 6 for the interface schematic.  |
| 8 to 11    | V <sub>DD4B</sub> to V <sub>DD1B</sub> | Drain Bias Voltage Pads for Alternate Bias Configuration. External bypass capacitors of 100 pF and 0.1 $\mu$ F are required for decoupling. See Figure 7 for the interface schematic. |
| 12         | V <sub>GG1B</sub>                      | Gate Control Pad for the Amplifier. External bypass capacitors of 100 pF and 0.1 $\mu$ F are required. See Figure 8 for the interface schematic.                                      |
| Die Bottom | GND                                    | Die bottom must be connected to RF/dc ground. See Figure 9 for the interface schematic.   |

## INTERFACE SCHEMATICS




Figure 3. RFIN Interface Schematic






Figure 7. V<sub>DD1B</sub> to V<sub>DD4B</sub> Interface SchematicFigure 4. V<sub>GG1A</sub> Interface SchematicFigure 8. V<sub>GG1B</sub> Interface SchematicFigure 5. V<sub>DD1A</sub> to V<sub>DD4A</sub> Interface Schematic

Figure 9. GND Interface Schematic




Figure 6. RFOUT Interface Schematic

## TYPICAL PERFORMANCE CHARACTERISTICS

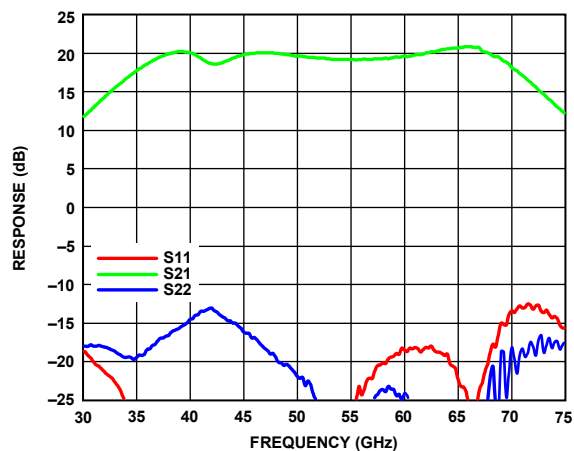


Figure 10. Response Gain and Return Loss vs. Frequency

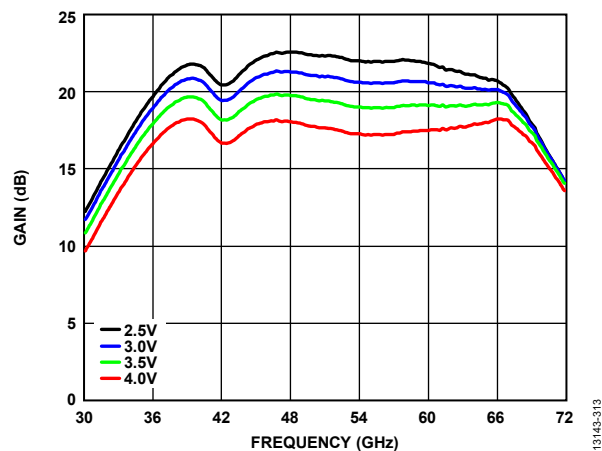
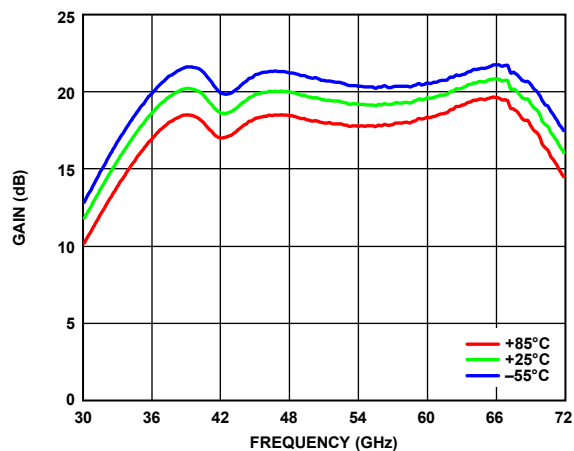
Figure 13. Gain vs. Frequency for Various  $V_{DD}$  at  $I_{DD} = 250$  mA

Figure 11. Gain vs. Frequency at Various Temperatures

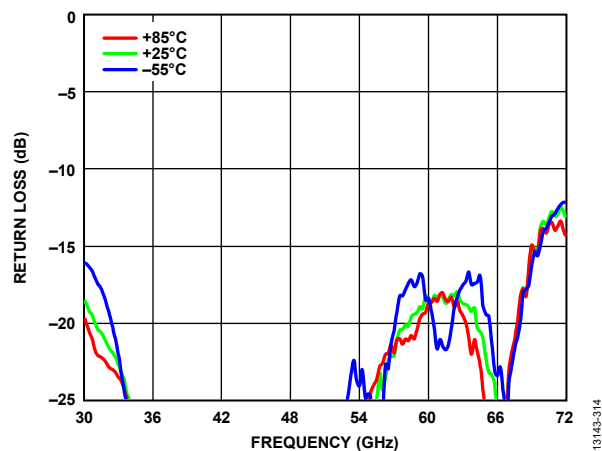
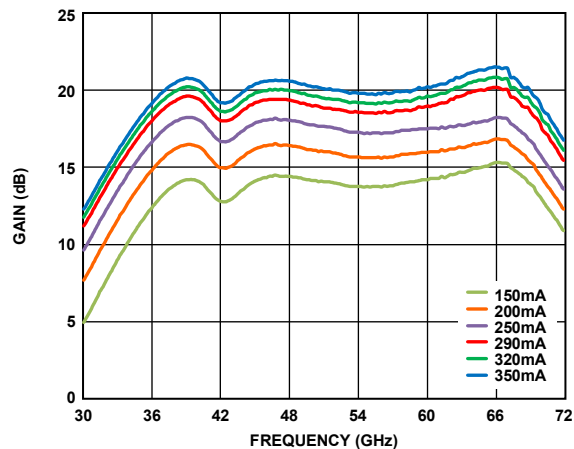
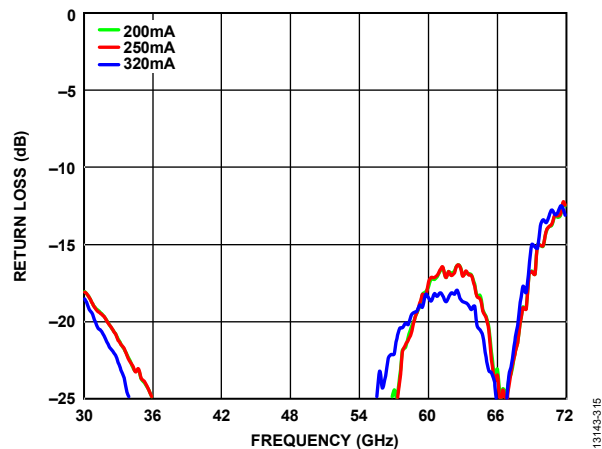


Figure 14. Input Return Loss vs. Frequency at Various Temperatures

Figure 12. Gain vs. Frequency for Various  $I_{DD}$  at  $V_{DD} = 4$  VFigure 15. Input Return Loss vs. Frequency for Various  $I_{DD}$  at  $V_{DD} = 4$  V

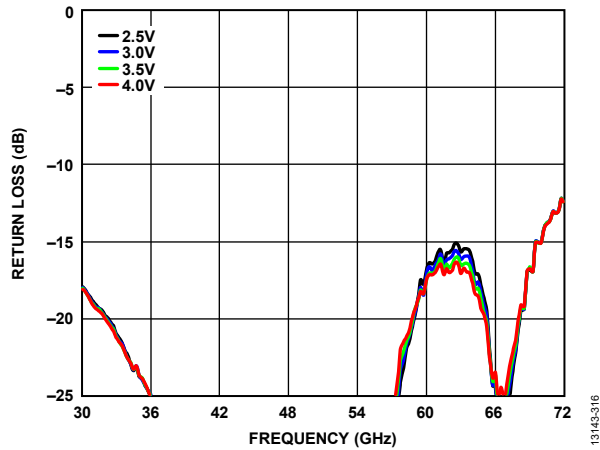
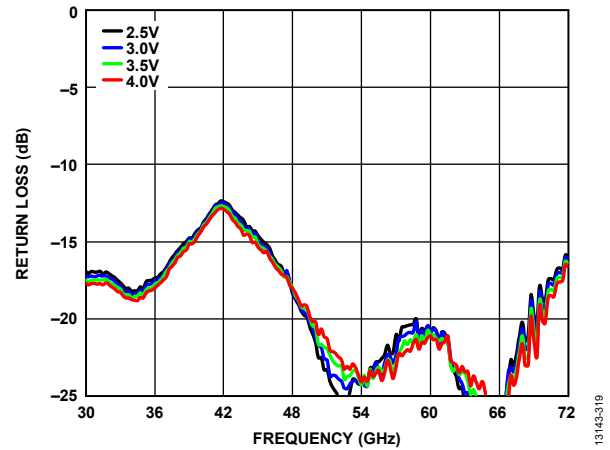
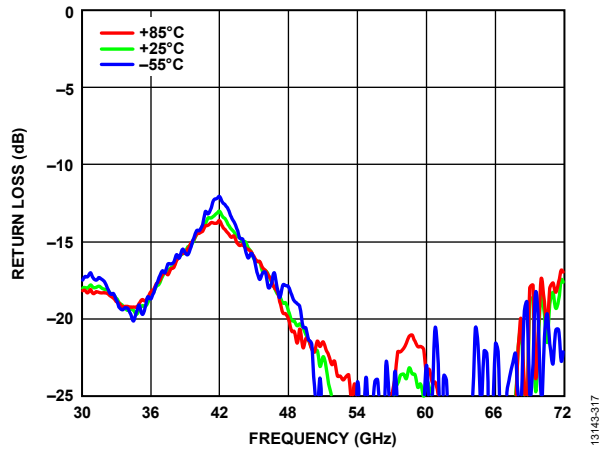
Figure 16. Input Return Loss vs. Frequency for Various  $V_{DD}$  at  $I_{DD} = 250$  mAFigure 19. Output Return Loss vs. Frequency for Various  $V_{DD}$  at  $I_{DD} = 250$  mA

Figure 17. Output Return Loss vs. Frequency at Various Temperatures

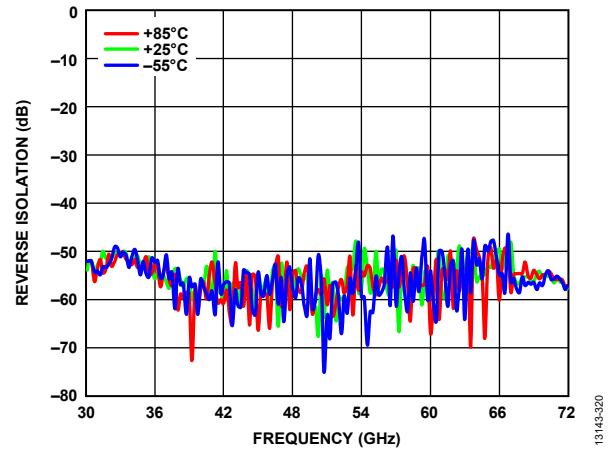
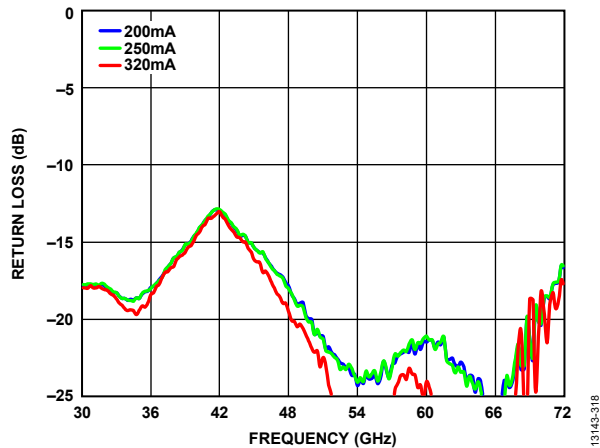
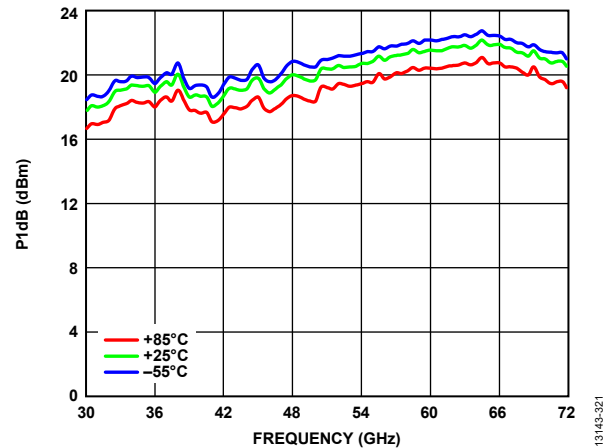
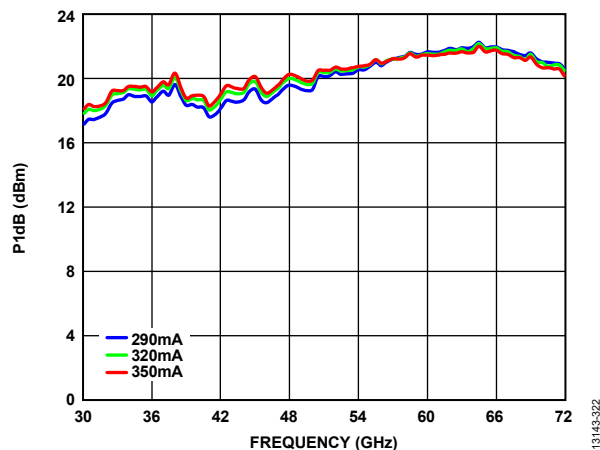
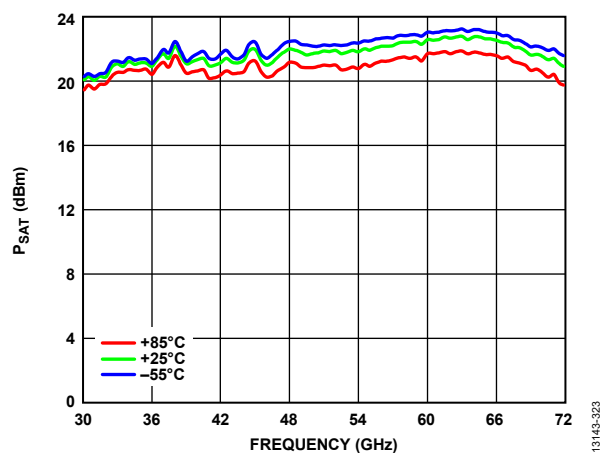
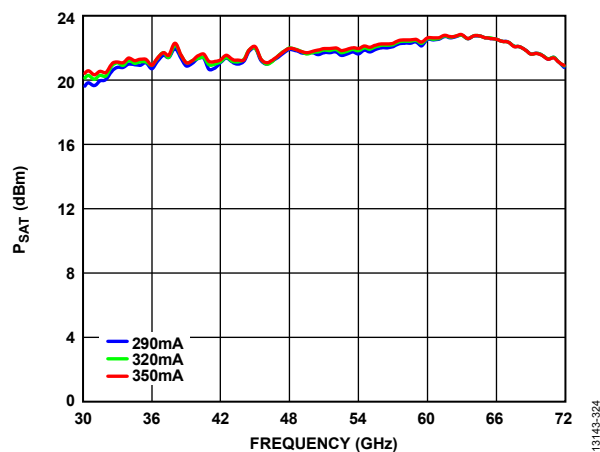
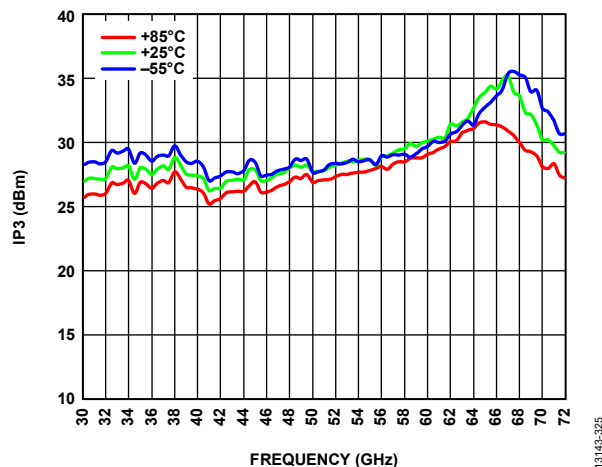
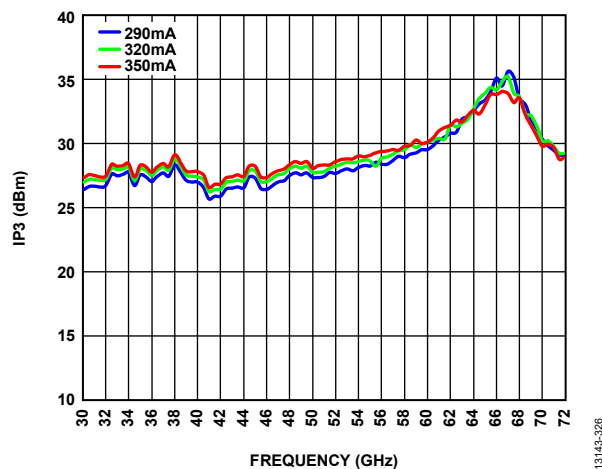
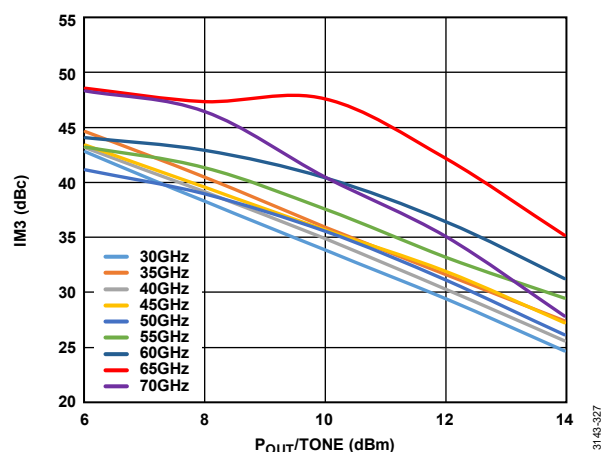


Figure 20. Reverse Isolation vs. Frequency at Various Temperatures

Figure 18. Output Return Loss vs. Frequency for Various  $I_{DD}$  at  $V_{DD} = 4$  VFigure 21.  $P_{1dB}$  vs. Frequency at Various Temperatures

Figure 22. P1dB vs. Frequency for Various  $I_{DD}$  at  $V_{DD} = 4$  VFigure 23.  $P_{SAT}$  vs. Frequency at Various TemperaturesFigure 24.  $P_{SAT}$  vs. Frequency for Various  $I_{DD}$  at  $V_{DD} = 4$  VFigure 25. Output IP3 vs. Frequency for Various Temperatures at  $P_{OUT} = 10$  dBm/ToneFigure 26. Output IP3 vs. Frequency for Various  $I_{DD}$  at  $P_{OUT} = 10$  dBm/ToneFigure 27. Output Third-Order Intermodulation (IMD3) vs.  $P_{OUT}/Tone$  for Various Frequencies at  $V_{DD} = 4$  V,  $I_{DD} = 320$  mA



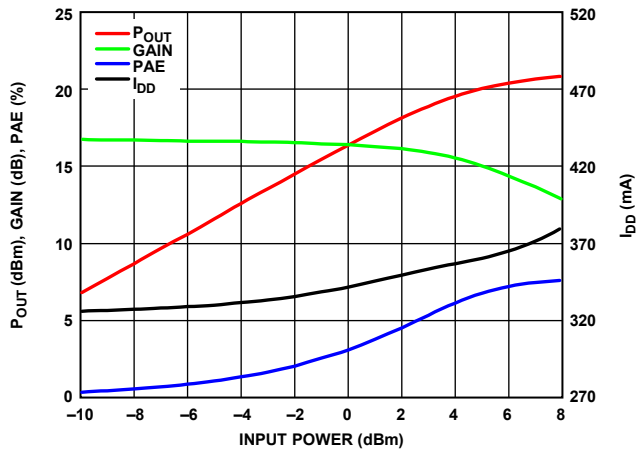
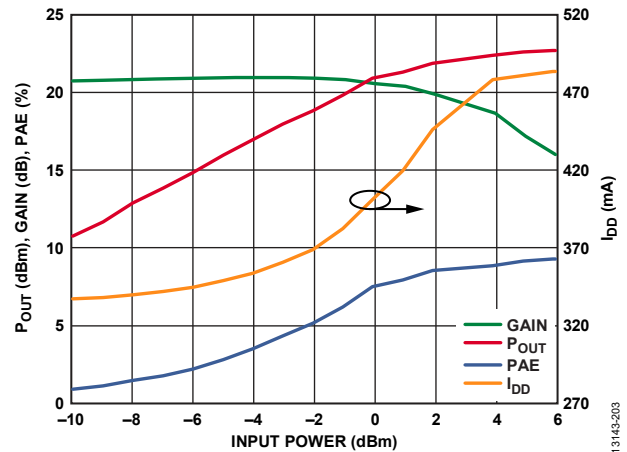
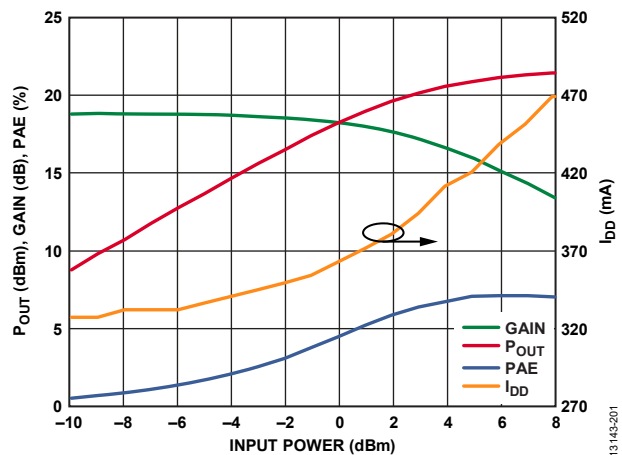
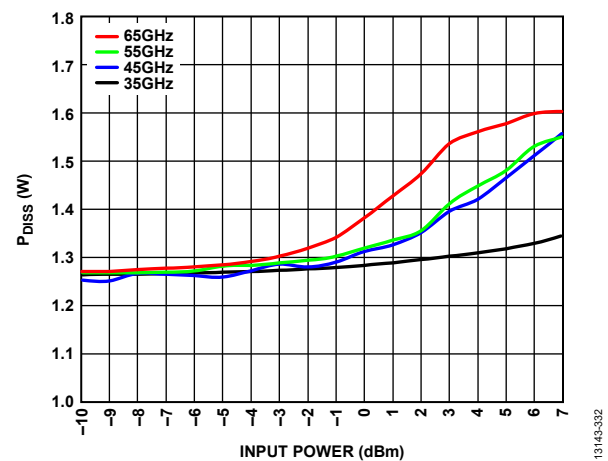
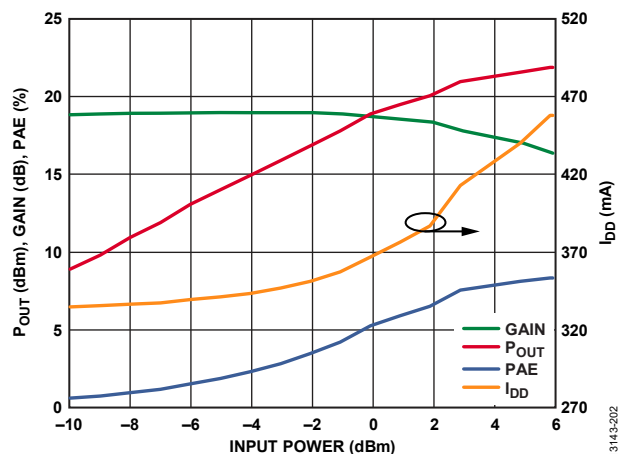
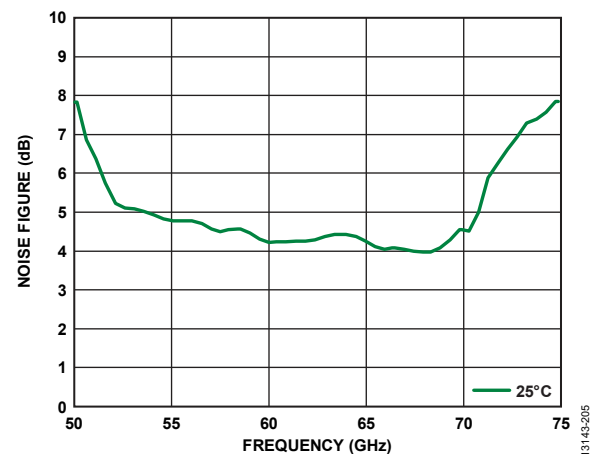
Figure 28.  $P_{OUT}$ , Gain, PAE, and  $I_{DD}$  vs. Input Power at 35 GHzFigure 31.  $P_{OUT}$ , Gain, PAE, and  $I_{DD}$  vs. Input Power at 65 GHzFigure 29.  $P_{OUT}$ , Gain, PAE, and  $I_{DD}$  vs. Input Power at 45 GHzFigure 32. Power Dissipation ( $P_{DISS}$ ) vs. Input Power at 85°C for Various FrequenciesFigure 30.  $P_{OUT}$ , Gain, PAE, and  $I_{DD}$  vs. Input Power at 55 GHz

Figure 33. Noise Figure vs. Frequency at 25°C

## THEORY OF OPERATION

The architecture of the HMC1144 power amplifier is shown in Figure 34. The HMC1144 uses two cascaded, four-stage amplifiers operating in quadrature between two 90° hybrids. This balanced amplifier approach forms an amplifier with a combined gain of 19 dB and a saturated output power ( $P_{SAT}$ ) of

22 dBm. The 90° hybrids ensure that the input and output return losses are greater than 15 dB. See the application circuits shown in Figure 38 and Figure 39 for further details on biasing the various blocks.

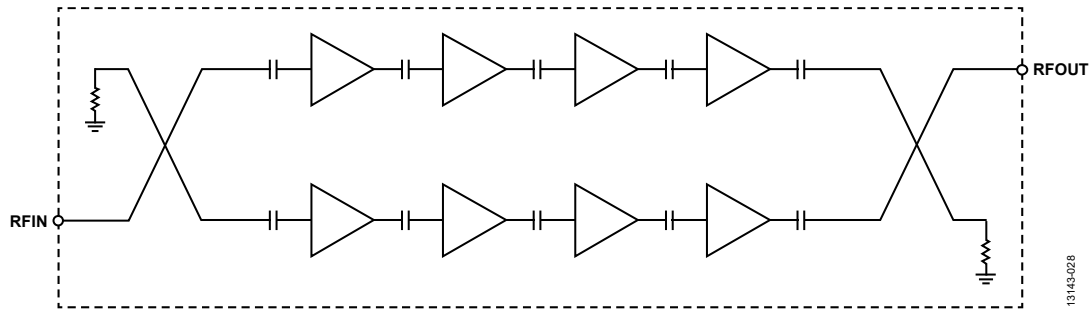


Figure 34. HMC1144 Architecture

## APPLICATIONS INFORMATION

The **HMC1144** is a GaAs, pHEMT, MMIC power amplifier. Capacitive bypassing is required for  $V_{DD1A}$  through  $V_{DD4A}$  and  $V_{DD1B}$  through  $V_{DD4B}$  (see Figure 38).  $V_{GG1B}$  is the gate bias pad for all four gain stages. Apply a gate bias voltage to  $V_{GG1B}$  and use capacitive bypassing as shown in Figure 38.

All measurements for this device were taken using the typical application circuit (see Figure 38) and configured as shown in the assembly diagram (see Figure 40).

The following is the recommended bias sequence during power-up:

1. Connect to ground.
2. Set the gate bias voltage to  $-2$  V.
3. Set all the drain bias voltages,  $V_{DD} = 4$  V.
4. Increase the gate bias voltage to achieve a quiescent current,  $I_{DD} = 320$  mA.
5. Apply the RF signal.

The following is the recommended bias sequence during power-down:

1. Turn off the RF signal.
2. Decrease the gate bias voltage to  $-2$  V to achieve  $I_{DD} = 0$  mA (approximately).
3. Decrease all of the drain bias voltages to 0 V.
4. Increase the gate bias voltage to 0 V.

The  $V_{DD} = 4$  V and  $I_{DD} = 320$  mA bias conditions are the operating points recommended to optimize the overall performance. Unless otherwise noted, the data shown was taken using the recommended bias condition. Operation of the **HMC1144** at different bias conditions may provide performance that differs from what is shown in the Typical Performance Characteristics section. Biasing the **HMC1144** for higher drain current typically results in higher P1dB, output IP3, and gain, but at the expense of increased power consumption.

### ALTERNATE BIASING CONFIGURATION

It is possible to bias the gate from the north (instead of the south) and bias the drain from the south (instead of the north). Although this alternate bias configuration was not measured during production testing and was evaluated minimally during product validation, it does offer flexibility in cases where it is more convenient to have the gate and drain bias approach the die from a different direction (see Figure 39).

In the alternate bias configuration, capacitive bypassing is required for the  $V_{GG1A}$  pad to which the bias voltage is applied, as well as for all eight  $V_{DDXA}/V_{DDXB}$  pads.

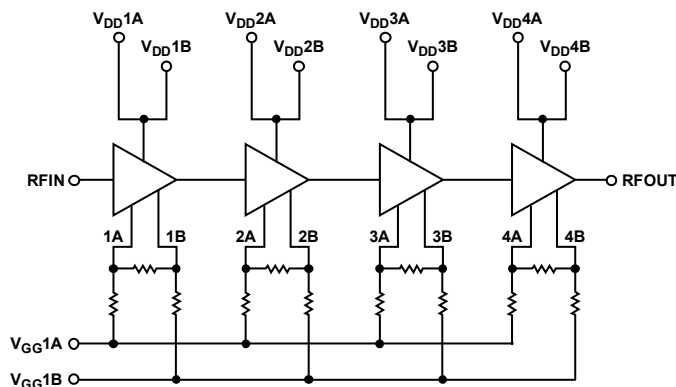


Figure 35. Simplified Block Diagram

13143-021

## MOUNTING AND BONDING TECHNIQUES FOR MILLIMETERWAVE GaAs MMICS

Attach the die directly to the ground plane eutectically or with conductive epoxy (see the Handling Precautions section, the Mounting section, and the Wire Bonding section).

Microstrip, 50  $\Omega$ , transmission lines on 0.127 mm (5 mil) thick alumina, thin film substrates are recommended for bringing the radio frequency to and from the chip (see Figure 36). When using 0.254 mm (10 mil) thick alumina, thin film substrates, raise the die 0.150 mm (6 mil) to ensure that the surface of the die is coplanar with the surface of the substrate. One way to accomplish this is to attach the 0.05 mm (2 mil) thick die to a 0.150 mm (6 mil) thick, molybdenum (Mo) heat spreader (moly tab), which can then be attached to the ground plane (see Figure 37).

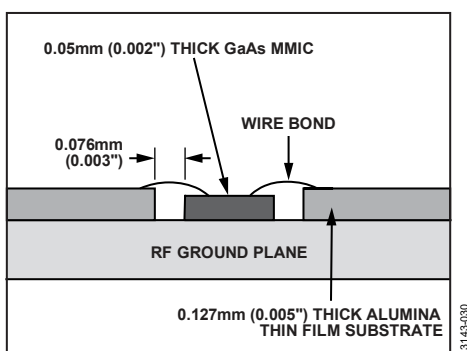


Figure 36. Routing RF Signals

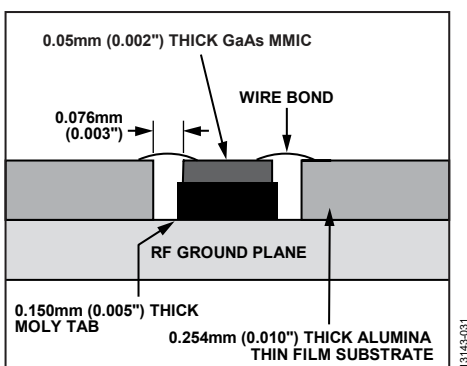


Figure 37. Routing RF Signals Using Moly Tab

Place microstrip substrates as close to the die as possible to minimize bond wire length. Typical die to substrate spacing is 0.076 mm to 0.152 mm (3 mil to 6 mil).

## Handling Precautions

To avoid permanent damage, follow these storage, cleanliness, static sensitivity, transient, and general handling precautions:

- Place all bare die in either waffle or gel-based ESD protective containers and then seal the die in an ESD protective bag for shipment. After the sealed ESD protective bag is opened, store all die in a dry nitrogen environment.
- Handle the chips in a clean environment. Do not attempt to clean the chip using liquid cleaning systems.
- Follow ESD precautions to protect against ESD strikes.
- While bias is applied, suppress instrument and bias supply transients. Use shielded signal and bias cables to minimize inductive pickup.
- Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip may have fragile air bridges and must not be touched with vacuum collet, tweezers, or fingers.

## Mounting

The chip is back metallized and can be die mounted with gold (Au) and tin (Sn) eutectic preforms or with electrically conductive epoxy. Ensure that the mounting surface is clean and flat.

When a eutectic die is attached, an 80% gold/20% tin preform is recommended with a work surface temperature of 255°C and a tool temperature of 265°C. When hot 90% nitrogen/10% hydrogen gas is applied, ensure that the tool tip temperature is 290°C. Do not expose the chip to a temperature greater than 320°C for more than 20 sec. For attachment, no more than 3 sec of scrubbing is required.

When an epoxy die is attached, apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip after it is placed into position. Cure the epoxy per the schedule of the manufacturer.

## Wire Bonding

RF bonds made with two 1 mil wires are recommended. Ensure that these bonds are thermosonically bonded with a force of 40 g to 60 g. DC bonds of 0.001" (0.025 mm) in diameter, thermosonically bonded, are recommended. Create ball bonds with a force of 40 g to 50 g and wedge bonds with a force of 18 g to 22 g. Create all bonds with a nominal stage temperature of 150°C. Apply a minimum amount of ultrasonic energy to achieve reliable bonds. Keep all bonds as short as possible, less than 12 mil (0.31 mm).

## TYPICAL APPLICATION CIRCUIT

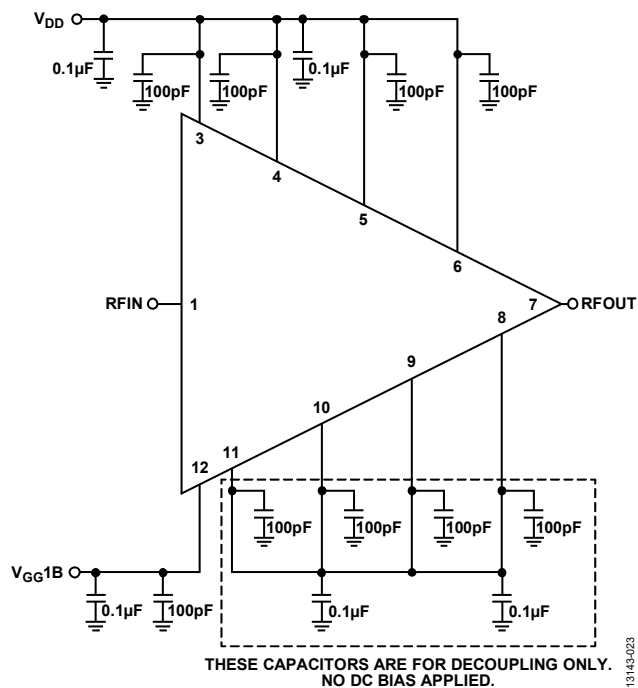


Figure 38. Typical Application Circuit

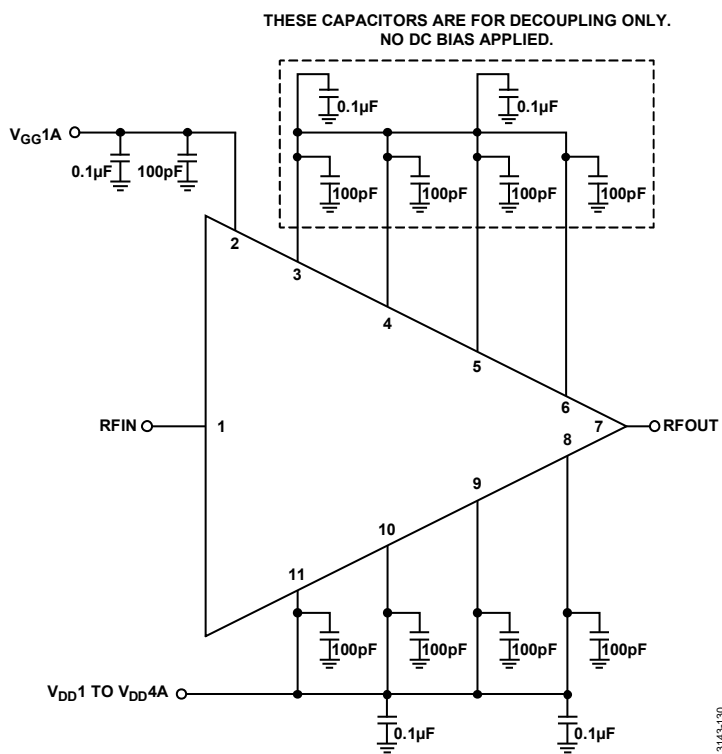


Figure 39. Alternate Bias Application Circuit

## ASSEMBLY DIAGRAM

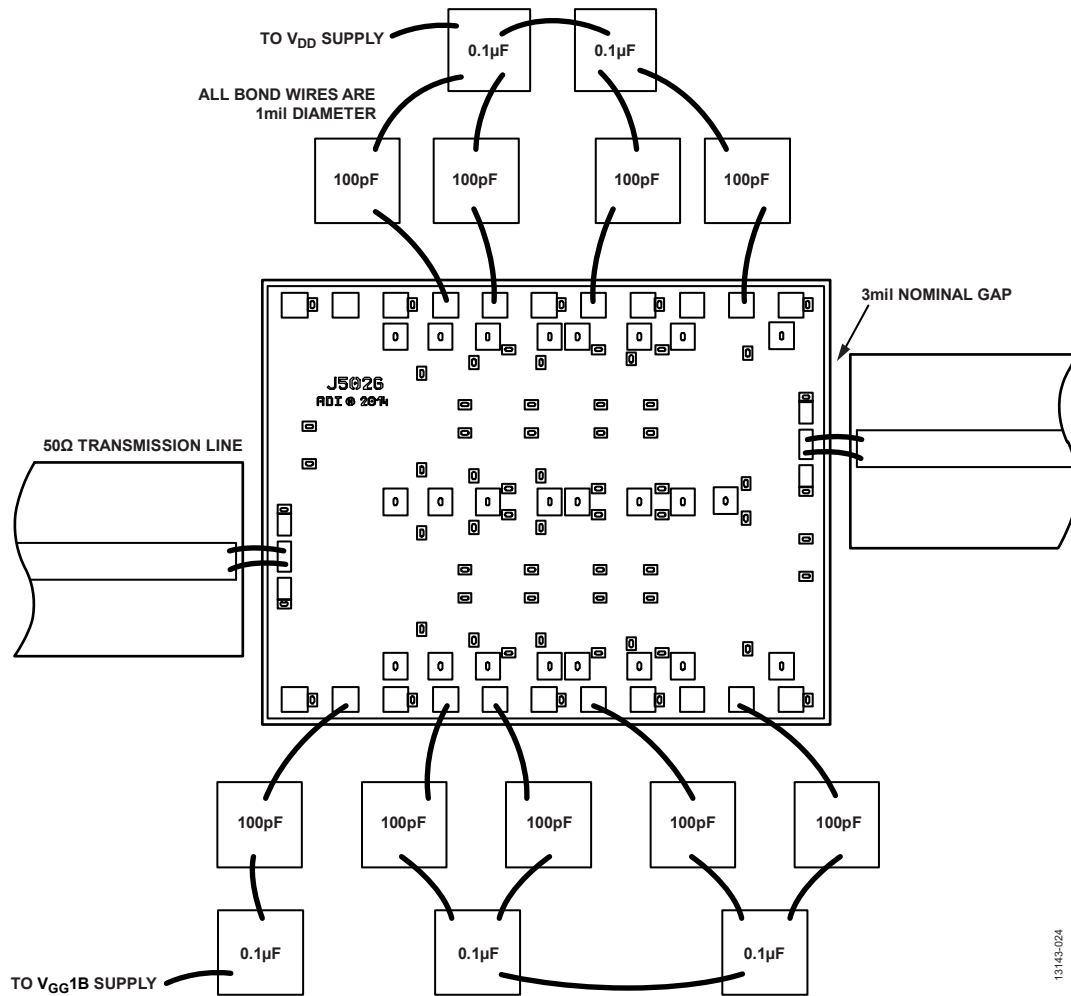


Figure 40. Assembly Diagram

13143-024

OUTLINE DIMENSIONS

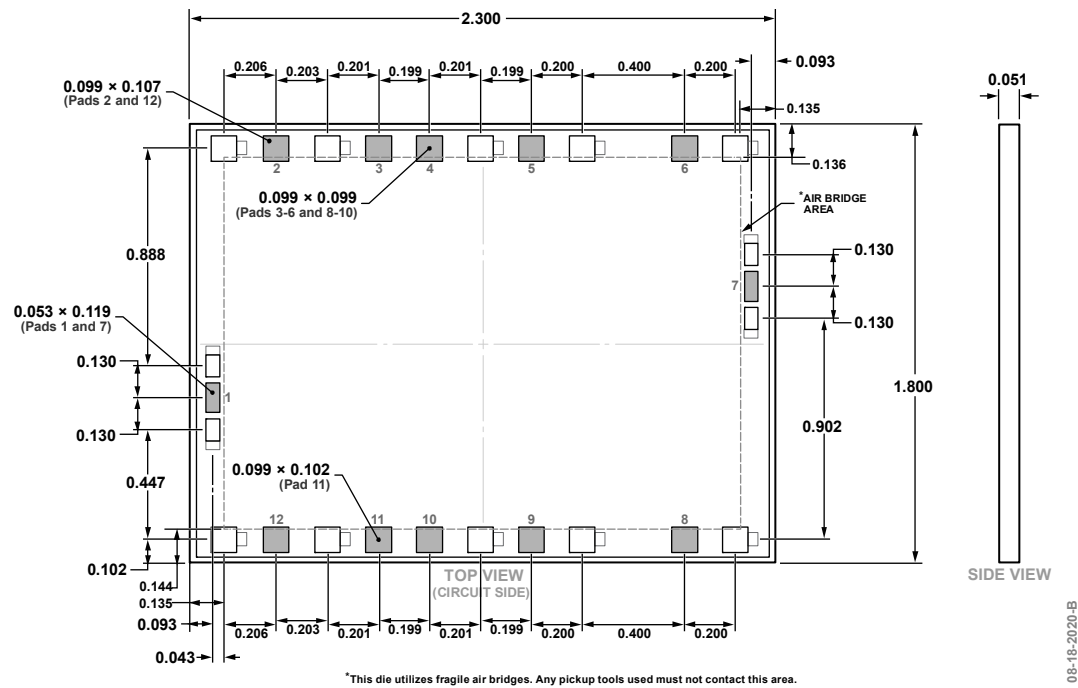


Figure 41. 12-Pad Bare Die [CHIP]  
(C-12-2)  
Dimensions shown in millimeters

ORDERING GUIDE

| Model      | Temperature Range | Package Description    | Package Option |
|------------|-------------------|------------------------|----------------|
| HMC1144    | −55°C to +85°C    | 12-Pad Bare Die [CHIP] | C-12-2         |
| HMC1144-SX | −55°C to +85°C    | 12-Pad Bare Die [CHIP] | C-12-2         |