


OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.) (7)	EFFICIENCY (MAX.)	REGULATION		MODEL NUMBER (9,10)
						LINE	LOAD	
150 W	2.95-5.5 Vdc	0.8-2.5 Vdc	0 A	60 A	93%	±5 mV	±5 mV	PTH04040W

Part Number System with Options

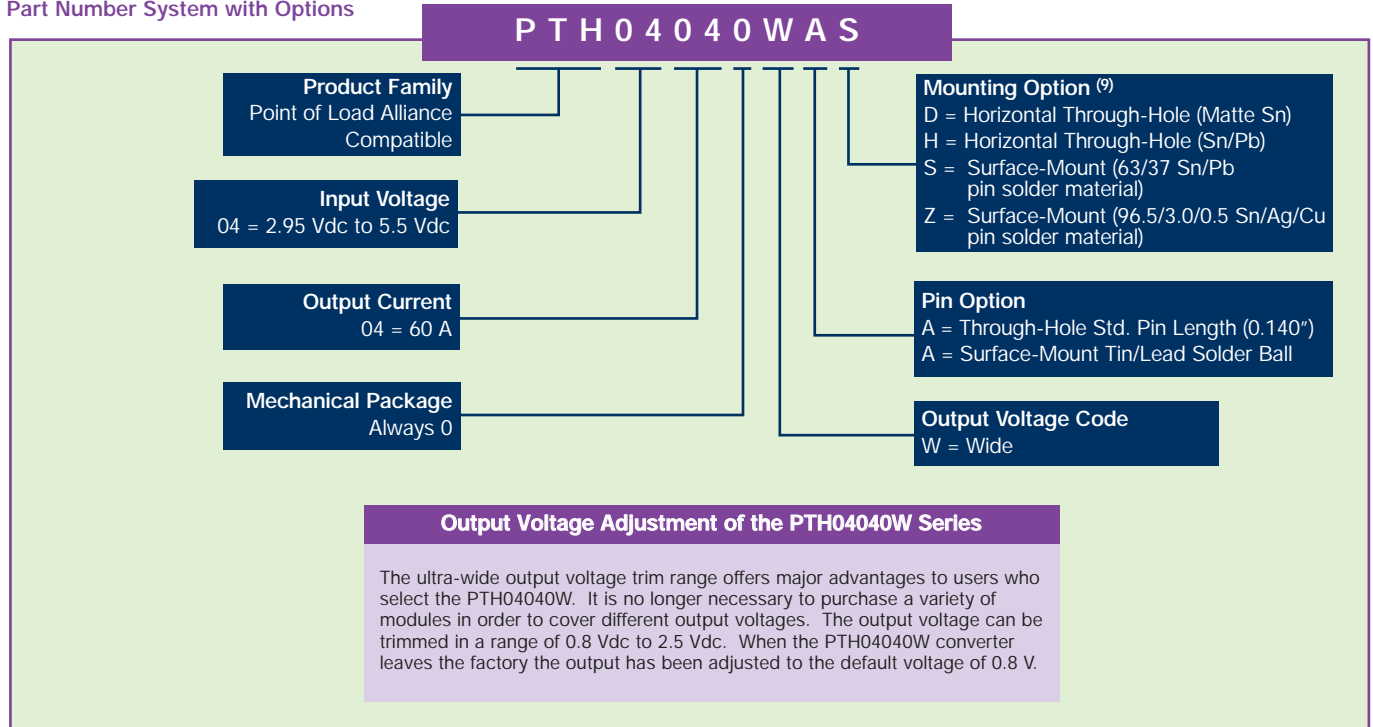

Notes

- The set-point voltage tolerance is affected by the tolerance and stability of R_{SET} . The stated limit is unconditionally met if R_{SET} has a tolerance of 1% with 100 ppm/°C or better temperature stability.
- This control pin has an internal pull-up to V_{in} nominal. If it is left open-circuit the module will operate when input power is applied. A small low-leakage (<100 nA) MOSFET is recommended for control. For further information, consult Application Note 192.
- A 1000 μ F input capacitor is required for proper operation. The capacitor must be rated for a minimum of 400 mA rms of ripple current.
- This is with a 1 A/ μ s loadstep, 50 to 100% I_{Omax} . $C_O = 660 \mu$ F.
- The minimum input voltage is 2.95 V or $1.34 \times V_O$, whichever is greater.
- These are default voltages. They may be adjusted using the 'UVLO Prog.' control input. Consult Application Note 192 for further details.
- See Figures 1 and 2 for safe operating curves. All power pins must be used.
- A small low-leakage (<100 nA) MOSFET is recommended to control this pin. The open-circuit voltage is less than 1 Vdc.
- To order Pb-free (RoHS compatible) surface-mount parts replace the mounting option 'S' with 'Z', e.g. PTH04040WAZ. To order Pb-free (RoHS compatible) through-hole parts replace the mounting option 'H' with 'D', e.g. PTH04040WAD.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

EFFICIENCY TABLE ($I_O = 45A$) $V_{in} = 5 V$

OUTPUT VOLTAGE	EFFICIENCY
$V_O = 2.5 V$	93%
$V_O = 1.8 V$	90%
$V_O = 1.5 V$	88%
$V_O = 1.2 V$	86%

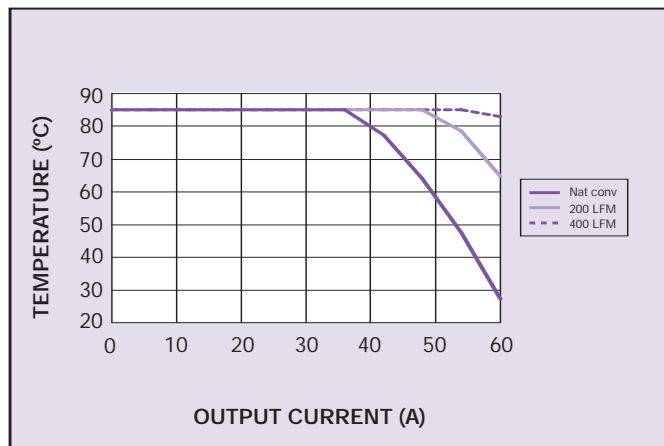


Figure 1 - Safe Operating Area
V_{in} = 3.3 V (See Note A)

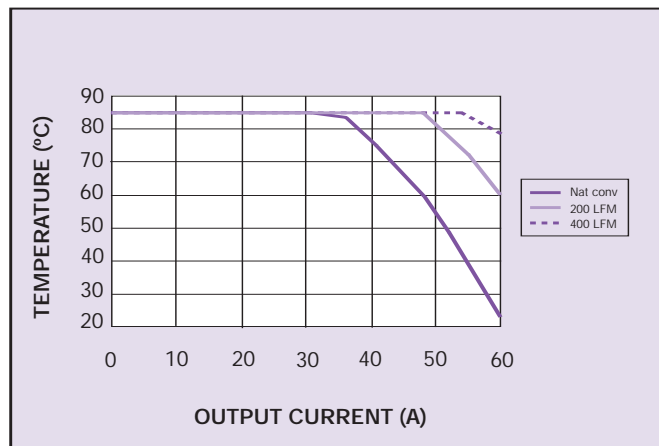


Figure 2 - Safe Operating Area
V_{in} = 5 V (See Note A)

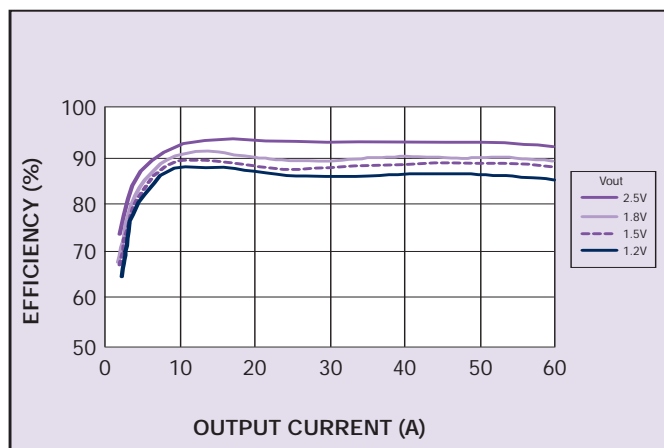


Figure 3 - Efficiency vs Load Current
 $V_{in} = 5\text{ V}$ (See Note B)

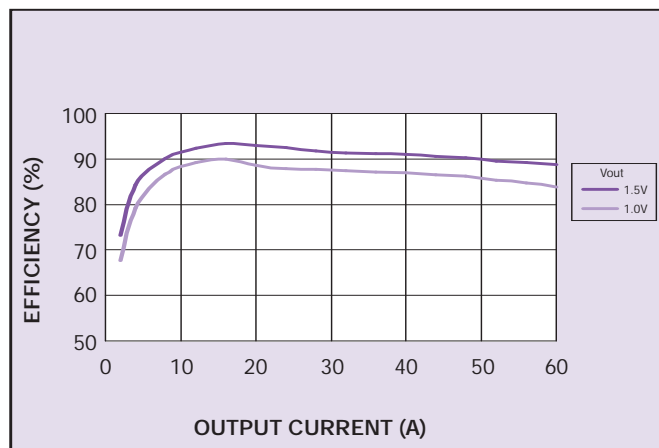


Figure 4 - Efficiency vs Load Current
 $V_{in} = 3.3 \text{ V}$ (See Note B)

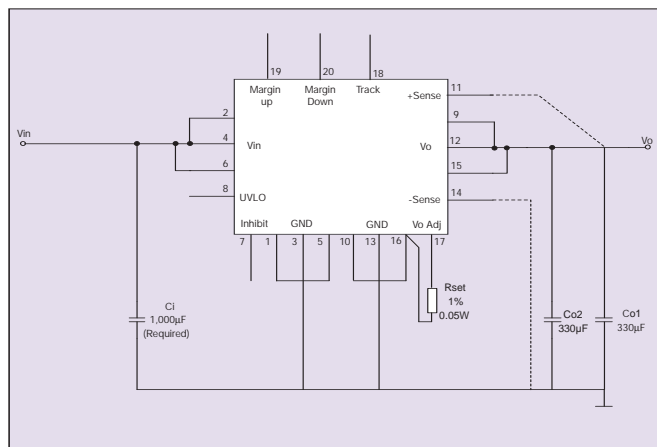


Figure 5 - Standard Application

Notes

- A** SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
- B** Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

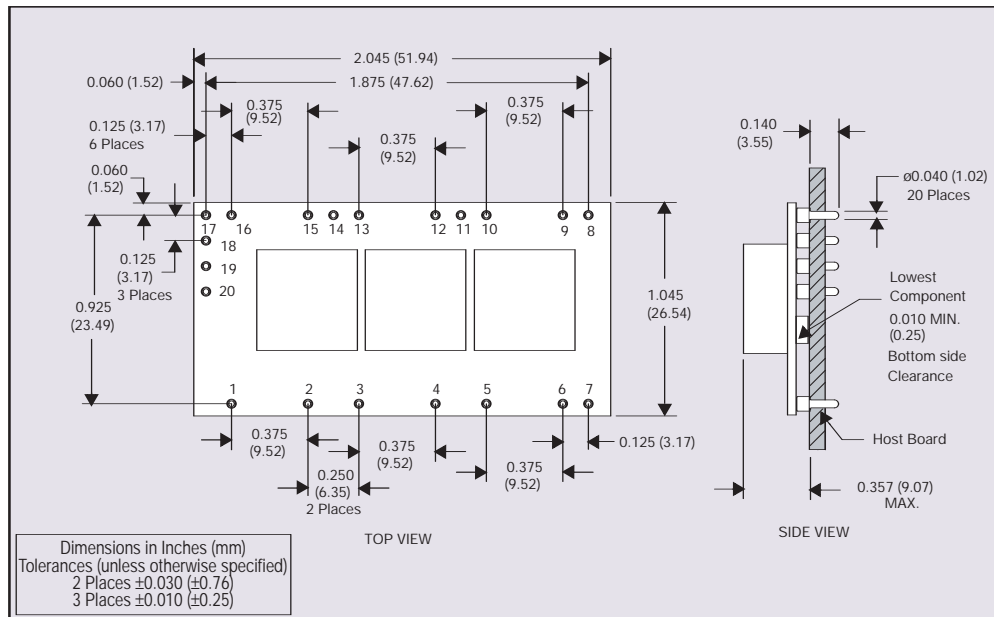


Figure 6 - Plated Through-Hole Mechanical Drawing

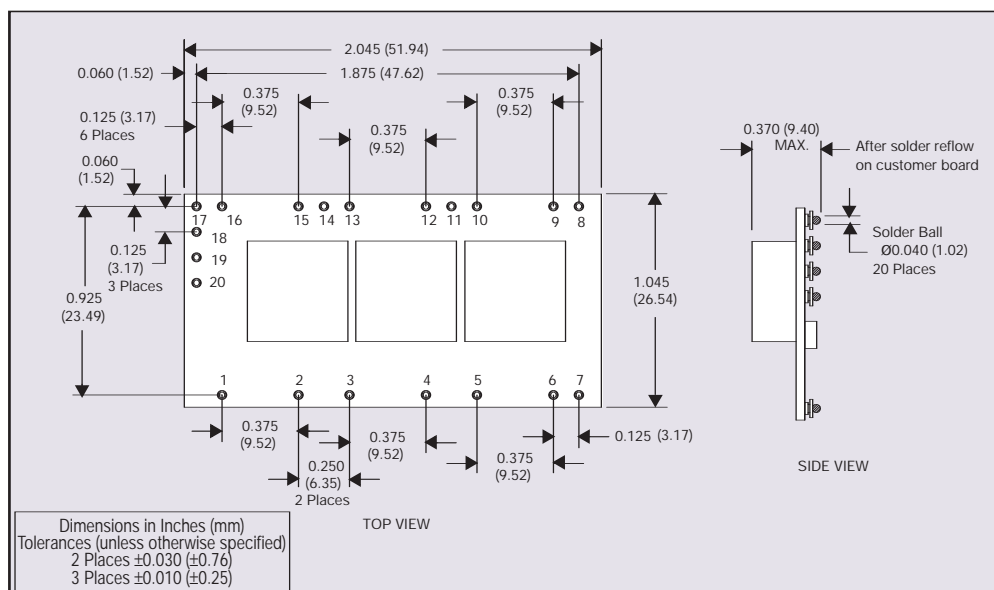


Figure 7 - Surface-Mount Mechanical Drawing

PIN CONNECTIONS	
PIN NO.	FUNCTION
1	Ground
2	Vin
3	Ground
4	Vin
5	Ground
6	Vin
7	Inhibit*
8	UVLO Programming
9	Vout
10	Ground
11	Vs+
12	Vout
13	Ground
14	Vs-
15	Vout
16	Ground
17	Adjust
18	Track
19	Margin Up*
20	Margin Down*

*Denotes negative logic:
Open = Normal operation
Ground = Function active