

**DESCRIPTION (continued)**

the open drain Overcurrent Fault pin will transition to a logic low state. Factory programming of the linear Hall sensor IC inside of the ACS709 results in exceptional accuracy in both analog and digital output signals.

The internal resistance of the copper path used for current sensing is typically 1.1 mΩ, for low power loss. Also, the current conduction path is electrically isolated from the low voltage device inputs and

outputs. This allows the ACS709 family of sensor ICs to be used in applications requiring electrical isolation, without the use of opto-isolators or other costly isolation techniques.

Applications include:

- Motor control and protection
- Load management and overcurrent detection
- Power conversion and battery monitoring / UPS systems

**SELECTION GUIDE**

| Part Number        | $I_{P(LIN)}$<br>(A) | Sens (Typ)<br>(mV/A) | $T_A$<br>(°C) | Packing*                            |
|--------------------|---------------------|----------------------|---------------|-------------------------------------|
| ACS709LLFTR-35BB-T | 75                  | 28 ( $V_{CC}=5V$ )   | -40 to 150    | Tape and Reel, 2500 pieces per reel |
| ACS709LLFTR-20BB-T | 37.5                | 56 ( $V_{CC}=5V$ )   |               |                                     |
| ACS709LLFTR-10BB-T | 24                  | 85 ( $V_{CC}=5V$ )   |               |                                     |
| ACS709LLFTR-6BB-T  | 15                  | 90 ( $V_{CC}=3.3V$ ) |               |                                     |

\*Contact Allegro for packing options.

**ABSOLUTE MAXIMUM RATINGS**


| Characteristic                                                                                                                                   | Symbol             | Notes   | Rating     | Units |
|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------|------------|-------|
| Supply Voltage                                                                                                                                   | $V_{CC}$           |         | 8          | V     |
| Filter Pin                                                                                                                                       | $V_{FILTER}$       |         | 8          | V     |
| Analog Output Pin                                                                                                                                | $V_{IOUT}$         |         | 32         | V     |
| Overcurrent Input Pin                                                                                                                            | $V_{OC}$           |         | 8          | V     |
| Overcurrent FAULT Pin                                                                                                                            | $V_{FAULT}$        |         | 8          | V     |
| Fault Enable (FAULT_EN) Pin                                                                                                                      | $V_{FAULTEN}$      |         | 8          | V     |
| Voltage Reference Output Pin                                                                                                                     | $V_{ZCR}$          |         | 8          | V     |
| DC Reverse Voltage: Supply Voltage, Filter, Analog Output, Overcurrent Input, Overcurrent Fault, Fault Enable, and Voltage Reference Output Pins | $V_{Rdcx}$         |         | -0.5       | V     |
| Output Current Source                                                                                                                            | $I_{IOUT(Source)}$ |         | 3          | mA    |
| Output Current Sink                                                                                                                              | $I_{IOUT(Sink)}$   |         | 1          | mA    |
| Operating Ambient Temperature                                                                                                                    | $T_A$              | Range L | -40 to 150 | °C    |
| Junction Temperature                                                                                                                             | $T_J(max)$         |         | 165        | °C    |
| Storage Temperature                                                                                                                              | $T_{stg}$          |         | -65 to 170 | °C    |

**ISOLATION CHARACTERISTICS**


| Characteristic                      | Symbol     | Notes                                                                                                            | Rating | Unit |
|-------------------------------------|------------|------------------------------------------------------------------------------------------------------------------|--------|------|
| Dielectric Strength Test Voltage*   | $V_{ISO}$  | Agency type-tested for 60 seconds per UL standard 1577                                                           | 1750   | VAC  |
| Working Voltage for Basic Isolation | $V_{WFSI}$ | For basic (single) isolation per UL standard 1577; for higher continuous voltage ratings, please contact Allegro | 277    | VAC  |

\* Allegro does not conduct 60-second testing. It is done only during the UL certification process.

Functional Block Diagram

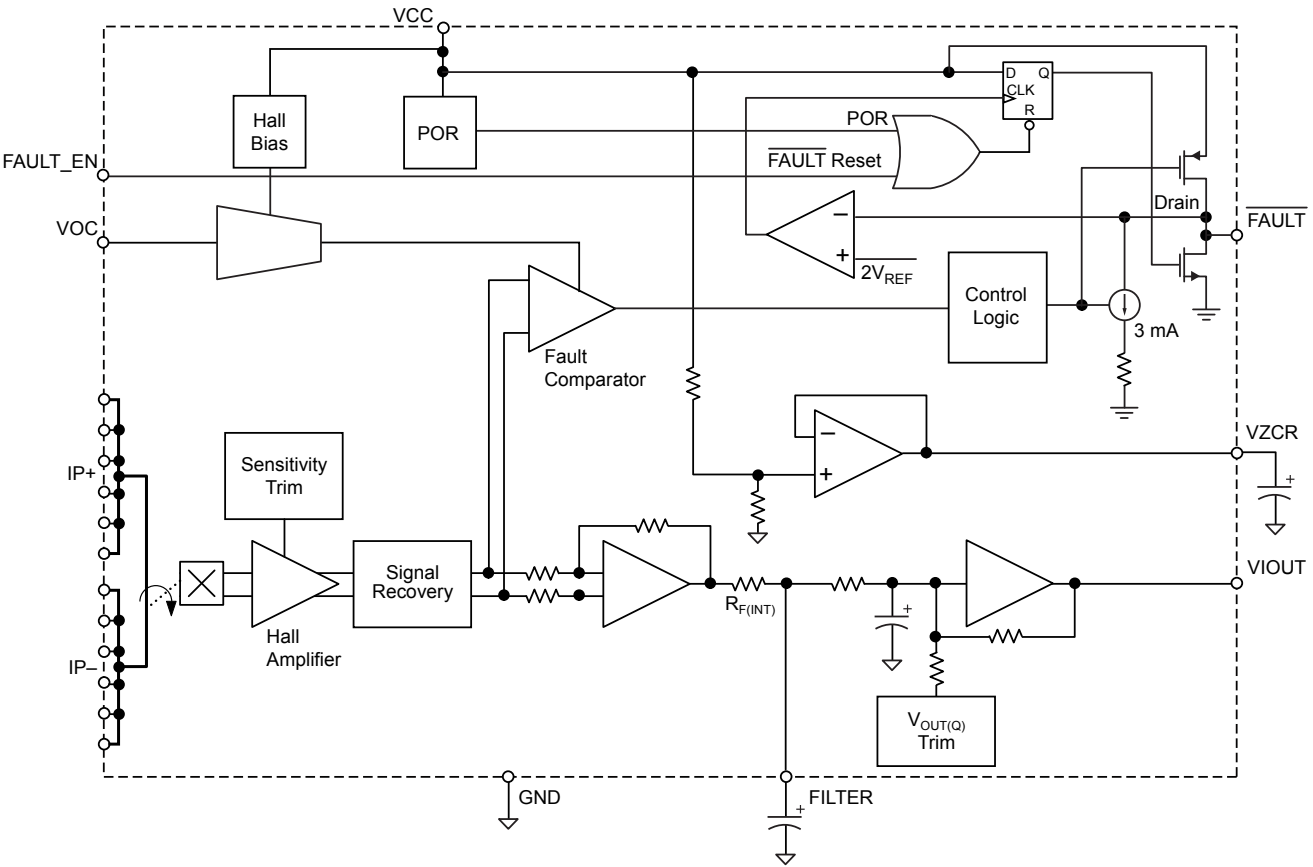

Pinout Diagram

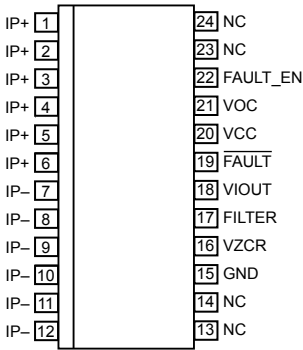

Terminal List

| Number         | Name     | Description                                                                                                                                                       |
|----------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 through 6    | IP+      | Sensed current copper conduction path pins. Terminals for current being sensed; fused internally, loop to IP- pins; unidirectional or bidirectional current flow. |
| 7 through 12   | IP-      | Sensed current copper conduction path pins. Terminals for current being sensed; fused internally, loop to IP+ pins; unidirectional or bidirectional current flow. |
| 13, 14, 23, 24 | NC       | No connection                                                                                                                                                     |
| 15             | GND      | Device ground connection.                                                                                                                                         |
| 16             | VZCR     | Voltage Reference Output pin. Zero current (0 A) reference; output voltage on this pin scales with V <sub>CC</sub> .                                              |
| 17             | FILTER   | Filter pin. Terminal for an external capacitor connected from this pin to GND to set the device bandwidth.                                                        |
| 18             | VIOUT    | Analog Output pin. Output voltage on this pin is proportional to current flowing through the loop between the IP+ pins and IP- pins.                              |
| 19             | FAULT    | Overcurrent Fault pin. When current flowing between IP+ pins and IP- pins exceeds the overcurrent fault threshold, this pin transitions to a logic low state.     |
| 20             | VCC      | Supply voltage.                                                                                                                                                   |
| 21             | VOC      | Overcurrent Input pin. Analog input voltage on this pin sets the overcurrent fault threshold.                                                                     |
| 22             | FAULT_EN | Enables overcurrent faulting when high. Resets FAULT when low.                                                                                                    |

**COMMON OPERATING CHARACTERISTICS:** Valid at  $T_A = -40^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ ,  $V_{CC} = 5\text{ V}$  (3.3 V for -6BB version), unless otherwise specified

| Characteristic                                              | Symbol                        | Test Conditions                                                                                                              | Min.                 | Typ.                | Max.                | Units         |
|-------------------------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------|---------------------|---------------|
| <b>ELECTRICAL CHARACTERISTICS</b>                           |                               |                                                                                                                              |                      |                     |                     |               |
| Supply Voltage <sup>[1]</sup>                               | $V_{CC}$                      |                                                                                                                              | 3                    | –                   | 5.5                 | V             |
| Nominal Supply Voltage                                      | $V_{CCN}$                     |                                                                                                                              | –                    | 5                   | –                   | V             |
| Supply Current                                              | $I_{CC}$                      | VIOOUT open, FAULT pin high, $V_{CC} = 5\text{ V}$<br>(all versions but -6BB)                                                | –                    | 11                  | 14.5                | mA            |
|                                                             |                               | VIOOUT open, FAULT pin high, $V_{CC} = 3.3\text{ V}$<br>(-6BB version)                                                       | –                    | 9                   | 11                  | mA            |
| Output Capacitance Load                                     | $C_{LOAD}$                    | VIOOUT pin to GND                                                                                                            | –                    | –                   | 10                  | nF            |
| Output Resistive Load                                       | $R_{LOAD}$                    | VIOOUT pin to GND                                                                                                            | 10                   | –                   | –                   | k $\Omega$    |
| Magnetic Coupling from Device Conductor to Hall Element     | $MC_{HALL}$                   | Current flowing from IP+ to IP– pins                                                                                         | –                    | 9.5                 | –                   | G/A           |
| Internal Filter Resistance <sup>[2]</sup>                   | $R_{F(INT)}$                  |                                                                                                                              | –                    | 1.7                 | –                   | k $\Omega$    |
| Primary Conductor Resistance                                | $R_{PRIMARY}$                 | $T_A = 25^{\circ}\text{C}$                                                                                                   | –                    | 1.1                 | –                   | m $\Omega$    |
| <b>ANALOG OUTPUT SIGNAL CHARACTERISTICS</b>                 |                               |                                                                                                                              |                      |                     |                     |               |
| Full Range Linearity <sup>[3]</sup>                         | $E_{LIN}$                     | $I_P = \pm I_{P0A}$                                                                                                          | –0.75                | $\pm 0.25$          | 0.75                | %             |
| Symmetry <sup>[4]</sup>                                     | $E_{SYM}$                     | $I_P = \pm I_{P0A}$                                                                                                          | 99.1                 | 100                 | 100.9               | %             |
| Bidirectional Quiescent Output                              | $V_{OUT(QBI)}$                | $I_P = 0\text{ A}$ , $T_A = 25^{\circ}\text{C}$                                                                              | –                    | $V_{CC} \times 0.5$ | –                   | V             |
| <b>TIMING PERFORMANCE CHARACTERISTICS</b>                   |                               |                                                                                                                              |                      |                     |                     |               |
| VIOOUT Signal Rise Time                                     | $t_r$                         | $T_A = 25^{\circ}\text{C}$ , Swing $I_P$ from 0 A to $I_{P0A}$ ,<br>no capacitor on FILTER pin, 100 pF from<br>VIOOUT to GND | –                    | 3                   | –                   | $\mu\text{s}$ |
| VIOOUT Signal Propagation Time                              | $t_{PROP}$                    | $T_A = 25^{\circ}\text{C}$ , no capacitor on FILTER pin,<br>100 pF from VIOOUT to GND                                        | –                    | 1                   | –                   | $\mu\text{s}$ |
| VIOOUT Signal Response Time                                 | $t_{RESPONSE}$                | $T_A = 25^{\circ}\text{C}$ , Swing $I_P$ from 0 A to $I_{P0A}$ ,<br>no capacitor on FILTER pin, 100 pF from<br>VIOOUT to GND | –                    | 4                   | –                   | $\mu\text{s}$ |
| VIOOUT Large Signal Bandwidth <sup>[5]</sup>                | $f_{3dB}$                     | –3 dB, $T_A = 25^{\circ}\text{C}$ , no capacitor on FILTER<br>pin, 100 pF from VIOOUT to GND                                 | –                    | 120                 | –                   | kHz           |
| Power-On Time                                               | $t_{PO}$                      | Output reaches 90% of steady-state level,<br>no capacitor on FILTER pin, $T_A = 25^{\circ}\text{C}$                          | –                    | 35                  | –                   | $\mu\text{s}$ |
| <b>OVERCURRENT CHARACTERISTICS</b>                          |                               |                                                                                                                              |                      |                     |                     |               |
| Setting Voltage for Overcurrent Switch Point <sup>[6]</sup> | $V_{OC}$                      |                                                                                                                              | $V_{CC} \times 0.25$ | –                   | $V_{CC} \times 0.4$ | V             |
| Signal Noise at Overcurrent Comparator Input                | $I_{NCOMP}$                   |                                                                                                                              | –                    | $\pm 1$             | –                   | A             |
| Overcurrent Fault Switch Point Error <sup>[7][8]</sup>      | $E_{OC}$                      | Switch point in $V_{OC}$ safe operating area;<br>assumes $I_{NCOMP} = 0\text{ A}$                                            | –                    | $\pm 5$             | –                   | %             |
| Overcurrent $\overline{\text{FAULT}}$ Pin Output Voltage    | $V_{\overline{\text{FAULT}}}$ | 1 mA sink current at $\overline{\text{FAULT}}$ pin                                                                           | –                    | –                   | 0.4                 | V             |
| Fault Enable (FAULT_EN Pin) Input Low Voltage Threshold     | $V_{IL}$                      |                                                                                                                              | –                    | –                   | $0.1 \times V_{CC}$ | V             |
| Fault Enable (FAULT_EN Pin) Input High Voltage Threshold    | $V_{IH}$                      |                                                                                                                              | $0.8 \times V_{CC}$  | –                   | –                   | V             |
| Fault Enable (FAULT_EN Pin) Input Resistance                | $R_{FEI}$                     |                                                                                                                              | –                    | 1                   | –                   | M $\Omega$    |

Continued on the next page...

**COMMON OPERATING CHARACTERISTICS (continued):** Valid at  $T_A = -40^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ ,  $V_{CC} = 5\text{ V}$  (3.3 V for -6BB version), unless otherwise specified

| Characteristic                                   | Symbol           | Test Conditions                                                                                                                                                                                                                                                              | Min. | Typ.                | Max. | Units         |
|--------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------------|------|---------------|
| <b>OVERCURRENT CHARACTERISTICS (continued)</b>   |                  |                                                                                                                                                                                                                                                                              |      |                     |      |               |
| Fault Enable (FAULT_EN Pin) Delay <sup>[9]</sup> | $t_{FED}$        | Set FAULT_EN to low, $V_{OC} = 0.25 \times V_{CC}$ , $C_{OC} = 0\text{ F}$ ; then run a DC $I_P$ exceeding the corresponding overcurrent threshold; then reset FAULT_EN from low to high and measure the delay from the rising edge of FAULT_EN to the falling edge of FAULT | —    | 15                  | —    | $\mu\text{s}$ |
| Overcurrent Fault Response Time                  | $t_{OC}$         | FAULT_EN set to high for a minimum of 20 $\mu\text{s}$ before the overcurrent event; switch point set at $V_{OC} = 0.25 \times V_{CC}$ ; delay from $I_P$ exceeding overcurrent fault threshold to $V_{FAULT} < 0.4\text{ V}$ , without external $C_{OC}$ capacitor          | —    | 1.9                 | —    | $\mu\text{s}$ |
| Overcurrent Fault Reset Delay                    | $t_{OCR}$        | Time from $V_{FAULTEN} < V_{IL}$ to $V_{FAULT} > 0.8 \times V_{CC}$ , $R_{PU} = 330\text{ k}\Omega$                                                                                                                                                                          | —    | 500                 | —    | ns            |
| Overcurrent Fault Reset Hold Time                | $t_{OCH}$        | Time from $V_{FAULTEN}$ pin $< V_{IL}$ to reset of fault latch; see Functional Block Diagram                                                                                                                                                                                 | —    | 250                 | —    | ns            |
| Overcurrent Input Pin Resistance                 | $R_{OC}$         | $T_A = 25^{\circ}\text{C}$ , VOC pin to GND                                                                                                                                                                                                                                  | 2    | —                   | —    | M $\Omega$    |
| <b>VOLTAGE REFERENCE CHARACTERISTICS</b>         |                  |                                                                                                                                                                                                                                                                              |      |                     |      |               |
| Voltage Reference Output                         | $V_{ZCR}$        | $T_A = 25^{\circ}\text{C}$                                                                                                                                                                                                                                                   | —    | $0.5 \times V_{CC}$ | —    | V             |
| Voltage Reference Output Load Current            | $I_{ZCR}$        | Source current                                                                                                                                                                                                                                                               | 3    | —                   | —    | mA            |
|                                                  |                  | Sink current                                                                                                                                                                                                                                                                 | 50   | —                   | —    | $\mu\text{A}$ |
| Voltage Reference Output Drift                   | $\Delta V_{ZCR}$ |                                                                                                                                                                                                                                                                              | —    | $\pm 10$            | —    | mV            |

<sup>[1]</sup> Devices are trimmed for maximum accuracy at  $V_{CC} = 5\text{ V}$ . The ratiometry feature of the device allows operation over the full  $V_{CC}$  range; however, accuracy may be slightly degraded for  $V_{CC}$  values other than 5 V. Contact the Allegro factory for applications that require maximum accuracy for  $V_{CC} = 3.3\text{ V}$ .

<sup>[2]</sup>  $R_{F(INT)}$  forms an RC circuit via the FILTER pin.

<sup>[3]</sup> This parameter can drift by as much as 0.25% over the lifetime of this product.

<sup>[4]</sup> This parameter can drift by as much as 0.3% over the lifetime of this product.

<sup>[5]</sup> Calculated using the formula  $f_{3dB} = 0.35 / t_r$ .

<sup>[6]</sup> See page 8 on how to set overcurrent fault switch point.

<sup>[7]</sup> Switch point can be lower at the expense of switch point accuracy.

<sup>[8]</sup> This error specification does not include the effect of noise. See the  $I_{NCOMP}$  specification in order to factor in the additional influence of noise on the fault switch point.

<sup>[9]</sup> Fault Enable Delay is designed to avoid false tripping of an Overcurrent (OC) fault at power-up. A 15  $\mu\text{s}$  (typical) delay will always be needed, every time FAULT\_EN is raised from low to high, before the device is ready for responding to any overcurrent event.

**X6BB PERFORMANCE CHARACTERISTICS,  $T_A$  Range L, valid at  $T_A = -40^\circ\text{C}$  to  $150^\circ\text{C}$ ,  $V_{CC} = 3.3\text{ V}$ , unless otherwise specified**

| Characteristic                                                           | Symbol           | Test Conditions                                                                                          | Min. | Typ.    | Max. | Units |
|--------------------------------------------------------------------------|------------------|----------------------------------------------------------------------------------------------------------|------|---------|------|-------|
| Optimized Accuracy Range                                                 | $I_{P(OA)}$      |                                                                                                          | -6.5 | —       | 6.5  | A     |
| Linear Sensing Range                                                     | $I_{P(LIN)}$     |                                                                                                          | -15  | —       | 15   | A     |
| <b>Performance Characteristics at <math>V_{CC} = 3.3\text{ V}</math></b> |                  |                                                                                                          |      |         |      |       |
| Noise [1]                                                                | $V_{NOISE(rms)}$ | $T_A = 25^\circ\text{C}$ , Sens = 90 mV/A, $C_f = 0$ , $C_{LOAD} = 4.7\text{ nF}$ , $R_{LOAD}$ open      | —    | 2.5     | —    | mV    |
| Sensitivity [2][3]                                                       | Sens             | $I_P = 6.5\text{ A}$ , $T_A = 25^\circ\text{C}$                                                          | —    | 90      | —    | mV/A  |
|                                                                          |                  | $I_P = 6.5\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                   | 85   | —       | 95   | mV/A  |
|                                                                          |                  | $I_P = 6.5\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                   | 83   | —       | 97   | mV/A  |
| Electrical Offset Voltage [2]                                            | $V_{OE}$         | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$                                                            | —    | $\pm 5$ | —    | mV    |
|                                                                          |                  | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                     | -30  | —       | 30   | mV    |
|                                                                          |                  | $I_P = 0\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                     | -45  | —       | 45   | mV    |
| Total Output Error [2][4]                                                | $E_{TOT}$        | Tested at $I_P = 6.5\text{ A}$ , $I_P$ applied for 5 ms, $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$ | —    | $\pm 2$ | —    | %     |
|                                                                          |                  | Tested at $I_P = 6.5\text{ A}$ , $I_P$ applied for 5 ms, $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$ | —    | $\pm 4$ | —    | %     |

[1]  $V_{pk-pk}$  noise (6 sigma noise) is equal to  $6 \times V_{NOISE(rms)}$ . Lower noise levels than this can be achieved by using  $C_f$  for applications requiring narrower bandwidth. See Characteristic Performance page for graphs of noise versus  $C_f$  and bandwidth versus  $C_f$ .

[2] See Characteristic Performance Data graphs for parameter distribution over ambient temperature range.

[3] This parameter can drift by as much as 1.75% over lifetime of the product.

[4] This parameter can drift by as much as 2.5% over lifetime of the product.

**X10BB PERFORMANCE CHARACTERISTICS,  $T_A$  Range L, valid at  $T_A = -40^\circ\text{C}$  to  $150^\circ\text{C}$ ,  $V_{CC} = 5\text{ V}$ , unless otherwise specified**

| Characteristic                                                         | Symbol           | Test Conditions                                                                                         | Min. | Typ.    | Max. | Units |
|------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------|------|---------|------|-------|
| Optimized Accuracy Range                                               | $I_{P(OA)}$      |                                                                                                         | -10  | —       | 10   | A     |
| Linear Sensing Range                                                   | $I_{P(LIN)}$     |                                                                                                         | -24  | —       | 24   | A     |
| <b>Performance Characteristics at <math>V_{CC} = 5\text{ V}</math></b> |                  |                                                                                                         |      |         |      |       |
| Noise [1]                                                              | $V_{NOISE(rms)}$ | $T_A = 25^\circ\text{C}$ , Sens = 85 mV/A, $C_f = 0$ , $C_{LOAD} = 4.7\text{ nF}$ , $R_{LOAD}$ open     | —    | 2.3     | —    | mV    |
| Sensitivity [2][3]                                                     | Sens             | $I_P = 10\text{ A}$ , $T_A = 25^\circ\text{C}$                                                          | —    | 85      | —    | mV/A  |
|                                                                        |                  | $I_P = 10\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                   | 82   | 85      | 88   | mV/A  |
|                                                                        |                  | $I_P = 10\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                   | 80   | 85      | 90   | mV/A  |
| Electrical Offset Voltage [2]                                          | $V_{OE}$         | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$                                                           | —    | $\pm 5$ | —    | mV    |
|                                                                        |                  | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                    | -30  | —       | 30   | mV    |
|                                                                        |                  | $I_P = 0\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                    | -45  | —       | 45   | mV    |
| Total Output Error [2][4]                                              | $E_{TOT}$        | Tested at $I_P = 10\text{ A}$ , $I_P$ applied for 5 ms, $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$ | —    | $\pm 2$ | —    | %     |
|                                                                        |                  | Tested at $I_P = 10\text{ A}$ , $I_P$ applied for 5 ms, $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$ | —    | $\pm 4$ | —    | %     |

[1]  $V_{pk-pk}$  noise (6 sigma noise) is equal to  $6 \times V_{NOISE(rms)}$ . Lower noise levels than this can be achieved by using  $C_f$  for applications requiring narrower bandwidth. See Characteristic Performance page for graphs of noise versus  $C_f$  and bandwidth versus  $C_f$ .

[2] See Characteristic Performance Data graphs for parameter distribution over ambient temperature range.

[3] This parameter can drift by as much as 1.75% over lifetime of the product.

[4] This parameter can drift by as much as 2.5% over lifetime of the product.

**X20BB PERFORMANCE CHARACTERISTICS,  $T_A$  Range L, valid at  $T_A = -40^\circ\text{C}$  to  $150^\circ\text{C}$ ,  $V_{CC} = 5\text{ V}$ , unless otherwise specified**

| Characteristic                                                         | Symbol           | Test Conditions                                                                                           | Min.  | Typ.    | Max. | Units |
|------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------|-------|---------|------|-------|
| Optimized Accuracy Range                                               | $I_{P(OA)}$      |                                                                                                           | -20   | —       | 20   | A     |
| Linear Sensing Range                                                   | $I_{P(LIN)}$     |                                                                                                           | -37.5 | —       | 37.5 | A     |
| <b>Performance Characteristics at <math>V_{CC} = 5\text{ V}</math></b> |                  |                                                                                                           |       |         |      |       |
| Noise [1]                                                              | $V_{NOISE(rms)}$ | $T_A = 25^\circ\text{C}$ , Sens = 56 mV/A, $C_f = 0$ , $C_{LOAD} = 4.7\text{ nF}$ , $R_{LOAD}$ open       | —     | 1.50    | —    | mV    |
| Sensitivity [2][3]                                                     | Sens             | $I_P = 12.5\text{ A}$ , $T_A = 25^\circ\text{C}$                                                          | —     | 56      | —    | mV/A  |
|                                                                        |                  | $I_P = 12.5\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                   | 54.5  | —       | 58   | mV/A  |
|                                                                        |                  | $I_P = 12.5\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                   | 54.5  | —       | 58.5 | mV/A  |
| Electrical Offset Voltage [2]                                          | $V_{OE}$         | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$                                                             | —     | $\pm 5$ | —    | mV    |
|                                                                        |                  | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                      | -25   | —       | 25   | mV    |
|                                                                        |                  | $I_P = 0\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                      | -40   | —       | 40   | mV    |
| Total Output Error [2][4]                                              | $E_{TOT}$        | Tested at $I_P = 12.5\text{ A}$ , $I_P$ applied for 5 ms, $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$ | —     | $\pm 2$ | —    | %     |
|                                                                        |                  | Tested at $I_P = 12.5\text{ A}$ , $I_P$ applied for 5 ms, $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$ | —     | $\pm 3$ | —    | %     |

[1]  $V_{pk-pk}$  noise (6 sigma noise) is equal to  $6 \times V_{NOISE(rms)}$ . Lower noise levels than this can be achieved by using  $C_f$  for applications requiring narrower bandwidth. See Characteristic Performance page for graphs of noise versus  $C_f$  and bandwidth versus  $C_f$ .

[2] See Characteristic Performance Data graphs for parameter distribution over ambient temperature range.

[3] This parameter can drift by as much as 1.75% over lifetime of the product.

[4] This parameter can drift by as much as 2.5% over lifetime of the product.

**X35BB PERFORMANCE CHARACTERISTICS,  $T_A$  Range L, valid at  $T_A = -40^\circ\text{C}$  to  $150^\circ\text{C}$ ,  $V_{CC} = 5\text{ V}$ , unless otherwise specified**

| Characteristic                                                         | Symbol           | Test Conditions                                                                                         | Min.  | Typ.    | Max. | Units |
|------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------|-------|---------|------|-------|
| Optimized Accuracy Range                                               | $I_{P(OA)}$      |                                                                                                         | -37.5 | —       | 37.5 | A     |
| Linear Sensing Range                                                   | $I_{P(LIN)}$     |                                                                                                         | -75   | —       | 75   | A     |
| <b>Performance Characteristics at <math>V_{CC} = 5\text{ V}</math></b> |                  |                                                                                                         |       |         |      |       |
| Noise [1]                                                              | $V_{NOISE(rms)}$ | $T_A = 25^\circ\text{C}$ , Sens = 28 mV/A, $C_f = 0$ , $C_{LOAD} = 4.7\text{ nF}$ , $R_{LOAD}$ open     | —     | 1       | —    | mV    |
| Sensitivity [2][3]                                                     | Sens             | $I_P = 25\text{ A}$ , $T_A = 25^\circ\text{C}$                                                          | —     | 28      | —    | mV/A  |
|                                                                        |                  | $I_P = 25\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                   | 27    | —       | 29.5 | mV/A  |
|                                                                        |                  | $I_P = 25\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                   | 27    | —       | 29.5 | mV/A  |
| Electrical Offset Voltage [2]                                          | $V_{OE}$         | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$                                                           | —     | $\pm 5$ | —    | mV    |
|                                                                        |                  | $I_P = 0\text{ A}$ , $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$                                    | -25   | —       | 25   | mV    |
|                                                                        |                  | $I_P = 0\text{ A}$ , $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$                                    | -40   | —       | 40   | mV    |
| Total Output Error [2][4]                                              | $E_{TOT}$        | Tested at $I_P = 25\text{ A}$ , $I_P$ applied for 5 ms, $T_A = 25^\circ\text{C}$ to $150^\circ\text{C}$ | —     | $\pm 3$ | —    | %     |
|                                                                        |                  | Tested at $I_P = 25\text{ A}$ , $I_P$ applied for 5 ms, $T_A = -40^\circ\text{C}$ to $25^\circ\text{C}$ | —     | $\pm 3$ | —    | %     |

[1]  $V_{pk-pk}$  noise (6 sigma noise) is equal to  $6 \times V_{NOISE(rms)}$ . Lower noise levels than this can be achieved by using  $C_f$  for applications requiring narrower bandwidth. See Characteristic Performance page for graphs of noise versus  $C_f$  and bandwidth versus  $C_f$ .

[2] See Characteristic Performance Data graphs for parameter distribution over ambient temperature range.

[3] This parameter can drift by as much as 1.75% over lifetime of the product.

[4] This parameter can drift by as much as 2.5% over lifetime of the product.


ACS709

High-Bandwidth, Fast Fault Response Current Sensor IC  
in Thermally Enhanced Package

Thermal Characteristics


| Characteristic                          | Symbol           | Test Conditions                                                                                                                                                                            | Value     | Units |
|-----------------------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|
| Steady State Package Thermal Resistance | $R_{\theta JA}$  | Tested with 30 A DC current and based on ACS709 demo board in 1 cu. ft. of still air. Please refer to product FAQs page on Allegro web site for detailed information on ACS709 demo board. | 21        | °C/W  |
| Transient Package Thermal Resistance    | $R_{T\theta JA}$ | Tested with 30 A DC current and based on ACS709 demo board in 1 cu. ft. of still air. Please refer to product FAQs page on Allegro web site for detailed information on ACS709 demo board. | See graph | °C/W  |

ACS709 Transient Package Thermal Resistance  
On 85--0444 Demo Board (No Al Plate)




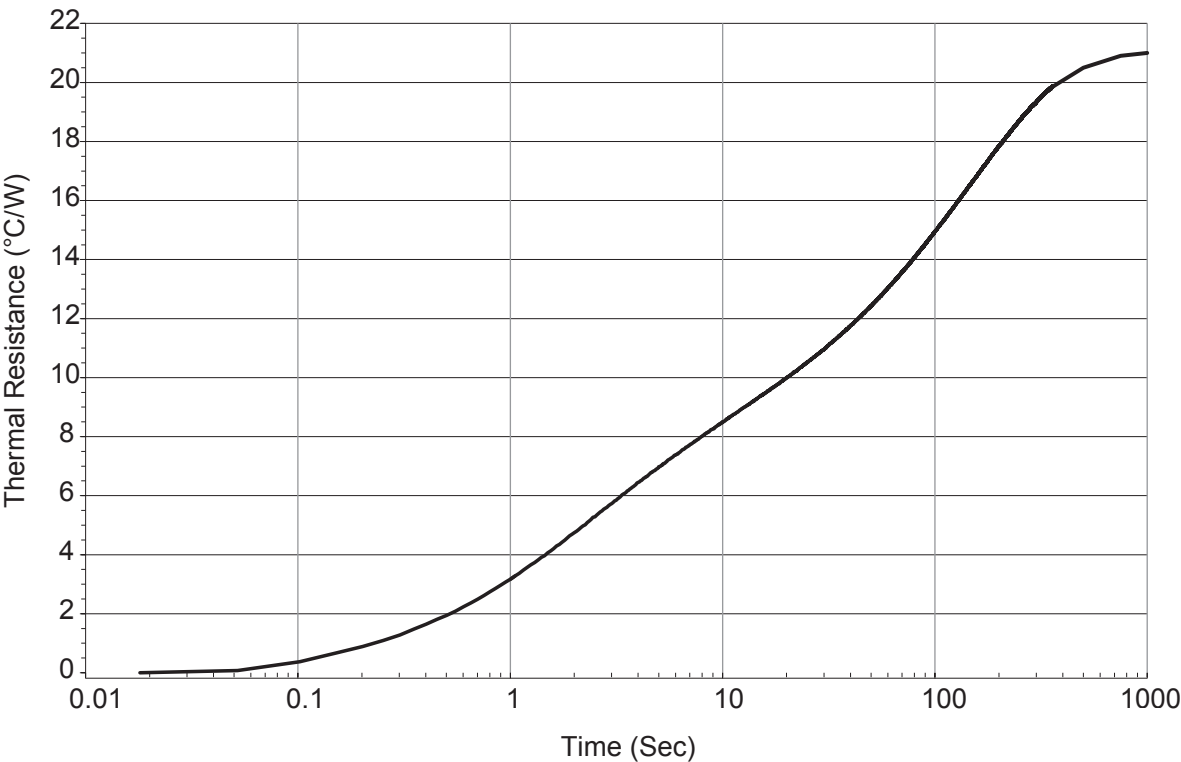


### CHARACTERISTIC PERFORMANCE

ACS709 Bandwidth versus External Capacitor Value,  $C_F$   
Capacitor connected between FILTER pin and GND

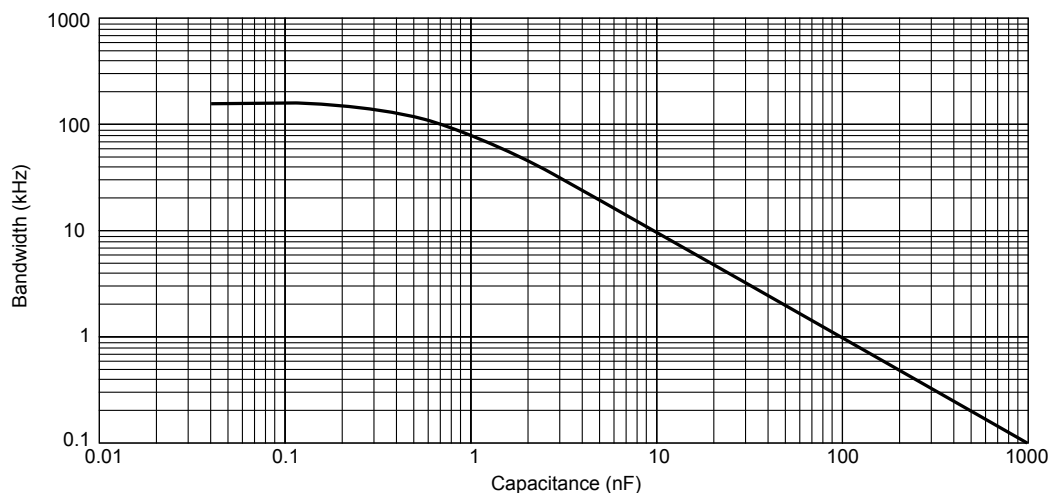


ACS709 Noise versus External Capacitor Value,  $C_F$   
Capacitor connected between FILTER pin and GND

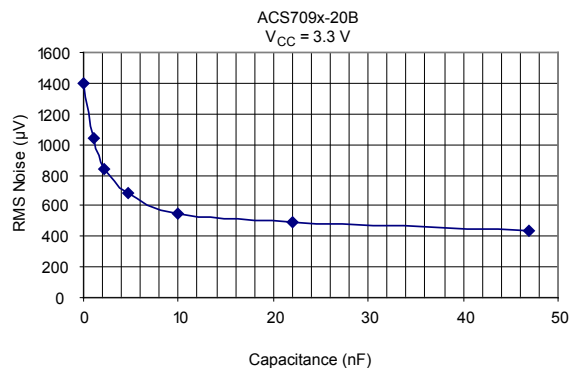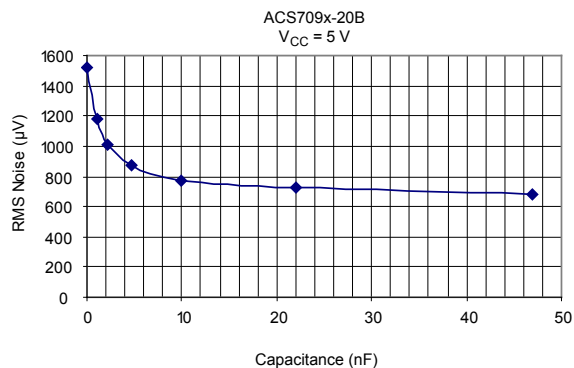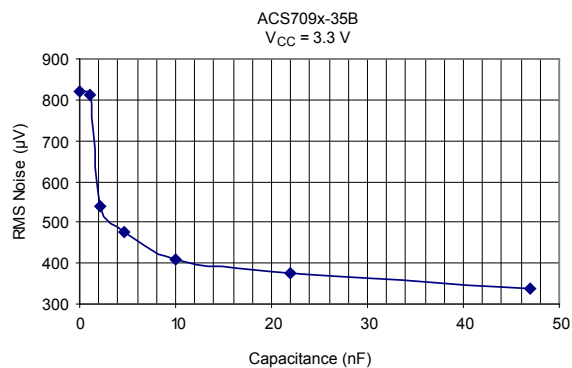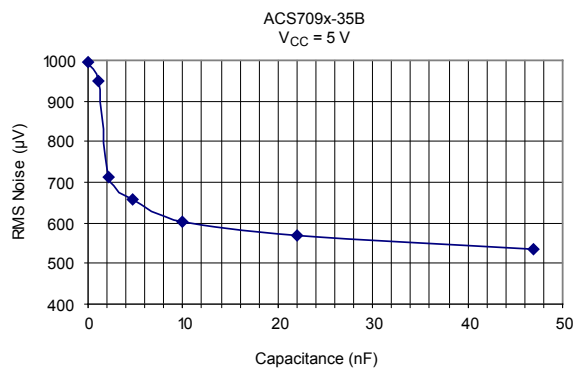


## CHARACTERISTIC PERFORMANCE DATA

Data taken using the ACS709-6BB,  $V_{CC} = 3.3\text{ V}$ Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

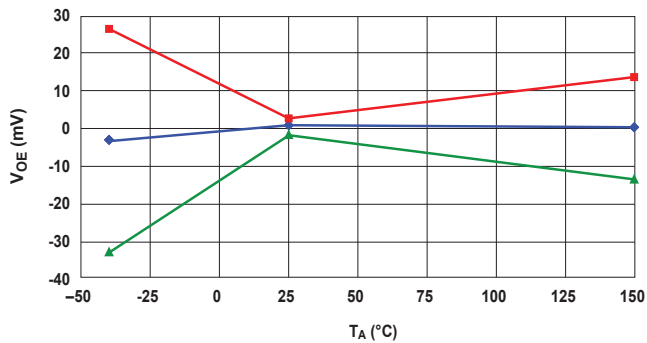


Sensitivity versus Ambient Temperature

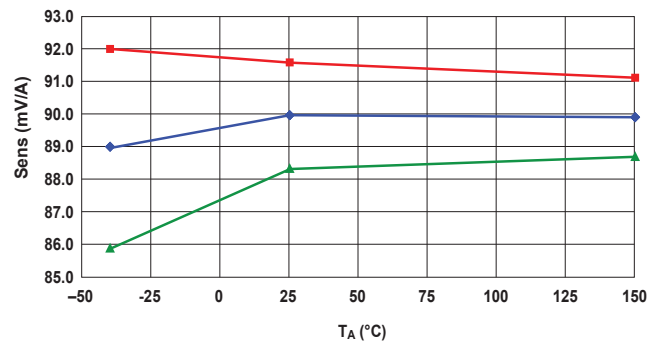


Nonlinearity versus Ambient Temperature

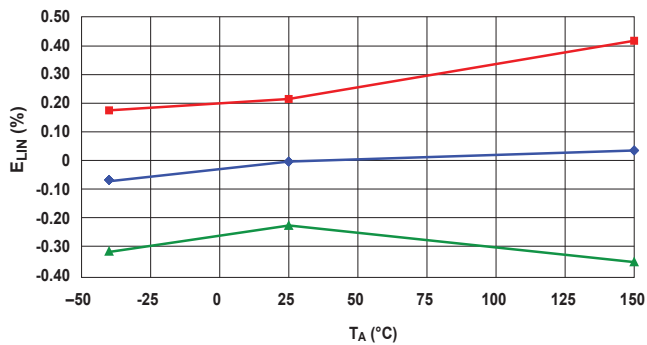

Symmetry versus Ambient Temperature

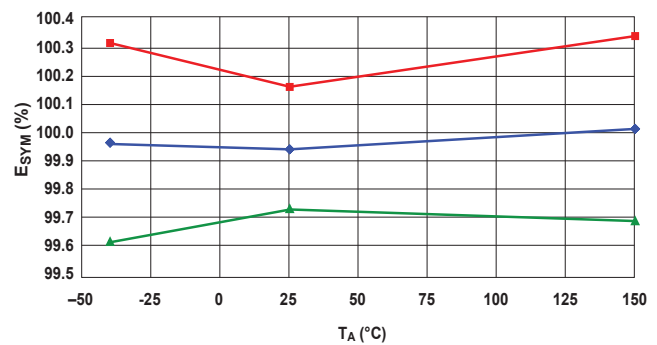

Total Output Error versus Ambient Temperature

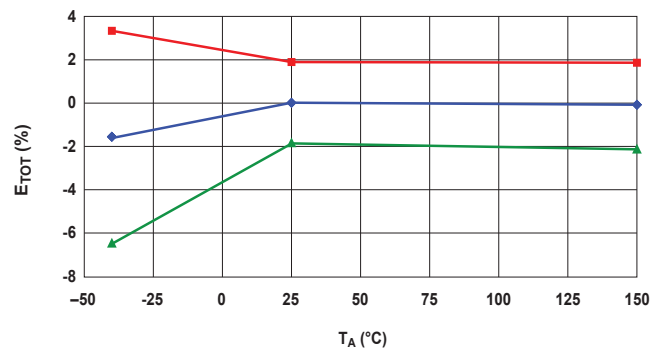


—■— Typical Maximum Limit    —◆— Mean    —▲— Typical Minimum Limit

### CHARACTERISTIC PERFORMANCE DATA


Data taken using the ACS709-10BB,  $V_{CC} = 5\text{ V}$

#### Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

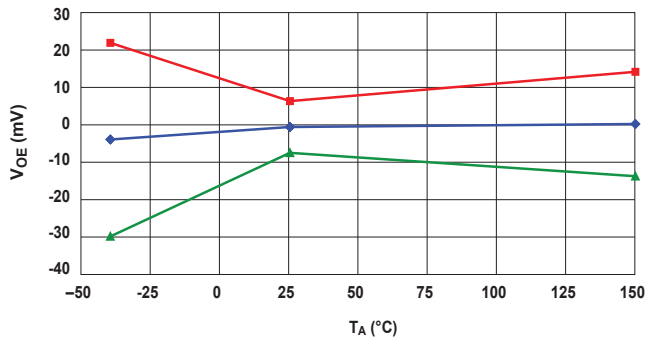


Sensitivity versus Ambient Temperature

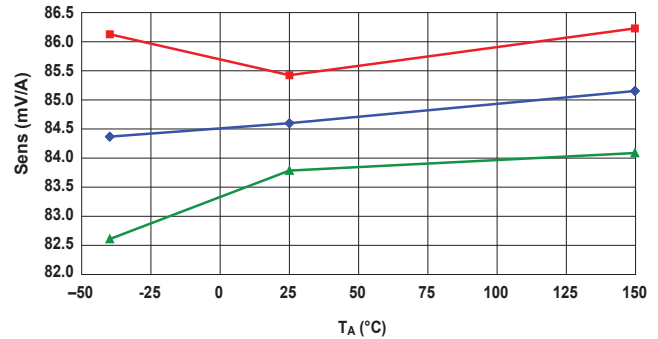


Nonlinearity versus Ambient Temperature

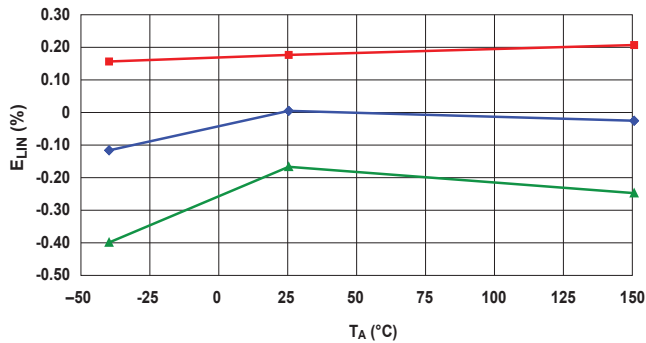

Symmetry versus Ambient Temperature

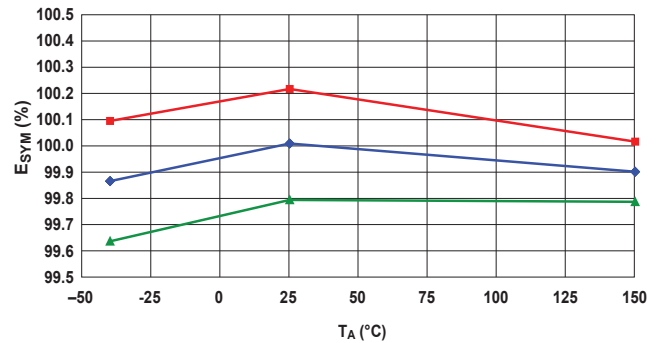

Total Output Error versus Ambient Temperature

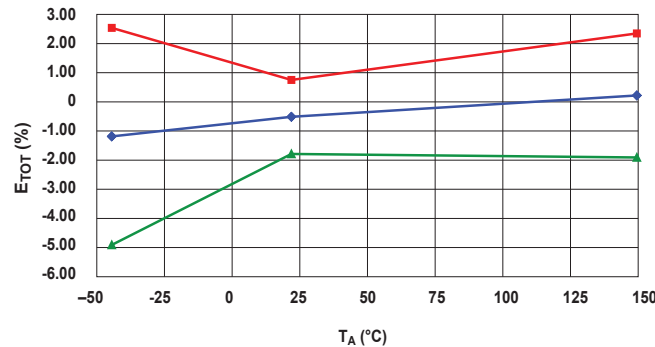


—■— Typical Maximum Limit —◆— Mean —▲— Typical Minimum Limit

### CHARACTERISTIC PERFORMANCE DATA


Data taken using the ACS709-20BB,  $V_{CC} = 5\text{ V}$

#### Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

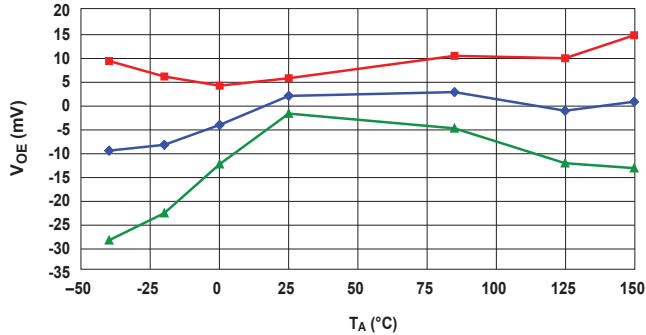


Sensitivity versus Ambient Temperature

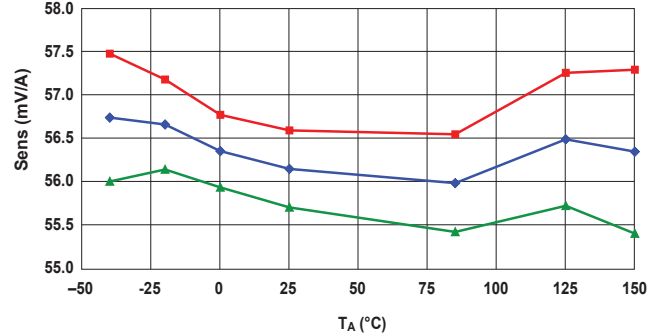


Nonlinearity versus Ambient Temperature

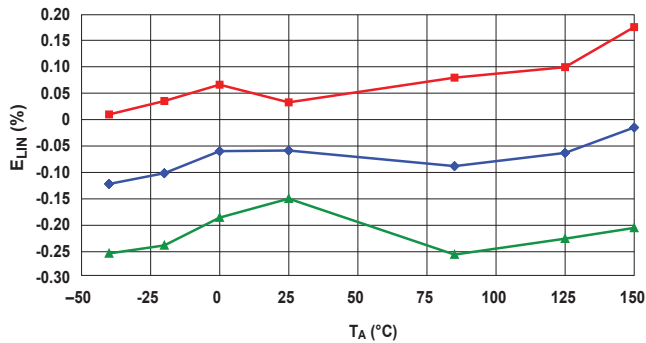

Symmetry versus Ambient Temperature

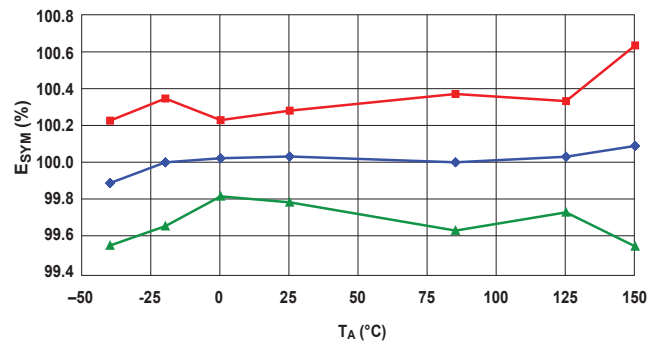

Total Output Error versus Ambient Temperature

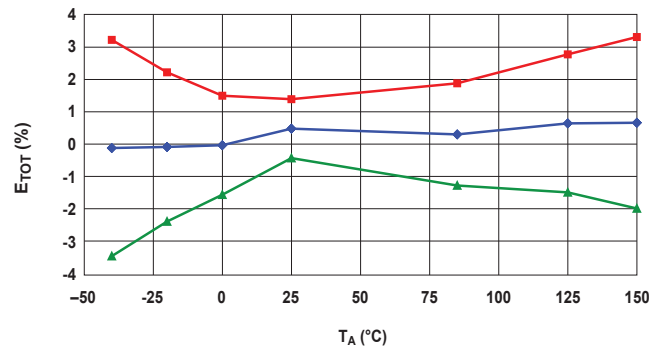


— Typical Maximum Limit — Mean — Typical Minimum Limit

### CHARACTERISTIC PERFORMANCE DATA


Data taken using the ACS709-35BB,  $V_{CC} = 5\text{ V}$

#### Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

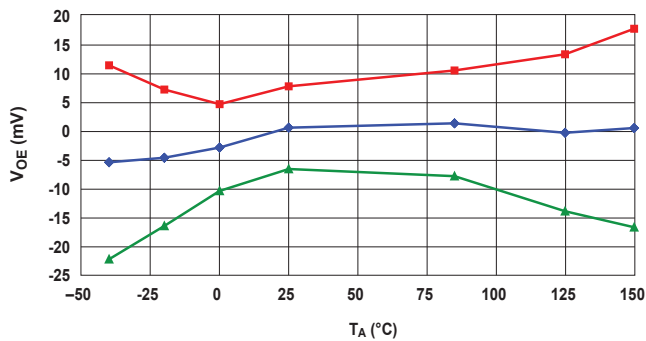


Sensitivity versus Ambient Temperature

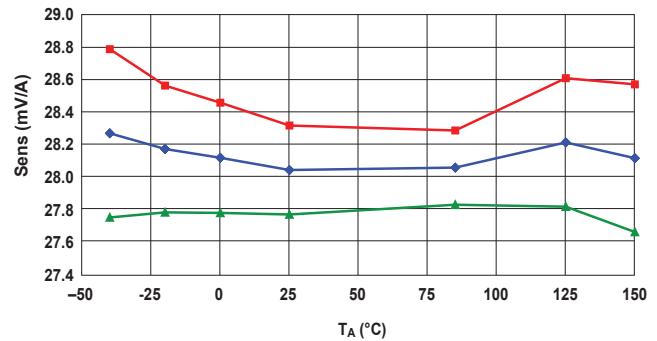


Nonlinearity versus Ambient Temperature

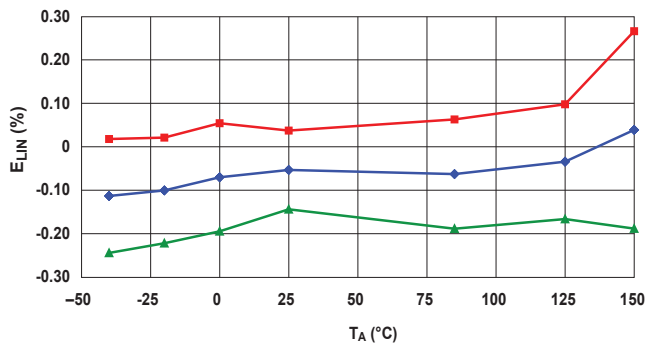

Symmetry versus Ambient Temperature

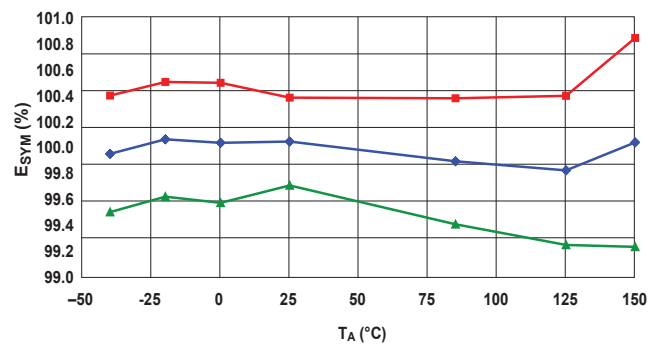

Total Output Error versus Ambient Temperature

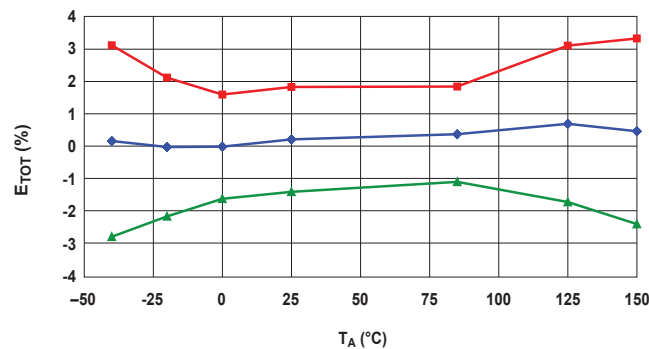

— Typical Maximum Limit — Mean — Typical Minimum Limit

### SETTING OVERCURRENT FAULT SWITCH POINT

#### Setting 20BB and 35BB Versions


The  $V_{OC}$  needed for setting the overcurrent fault switch point can be calculated as follows:

$$V_{OC} = \text{Sens} \times |I_{OC}|,$$

where  $V_{OC}$  is in mV, Sens in mV/A, and  $I_{OC}$  (overcurrent fault switch point) in A.

$|I_{OC}|$  is the overcurrent fault switch point for a bi-directional (AC) current, which means a bi-directional device will have two symmetrical overcurrent fault switch points,  $+I_{OC}$  and  $-I_{OC}$ .

See the following graph for  $I_{OC}$  and  $V_{OC}$  ranges.

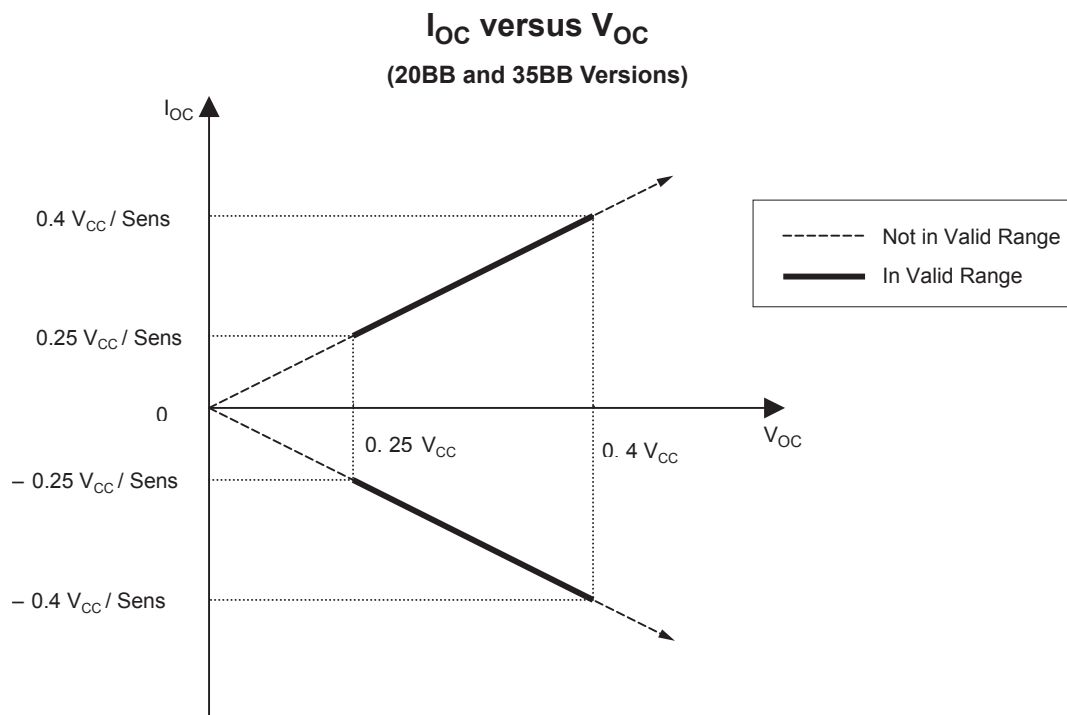

Example: For ACS709LLFTR-35BB-T, if required overcurrent fault switch point is 50 A, and  $V_{CC} = 5$  V, then the required  $V_{OC}$  can be calculated as follows:

$$V_{OC} = \text{Sens} \times I_{OC} = 28 \times 50 = 1400 \text{ (mV)}$$

### Setting 10BB and 6BB Versions


The  $V_{OC}$  needed for setting the overcurrent fault switch point can be calculated as follows:

$$V_{OC} = 1.17 \times \text{Sens} \times |I_{OC}|,$$

where  $V_{OC}$  is in mV, Sens in mV/A, and  $I_{OC}$  (overcurrent fault switch point) in A.

$|I_{OC}|$  is the overcurrent fault switch point for a bi-directional (AC) current, which means a bi-directional sensor will have two symmetrical overcurrent fault switch points,  $+I_{OC}$  and  $-I_{OC}$ .

See the following graph for  $I_{OC}$  and  $V_{OC}$  ranges.

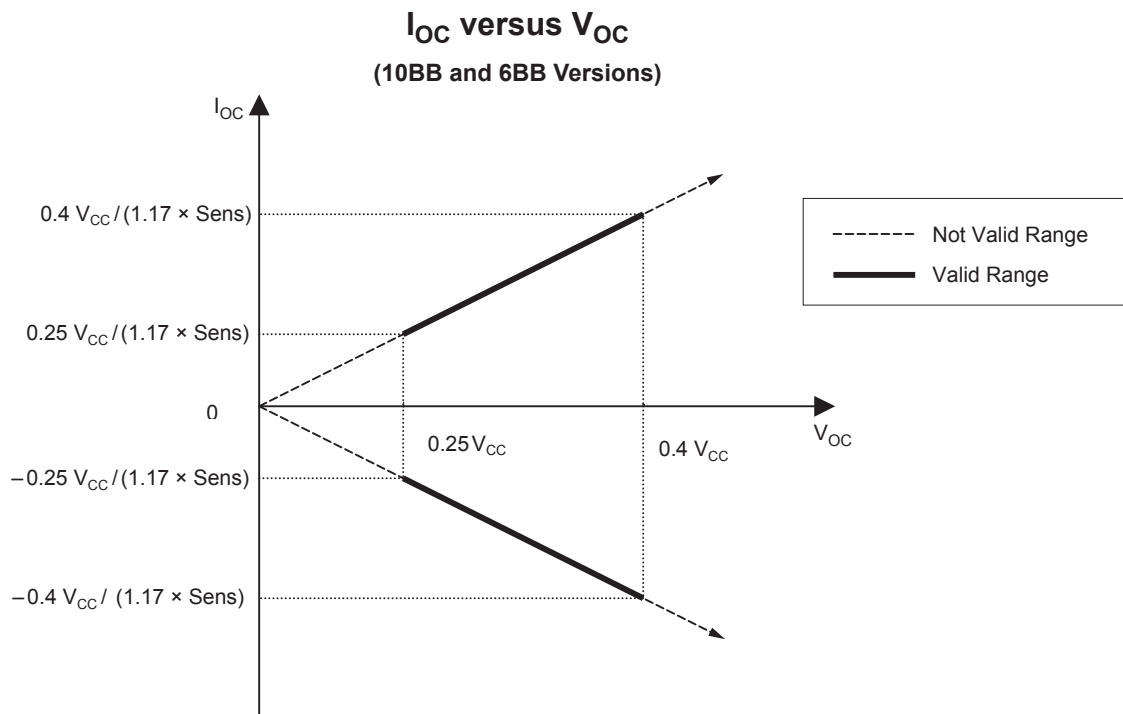

Example: For ACS709LLFTR-6BB-T, if required overcurrent fault switch point is 10 A, and  $V_{CC} = 3.3$  V, then the required  $V_{OC}$  can be calculated as follows:

$$V_{OC} = 1.17 \times \text{Sens} \times I_{OC} = 1.17 \times 90 \times 10 = 1053 \text{ (mV)}$$

## FUNCTIONAL DESCRIPTION

## Overcurrent Fault Operation

The primary concern with high-speed fault detection is that noise may cause false tripping. Various applications have or need to be able to ignore certain faults that are due to switching noise or other parasitic phenomena, which are application dependant. The problem with simply trying to filter out this noise up front is that in high-speed applications, with asymmetric noise, the act of filtering introduces an error into the measurement. To get around this issue, and allow the user to prevent the fault signal from being latched by noise, a circuit was designed to slew the  $\overline{\text{FAULT}}$  pin voltage based on the value of the capacitor from that pin to ground. Once the voltage on the pin falls below 2 V, as established by an internal reference, the fault output is latched and pulled to ground quickly with an internal N-channel MOSFET.

## Fault Walk-Through

The following walk-through references various sections and attributes in the figure below. This figure shows different fault set/reset scenarios and how they relate to the voltages on the  $\overline{\text{FAULT}}$  pin,  $\text{FAULT\_EN}$  pin, and the internal Overcurrent (OC) Fault node, which is invisible to the customer.


1. Because the device is enabled ( $\text{FAULT\_EN}$  is high for a minimum period of time, the Fault Enable Delay,  $t_{\text{FED}}$ , 15  $\mu\text{s}$  typical) and there is an OC fault condition, the device  $\overline{\text{FAULT}}$  pin starts discharging.

- When the  $\overline{\text{FAULT}}$  pin voltage reaches approximately 2 V, the fault is latched, and an internal NMOS device pulls the  $\overline{\text{FAULT}}$  pin voltage to approximately 0 V. The rate at which the  $\overline{\text{FAULT}}$  pin slews downward (see [4] in the figure) is dependent on the external capacitor,  $C_{\text{OC}}$ , on the  $\overline{\text{FAULT}}$  pin.
- When the  $\text{FAULT\_EN}$  pin is brought low, the  $\overline{\text{FAULT}}$  pin starts resetting if no OC Fault condition exists. The internal NMOS pull-down turns off and an internal PMOS pull-up turns on (see [7] if the OC Fault condition still exists).
- The slope, and thus the delay, on the fault is controlled by the capacitor,  $C_{\text{OC}}$ , placed on the  $\overline{\text{FAULT}}$  pin to ground. During this portion of the fault (when the  $\overline{\text{FAULT}}$  pin is between  $V_{\text{CC}}$  and 2 V), there is a 3 mA constant current sink, which discharges  $C_{\text{OC}}$ . The length of the fault delay,  $t$ , is equal to:

$$t = \frac{C_{\text{OC}} \times (V_{\text{CC}} - 2 \text{ V})}{3 \text{ mA}} \quad (1)$$

where  $V_{\text{CC}}$  is the device power supply voltage.

- The  $\overline{\text{FAULT}}$  pin did not reach the 2 V latch point before the OC fault condition cleared. Because of this, the fixed 3 mA current sink turns off, and the internal PMOS pull-up turns on to recharge  $C_{\text{OC}}$  through the  $\overline{\text{FAULT}}$  pin.

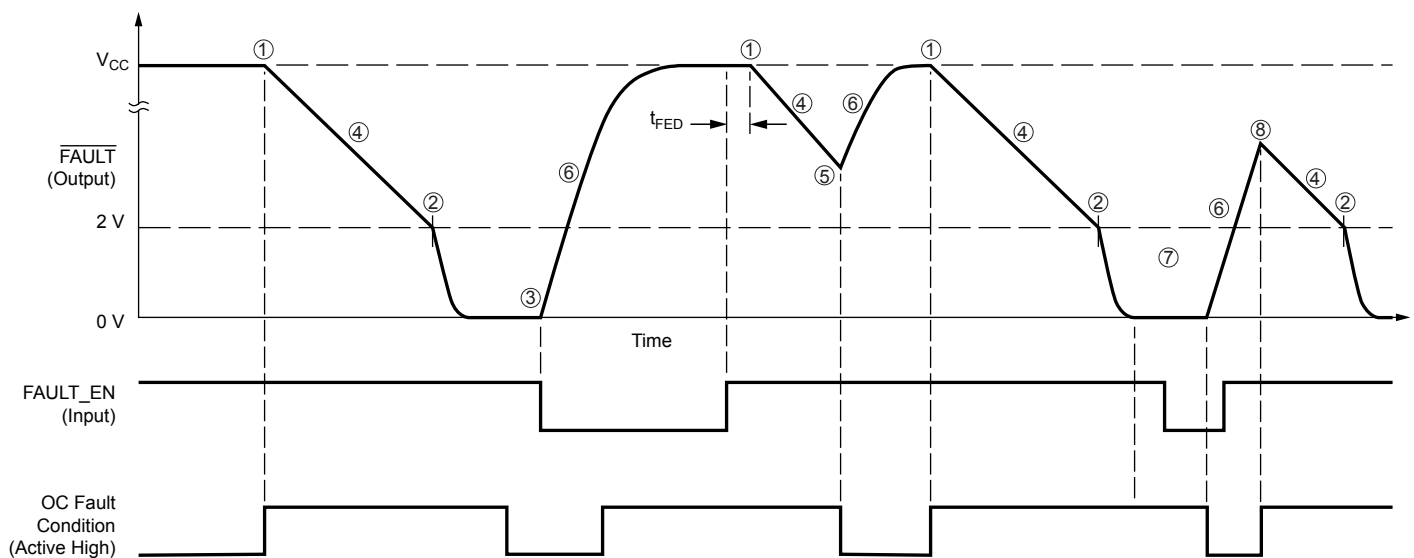


6. This curve shows  $V_{CC}$  charging external capacitor  $C_{OC}$  through the internal PMOS pull-up. The slope is determined by  $C_{OC}$ .
7. When the  $\overline{\text{FAULT\_EN}}$  pin is brought low, if the fault condition still exists, the latched  $\overline{\text{FAULT}}$  pin will stay low until the fault condition is removed, then it will start resetting.
8. At this point there is a fault condition, and the part is enabled before the  $\overline{\text{FAULT}}$  pin can charge to  $V_{CC}$ . This shortens the user-set delay, so the fault is latched earlier. The new delay time can be calculated by equation 1, after substituting the voltage seen on the  $\overline{\text{FAULT}}$  pin for  $V_{CC}$ .

### Chopper Stabilization Technique

Chopper Stabilization is an innovative circuit technique that is used to minimize the offset voltage of a Hall element and an associated on-chip amplifier. Allegro patented a Chopper Stabilization technique that nearly eliminates Hall IC output drift induced by temperature or package stress effects. This offset reduction

technique is based on a signal modulation-demodulation process. Modulation is used to separate the undesired dc offset signal from the magnetically induced signal in the frequency domain. Then, using a low-pass filter, the modulated DC offset is suppressed while the magnetically induced signal passes through the filter. As a result of this chopper stabilization approach, the output voltage from the Hall IC is desensitized to the effects of temperature and mechanical stress. This technique produces devices that have an extremely stable Electrical Offset Voltage, are immune to thermal stress, and have precise recoverability after temperature cycling.

This technique is made possible through the use of a BiCMOS process that allows the use of low-offset and low-noise amplifiers in combination with high-density logic integration and sample and hold circuits.

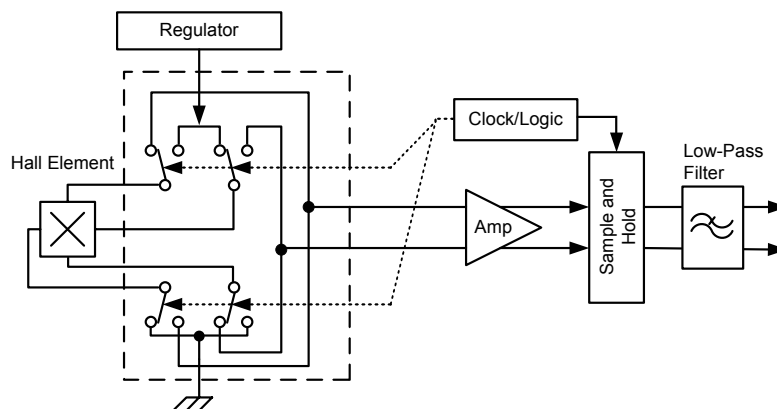

Concept of Chopper Stabilization Technique

### DEFINITIONS OF ACCURACY CHARACTERISTICS

**Sensitivity (Sens).** The change in device output in response to a 1 A change through the primary conductor. The sensitivity is the product of the magnetic circuit sensitivity (G/A) and the linear IC amplifier gain (mV/G). The linear IC amplifier gain is programmed at the factory to optimize the sensitivity (mV/A) for the full-scale current of the device.

**Noise ( $V_{\text{NOISE}}$ ).** The product of the linear IC amplifier gain (mV/G) and the noise floor for the Allegro Hall effect linear IC ( $\approx 1$  G). The noise floor is derived from the thermal and shot noise observed in Hall elements. Dividing the noise (mV) by the sensitivity (mV/A) provides the smallest current that the device is able to resolve.

**Linearity ( $E_{\text{LIN}}$ ).** The degree to which the voltage output from the device varies in direct proportion to the primary current through its full-scale amplitude. Nonlinearity in the output can be attributed to the saturation of the flux concentrator approaching the full-scale current. The following equation is used to derive the linearity:

$$100 \left\{ 1 - \left[ \frac{V_{\text{IOUT\_full-scale amperes}} - V_{\text{IOUT(Q)}}}{2 (V_{\text{IOUT\_1/2 full-scale amperes}} - V_{\text{IOUT(Q)}})} \right] \right\}$$

where  $V_{\text{IOUT\_full-scale amperes}}$  = the output voltage (V) when the sensed current approximates full-scale  $\pm I_p$ .

**Symmetry ( $E_{\text{SYM}}$ ).** The degree to which the absolute voltage output from the device varies in proportion to either a positive or negative full-scale primary current. The following formula is used to derive symmetry:

$$100 \left( \frac{V_{\text{IOUT\_+ full-scale amperes}} - V_{\text{IOUT(Q)}}}{V_{\text{IOUT(Q)}} - V_{\text{IOUT\_full-scale amperes}}} \right)$$

**Quiescent output voltage ( $V_{\text{IOUT(Q)}}$ ).** The output of the device when the primary current is zero. For a unipolar supply voltage, it nominally remains at  $0.5 \times V_{\text{CC}}$ . For example, in the case of a bidirectional output device,  $V_{\text{CC}} = 5$  V translates into  $V_{\text{IOUT(Q)}} = 2.5$  V. Variation in  $V_{\text{IOUT(Q)}}$  can be attributed to the resolution of the Allegro linear IC quiescent voltage trim and thermal drift.

**Electrical offset voltage ( $V_{\text{OE}}$ ).** The deviation of the device output from its ideal quiescent voltage due to nonmagnetic causes. To convert this voltage to amperes, divide by the device sensitivity, Sens.

**Accuracy ( $E_{\text{TOT}}$ ).** The accuracy represents the maximum deviation of the actual output from its ideal value. This is also known as the total output error. The accuracy is illustrated graphically in the output voltage versus current chart at right. Note that error is directly measured during final test at Allegro.

Accuracy is divided into four areas:

- **0 A at 25°C.** Accuracy of sensing zero current flow at 25°C, without the effects of temperature.
- **0 A over  $\Delta$  temperature.** Accuracy of sensing zero current flow including temperature effects.
- **Full-scale current at 25°C.** Accuracy of sensing the full-scale current at 25°C, without the effects of temperature.
- **Full-scale current over  $\Delta$  temperature.** Accuracy of sensing full-scale current flow including temperature effects.


**Ratiometry.** The ratiometric feature means that its 0 A output,  $V_{\text{IOUT(Q)}}$ , (nominally equal to  $V_{\text{CC}}/2$ ) and sensitivity, Sens, are proportional to its supply voltage,  $V_{\text{CC}}$ . The following formula is used to derive the ratiometric change in 0 A output voltage,  $\Delta V_{\text{IOUT(Q)RAT}}$  (%).

$$100 \left( \frac{V_{\text{IOUT(Q)VCC}} / V_{\text{IOUT(Q)5V}}}{V_{\text{CC}} / 5 \text{ V}} \right)$$

The ratiometric change in sensitivity,  $\Delta \text{Sens}_{\text{RAT}}$  (%), is defined as:


$$100 \left( \frac{\text{Sens}_{\text{VCC}} / \text{Sens}_{5\text{V}}}{V_{\text{CC}} / 5 \text{ V}} \right)$$

**Output Voltage versus Sensed Current**  
Accuracy at 0 A and at Full-Scale Current

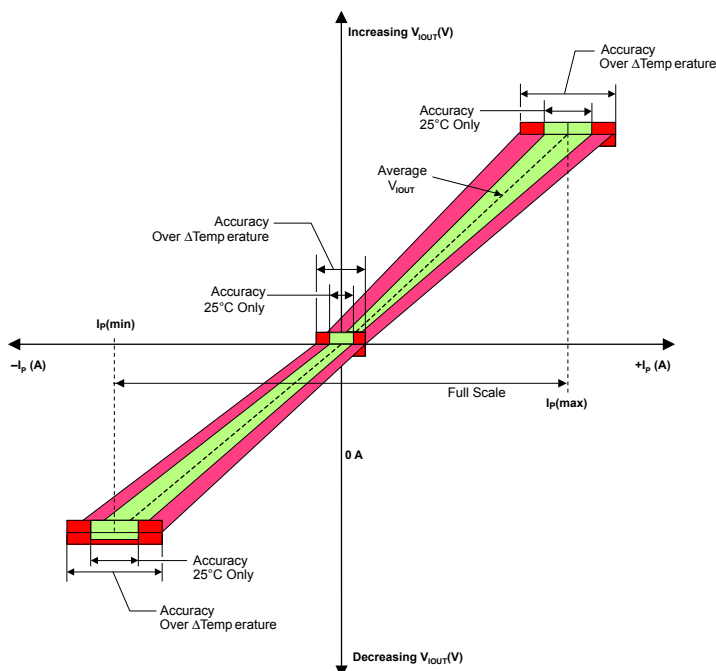


### DEFINITIONS OF DYNAMIC RESPONSE CHARACTERISTICS


**Propagation delay ( $t_{PROP}$ ).** The time required for the device output to reflect a change in the primary current signal. Propagation delay is attributed to inductive loading within the linear IC package, as well as in the inductive loop formed by the primary conductor geometry. Propagation delay can be considered as a fixed time offset and may be compensated.

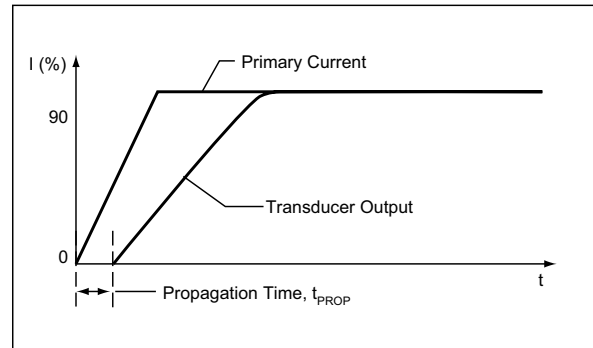


**Response time ( $t_{RESPONSE}$ ).** The time interval between a) when the primary current signal reaches 90% of its final value, and b) when the device reaches 90% of its output corresponding to the applied current.

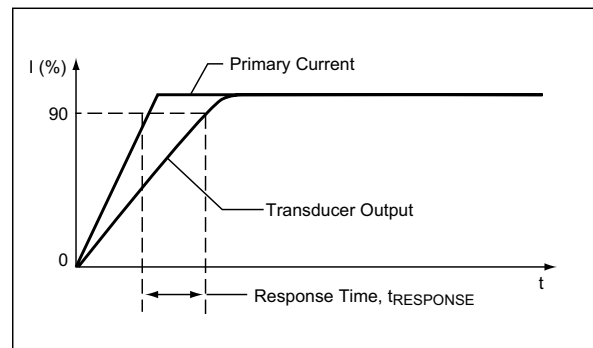

**Rise time ( $t_r$ ).** The time interval between a) when the device reaches 10% of its full scale value, and b) when it reaches 90% of its full scale value. The rise time to a step response is used to derive the bandwidth of the current sensor IC, in which  $f(-3 \text{ dB}) = 0.35/t_r$ . Both  $t_r$  and  $t_{RESPONSE}$  are detrimentally affected by eddy current losses observed in the conductive IC ground plane.

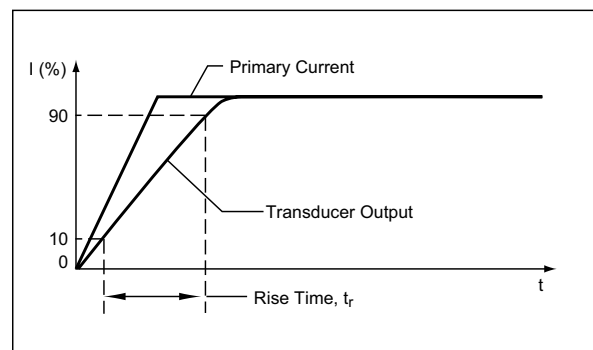

### Package LF, 24-pin QSOP

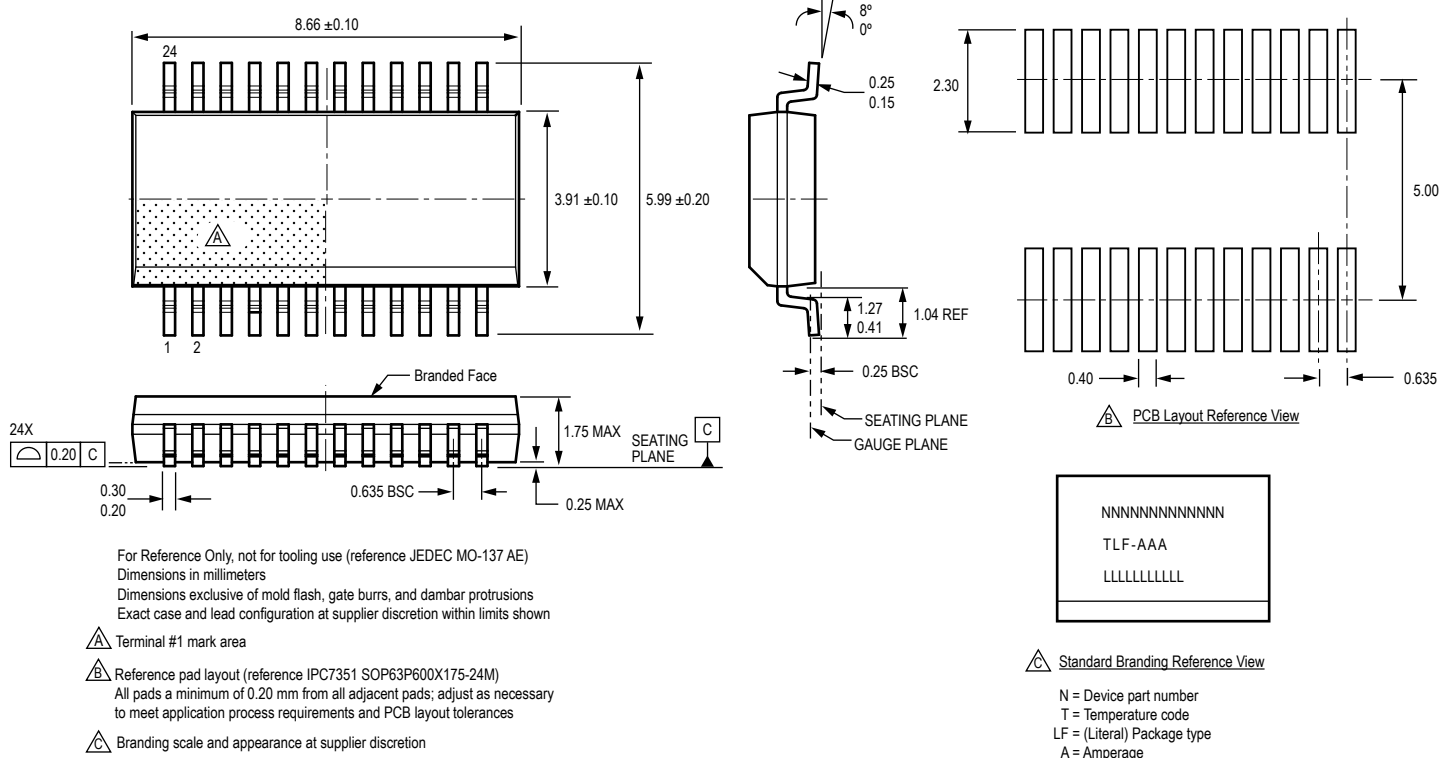

**REVISION HISTORY**

| Number | Date             | Description                                                                                     |
|--------|------------------|-------------------------------------------------------------------------------------------------|
| 3      | June 6, 2014     | Added 10BB and 6BB parts                                                                        |
| 4      | February 8, 2016 | Updated Common Operating Characteristics and Supply Current in electrical characteristics table |
| 5      | June 5, 2017     | Updated product status                                                                          |
| 6      | February 5, 2019 | Updated Dielectric Strength Test Voltage and minor editorial updates                            |
| 7      | January 30, 2020 | Updated product status and minor editorial updates                                              |

The products described herein are protected by U.S. patents: 7,166,807; 7,425,821; 7,573,393; and 7,598,601.

Copyright 2020, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.

For the latest version of this document, visit our website:

[www.allegromicro.com](http://www.allegromicro.com)