

ADC-HX, ADC-HZ Series

12-Bit, 8 and 20µsec Analog-to-Digital Converters

ABSOLUTE MAXIMUM RATINGS

PARAMETERS	LIMITS	UNITS
------------	--------	-------

+15V Supply, Pin 28	+18	Volts
–15V Supply, Pin 31	–18	Volts
+5V Supply, Pin 16	+7	Volts
Digital Inputs, Pins 14, 21	±5.5	Volts
Analog Inputs, Pins 24, 25	±25	Volts
Buffer Input, Pin 30	±15	Volts
Lead Temperature (10 seconds)	300	°C

Functional Specifications

(Typical at +25°C and ±15V and +5V supplies unless otherwise noted)

INPUTS	ADC-HX12B	ADC-HZ12B
--------	-----------	-----------

Analog Input Ranges

Unipolar	0 to +5V, 0 to +10V
Bipolar	±2.5V, ±5V, ±10V
Input Impedance	2.5k (0 to +5V, ±2.5V)

Input Impedance with Buffer

10k (±10V)
5k (0 to +10V, ±5V)

Input Bias Current of Buffer

125nA typical, 250nA max.

Start Conversion

+2V min. to +5.5V max; positive pulse with duration of 100ns min. Rise and fall times <30ns.

Logic "1" to "0" transition resets converter and initiates next conversion. Loading: 2 TTL loads.

PERFORMANCE

Resolution	12 bits
Nonlinearity	±1/2LSB max.
Differential Nonlinearity	±3/4LSB max.
Accuracy Error ①	±0.2%
Gain (before adjustment)	±0.1% of FSR ②
Offset, Bipolar (before adj.)	±0.2% of FSR ②
Temperature Coefficient	±0.2% of FSR ②
Gain Zero, Unipolar	±20ppm/°C max.
Offset, Bipolar Zero, Unipolar	±5ppm/°C of FSR max. ②
Diff. Nonlinearity Tempco	±10ppm/°C of FSR max. ②
No Missing Codes	±20ppm/°C max.
Conversion Time ③	20µs max. 15µs max. 10µs max. 8 Bits ④ 10 Bits ④ 12 Bits
Buffer Settling Time (10V step)	3µs to ±0.01% ±0.004%/µs supply max.
Power Supply Rejection	±0.004%/µs supply max.

Parallel Output Data

Unipolar Coding	Complementary binary
Bipolar Coding	Complementary offset binary
Serial Output Data	NRZ successive decision pulses out, MSB first.
End of Conversion (Status)	Conversion status signal. Output is logic "1" during reset and conversion and logic "0" when conversion complete.
Clock Output	Train of positive going +5V 100ns pulses. 600kHz for ADC-HX and 1.5MHz for ADC-HZ (pin 17 grounded).
Internal Reference	ADC-HZ (pin 17 grounded).
Reference Tempco	+6.3V ±20ppm/°C max.
External Reference Current	2.5mA max.

DATAL is a registered trademark of Murata Power Solutions • 11 Cabot Boulevard, Mansfield, MA 02048-1151 USA • Tel: (508) 339-3000 • www.datal.com • e-mail: help@datal.com

ADC-HXHZ.B03 Page 2 of 6

TECHNICAL NOTES

1. It is recommended that the ±15V power input pins both be bypassed to ground with a 0.01µF ceramic capacitor in parallel with a 1µF electrolytic capacitor and the +5V power input pin be bypassed to ground with a 10µF electrolytic capacitor as shown in the connection diagrams. In addition, GAIN ADJUST (pin 27) should be bypassed to ground with a 0.01µF ceramic capacitor.

2. DIGITAL COMMON (pin 15) and ANALOG COMMON (pin 26) are not connected together internally, and therefore must be connected as directly as possible externally. It is recommended that a ground plane be run underneath the case between the two commons. Analog ground and ±15V power ground should be run to pin 26 whereas digital ground and +5V ground should be run to pin 15.

3. External adjustment of zero or offset and gain are made by using trimming potentiometers connected as shown in the connection diagrams. The potentiometer values can be between 10k and 100k Ohms and should be 100ppm/°C or better types. The trimming pots should be located as close as possible to the converter to avoid noise pickup. In some cases, for example 8-bit short-cycled operation, external adjustment may not be necessary.

4. Short-cycled operation results in shorter conversion times when the conversion is truncated to less than 12 bits. This is done by connecting SHORT CYCLE (pin 14) to the output bit following the last bit desired. For example, for an 8-bit conversion, pin 14 is connected to the bit 9 output. Maximum conversion times are given for short-cycled conversions of 8 or 10 bits. In these two cases, the clock rate is accelerated by connecting the CLOCK RATE adjust (pin 17) to +5V (10 bits) or +15V (8 bits). The clock rate should not be arbitrarily speeded up to exceed the maximum conversion rate at a given resolution, as missing codes will result.

5. Note that output coding is complementary coding. For unipolar operation it is complementary binary, and for bipolar operation it is complementary offset binary or complementary two's complement. In cases in which bipolar coding of offset binary or two's complement is required, this can be achieved by inverting the analog input to the converter (using an op amp connected for gain of –1). The converter is then calibrated so that –FS analog input gives an output code of 0000 0000 0000, and +FS –1LSB gives 1111 1111 1111.

6. These converters can be operated with an external clock. To accomplish this, a negative pulse train is applied to START CONVERT (pin 21). The rate of the external clock must be lower than the rate of the internal clock as adjusted (see Short Cycle Operation tables) for the converter resolution selected. The pulse width of the external clock should be between 100 and 300 nanoseconds. Each N-bit conversion cycle requires a pulse train of N + 1 clock pulses for completion, e.g., an 8-bit conversion requires 9 clock pulses for completion. A continuous pulse train may be used for consecutive conversions, resulting in an N-bit conversion every N + 1 pulses, or the E.O.C. output may be used to gate a continuous pulse train for single conversions.

7. When the input buffer amplifier is used, a delay equal to its settling time must be allowed between the input level change, such as a multiplexer channel change, and the negative-going edge of the START CONVERT pulse. If the buffer is not required, BUFFER INPUT (pin 30) should be tied to ANALOG COMMON (pin 26). This prevents the unused amplifier from introducing noise into the converter. For applications not using the buffer, the converter must be driven from a source with an extremely low output impedance.

POWER REQUIREMENTS

Power Supply Voltages	+15V ±0.5V at +20mA –15V ±0.5V at –25mA +5V ±0.25V at +85mA
------------------------------	---

PHYSICAL/ENVIRONMENTAL

Operating Temp. Range, Case	0 to +70°C or –55 to +125°C
Storage Temperature Range	–65 to +150°C
Package Type	32-pin ceramic TDIP
Weight	0.5 ounces (14 grams)
Thermal Impedance	6°C/W 30°C/W

Footnotes:

- ① Adjustable to zero.
- ② FSR is full scale range and is 10V for 0 to +10V or ±5V inputs and 20V for ±10V input, etc.
- ③ Without buffer amplifier used. ADC-HZ may require external adjustment of clock rate.
- ④ Short cycled operation.
- ⑤ All digital outputs can drive 2 TTL loads.

ADC-HX, ADC-HZ Series

12-Bit, 8 and 20µsec Analog-to-Digital Converters

CODING TABLES


UNIPOLAR OPERATION		
INPUT RANGE		COMP. BINARY CODING
0 TO +10V	0 TO +5V	MSB
+9.9976V	+4.9988V	0000 0000 0000
+8.7500	+4.3750	0001 1111 1111
+7.5000	+3.7500	0011 1111 1111
+5.0000	+2.5000	0111 1111 1111
+2.5000	+1.2500	1011 1111 1111
+1.2500	+0.6250	1101 1111 1111
+0.0024	+0.0012	1111 1111 1110
0.0000	0.0000	1111 1111 1111

BIPOLAR OPERATION					
INPUT VOLTAGE RANGE			COMP. OFFSET BINARY		
+10V	+5V	+2.5V	MSB	LSB	MSB
+9.9951V	+4.9976V	+2.4988V	0000 0000 0000	0000 0000 0000	1000 0000 0000
+7.5000	+3.7500	+1.8750	0001 1111 1111	0001 1111 1111	1001 1111 1111
+5.0000	+2.5000	+1.2500	0011 1111 1111	0011 1111 1111	1011 1111 1111
0.0000	0.0000	0.0000	0111 1111 1111	0111 1111 1111	1111 1111 1111
-5.0000	-2.5000	-1.2500	1011 1111 1111	1011 1111 1111	0011 1111 1111
-7.5000	-3.7500	-1.8750	1101 1111 1111	1101 1111 1111	0101 1111 1111
-9.9951	-4.9976	-2.4988	1111 1111 1110	1111 1111 1110	0111 1111 1110
-10.0000	-5.0000	-2.5000	1111 1111 1111	1111 1111 1111	0111 1111 1111

Refer to Technical Note 4 for methods of reducing the ADC-HX or ADC-HZ conversion times.

SHORT CYCLE OPERATION

CONNECTIONS

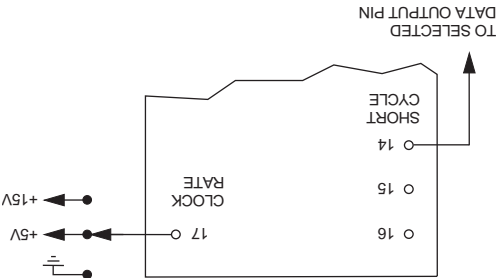

CLOCK RATE VS. VOLTAGE		
PIN 17 VOLTAGE	ADC-HX	ADC-HZ
	CLOCK RATE	CLOCK RATE
0V	600KHZ	1.5MHZ
+5V	720KHZ	1.8MHZ
+15V	880KHZ	2.2MHZ

8, 10 & 12-BIT CONVERSION TIMES			
RESOLUTION		Connect These Pins Together	
12 BITS	20µs	14 & 16	8µs
10 BITS	15µs	17 & 15	6µs
8 BITS	10µs	17 & 28	4µs

PIN 14 CONNECTION			
RES. (BITS)	PIN 14 TO	RES. (BITS)	PIN 14 TO
1	PIN 11	7	PIN 5
2	PIN 10	8	PIN 4
3	PIN 9	9	PIN 3
4	PIN 8	10	PIN 2
5	PIN 7	11	PIN 1
6	PIN 6	12	PIN 16

INPUT CONNECTIONS							
		WITHOUT BUFFER		INPUT PIN		INPUT VOLTAGE RANGE	
		CONNECT THESE PINS TOGETHER		CONNECT THESE PINS TOGETHER			
		INPUT PIN					
WITH BUFFER		CONNECT THESE PINS TOGETHER					
0 to +5V	24	22 & 25	23 & 26	30	22 & 25	23 & 26	29 & 24
0 to +10V	24	—	23 & 26	30	—	23 & 26	29 & 24
±2.5V	24	22 & 25	23 & 22	30	22 & 25	23 & 22	29 & 24
±5V	24	—	23 & 22	30	—	23 & 22	29 & 24
±10V	25	—	23 & 22	30	—	23 & 22	29 & 25

Figure 3. Bipolar Operation, -5 to +5V


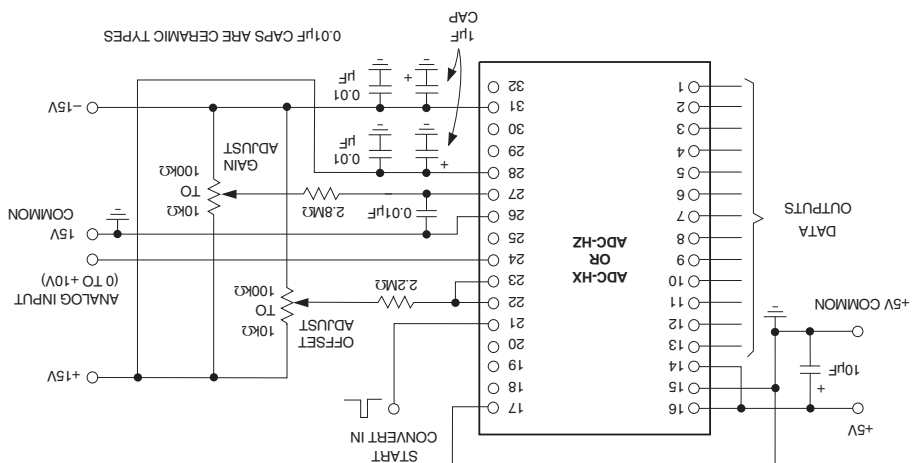


Figure 2. Unipolar Operation, 0 to +10V

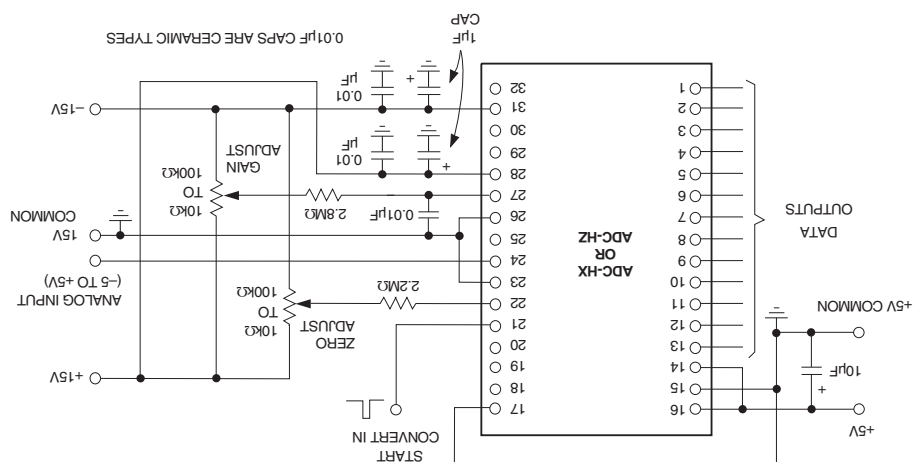


ADC-HX, ADC-HZ Series

12-Bit, 8 and 20µsec Analog-to-Digital Converters

CALIBRATION PROCEDURE

1. Connect the converter for bipolar or unipolar operation.
Use the input connection table for the desired input voltage range and input impedance. Apply START CONVERT pulses of 100 nanoseconds minimum duration to pin 21. The spacing of the pulses should be no less than the maximum conversion time.
2. Zero and Offset Adjustments
Apply a precision voltage reference source between the selected analog input and ground. Adjust the output of the reference source to the value shown in the Calibration Table for the unipolar zero adjustment (zero + 1/2LSB) or the bipolar offset adjustment (–FS + 1/2LSB). Adjust the trimming potentiometer so that the output code flickers equally between 1111 1111 1111 and 1111 1111 1110.
3. Full Scale Adjustment
Change the output of the precision voltage reference source to the value shown in the Calibration Table for the unipolar or bipolar gain adjustment (+FS – 1.5LSB). Adjust the gain trimming potentiometer so that the output code flickers equally between 0000 0000 0001 and 0000 0000 0000.


**TIMING DIAGRAM FOR
ADC-HX, ADC-HZ OUTPUT: 101010101010**

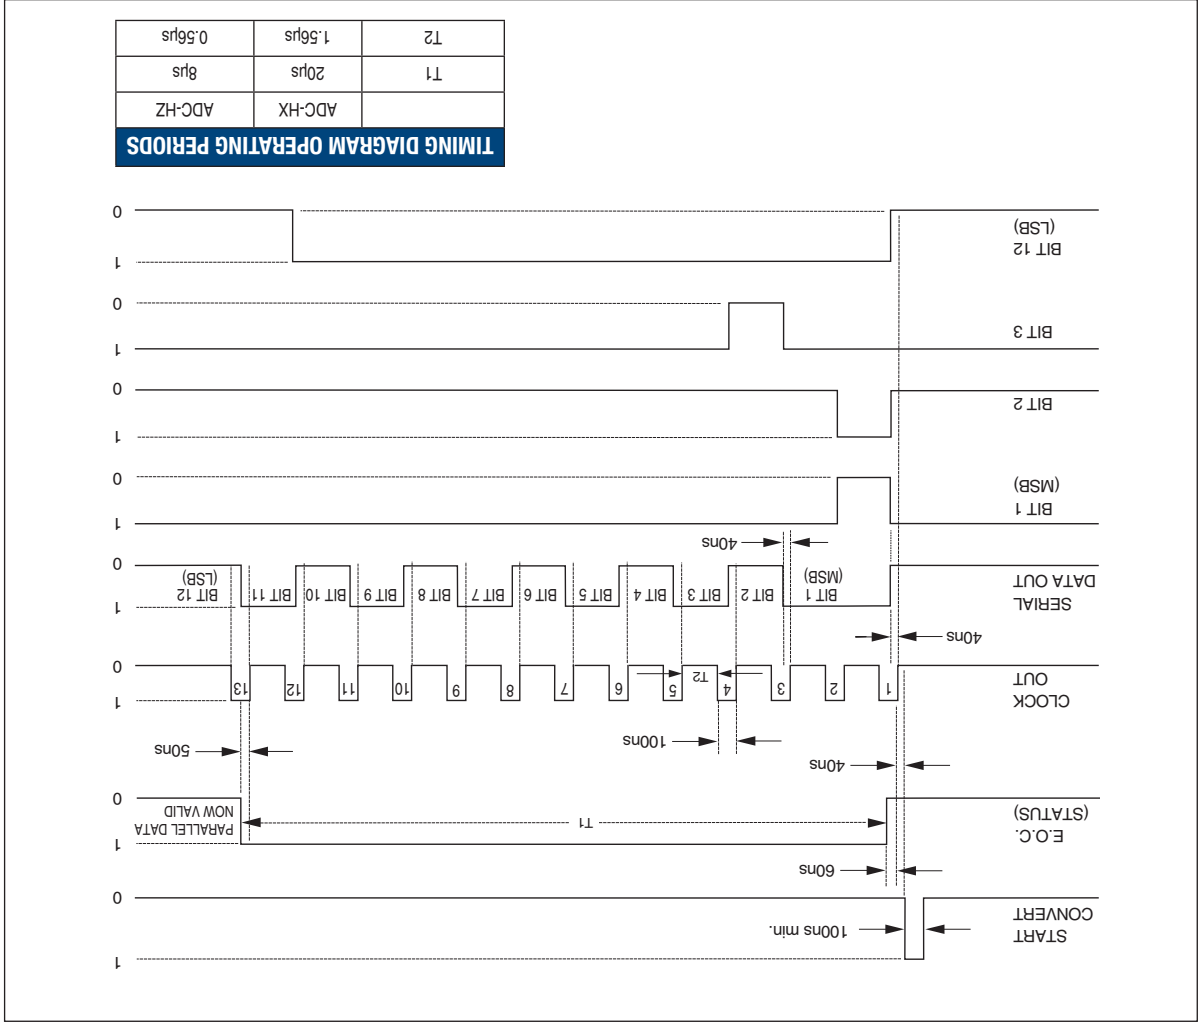

CALIBRATION TABLE		
UNIPOLAR RANGE	ADJUST.	INPUT VOLTAGE
0 to + 5V	ZERO	+ 0.6 mV
0 to + 10V	ZERO	+ 4.982V
	ZERO	+ 1.2 mV
BIPOLAR RANGE		
± 2.5V	OFFSET	-2.494V
± 5V	OFFSET	-4.988V
± 10V	OFFSET	-9.976V
	GAIN	+ 2.4982V
	OFFSET	-2.494V
	GAIN	+ 4.988V
	OFFSET	-9.976V
	GAIN	+ 9.972V

ADC-HX, ADC-HZ Series

12-Bit, 8 and 20µsec Analog-to-Digital Converters

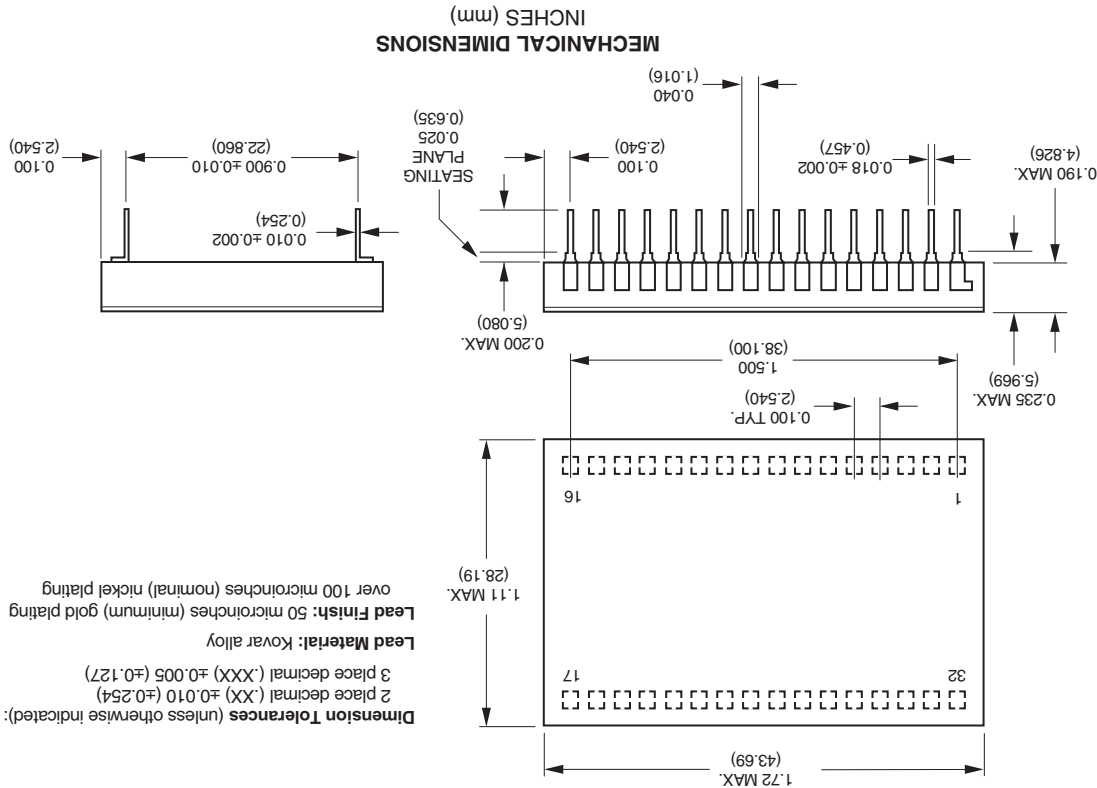

ORDERING GUIDE SUMMARY

MODEL	TEMP. RANGE
ADC-HX12BGC	0 to +70°C
ADC-HX12BMC	0 to +70°C
ADC-HX12BMM	-55 to +125°C
ADC-HX12BMM-QL	-55 to +125°C
ADC-HX/883	-55 to +125°C
ADC-HZ12BGC	0 to +70°C
ADC-HZ12BMC	0 to +70°C
ADC-HZ12BMM	-55 to +125°C
ADC-HZ12BMM-QL	-55 to +125°C
ADC-HZ/883	-55 to +125°C

MIL-STD-883B units are available under DESC Drawing Number 5962-88508. Contact DATel for 883 product specification.

DATel is a registered trademark of
Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 USA
ITAR and ISO 9001/14001 REGISTERED

www.datel.com • e-mail: help@datel.com

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2011 Murata Power Solutions, Inc.