


## 1. Pin Configurations

Figure 1-1. Pinout ATtiny261A/461A/861A

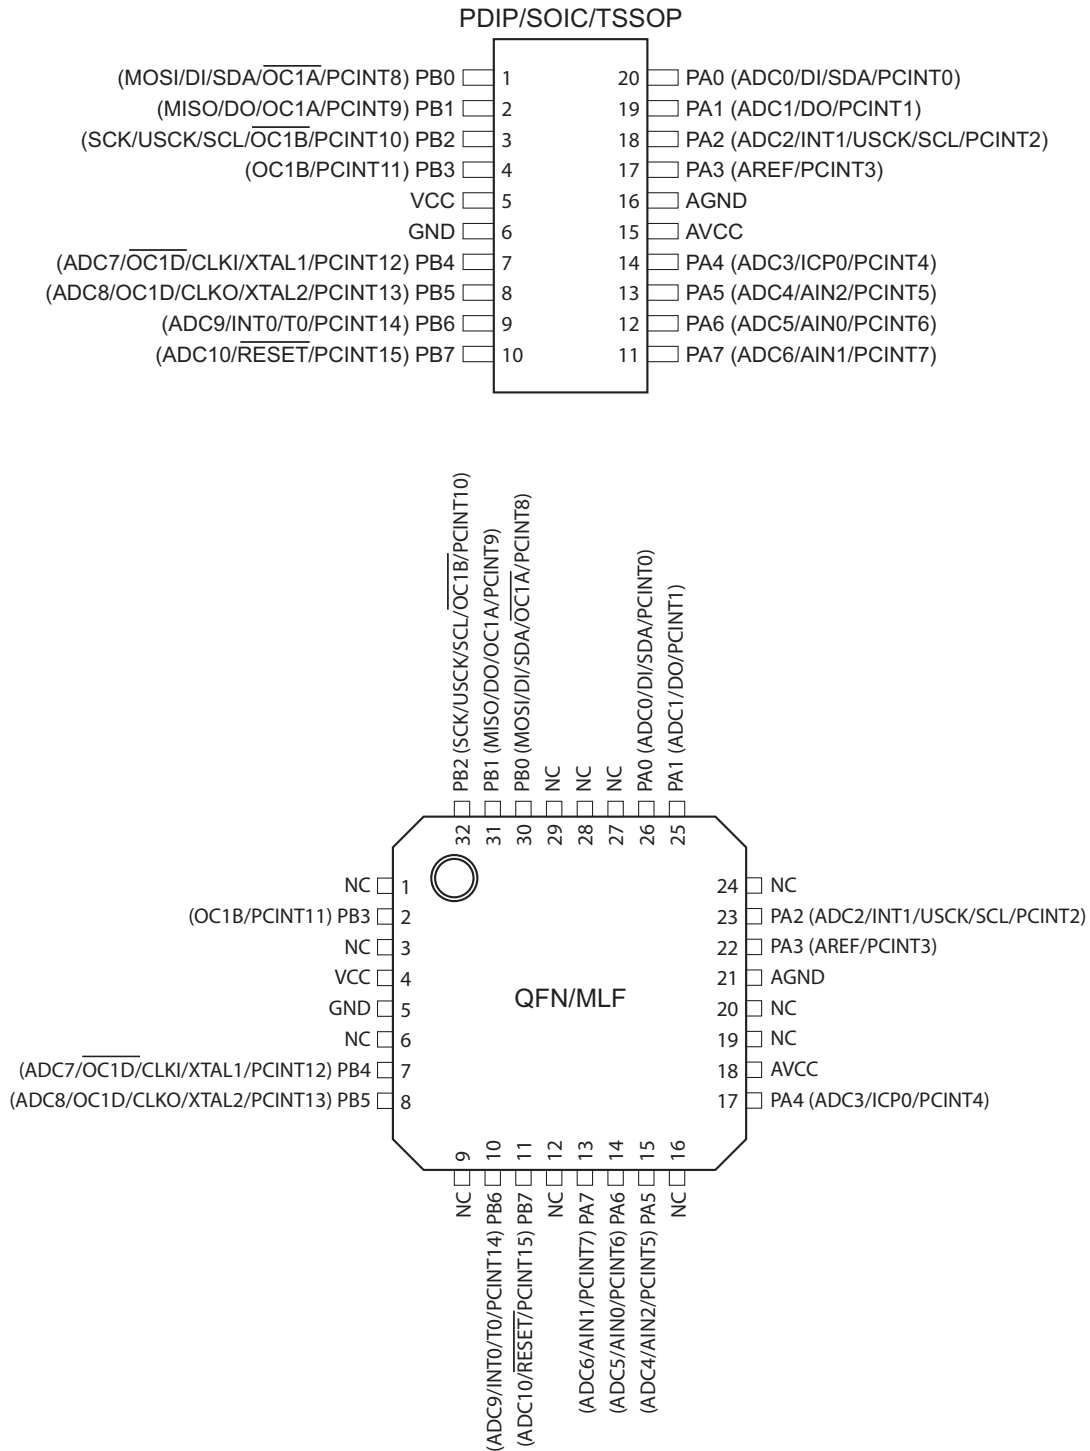

Note: To ensure mechanical stability the center pad underneath the QFN/MLF package should be soldered to ground on the board.

## **1.1 Pin Descriptions**

### **1.1.1 VCC**

Supply voltage.

### **1.1.2 GND**

Ground.

### **1.1.3 AVCC**

Analog supply voltage. This is the supply voltage pin for the Analog-to-digital Converter (ADC), the analog comparator, the Brown-Out Detector (BOD), the internal voltage reference and Port A. It should be externally connected to VCC, even if some peripherals such as the ADC are not used. If the ADC is used AVCC should be connected to VCC through a low-pass filter.

### **1.1.4 AGND**

Analog ground.

### **1.1.5 Port A (PA7:PA0)**

An 8-bit, bi-directional I/O port with internal pull-up resistors, individually selectable for each bit. Output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, port pins that are externally pulled low will source current if pull-up resistors have been activated. Port pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port A also serves the functions of various special features of the device, as listed on [page 62](#).

### **1.1.6 Port B (PB7:PB0)**

An 8-bit, bi-directional I/O port with internal pull-up resistors, individually selectable for each bit. Output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, port pins that are externally pulled low will source current if pull-up resistors have been activated. Port pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port B also serves the functions of various special features of the device, as listed on [page 65](#).

### **1.1.7 RESET**

Reset input. A low level on this pin for longer than the minimum pulse length will generate a reset, even if the clock is not running and provided the reset pin has not been disabled. The minimum pulse length is given in [Table 19-4 on page 188](#). Shorter pulses are not guaranteed to generate a reset.


The reset pin can also be used as a (weak) I/O pin.

## 2. Overview

ATtiny261A/461A/861A are low-power CMOS 8-bit microcontrollers based on the AVR enhanced RISC architecture. By executing powerful instructions in a single clock cycle, the devices achieve throughputs approaching 1 MIPS per MHz allowing the system designer to optimize power consumption versus processing speed.

### 2.1 Block Diagram

Figure 2-1. Block Diagram

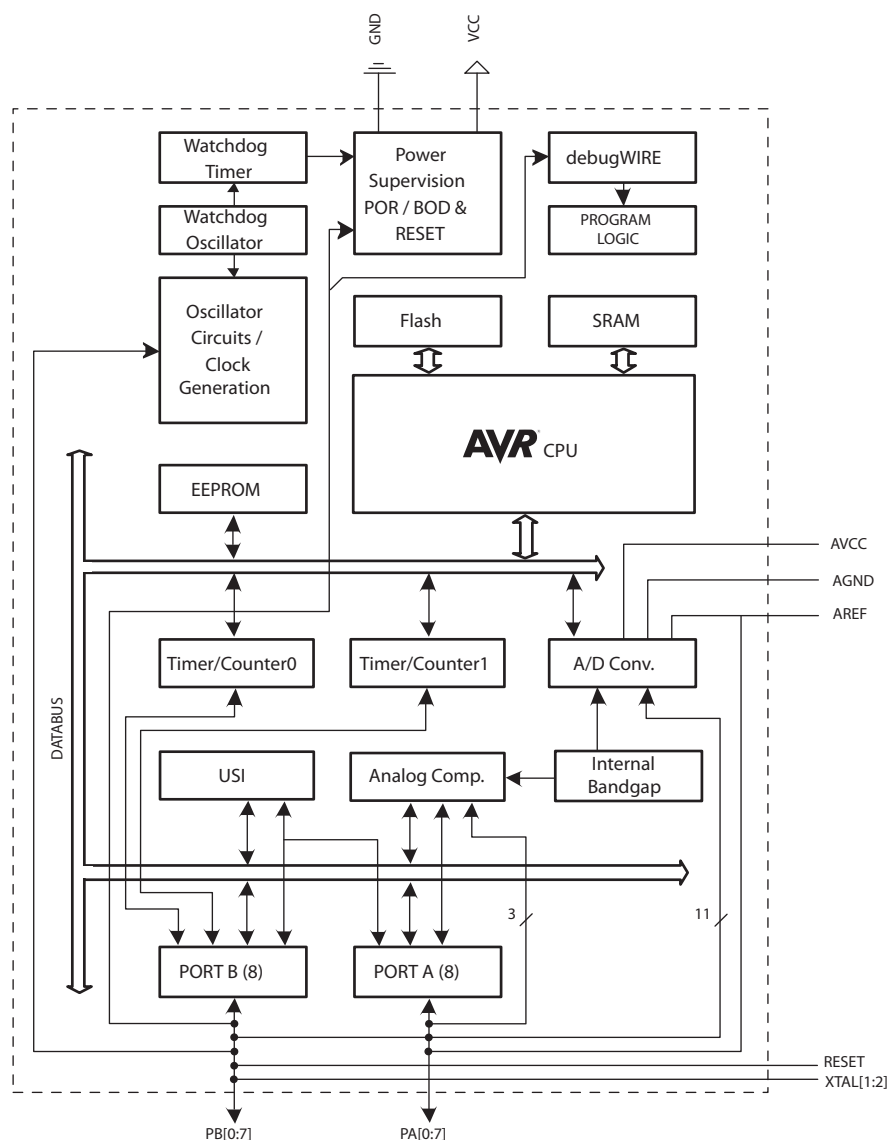

The AVR core combines a rich instruction set with 32 general purpose working registers. All 32 registers are directly connected to the Arithmetic Logic Unit (ALU), allowing two independent registers to be accessed in one single instruction executed in one clock cycle. The resulting architecture is more code efficient while achieving throughputs up to ten times faster than conventional CISC microcontrollers.

The ATtiny261A/461A/861A provides the following features: 2/4/8K byte of In-System Programmable Flash, 128/256/512 bytes EEPROM, 128/256/512 bytes SRAM, 16 general purpose I/O lines, 32 general purpose working registers, an 8-bit Timer/Counter with compare modes, an 8-bit high speed Timer/Counter, a Universal Serial Interface, Internal and External Interrupts, an 11-channel, 10-bit ADC, a programmable Watchdog Timer with internal oscillator, and four software selectable power saving modes. Idle mode stops the CPU while allowing the SRAM, Timer/Counter, ADC, Analog Comparator, and Interrupt system to continue functioning. Power-down mode saves the register contents, disabling all chip functions until the next Interrupt or Hardware Reset. ADC Noise Reduction mode stops the CPU and all I/O modules except ADC, to minimize switching noise during ADC conversions. In Standby mode, the crystal/resonator oscillator is running while the rest of the device is sleeping, allowing very fast start-up combined with low power consumption.

The device is manufactured using Atmel's high density non-volatile memory technology. The On-chip ISP Flash allows the Program memory to be re-programmed In-System through an SPI serial interface, by a conventional non-volatile memory programmer or by an On-chip boot code running on the AVR core.

The ATtiny261A/461A/861A AVR is supported by a full suite of program and system development tools including: C Compilers, Macro Assemblers, Program Debugger/Simulators, and Evaluation kits.

## 3. General Information

### 3.1 Resources

A comprehensive set of drivers, application notes, data sheets and descriptions on development tools are available for download at <http://www.atmel.com/avr>.

### 3.2 Code Examples

This documentation contains simple code examples that briefly show how to use various parts of the device. These code examples assume that the part specific header file is included before compilation. Be aware that not all C compiler vendors include bit definitions in the header files and interrupt handling in C is compiler dependent. Please confirm with the C compiler documentation for more details.

For I/O Registers located in the extended I/O map, “IN”, “OUT”, “SBIS”, “SBIC”, “CBI”, and “SBI” instructions must be replaced with instructions that allow access to extended I/O. Typically, this means “LDS” and “STS” combined with “SBRS”, “SBRC”, “SBR”, and “CBR”. Note that not all AVR devices include an extended I/O map.

### 3.3 Capacitive Touch Sensing

Atmel QTouch Library provides a simple to use solution for touch sensitive interfaces on Atmel AVR microcontrollers. The QTouch Library includes support for QTouch<sup>®</sup> and QMatrix<sup>®</sup> acquisition methods.

Touch sensing is easily added to any application by linking the QTouch Library and using the Application Programming Interface (API) of the library to define the touch channels and sensors. The application then calls the API to retrieve channel information and determine the state of the touch sensor.

The QTouch Library is free and can be downloaded from the Atmel website. For more information and details of implementation, refer to the QTouch Library User Guide – also available from the Atmel website.

### 3.4 Data Retention

Reliability Qualification results show that the projected data retention failure rate is much less than 1 PPM over 20 years at 85°C or 100 years at 25°C.

## 4. Register Summary

| Address     | Name     | Bit 7                                     | Bit 6   | Bit 5   | Bit 4   | Bit 3   | Bit 2   | Bit 1   | Bit 0   | Page                                                                        |
|-------------|----------|-------------------------------------------|---------|---------|---------|---------|---------|---------|---------|-----------------------------------------------------------------------------|
| 0x3F (0x5F) | SREG     | I                                         | T       | H       | S       | V       | N       | Z       | C       | <a href="#">page 8</a>                                                      |
| 0x3E (0x5E) | SPH      | –                                         | –       | –       | –       | –       | SP10    | SP9     | SP8     | <a href="#">page 11</a>                                                     |
| 0x3D (0x5D) | SPL      | SP7                                       | SP6     | SP5     | SP4     | SP3     | SP2     | SP1     | SP0     | <a href="#">page 11</a>                                                     |
| 0x3C (0x5C) | Reserved | –                                         |         |         |         |         |         |         |         |                                                                             |
| 0x3B (0x5B) | GIMSK    | INT1                                      | INT0    | PCIE1   | PCIE0   | –       | –       | –       | –       | <a href="#">page 51</a>                                                     |
| 0x3A (0x5A) | GIFR     | INTF1                                     | INTF0   | PCIF    | –       | –       | –       | –       | –       | <a href="#">page 52</a>                                                     |
| 0x39 (0x59) | TIMSK    | OCIE1D                                    | OCIE1A  | OCIE1B  | OCIE0A  | OCIE0B  | TOIE1   | TOIE0   | TICIE0  | <a href="#">page 85</a> , <a href="#">page 122</a>                          |
| 0x38 (0x58) | TIFR     | OCF1D                                     | OCF1A   | OCF1B   | OCF0A   | OCF0B   | TOV1    | TOV0    | ICF0    | <a href="#">page 86</a> , <a href="#">page 122</a>                          |
| 0x37 (0x57) | SPMCSR   | –                                         | –       | –       | CTPB    | RFLB    | PGWRT   | PGERS   | SPMEN   | <a href="#">page 167</a>                                                    |
| 0x36 (0x56) | PRR      | –                                         | –       | –       | –       | PRTIM1  | PRTIM0  | PRUSI   | PRADC   | <a href="#">page 36</a>                                                     |
| 0x35 (0x55) | MCUCR    | BODS                                      | PUD     | SE      | SM1     | SM0     | BODSE   | ISC01   | ISC00   | <a href="#">page 38</a> , <a href="#">page 68</a> , <a href="#">page 51</a> |
| 0x34 (0x54) | MCUSR    | –                                         | –       | –       | –       | WDRF    | BORF    | EXTRF   | PORF    | <a href="#">page 46</a>                                                     |
| 0x33 (0x53) | TCCR0B   | –                                         | –       | –       | TSM     | PSR0    | CS02    | CS01    | CS00    | <a href="#">page 84</a>                                                     |
| 0x32 (0x52) | TCNT0L   | Timer/Counter0 Counter Register Low Byte  |         |         |         |         |         |         |         | <a href="#">page 84</a>                                                     |
| 0x31 (0x51) | OSCCAL   | Oscillator Calibration Register           |         |         |         |         |         |         |         | <a href="#">page 32</a>                                                     |
| 0x30 (0x50) | TCCR1A   | COM1A1                                    | COM1A0  | COM1B1  | COM1B0  | FOC1A   | FOC1B   | PWM1A   | PWM1B   | <a href="#">page 111</a>                                                    |
| 0x2F (0x4F) | TCCR1B   | PWM1X                                     | PSR1    | DTPS11  | DTPS10  | CS13    | CS12    | CS11    | CS10    | <a href="#">page 167</a>                                                    |
| 0x2E (0x4E) | TCNT1    | Timer/Counter1 Counter Register           |         |         |         |         |         |         |         | <a href="#">page 120</a>                                                    |
| 0x2D (0x4D) | OCR1A    | Timer/Counter1 Output Compare Register A  |         |         |         |         |         |         |         | <a href="#">page 120</a>                                                    |
| 0x2C (0x4C) | OCR1B    | Timer/Counter1 Output Compare Register B  |         |         |         |         |         |         |         | <a href="#">page 121</a>                                                    |
| 0x2B (0x4B) | OCR1C    | Timer/Counter1 Output Compare Register C  |         |         |         |         |         |         |         | <a href="#">page 121</a>                                                    |
| 0x2A (0x4A) | OCR1D    | Timer/Counter1 Output Compare Register D  |         |         |         |         |         |         |         | <a href="#">page 121</a>                                                    |
| 0x29 (0x49) | PLLCR    | LSM                                       | –       | –       | –       | –       | –       | –       | –       | <a href="#">page 119</a>                                                    |
| 0x28 (0x48) | CLKPR    | CLKPCE                                    | –       | –       | –       | –       | –       | –       | –       | <a href="#">page 32</a>                                                     |
| 0x27 (0x47) | TCCR1C   | COM1A1S                                   | COM1A0S | COM1B1S | COM1B0S | COM1D1  | COM1D0  | FOC1D   | PWM1D   | <a href="#">page 116</a>                                                    |
| 0x26 (0x46) | TCCR1D   | FP1E1                                     | FP1EN1  | FP1NC1  | FP1ES1  | FP1AC1  | FP1F1   | WGM11   | WGM10   | <a href="#">page 117</a>                                                    |
| 0x25 (0x45) | TC1H     | –                                         | –       | –       | –       | –       | –       | –       | –       | <a href="#">page 120</a>                                                    |
| 0x24 (0x44) | DT1      | DT1H3                                     | DT1H2   | DT1H1   | DT1H0   | DT1L3   | DT1L2   | DT1L1   | DT1L0   | <a href="#">page 123</a>                                                    |
| 0x23 (0x43) | PCMSK0   | PCINT7                                    | PCINT6  | PCINT5  | PCINT4  | PCINT3  | PCINT2  | PCINT1  | PCINT0  | <a href="#">page 53</a>                                                     |
| 0x22 (0x42) | PCMSK1   | PCINT15                                   | PCINT14 | PCINT13 | PCINT12 | PCINT11 | PCINT10 | PCINT9  | PCINT8  | <a href="#">page 53</a>                                                     |
| 0x21 (0x41) | WDTCR    | WDIF                                      | WDIE    | WDP3    | WDCE    | WDE     | WDP2    | WDP1    | WDP0    | <a href="#">page 46</a>                                                     |
| 0x20 (0x40) | DWDR     | DWDR[7:0]                                 |         |         |         |         |         |         |         | <a href="#">page 36</a>                                                     |
| 0x1F (0x3F) | EEARH    | –                                         | –       | –       | –       | –       | –       | –       | –       | <a href="#">page 20</a>                                                     |
| 0x1E (0x3E) | EEARL    | EEAR7                                     | EEAR6   | EEAR5   | EEAR4   | EEAR3   | EEAR2   | EEAR1   | EEAR0   | <a href="#">page 21</a>                                                     |
| 0x1D (0x3D) | EEDR     | EEPROM Data Register                      |         |         |         |         |         |         |         | <a href="#">page 21</a>                                                     |
| 0x1C (0x3C) | EEDCR    | –                                         | –       | EEP1M   | EEP1M0  | EEP1R1E | EEP1MPE | EEP1EPE | EEP1ERE | <a href="#">page 21</a>                                                     |
| 0x1B (0x3B) | PORTA    | PORTA7                                    | PORTA6  | PORTA5  | PORTA4  | PORTA3  | PORTA2  | PORTA1  | PORTA0  | <a href="#">page 68</a>                                                     |
| 0x1A (0x3A) | DDRA     | DDA7                                      | DDA6    | DDA5    | DDA4    | DDA3    | DDA2    | DDA1    | DDA0    | <a href="#">page 68</a>                                                     |
| 0x19 (0x39) | PINA     | PINA7                                     | PINA6   | PINA5   | PINA4   | PINA3   | PINA2   | PINA1   | PINA0   | <a href="#">page 69</a>                                                     |
| 0x18 (0x38) | PORTB    | PORTB7                                    | PORTB6  | PORTB5  | PORTB4  | PORTB3  | PORTB2  | PORTB1  | PORTB0  | <a href="#">page 69</a>                                                     |
| 0x17 (0x37) | DDRB     | ddb7                                      | ddb6    | ddb5    | ddb4    | ddb3    | ddb2    | ddb1    | ddb0    | <a href="#">page 69</a>                                                     |
| 0x16 (0x36) | PINB     | PINB7                                     | PINB6   | PINB5   | PINB4   | PINB3   | PINB2   | PINB1   | PINB0   | <a href="#">page 69</a>                                                     |
| 0x15 (0x35) | TCCR0A   | TCW0                                      | ICEN0   | ICNC0   | ICES0   | ACIC0   | –       | –       | CTC0    | <a href="#">page 83</a>                                                     |
| 0x14 (0x34) | TCNT0H   | Timer/Counter0 Counter Register High Byte |         |         |         |         |         |         |         | <a href="#">page 85</a>                                                     |
| 0x13 (0x33) | OCR0A    | Timer/Counter0 Output Compare Register A  |         |         |         |         |         |         |         | <a href="#">page 85</a>                                                     |
| 0x12 (0x32) | OCR0B    | Timer/Counter0 Output Compare Register B  |         |         |         |         |         |         |         | <a href="#">page 85</a>                                                     |
| 0x11 (0x31) | USIPP    | –                                         | –       | –       | –       | –       | –       | –       | –       | <a href="#">page 135</a>                                                    |
| 0x10 (0x30) | USIBR    | USI Buffer Register                       |         |         |         |         |         |         |         | <a href="#">page 132</a>                                                    |
| 0x0F (0x2F) | USIDR    | USI Data Register                         |         |         |         |         |         |         |         | <a href="#">page 131</a>                                                    |
| 0x0E (0x2E) | USISR    | USISIF                                    | USIOIF  | USIPF   | USIDC   | USICNT3 | USICNT2 | USICNT1 | USICNT0 | <a href="#">page 132</a>                                                    |
| 0x0D (0x2D) | USICR    | USISIE                                    | USIOIE  | USIWM1  | USIWM0  | USICS1  | USICS0  | USICLK  | USITC   | <a href="#">page 133</a>                                                    |
| 0x0C (0x2C) | GPOR2    | General Purpose I/O Register 2            |         |         |         |         |         |         |         | <a href="#">page 23</a>                                                     |
| 0x0B (0x2B) | GPOR1    | General Purpose I/O Register 1            |         |         |         |         |         |         |         | <a href="#">page 23</a>                                                     |
| 0x0A (0x2A) | GPOR0    | General Purpose I/O Register 0            |         |         |         |         |         |         |         | <a href="#">page 23</a>                                                     |
| 0x09 (0x29) | ACSRB    | HSEL                                      | HLEV    | –       | –       | –       | ACM2    | ACM1    | ACM0    | <a href="#">page 139</a>                                                    |
| 0x08 (0x28) | ACSRA    | ACD                                       | ACBG    | ACO     | ACI     | ACIE    | ACME    | ACIS1   | ACIS0   | <a href="#">page 138</a>                                                    |
| 0x07 (0x27) | ADMUX    | REFS1                                     | REFS0   | ADLAR   | MUX4    | MUX3    | MUX2    | MUX1    | MUX0    | <a href="#">page 155</a>                                                    |
| 0x06 (0x26) | ADCSRA   | ADEN                                      | ADSC    | ADATE   | ADIF    | ADIE    | ADPS2   | ADPS1   | ADPS0   | <a href="#">page 154</a>                                                    |
| 0x05 (0x25) | ADCH     | ADC Data Register High Byte               |         |         |         |         |         |         |         | <a href="#">page 155</a>                                                    |
| 0x04 (0x24) | ADCL     | ADC Data Register Low Byte                |         |         |         |         |         |         |         | <a href="#">page 155</a>                                                    |
| 0x03 (0x23) | ADCSRB   | BIN                                       | GSEL    | –       | REFS2   | MUX5    | ADTS2   | ADTS1   | ADTS0   | <a href="#">page 159</a>                                                    |
| 0x02 (0x22) | DIDR1    | ADC10D                                    | ADC9D   | ADC8D   | ADC7D   | –       | –       | –       | –       | <a href="#">page 160</a>                                                    |
| 0x01 (0x21) | DIDR0    | ADC6D                                     | ADC5D   | ADC4D   | ADC3D   | AREFD   | ADC2D   | ADC1D   | ADC0D   | <a href="#">page 160</a>                                                    |
| 0x00 (0x20) | TCCR1E   | –                                         | –       | OC1OE5  | OC1OE4  | OC1OE3  | OC1OE2  | OC1OE1  | OC1OE0  | <a href="#">page 118</a>                                                    |



- Note:
1. For compatibility with future devices, reserved bits should be written to zero if accessed. Reserved I/O memory addresses should never be written.
  2. I/O Registers within the address range 0x00 - 0x1F are directly bit-accessible using the SBI and CBI instructions. In these registers, the value of single bits can be checked by using the SBIS and SBIC instructions.
  3. Some of the Status Flags are cleared by writing a logical one to them. Note that, unlike most other AVR's, the CBI and SBI instructions will only operation the specified bit, and can therefore be used on registers containing such Status Flags. The CBI and SBI instructions work with registers 0x00 to 0x1F only.

## 5. Instruction Set Summary

| Mnemonics                                | Operands | Description                            | Operation                                                          | Flags      | #Clocks |
|------------------------------------------|----------|----------------------------------------|--------------------------------------------------------------------|------------|---------|
| <b>ARITHMETIC AND LOGIC INSTRUCTIONS</b> |          |                                        |                                                                    |            |         |
| ADD                                      | Rd, Rr   | Add two Registers                      | $Rd \leftarrow Rd + Rr$                                            | Z,C,N,V,H  | 1       |
| ADC                                      | Rd, Rr   | Add with Carry two Registers           | $Rd \leftarrow Rd + Rr + C$                                        | Z,C,N,V,H  | 1       |
| ADIW                                     | RdI,K    | Add Immediate to Word                  | $Rdh:Rdl \leftarrow Rdh:Rdl + K$                                   | Z,C,N,V,S  | 2       |
| SUB                                      | Rd, Rr   | Subtract two Registers                 | $Rd \leftarrow Rd - Rr$                                            | Z,C,N,V,H  | 1       |
| SUBI                                     | Rd, K    | Subtract Constant from Register        | $Rd \leftarrow Rd - K$                                             | Z,C,N,V,H  | 1       |
| SBC                                      | Rd, Rr   | Subtract with Carry two Registers      | $Rd \leftarrow Rd - Rr - C$                                        | Z,C,N,V,H  | 1       |
| SBCI                                     | Rd, K    | Subtract with Carry Constant from Reg. | $Rd \leftarrow Rd - K - C$                                         | Z,C,N,V,H  | 1       |
| SBIW                                     | RdI,K    | Subtract Immediate from Word           | $Rdh:Rdl \leftarrow Rdh:Rdl - K$                                   | Z,C,N,V,S  | 2       |
| AND                                      | Rd, Rr   | Logical AND Registers                  | $Rd \leftarrow Rd \bullet Rr$                                      | Z,N,V      | 1       |
| ANDI                                     | Rd, K    | Logical AND Register and Constant      | $Rd \leftarrow Rd \bullet K$                                       | Z,N,V      | 1       |
| OR                                       | Rd, Rr   | Logical OR Registers                   | $Rd \leftarrow Rd \vee Rr$                                         | Z,N,V      | 1       |
| ORI                                      | Rd, K    | Logical OR Register and Constant       | $Rd \leftarrow Rd \vee K$                                          | Z,N,V      | 1       |
| EOR                                      | Rd, Rr   | Exclusive OR Registers                 | $Rd \leftarrow Rd \oplus Rr$                                       | Z,N,V      | 1       |
| COM                                      | Rd       | One's Complement                       | $Rd \leftarrow 0xFF - Rd$                                          | Z,C,N,V    | 1       |
| NEG                                      | Rd       | Two's Complement                       | $Rd \leftarrow 0x00 - Rd$                                          | Z,C,N,V,H  | 1       |
| SBR                                      | Rd,K     | Set Bit(s) in Register                 | $Rd \leftarrow Rd \vee K$                                          | Z,N,V      | 1       |
| CBR                                      | Rd,K     | Clear Bit(s) in Register               | $Rd \leftarrow Rd \bullet (0xFF - K)$                              | Z,N,V      | 1       |
| INC                                      | Rd       | Increment                              | $Rd \leftarrow Rd + 1$                                             | Z,N,V      | 1       |
| DEC                                      | Rd       | Decrement                              | $Rd \leftarrow Rd - 1$                                             | Z,N,V      | 1       |
| TST                                      | Rd       | Test for Zero or Minus                 | $Rd \leftarrow Rd \bullet Rd$                                      | Z,N,V      | 1       |
| CLR                                      | Rd       | Clear Register                         | $Rd \leftarrow Rd \oplus Rd$                                       | Z,N,V      | 1       |
| SER                                      | Rd       | Set Register                           | $Rd \leftarrow 0xFF$                                               | None       | 1       |
| <b>BRANCH INSTRUCTIONS</b>               |          |                                        |                                                                    |            |         |
| RJMP                                     | k        | Relative Jump                          | $PC \leftarrow PC + k + 1$                                         | None       | 2       |
| IJMP                                     |          | Indirect Jump to (Z)                   | $PC \leftarrow Z$                                                  | None       | 2       |
| RCALL                                    | k        | Relative Subroutine Call               | $PC \leftarrow PC + k + 1$                                         | None       | 3       |
| ICALL                                    |          | Indirect Call to (Z)                   | $PC \leftarrow Z$                                                  | None       | 3       |
| RET                                      |          | Subroutine Return                      | $PC \leftarrow STACK$                                              | None       | 4       |
| RETI                                     |          | Interrupt Return                       | $PC \leftarrow STACK$                                              | I          | 4       |
| CPSE                                     | Rd,Rr    | Compare, Skip if Equal                 | if (Rd = Rr) $PC \leftarrow PC + 2$ or 3                           | None       | 1/2/3   |
| CP                                       | Rd,Rr    | Compare                                | $Rd - Rr$                                                          | Z, N,V,C,H | 1       |
| CPC                                      | Rd,Rr    | Compare with Carry                     | $Rd - Rr - C$                                                      | Z, N,V,C,H | 1       |
| CPI                                      | Rd,K     | Compare Register with Immediate        | $Rd - K$                                                           | Z, N,V,C,H | 1       |
| SBRC                                     | Rr, b    | Skip if Bit in Register Cleared        | if (Rr(b)=0) $PC \leftarrow PC + 2$ or 3                           | None       | 1/2/3   |
| SBRS                                     | Rr, b    | Skip if Bit in Register is Set         | if (Rr(b)=1) $PC \leftarrow PC + 2$ or 3                           | None       | 1/2/3   |
| SBIC                                     | P, b     | Skip if Bit in I/O Register Cleared    | if (P(b)=0) $PC \leftarrow PC + 2$ or 3                            | None       | 1/2/3   |
| SBIS                                     | P, b     | Skip if Bit in I/O Register is Set     | if (P(b)=1) $PC \leftarrow PC + 2$ or 3                            | None       | 1/2/3   |
| BRBS                                     | s, k     | Branch if Status Flag Set              | if (SREG(s) = 1) then $PC \leftarrow PC + k + 1$                   | None       | 1/2     |
| BRBC                                     | s, k     | Branch if Status Flag Cleared          | if (SREG(s) = 0) then $PC \leftarrow PC + k + 1$                   | None       | 1/2     |
| BREQ                                     | k        | Branch if Equal                        | if (Z = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRNE                                     | k        | Branch if Not Equal                    | if (Z = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRCS                                     | k        | Branch if Carry Set                    | if (C = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRCC                                     | k        | Branch if Carry Cleared                | if (C = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRSH                                     | k        | Branch if Same or Higher               | if (C = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRLO                                     | k        | Branch if Lower                        | if (C = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRMI                                     | k        | Branch if Minus                        | if (N = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRPL                                     | k        | Branch if Plus                         | if (N = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRGE                                     | k        | Branch if Greater or Equal, Signed     | if (N $\oplus$ V = 0) then $PC \leftarrow PC + k + 1$              | None       | 1/2     |
| BRLT                                     | k        | Branch if Less Than Zero, Signed       | if (N $\oplus$ V = 1) then $PC \leftarrow PC + k + 1$              | None       | 1/2     |
| BRHS                                     | k        | Branch if Half Carry Flag Set          | if (H = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRHC                                     | k        | Branch if Half Carry Flag Cleared      | if (H = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRTS                                     | k        | Branch if T Flag Set                   | if (T = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRTC                                     | k        | Branch if T Flag Cleared               | if (T = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRVS                                     | k        | Branch if Overflow Flag is Set         | if (V = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRVC                                     | k        | Branch if Overflow Flag is Cleared     | if (V = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRIE                                     | k        | Branch if Interrupt Enabled            | if (I = 1) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| BRID                                     | k        | Branch if Interrupt Disabled           | if (I = 0) then $PC \leftarrow PC + k + 1$                         | None       | 1/2     |
| <b>BIT AND BIT-TEST INSTRUCTIONS</b>     |          |                                        |                                                                    |            |         |
| SBI                                      | P,b      | Set Bit in I/O Register                | $I/O(P,b) \leftarrow 1$                                            | None       | 2       |
| CBI                                      | P,b      | Clear Bit in I/O Register              | $I/O(P,b) \leftarrow 0$                                            | None       | 2       |
| LSL                                      | Rd       | Logical Shift Left                     | $Rd(n+1) \leftarrow Rd(n), Rd(0) \leftarrow 0$                     | Z,C,N,V    | 1       |
| LSR                                      | Rd       | Logical Shift Right                    | $Rd(n) \leftarrow Rd(n+1), Rd(7) \leftarrow 0$                     | Z,C,N,V    | 1       |
| ROL                                      | Rd       | Rotate Left Through Carry              | $Rd(0) \leftarrow C, Rd(n+1) \leftarrow Rd(n), C \leftarrow Rd(7)$ | Z,C,N,V    | 1       |
| ROR                                      | Rd       | Rotate Right Through Carry             | $Rd(7) \leftarrow C, Rd(n) \leftarrow Rd(n+1), C \leftarrow Rd(0)$ | Z,C,N,V    | 1       |

| Mnemonics                         | Operands | Description                      | Operation                                                    | Flags   | #Clocks |
|-----------------------------------|----------|----------------------------------|--------------------------------------------------------------|---------|---------|
| ASR                               | Rd       | Arithmetic Shift Right           | $Rd(n) \leftarrow Rd(n+1), n=0..6$                           | Z,C,N,V | 1       |
| SWAP                              | Rd       | Swap Nibbles                     | $Rd(3..0) \leftarrow Rd(7..4), Rd(7..4) \leftarrow Rd(3..0)$ | None    | 1       |
| BSET                              | s        | Flag Set                         | $SREG(s) \leftarrow 1$                                       | SREG(s) | 1       |
| BCLR                              | s        | Flag Clear                       | $SREG(s) \leftarrow 0$                                       | SREG(s) | 1       |
| BST                               | Rr, b    | Bit Store from Register to T     | $T \leftarrow Rr(b)$                                         | T       | 1       |
| BLD                               | Rd, b    | Bit load from T to Register      | $Rd(b) \leftarrow T$                                         | None    | 1       |
| SEC                               |          | Set Carry                        | $C \leftarrow 1$                                             | C       | 1       |
| CLC                               |          | Clear Carry                      | $C \leftarrow 0$                                             | C       | 1       |
| SEN                               |          | Set Negative Flag                | $N \leftarrow 1$                                             | N       | 1       |
| CLN                               |          | Clear Negative Flag              | $N \leftarrow 0$                                             | N       | 1       |
| SEZ                               |          | Set Zero Flag                    | $Z \leftarrow 1$                                             | Z       | 1       |
| CLZ                               |          | Clear Zero Flag                  | $Z \leftarrow 0$                                             | Z       | 1       |
| SEI                               |          | Global Interrupt Enable          | $I \leftarrow 1$                                             | I       | 1       |
| CLI                               |          | Global Interrupt Disable         | $I \leftarrow 0$                                             | I       | 1       |
| SES                               |          | Set Signed Test Flag             | $S \leftarrow 1$                                             | S       | 1       |
| CLS                               |          | Clear Signed Test Flag           | $S \leftarrow 0$                                             | S       | 1       |
| SEV                               |          | Set Twos Complement Overflow.    | $V \leftarrow 1$                                             | V       | 1       |
| CLV                               |          | Clear Twos Complement Overflow   | $V \leftarrow 0$                                             | V       | 1       |
| SET                               |          | Set T in SREG                    | $T \leftarrow 1$                                             | T       | 1       |
| CLT                               |          | Clear T in SREG                  | $T \leftarrow 0$                                             | T       | 1       |
| SEH                               |          | Set Half Carry Flag in SREG      | $H \leftarrow 1$                                             | H       | 1       |
| CLH                               |          | Clear Half Carry Flag in SREG    | $H \leftarrow 0$                                             | H       | 1       |
| <b>DATA TRANSFER INSTRUCTIONS</b> |          |                                  |                                                              |         |         |
| MOV                               | Rd, Rr   | Move Between Registers           | $Rd \leftarrow Rr$                                           | None    | 1       |
| MOVW                              | Rd, Rr   | Copy Register Word               | $Rd+1:Rd \leftarrow Rr+1:Rr$                                 | None    | 1       |
| LDI                               | Rd, K    | Load Immediate                   | $Rd \leftarrow K$                                            | None    | 1       |
| LD                                | Rd, X    | Load Indirect                    | $Rd \leftarrow (X)$                                          | None    | 2       |
| LD                                | Rd, X+   | Load Indirect and Post-Inc.      | $Rd \leftarrow (X), X \leftarrow X + 1$                      | None    | 2       |
| LD                                | Rd, -X   | Load Indirect and Pre-Dec.       | $X \leftarrow X - 1, Rd \leftarrow (X)$                      | None    | 2       |
| LD                                | Rd, Y    | Load Indirect                    | $Rd \leftarrow (Y)$                                          | None    | 2       |
| LD                                | Rd, Y+   | Load Indirect and Post-Inc.      | $Rd \leftarrow (Y), Y \leftarrow Y + 1$                      | None    | 2       |
| LD                                | Rd, -Y   | Load Indirect and Pre-Dec.       | $Y \leftarrow Y - 1, Rd \leftarrow (Y)$                      | None    | 2       |
| LDD                               | Rd, Y+q  | Load Indirect with Displacement  | $Rd \leftarrow (Y + q)$                                      | None    | 2       |
| LD                                | Rd, Z    | Load Indirect                    | $Rd \leftarrow (Z)$                                          | None    | 2       |
| LD                                | Rd, Z+   | Load Indirect and Post-Inc.      | $Rd \leftarrow (Z), Z \leftarrow Z + 1$                      | None    | 2       |
| LD                                | Rd, -Z   | Load Indirect and Pre-Dec.       | $Z \leftarrow Z - 1, Rd \leftarrow (Z)$                      | None    | 2       |
| LDD                               | Rd, Z+q  | Load Indirect with Displacement  | $Rd \leftarrow (Z + q)$                                      | None    | 2       |
| LDS                               | Rd, k    | Load Direct from SRAM            | $Rd \leftarrow (k)$                                          | None    | 2       |
| ST                                | X, Rr    | Store Indirect                   | $(X) \leftarrow Rr$                                          | None    | 2       |
| ST                                | X+, Rr   | Store Indirect and Post-Inc.     | $(X) \leftarrow Rr, X \leftarrow X + 1$                      | None    | 2       |
| ST                                | -X, Rr   | Store Indirect and Pre-Dec.      | $X \leftarrow X - 1, (X) \leftarrow Rr$                      | None    | 2       |
| ST                                | Y, Rr    | Store Indirect                   | $(Y) \leftarrow Rr$                                          | None    | 2       |
| ST                                | Y+, Rr   | Store Indirect and Post-Inc.     | $(Y) \leftarrow Rr, Y \leftarrow Y + 1$                      | None    | 2       |
| ST                                | -Y, Rr   | Store Indirect and Pre-Dec.      | $Y \leftarrow Y - 1, (Y) \leftarrow Rr$                      | None    | 2       |
| STD                               | Y+q, Rr  | Store Indirect with Displacement | $(Y + q) \leftarrow Rr$                                      | None    | 2       |
| ST                                | Z, Rr    | Store Indirect                   | $(Z) \leftarrow Rr$                                          | None    | 2       |
| ST                                | Z+, Rr   | Store Indirect and Post-Inc.     | $(Z) \leftarrow Rr, Z \leftarrow Z + 1$                      | None    | 2       |
| ST                                | -Z, Rr   | Store Indirect and Pre-Dec.      | $Z \leftarrow Z - 1, (Z) \leftarrow Rr$                      | None    | 2       |
| STD                               | Z+q, Rr  | Store Indirect with Displacement | $(Z + q) \leftarrow Rr$                                      | None    | 2       |
| STS                               | k, Rr    | Store Direct to SRAM             | $(k) \leftarrow Rr$                                          | None    | 2       |
| LPM                               |          | Load Program Memory              | $R0 \leftarrow (Z)$                                          | None    | 3       |
| LPM                               | Rd, Z    | Load Program Memory              | $Rd \leftarrow (Z)$                                          | None    | 3       |
| LPM                               | Rd, Z+   | Load Program Memory and Post-Inc | $Rd \leftarrow (Z), Z \leftarrow Z + 1$                      | None    | 3       |
| SPM                               |          | Store Program Memory             | $(Z) \leftarrow R1:R0$                                       | None    |         |
| IN                                | Rd, P    | In Port                          | $Rd \leftarrow P$                                            | None    | 1       |
| OUT                               | P, Rr    | Out Port                         | $P \leftarrow Rr$                                            | None    | 1       |
| PUSH                              | Rr       | Push Register on Stack           | $STACK \leftarrow Rr$                                        | None    | 2       |
| POP                               | Rd       | Pop Register from Stack          | $Rd \leftarrow STACK$                                        | None    | 2       |
| <b>MCU CONTROL INSTRUCTIONS</b>   |          |                                  |                                                              |         |         |
| NOP                               |          | No Operation                     |                                                              | None    | 1       |
| SLEEP                             |          | Sleep                            | (see specific descr. for Sleep function)                     | None    | 1       |
| WDR                               |          | Watchdog Reset                   | (see specific descr. for WDR/Timer)                          | None    | 1       |
| BREAK                             |          | Break                            | For On-chip Debug Only                                       | None    | N/A     |

## 6. Ordering Information

### 6.1 ATtiny261A

| Speed (MHz) | Power Supply | Ordering Code <sup>(1)</sup>                                                                                           | Package <sup>(2)</sup>                                 | Operational Range                              |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|------------------------------------------------|
| 20          | 1.8 – 5.5V   | ATtiny261A-MU<br>ATtiny261A-MUR<br>ATtiny261A-PU<br>ATtiny261A-SU<br>ATtiny261A-SUR<br>ATtiny261A-XU<br>ATtiny261A-XUR | 32M1-A<br>32M1-A<br>20P3<br>20S2<br>20S2<br>20X<br>20X | Industrial<br>(-40°C to +85°C) <sup>(3)</sup>  |
| 20          | 1.8 – 5.5V   | ATtiny261A-MN<br>ATtiny261A-MNR                                                                                        | 32M1-A<br>32M1-A                                       | Industrial<br>(-40°C to +105°C) <sup>(4)</sup> |

Notes: 1. Code indicators:

- N or U: matte tin
- R: tape & reel

2. All packages are Pb-free, halide-free and fully green and they comply with the European directive for Restriction of Hazardous Substances (RoHS).
3. These devices can also be supplied in wafer form. Please contact your local Atmel sales office for detailed ordering information and minimum quantities.
4. For typical and electrical characteristics of this device please consult "Appendix A – ATtiny261A Specification at 105°C".

| Package Type  |                                                                                 |
|---------------|---------------------------------------------------------------------------------|
| <b>32M1-A</b> | 32-pad, 5 x 5 x 1.0 mm Body, Lead Pitch 0.50 mm, Micro Lead Frame Package (MLF) |
| <b>20P3</b>   | 20-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)                        |
| <b>20S2</b>   | 20-lead, 0.300" Wide, Plastic Gull Wing Small Outline Package (SOIC)            |
| <b>20X</b>    | 20-lead, 4.4 mm Wide, Plastic Thin Shrink Small Outline Package (TSSOP)         |

## 6.2 ATtiny461A

| Speed (MHz) | Power Supply | Ordering Code <sup>(1)</sup>                                                                                           | Package <sup>(2)</sup>                                 | Operational Range                             |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------|
| 20          | 1.8 – 5.5V   | ATtiny461A-MU<br>ATtiny461A-MUR<br>ATtiny461A-PU<br>ATtiny461A-SU<br>ATtiny461A-SUR<br>ATtiny461A-XU<br>ATtiny461A-XUR | 32M1-A<br>32M1-A<br>20P3<br>20S2<br>20S2<br>20X<br>20X | Industrial<br>(-40°C to +85°C) <sup>(3)</sup> |

Notes: 1. Code indicators:

- U: matte tin
- R: tape & reel

2. All packages are Pb-free, halide-free and fully green and they comply with the European directive for Restriction of Hazardous Substances (RoHS).
3. These devices can also be supplied in wafer form. Please contact your local Atmel sales office for detailed ordering information and minimum quantities.

| Package Type  |                                                                                 |
|---------------|---------------------------------------------------------------------------------|
| <b>32M1-A</b> | 32-pad, 5 x 5 x 1.0 mm Body, Lead Pitch 0.50 mm, Micro Lead Frame Package (MLF) |
| <b>20P3</b>   | 20-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)                        |
| <b>20S2</b>   | 20-lead, 0.300" Wide, Plastic Gull Wing Small Outline Package (SOIC)            |
| <b>20X</b>    | 20-lead, 4.4 mm Wide, Plastic Thin Shrink Small Outline Package (TSSOP)         |

## 6.3 ATtiny861A

| Speed (MHz) | Power Supply | Ordering Code <sup>(1)</sup>                                                                                           | Package <sup>(2)</sup>                                 | Operational Range                             |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------|
| 20          | 1.8 – 5.5V   | ATtiny861A-MU<br>ATtiny861A-MUR<br>ATtiny861A-PU<br>ATtiny861A-SU<br>ATtiny861A-SUR<br>ATtiny861A-XU<br>ATtiny861A-XUR | 32M1-A<br>32M1-A<br>20P3<br>20S2<br>20S2<br>20X<br>20X | Industrial<br>(-40°C to +85°C) <sup>(3)</sup> |

Notes: 1. Code indicators:




- U: matte tin
- R: tape & reel

2. All packages are Pb-free, halide-free and fully green and they comply with the European directive for Restriction of Hazardous Substances (RoHS).
3. These devices can also be supplied in wafer form. Please contact your local Atmel sales office for detailed ordering information and minimum quantities.

| Package Type  |                                                                                 |
|---------------|---------------------------------------------------------------------------------|
| <b>32M1-A</b> | 32-pad, 5 x 5 x 1.0 mm Body, Lead Pitch 0.50 mm, Micro Lead Frame Package (MLF) |
| <b>20P3</b>   | 20-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)                        |
| <b>20S2</b>   | 20-lead, 0.300" Wide, Plastic Gull Wing Small Outline Package (SOIC)            |
| <b>20X</b>    | 20-lead, 4.4 mm Wide, Plastic Thin Shrink Small Outline Package (TSSOP)         |

## 7. Packaging Information

### 7.1 32M1-A

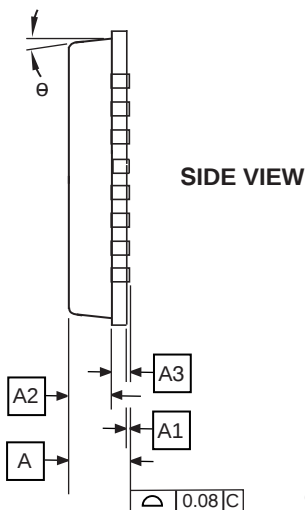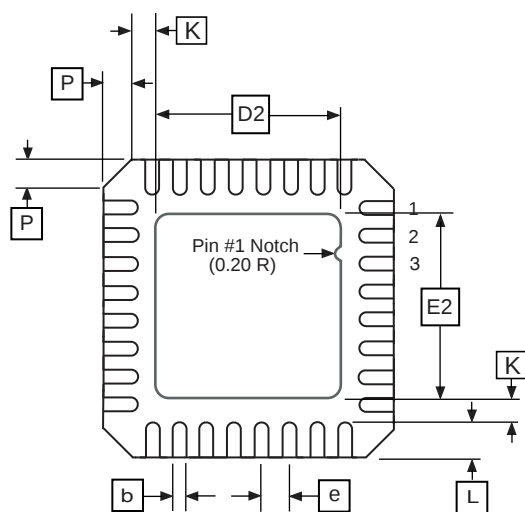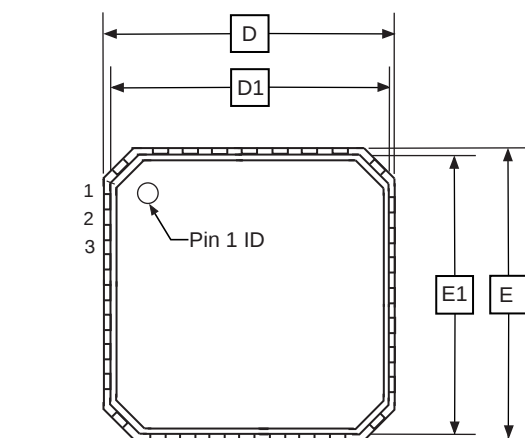

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL   | MIN      | NOM  | MAX  | NOTE |
|----------|----------|------|------|------|
| A        | 0.80     | 0.90 | 1.00 |      |
| A1       | —        | 0.02 | 0.05 |      |
| A2       | —        | 0.65 | 1.00 |      |
| A3       | 0.20 REF |      |      |      |
| b        | 0.18     | 0.23 | 0.30 |      |
| D        | 4.90     | 5.00 | 5.10 |      |
| D1       | 4.70     | 4.75 | 4.80 |      |
| D2       | 2.95     | 3.10 | 3.25 |      |
| E        | 4.90     | 5.00 | 5.10 |      |
| E1       | 4.70     | 4.75 | 4.80 |      |
| E2       | 2.95     | 3.10 | 3.25 |      |
| e        | 0.50 BSC |      |      |      |
| L        | 0.30     | 0.40 | 0.50 |      |
| P        | —        | —    | 0.60 |      |
| $\theta$ | —        | —    | 12°  |      |
| K        | 0.20     | —    | —    |      |

Note: JEDEC Standard MO-220, Fig. 2 (Anvil Singulation), VHHD-2.

5/25/06



2325 Orchard Parkway  
San Jose, CA 95131

#### TITLE

**32M1-A**, 32-pad, 5 x 5 x 1.0 mm Body, Lead Pitch 0.50 mm,  
3.10 mm Exposed Pad, Micro Lead Frame Package (MLF)


#### DRAWING NO.

32M1-A

#### REV.

E

## 7.2 20P3

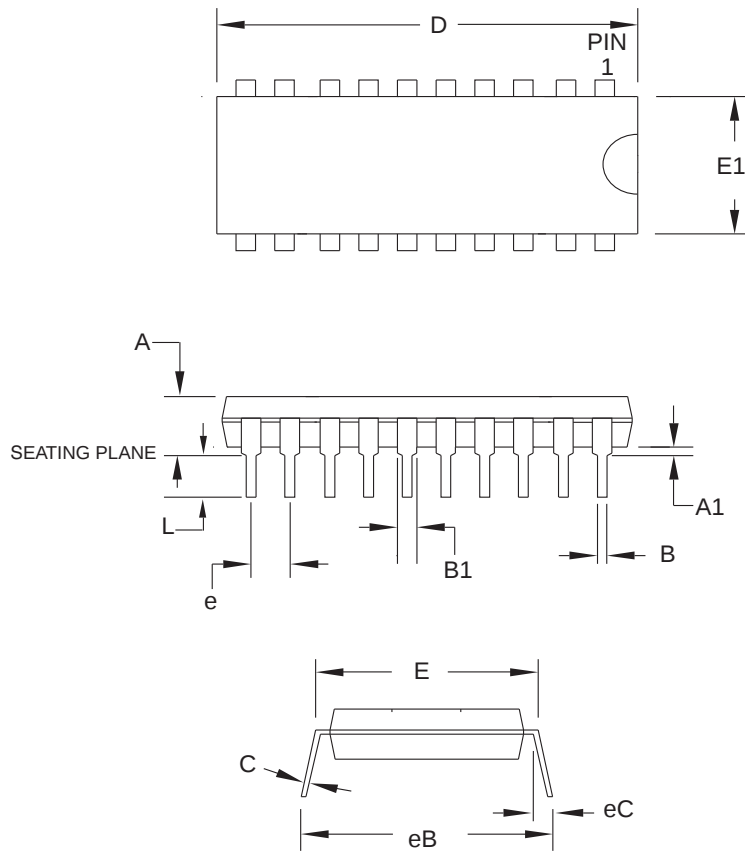

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN       | NOM | MAX    | NOTE   |
|--------|-----------|-----|--------|--------|
| A      | —         | —   | 5.334  |        |
| A1     | 0.381     | —   | —      |        |
| D      | 25.493    | —   | 25.984 | Note 2 |
| E      | 7.620     | —   | 8.255  |        |
| E1     | 6.096     | —   | 7.112  | Note 2 |
| B      | 0.356     | —   | 0.559  |        |
| B1     | 1.270     | —   | 1.551  |        |
| L      | 2.921     | —   | 3.810  |        |
| C      | 0.203     | —   | 0.356  |        |
| eB     | —         | —   | 10.922 |        |
| eC     | 0.000     | —   | 1.524  |        |
| e      | 2.540 TYP |     |        |        |

**Notes:**

1. This package conforms to JEDEC reference MS-001, Variation AD.
2. Dimensions D and E1 do not include mold Flash or Protrusion.  
Mold Flash or Protrusion shall not exceed 0.25 mm (0.010").

2010-10-19



2325 Orchard Parkway  
San Jose, CA 95131

**TITLE**

**20P3**, 20-lead (0.300"/7.62 mm Wide) Plastic Dual  
Inline Package (PDIP)

**DRAWING NO.**


20P3

**REV.**


D




## 7.3 20S2

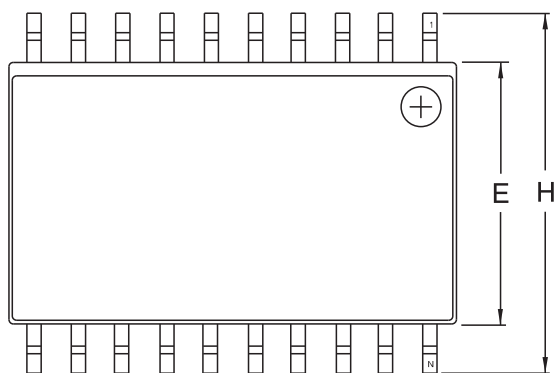

Top View

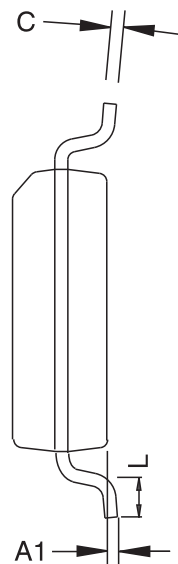

End View

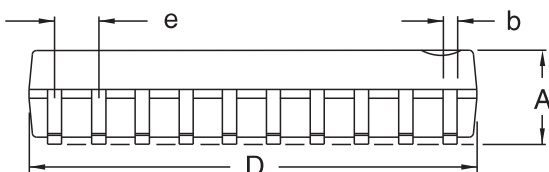

Side View

**COMMON DIMENSIONS**  
(Unit of Measure – mm)

| SYMBOL | MIN      | NOM | MAX   | NOTE |
|--------|----------|-----|-------|------|
| A      | 2.35     |     | 2.65  |      |
| A1     | 0.10     |     | 0.30  |      |
| b      | 0.33     |     | 0.51  | 4    |
| C      | 0.23     |     | 0.32  |      |
| D      | 12.60    |     | 13.00 | 1    |
| E      | 7.40     |     | 7.60  | 2    |
| H      | 10.00    |     | 10.65 |      |
| L      | 0.40     |     | 1.27  | 3    |
| e      | 1.27 BSC |     |       |      |

- Notes.
1. This drawing is for general information only; refer to JEDEC Drawing MS-013, Variation AC for additional information.
  2. Dimension 'D' does not include mold Flash, protrusions or gate burrs. Mold Flash, protrusions and gate burrs shall not exceed 0.15 mm (0.006") per side.
  3. Dimension 'E' does not include inter-lead Flash or protrusion. Inter-lead Flash and protrusions shall not exceed 0.25 mm (0.010") per side.
  4. 'L' is the length of the terminal for soldering to a substrate.
  5. The lead width 'b', as measured 0.36 mm (0.014") or greater above the seating plane, shall not exceed a maximum value of 0.61 mm (0.024") per side.



2325 Orchard Parkway  
San Jose, CA 95131

**TITLE**

**20S2**, 20-lead, 0.300" Wide Body, Plastic Gull Wing Small Outline Package (SOIC)

**DRAWING NO.**


20S2

**REV.**

B

## 7.4 20X

Dimensions in Millimeters and (Inches).  
Controlling dimension: Millimeters.  
JEDEC Standard MO-153 AC

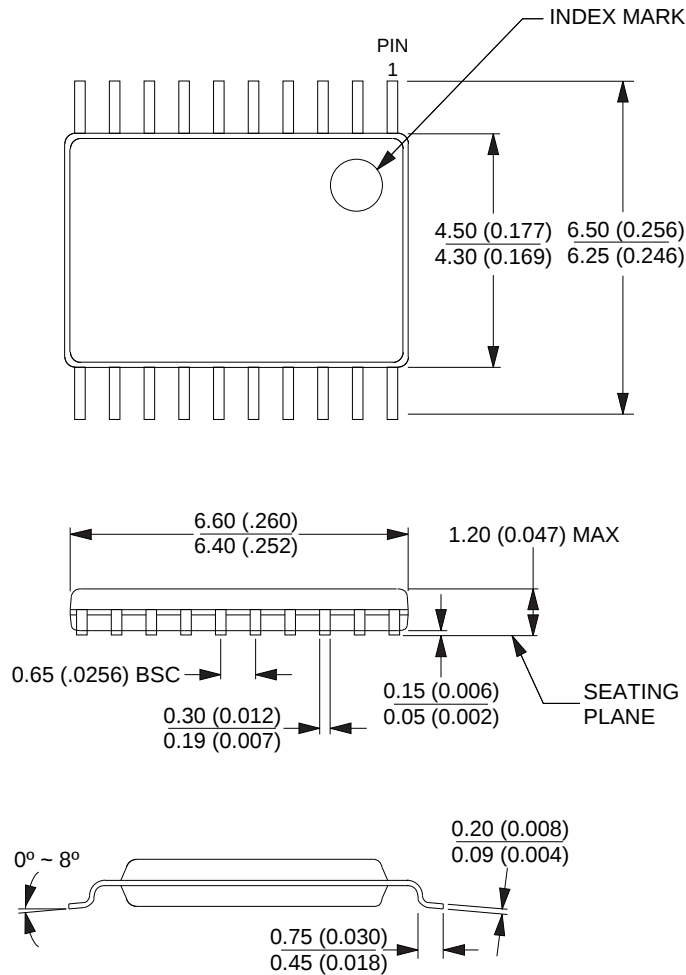

10/23/03



2325 Orchard Parkway  
San Jose, CA 95131

### TITLE

**20X**, (Formerly 20T), 20-lead, 4.4 mm Body Width,  
Plastic Thin Shrink Small Outline Package (TSSOP)

### DRAWING NO.

20X

### REV.

C



## 8. Errata

### 8.1 Errata ATtiny261A

The revision letter in this section refers to the revision of the ATtiny261A device.

#### 8.1.1 Rev D

No known errata.

#### 8.1.2 Rev C

Not sampled.

### 8.2 Errata ATtiny461A

The revision letter in this section refers to the revision of the ATtiny461A device.

#### 8.2.1 Rev C

No known errata.

### 8.3 Errata ATtiny861A

The revision letter in this section refers to the revision of the ATtiny861A device.

#### 8.3.1 Rev D

No known errata.

#### 8.3.2 Rev C

Not sampled.

## 9. Datasheet Revision History

### 9.1 Rev. 8197C – 05/11

1. Added:
  - [Section 3.3 “Capacitive Touch Sensing” on page 6](#)
  - [Section 4. “CPU Core” on page 7](#)
  - [Table 6-10, “Capacitance of Low-Frequency Crystal Oscillator,” on page 29](#)
  - [Table 15-5 on page 157](#)
  - [Section 19.7 “Analog Comparator Characteristics” on page 193](#)
  - [Table 19-8 on page 191](#)
  - [Table 19-9 on page 192](#)
  - Tape & reel part numbers in [Section 23. “Ordering Information” on page 281](#)
  - Ordering codes for ATtiny261A with extended temperature, on [page 281](#)
2. Updated:
  - [Section 6.4 “Clock Output Buffer” on page 32 \(CLKO\)](#)
  - [Figure 15-1 on page 142](#), “Analog to Digital Converter Block Schematic”, changed INTERNAL 1.18V REFERENCE to 1.1V
  - [Table 18-8 on page 171](#), No. of Pages in the EEPROM from 64 to 32 for ATtiny261A
  - [Table 19-1 on page 185](#)
  - [Section 19.3 “Speed” on page 187](#)
  - Characteristic plots [Figure 20-3 on page 200](#), [Figure 20-8 on page 202](#), [Figure 20-54 on page 226](#), [Figure 20-59 on page 228](#), [Figure 20-105 on page 252](#), and [Figure 20-110 on page 254](#)
  - Bit syntax throughout the datasheet, e.g. from CS02:0 to CS0[2:0]
3. Deleted:
  - “Preliminary” status. All devices now final and in production.
  - [“Disclaimer” on page 6](#).

### 9.2 Rev. 8197B – 01/10

1. Updated 32M1-A drawing in [Section 24. “Packaging Information” on page 284](#).

### 9.3 Rev. 8197A – 10/09

1. Initial revision created from document 2588C (ATtiny261/461/861)
2. Updated “Ordering Information” on [page 281](#), [page 282](#) and [page 283](#). Pb-plated packages are no longer offered and there are no separate ordering codes for commercial operation range, the only available option now is industrial. Also, added new package options
3. Added sections:
  - [“Software BOD Disable” on page 36](#)
  - [“ATtiny461A” on page 225](#)
  - [“ATtiny861A” on page 251](#)
4. Updated sections:
  - [“Stack Pointer” on page 11](#)

- “OSCCAL – Oscillator Calibration Register” on page 32
  - “MCUCR – MCU Control Register” on page 38
  - “MCUCR – MCU Control Register” on page 51
  - “MCUCR – MCU Control Register” on page 68
  - “Speed” on page 187
  - “Enhanced Power-On Reset” on page 189
  - “ATtiny261A” on page 199
  - “Register Summary” on page 277
5. Updated tables:
- “DC Characteristics. TA = -40°C to +85°C, VCC = 1.8V to 5.5V (unless otherwise noted).” on page 185
  - “Additional Current Consumption for the different I/O modules (absolute values).” on page 197
  - “Additional Current Consumption (percentage) in Active and Idle mode.” on page 198





## Headquarters

---

### **Atmel Corporation**

2325 Orchard Parkway  
San Jose, CA 95131  
USA  
Tel: (+1)(408) 441-0311  
Fax: (+1)(408) 487-2600

## International

---

### **Atmel Asia Limited**

Unit 01-5 & 16, 19F  
BEA Tower, Millennium City 5  
418 Kwun Tong Road  
Kwun Tong, Kowloon  
HONG KONG  
Tel: (+852) 2245-6100  
Fax: (+852) 2722-1369

### **Atmel Munich GmbH**

Business Campus  
Parking 4  
D-85748 Garching b. Munich  
GERMANY  
Tel: (+49) 89-31970-0  
Fax: (+49) 89-3194621

### **Atmel Japan**

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
JAPAN  
Tel: (+81)(3) 3523-3551  
Fax: (+81)(3) 3523-7581

## Product Contact

---

### **Web Site**

[www.atmel.com](http://www.atmel.com)

### **Technical Support**

[avr@atmel.com](mailto:avr@atmel.com)

### **Sales Contact**

[www.atmel.com/contacts](http://www.atmel.com/contacts)

### **Literature Requests**

[www.atmel.com/literature](http://www.atmel.com/literature)

---

**Disclaimer:** The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2011 Atmel Corporation. All rights reserved.

Atmel®, logo and combinations thereof, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.