

## TABLE OF CONTENTS

|                                           |    |
|-------------------------------------------|----|
| Features .....                            | 1  |
| Applications .....                        | 1  |
| Pin Connections (Top Views) .....         | 1  |
| General Description .....                 | 1  |
| Revision History .....                    | 2  |
| Specifications .....                      | 3  |
| Absolute Maximum Ratings .....            | 9  |
| Thermal Resistance .....                  | 9  |
| Maximum Power Dissipation .....           | 9  |
| ESD Caution .....                         | 9  |
| Typical Performance Characteristics ..... | 10 |
| Theory of Operation .....                 | 16 |

## REVISION HISTORY

### 7/09—Rev. I to Rev. J

|                            |    |
|----------------------------|----|
| Changes to Figure 22 ..... | 12 |
|----------------------------|----|

### 12/08—Rev. H to Rev. I

|                                                          |    |
|----------------------------------------------------------|----|
| Change to Settling Time to 0.1% Parameter, Table 1 ..... | 3  |
| Updated Outline Dimensions .....                         | 20 |

### 12/07—Rev. G to Rev. H

|                                  |    |
|----------------------------------|----|
| Changes to Applications .....    | 1  |
| Updated Outline Dimensions ..... | 21 |
| Changes to Ordering Guide .....  | 23 |

### 5/06—Rev. F to Rev. G

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| Updated Format .....                                             | Universal |
| Changes to Features, Applications, and General Description ..... | 1         |
| Changes to Figure 15 .....                                       | 12        |
| Changes to the Ordering Guide .....                              | 22        |

### 9/04—Rev. E to Rev. F

|                                 |    |
|---------------------------------|----|
| Changes to Ordering Guide ..... | 7  |
| Changes to Figure 15 .....      | 15 |

### 3/04—Rev. D to Rev. E

|                                      |   |
|--------------------------------------|---|
| Changes to General Description ..... | 2 |
| Changes to Specifications .....      | 3 |
| Changes to Ordering Guide .....      | 6 |

|                                                            |    |
|------------------------------------------------------------|----|
| Circuit Description .....                                  | 16 |
| Application Information .....                              | 17 |
| Overdrive Recovery .....                                   | 17 |
| Driving Capacitive Loads .....                             | 17 |
| Layout Considerations .....                                | 18 |
| Active Filters .....                                       | 18 |
| Analog-to-Digital and Digital-to-Analog Applications ..... | 19 |
| Sync Stripper .....                                        | 20 |
| Single-Supply Composite Video Line Driver .....            | 20 |
| Outline Dimensions .....                                   | 21 |
| Ordering Guide .....                                       | 23 |

### 2/03—Rev. C to Rev. D

|                                           |   |
|-------------------------------------------|---|
| Changes to General Description .....      | 1 |
| Changes to Specifications .....           | 3 |
| Changes to Absolute Maximum Ratings ..... | 6 |

### 1/03—Rev. B to Rev. C

|                                           |    |
|-------------------------------------------|----|
| Changes to General Description .....      | 1  |
| Changes to Pin Connections .....          | 1  |
| Changes to Specifications .....           | 2  |
| Changes to Absolute Maximum Ratings ..... | 9  |
| Changes to Figure 2 .....                 | 9  |
| Changes to Ordering Guide .....           | 9  |
| Updated Outline Dimensions .....          | 20 |

## SPECIFICATIONS

@  $T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $R_L = 2\text{ k}\Omega$  to  $2.5\text{ V}$ , unless otherwise noted.

Table 1.

| Parameter                              | Conditions                                                               | AD8051A/AD8052A |               |      | AD8054A |               |     | Unit    |
|----------------------------------------|--------------------------------------------------------------------------|-----------------|---------------|------|---------|---------------|-----|---------|
|                                        |                                                                          | Min             | Typ           | Max  | Min     | Typ           | Max |         |
| DYNAMIC PERFORMANCE                    |                                                                          |                 |               |      |         |               |     |         |
| –3 dB Small Signal Bandwidth           | G = +1, V <sub>OUT</sub> = 0.2 V p-p                                     | 70              | 110           |      | 80      | 150           |     | MHz     |
|                                        | G = –1, +2, V <sub>OUT</sub> = 0.2 V p-p                                 |                 | 50            |      |         | 60            |     | MHz     |
| Bandwidth for 0.1 dB Flatness          | G = +2, V <sub>OUT</sub> = 0.2 V p-p,<br>R <sub>L</sub> = 150 Ω to 2.5 V |                 |               |      |         |               |     |         |
|                                        | R <sub>F</sub> = 806 Ω (AD8051A/<br>AD8052A)                             |                 | 20            |      |         |               |     | MHz     |
|                                        | R <sub>F</sub> = 200 Ω (AD8054A)                                         |                 |               |      |         | 12            |     | MHz     |
| Slew Rate                              | G = –1, V <sub>OUT</sub> = 2 V step                                      | 100             | 145           |      | 140     | 170           |     | V/μs    |
| Full Power Response                    | G = +1, V <sub>OUT</sub> = 2 V p-p                                       |                 | 35            |      |         | 45            |     | MHz     |
| Settling Time to 0.1%                  | G = –1, V <sub>OUT</sub> = 2 V step                                      |                 | 50            |      |         | 40            |     | ns      |
| NOISE/DISTORTION PERFORMANCE           |                                                                          |                 |               |      |         |               |     |         |
| Total Harmonic Distortion <sup>1</sup> | f <sub>C</sub> = 5 MHz, V <sub>OUT</sub> = 2 V p-p,<br>G = +2            |                 | –67           |      |         | –68           |     | dB      |
| Input Voltage Noise                    | f = 10 kHz                                                               |                 | 16            |      |         | 16            |     | nV/√Hz  |
| Input Current Noise                    | f = 10 kHz                                                               |                 | 850           |      |         | 850           |     | fA/√Hz  |
| Differential Gain Error (NTSC)         | G = +2, R <sub>L</sub> = 150 Ω to 2.5 V                                  |                 | 0.09          |      |         | 0.07          |     | %       |
|                                        | R <sub>L</sub> = 1 kΩ to 2.5 V                                           |                 | 0.03          |      |         | 0.02          |     | %       |
| Differential Phase Error (NTSC)        | G = +2, R <sub>L</sub> = 150 Ω to 2.5 V                                  |                 | 0.19          |      |         | 0.26          |     | Degrees |
|                                        | R <sub>L</sub> = 1 kΩ to 2.5 V                                           |                 | 0.03          |      |         | 0.05          |     | Degrees |
| Crosstalk                              | f = 5 MHz, G = +2                                                        |                 | –60           |      |         | –60           |     | dB      |
| DC PERFORMANCE                         |                                                                          |                 |               |      |         |               |     |         |
| Input Offset Voltage                   | T <sub>MIN</sub> – T <sub>MAX</sub>                                      |                 | 1.7           | 10   |         | 1.7           | 12  | mV      |
|                                        |                                                                          |                 |               |      | 25      |               |     | 30      |
| Offset Drift                           |                                                                          |                 | 10            |      |         | 15            |     | μV/°C   |
| Input Bias Current                     | T <sub>MIN</sub> – T <sub>MAX</sub>                                      |                 | 1.4           | 2.5  |         | 2             | 4.5 | μA      |
|                                        |                                                                          |                 |               |      | 3.25    |               |     | 4.5     |
| Input Offset Current                   |                                                                          |                 | 0.1           | 0.75 |         | 0.2           | 1.2 | μA      |
| Open-Loop Gain                         | R <sub>L</sub> = 2 kΩ to 2.5 V                                           | 86              | 98            |      | 82      | 98            |     | dB      |
|                                        | T <sub>MIN</sub> – T <sub>MAX</sub>                                      |                 | 96            |      |         | 96            |     | dB      |
|                                        | R <sub>L</sub> = 150 Ω to 2.5 V                                          | 76              | 82            |      | 74      | 82            |     | dB      |
|                                        | T <sub>MIN</sub> – T <sub>MAX</sub>                                      |                 | 78            |      |         | 78            |     | dB      |
| INPUT CHARACTERISTICS                  |                                                                          |                 |               |      |         |               |     |         |
| Input Resistance                       |                                                                          |                 | 290           |      |         | 300           |     | kΩ      |
| Input Capacitance                      |                                                                          |                 | 1.4           |      |         | 1.5           |     | pF      |
| Input Common-Mode Voltage Range        |                                                                          |                 | –0.2 to<br>+4 |      |         | –0.2 to<br>+4 |     | V       |
| Common-Mode Rejection Ratio            | V <sub>CM</sub> = 0 V to 3.5 V                                           | 72              | 88            |      | 70      | 86            |     | dB      |

# AD8051/AD8052/AD8054

| Parameter                    | Conditions                          | AD8051A/AD8052A |                |      | AD8054A        |               |       | Unit |
|------------------------------|-------------------------------------|-----------------|----------------|------|----------------|---------------|-------|------|
|                              |                                     | Min             | Typ            | Max  | Min            | Typ           | Max   |      |
| OUTPUT CHARACTERISTICS       |                                     |                 |                |      |                |               |       |      |
| Output Voltage Swing         | R <sub>L</sub> = 10 kΩ to 2.5 V     |                 | 0.015 to 4.985 |      |                | 0.03 to 4.975 |       | V    |
|                              | R <sub>L</sub> = 2 kΩ to 2.5 V      | 0.1 to 4.9      | 0.025 to 4.975 |      | 0.125 to 4.875 | 0.05 to 4.95  |       | V    |
|                              | R <sub>L</sub> = 150 Ω to 2.5 V     | 0.3 to 4.625    | 0.2 to 4.8     |      | 0.55 to 4.4    | 0.25 to 4.65  |       | V    |
| Output Current               | V <sub>OUT</sub> = 0.5 V to 4.5 V   |                 | 45             |      |                | 30            |       | mA   |
|                              | T <sub>MIN</sub> – T <sub>MAX</sub> |                 | 45             |      |                | 30            |       | mA   |
| Short-Circuit Current        | Sourcing                            |                 | 80             |      |                | 45            |       | mA   |
|                              | Sinking                             |                 | 130            |      |                | 85            |       | mA   |
| Capacitive Load Drive        | G = +1 (AD8051/AD8052)              |                 | 50             |      |                |               |       | pF   |
|                              | G = +2 (AD8054)                     |                 |                |      |                | 40            |       | pF   |
| POWER SUPPLY                 |                                     |                 |                |      |                |               |       |      |
| Operating Range              |                                     | 3               |                | 12   | 3              |               | 12    | V    |
| Quiescent Current/Amplifier  |                                     |                 | 4.4            | 5    |                | 2.75          | 3.275 | mA   |
| Power Supply Rejection Ratio | ΔV <sub>S</sub> = ±1 V              | 70              | 80             |      | 68             | 80            |       | dB   |
| OPERATING TEMPERATURE RANGE  |                                     |                 |                |      |                |               |       |      |
|                              | RJ-5                                | −40             |                | +85  |                |               |       | °C   |
|                              | RM-8, R-8, RU-14, R-14              | −40             |                | +125 | −40            |               | +125  | °C   |

<sup>1</sup> Refer to Figure 19.

@  $T_A = 25^\circ\text{C}$ ,  $V_S = 3\text{ V}$ ,  $R_L = 2\text{ k}\Omega$  to  $1.5\text{ V}$ , unless otherwise noted.

Table 2.

| Parameter                              | Conditions                                                                                  | AD8051A/AD8052A |            |     | AD8054A |            |     | Unit    |
|----------------------------------------|---------------------------------------------------------------------------------------------|-----------------|------------|-----|---------|------------|-----|---------|
|                                        |                                                                                             | Min             | Typ        | Max | Min     | Typ        | Max |         |
| DYNAMIC PERFORMANCE                    |                                                                                             |                 |            |     |         |            |     |         |
| –3 dB Small Signal Bandwidth           | G = +1, V <sub>OUT</sub> = 0.2 V p-p                                                        | 70              | 110        |     | 80      | 135        |     | MHz     |
|                                        | G = –1, +2, V <sub>OUT</sub> = 0.2 V p-p                                                    |                 | 50         |     |         | 65         |     | MHz     |
| Bandwidth for 0.1 dB Flatness          | G = +2, V <sub>OUT</sub> = 0.2 V p-p, R <sub>L</sub> = 150 Ω to 2.5 V                       |                 | 17         |     |         | 10         |     | MHz     |
|                                        | R <sub>F</sub> = 402 Ω (AD8051A/AD8052A)                                                    |                 |            |     |         |            |     |         |
|                                        | R <sub>F</sub> = 200 Ω (AD8054A)                                                            |                 |            |     |         |            |     | MHz     |
| Slew Rate                              | G = –1, V <sub>OUT</sub> = 2 V step                                                         | 90              | 135        |     | 110     | 150        |     | V/μs    |
| Full Power Response                    | G = +1, V <sub>OUT</sub> = 1 V p-p                                                          |                 | 65         |     |         | 85         |     | MHz     |
| Settling Time to 0.1%                  | G = –1, V <sub>OUT</sub> = 2 V step                                                         |                 | 55         |     |         | 55         |     | ns      |
| NOISE/DISTORTION PERFORMANCE           |                                                                                             |                 |            |     |         |            |     |         |
| Total Harmonic Distortion <sup>1</sup> | f <sub>C</sub> = 5 MHz, V <sub>OUT</sub> = 2 V p-p, G = –1, R <sub>L</sub> = 100 Ω to 1.5 V |                 | –47        |     |         | –48        |     | dB      |
| Input Voltage Noise                    | f = 10 kHz                                                                                  |                 | 16         |     |         | 16         |     | nV/√Hz  |
| Input Current Noise                    | f = 10 kHz                                                                                  |                 | 600        |     |         | 600        |     | fA/√Hz  |
| Differential Gain Error (NTSC)         | G = +2, V <sub>CM</sub> = 1 V                                                               |                 |            |     |         |            |     |         |
|                                        | R <sub>L</sub> = 150 Ω to 1.5 V                                                             |                 | 0.11       |     |         | 0.13       |     | %       |
|                                        | R <sub>L</sub> = 1 kΩ to 1.5 V                                                              |                 | 0.09       |     |         | 0.09       |     | %       |
| Differential Phase Error (NTSC)        | G = +2, V <sub>CM</sub> = 1 V                                                               |                 |            |     |         |            |     |         |
|                                        | R <sub>L</sub> = 150 Ω to 1.5 V                                                             |                 | 0.24       |     |         | 0.3        |     | Degrees |
|                                        | R <sub>L</sub> = 1 kΩ to 1.5 V                                                              |                 | 0.10       |     |         | 0.1        |     | Degrees |
| Crosstalk                              | f = 5 MHz, G = +2                                                                           |                 | –60        |     |         | –60        |     | dB      |
| DC PERFORMANCE                         |                                                                                             |                 |            |     |         |            |     |         |
| Input Offset Voltage                   | T <sub>MIN</sub> – T <sub>MAX</sub>                                                         |                 | 1.6        | 10  |         | 1.6        | 12  | mV      |
|                                        |                                                                                             |                 |            |     | 25      |            |     | 30      |
| Offset Drift                           |                                                                                             |                 | 10         |     |         | 15         |     | μV/°C   |
| Input Bias Current                     | T <sub>MIN</sub> – T <sub>MAX</sub>                                                         |                 | 1.3        | 2.6 |         | 2          | 4.5 | μA      |
|                                        |                                                                                             |                 |            |     | 3.25    |            |     | 4.5     |
| Input Offset Current                   |                                                                                             |                 | 0.15       | 0.8 |         | 0.2        | 1.2 | μA      |
| Open-Loop Gain                         | R <sub>L</sub> = 2 kΩ                                                                       | 80              | 96         |     | 80      | 96         |     | dB      |
|                                        | T <sub>MIN</sub> – T <sub>MAX</sub>                                                         |                 | 94         |     |         | 94         |     | dB      |
|                                        | R <sub>L</sub> = 150 Ω                                                                      | 74              | 82         |     | 72      | 80         |     | dB      |
|                                        | T <sub>MIN</sub> – T <sub>MAX</sub>                                                         |                 | 76         |     |         | 76         |     | dB      |
| INPUT CHARACTERISTICS                  |                                                                                             |                 |            |     |         |            |     |         |
| Input Resistance                       |                                                                                             |                 | 290        |     |         | 300        |     | kΩ      |
| Input Capacitance                      |                                                                                             |                 | 1.4        |     |         | 1.5        |     | pF      |
| Input Common-Mode Voltage Range        |                                                                                             |                 | –0.2 to +2 |     |         | –0.2 to +2 |     | V       |
| Common-Mode Rejection Ratio            | V <sub>CM</sub> = 0 V to 1.5 V                                                              | 72              | 88         |     | 70      | 86         |     | dB      |

# AD8051/AD8052/AD8054

| Parameter                    | Conditions                          | AD8051A/AD8052A |                |      | AD8054A      |               |       | Unit |
|------------------------------|-------------------------------------|-----------------|----------------|------|--------------|---------------|-------|------|
|                              |                                     | Min             | Typ            | Max  | Min          | Typ           | Max   |      |
| OUTPUT CHARACTERISTICS       |                                     |                 |                |      |              |               |       |      |
| Output Voltage Swing         | R <sub>L</sub> = 10 kΩ to 1.5 V     |                 | 0.01 to 2.99   |      |              | 0.025 to 2.98 |       | V    |
|                              | R <sub>L</sub> = 2 kΩ to 1.5 V      | 0.075 to 2.9    | 0.02 to 2.98   |      | 0.1 to 2.9   | 0.35 to 2.965 |       | V    |
|                              | R <sub>L</sub> = 150 Ω to 1.5 V     | 0.2 to 2.75     | 0.125 to 2.875 |      | 0.35 to 2.55 | 0.15 to 2.75  |       | V    |
| Output Current               | V <sub>OUT</sub> = 0.5 V to 2.5 V   |                 | 45             |      |              | 25            |       | mA   |
|                              | T <sub>MIN</sub> – T <sub>MAX</sub> |                 | 45             |      |              | 25            |       | mA   |
| Short-Circuit Current        | Sourcing                            |                 | 60             |      |              | 30            |       | mA   |
|                              | Sinking                             |                 | 90             |      |              | 50            |       | mA   |
| Capacitive Load Drive        | G = +1 (AD8051/AD8052)              |                 | 45             |      |              |               |       | pF   |
|                              | G = +2 (AD8054)                     |                 |                |      |              | 35            |       | pF   |
| POWER SUPPLY                 |                                     |                 |                |      |              |               |       |      |
| Operating Range              |                                     | 3               |                | 12   | 3            |               | 12    | V    |
| Quiescent Current/Amplifier  |                                     |                 | 4.2            | 4.8  |              | 2.625         | 3.125 | mA   |
| Power Supply Rejection Ratio | ΔV <sub>S</sub> = 0.5 V             | 68              | 80             |      | 68           | 80            |       | dB   |
| OPERATING TEMPERATURE RANGE  |                                     |                 |                |      |              |               |       |      |
|                              | RJ-5                                | –40             |                | +85  |              |               |       | °C   |
|                              | RM-8, R-8, RU-14, R-14              | –40             |                | +125 | –40          |               | +125  | °C   |

<sup>1</sup> Refer to Figure 19.

@  $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 5\text{ V}$ ,  $R_L = 2\text{ k}\Omega$  to ground, unless otherwise noted.

Table 3.

| Parameter                       | Conditions                                                                                                                                            | AD8051A/AD8052A   |                   |      | AD8054A         |                   |     | Unit    |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|------|-----------------|-------------------|-----|---------|
|                                 |                                                                                                                                                       | Min               | Typ               | Max  | Min             | Typ               | Max |         |
| DYNAMIC PERFORMANCE             |                                                                                                                                                       |                   |                   |      |                 |                   |     |         |
| –3 dB Small Signal Bandwidth    | G = +1, V <sub>OUT</sub> = 0.2 V p-p                                                                                                                  | 70                | 110               |      | 85              | 160               |     | MHz     |
|                                 | G = –1, +2, V <sub>OUT</sub> = 0.2 V p-p                                                                                                              |                   | 50                |      |                 | 65                |     | MHz     |
| Bandwidth for 0.1 dB Flatness   | G = +2, V <sub>OUT</sub> = 0.2 V p-p,<br>R <sub>L</sub> = 150 Ω,<br>R <sub>F</sub> = 1.1 kΩ (AD8051A/<br>AD8052A)<br>R <sub>F</sub> = 200 Ω (AD8054A) |                   | 20                |      |                 | 15                |     | MHz     |
| Slew Rate                       | G = –1, V <sub>OUT</sub> = 2 V step                                                                                                                   | 105               | 170               |      | 150             | 190               |     | V/μs    |
| Full Power Response             | G = +1, V <sub>OUT</sub> = 2 V p-p                                                                                                                    |                   | 40                |      |                 | 50                |     | MHz     |
| Settling Time to 0.1%           | G = –1, V <sub>OUT</sub> = 2 V step                                                                                                                   |                   | 50                |      |                 | 40                |     | MHz     |
| NOISE/DISTORTION PERFORMANCE    |                                                                                                                                                       |                   |                   |      |                 |                   |     |         |
| Total Harmonic Distortion       | f <sub>C</sub> = 5 MHz, V <sub>OUT</sub> = 2 V p-p,<br>G = +2                                                                                         |                   | –71               |      |                 | –72               |     | dB      |
| Input Voltage Noise             | f = 10 kHz                                                                                                                                            |                   | 16                |      |                 | 16                |     | nV/√Hz  |
| Input Current Noise             | f = 10 kHz                                                                                                                                            |                   | 900               |      |                 | 900               |     | fA/√Hz  |
| Differential Gain Error (NTSC)  | G = +2, R <sub>L</sub> = 150 Ω                                                                                                                        |                   | 0.02              |      |                 | 0.06              |     | %       |
|                                 | R <sub>L</sub> = 1 kΩ                                                                                                                                 |                   | 0.02              |      |                 | 0.02              |     | %       |
| Differential Phase Error (NTSC) | G = +2, R <sub>L</sub> = 150 Ω                                                                                                                        |                   | 0.11              |      |                 | 0.15              |     | Degrees |
|                                 | R <sub>L</sub> = 1 kΩ                                                                                                                                 |                   | 0.02              |      |                 | 0.03              |     | Degrees |
| Crosstalk                       | f = 5 MHz, G = +2                                                                                                                                     |                   | –60               |      |                 | –60               |     | dB      |
| DC PERFORMANCE                  |                                                                                                                                                       |                   |                   |      |                 |                   |     |         |
| Input Offset Voltage            | T <sub>MIN</sub> – T <sub>MAX</sub>                                                                                                                   |                   | 1.8               | 11   |                 | 1.8               | 13  | mV      |
|                                 |                                                                                                                                                       |                   |                   |      | 27              |                   |     | 32      |
| Offset Drift                    |                                                                                                                                                       |                   | 10                |      |                 | 15                |     | μV/°C   |
| Input Bias Current              | T <sub>MIN</sub> – T <sub>MAX</sub>                                                                                                                   |                   | 1.4               | 2.6  |                 | 2                 | 4.5 | μA      |
|                                 |                                                                                                                                                       |                   |                   |      | 3.5             |                   | 4.5 | μA      |
| Input Offset Current            |                                                                                                                                                       |                   | 0.1               | 0.75 |                 | 0.2               | 1.2 | μA      |
| Open-Loop Gain                  | R <sub>L</sub> = 2 kΩ                                                                                                                                 | 88                | 96                |      | 84              | 96                |     | dB      |
|                                 | T <sub>MIN</sub> – T <sub>MAX</sub>                                                                                                                   |                   | 96                |      |                 | 96                |     | dB      |
|                                 | R <sub>L</sub> = 150 Ω                                                                                                                                | 78                | 82                |      | 76              | 82                |     | dB      |
|                                 | T <sub>MIN</sub> – T <sub>MAX</sub>                                                                                                                   |                   | 80                |      |                 | 80                |     | dB      |
| INPUT CHARACTERISTICS           |                                                                                                                                                       |                   |                   |      |                 |                   |     |         |
| Input Resistance                |                                                                                                                                                       |                   | 290               |      |                 | 300               |     | kΩ      |
| Input Capacitance               |                                                                                                                                                       |                   | 1.4               |      |                 | 1.5               |     | pF      |
| Input Common-Mode Voltage Range |                                                                                                                                                       |                   | –5.2 to<br>+4     |      |                 | –5.2 to<br>+4     |     | V       |
| Common-Mode Rejection Ratio     | V <sub>CM</sub> = –5 V to +3.5 V                                                                                                                      | 72                | 88                |      | 70              | 86                |     | dB      |
| OUTPUT CHARACTERISTICS          |                                                                                                                                                       |                   |                   |      |                 |                   |     |         |
| Output Voltage Swing            | R <sub>L</sub> = 10 kΩ                                                                                                                                |                   | –4.98 to<br>+4.98 |      |                 | –4.97 to<br>+4.97 |     | V       |
|                                 | R <sub>L</sub> = 2 kΩ                                                                                                                                 | –4.85 to<br>+4.85 | –4.97 to<br>+4.97 |      | –4.8 to<br>+4.8 | –4.9 to<br>+4.9   |     | V       |
|                                 | R <sub>L</sub> = 150 Ω                                                                                                                                | –4.45 to<br>+4.3  | –4.6 to<br>+4.6   |      | –4.0 to<br>+3.8 | –4.5 to<br>+4.5   |     | V       |
| Output Current                  | V <sub>OUT</sub> = –4.5 V to +4.5 V                                                                                                                   |                   | 45                |      |                 | 30                |     | mA      |
|                                 | T <sub>MIN</sub> – T <sub>MAX</sub>                                                                                                                   |                   | 45                |      |                 | 30                |     | mA      |
| Short-Circuit Current           | Sourcing                                                                                                                                              |                   | 100               |      |                 | 60                |     | mA      |
|                                 | Sinking                                                                                                                                               |                   | 160               |      |                 | 100               |     | mA      |
| Capacitive Load Drive           | G = +1 (AD8051/AD8052)                                                                                                                                |                   | 50                |      |                 |                   |     | pF      |
|                                 | G = +2 (AD8054)                                                                                                                                       |                   |                   |      |                 | 40                |     | pF      |

# AD8051/AD8052/AD8054

| Parameter                    | Conditions             | AD8051A/AD8052A |     |      | AD8054A |       |      | Unit |
|------------------------------|------------------------|-----------------|-----|------|---------|-------|------|------|
|                              |                        | Min             | Typ | Max  | Min     | Typ   | Max  |      |
| POWER SUPPLY                 |                        |                 |     |      |         |       |      |      |
| Operating Range              |                        | 3               |     | 12   | 3       |       | 12   | V    |
| Quiescent Current/Amplifier  |                        |                 | 4.8 | 5.5  |         | 2.875 | 3.4  | mA   |
| Power Supply Rejection Ratio | $\Delta V_S = \pm 1$   | 68              | 80  |      | 68      | 80    |      | dB   |
| OPERATING TEMPERATURE RANGE  | RJ-5                   | −40             |     | +85  |         |       |      | °C   |
|                              | RM-8, R-8, RU-14, R-14 | −40             |     | +125 | −40     |       | +125 | °C   |

## ABSOLUTE MAXIMUM RATINGS

Table 4.

| Parameter                               | Ratings                       |
|-----------------------------------------|-------------------------------|
| Supply Voltage                          | 12.6 V                        |
| Internal Power Dissipation <sup>1</sup> |                               |
| SOIC Packages                           | Observe power derating curves |
| SOT-23 Package                          | Observe power derating curves |
| MSOP Package                            | Observe power derating curves |
| TSSOP Package                           | Observe power derating curves |
| Input Voltage (Common Mode)             | $\pm V_S$                     |
| Differential Input Voltage              | $\pm 2.5$ V                   |
| Output Short-Circuit Duration           | Observe power derating curves |
| Storage Temperature Range (R)           | -65°C to +150°C               |
| Operating Temperature Range (A Grade)   | -40°C to +125°C               |
| Lead Temperature (Soldering 10 sec)     | 300°C                         |

<sup>1</sup> See Table 5.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### THERMAL RESISTANCE

Specification is for device in free air.

Table 5. Thermal Resistance

| Package Type  | $\theta_{JA}$ | Unit |
|---------------|---------------|------|
| 8-Lead SOIC   | 125           | °C/W |
| 5-Lead SOT-23 | 180           | °C/W |
| 8-Lead MSOP   | 150           | °C/W |
| 14-Lead SOIC  | 90            | °C/W |
| 14-Lead TSSOP | 120           | °C/W |

### MAXIMUM POWER DISSIPATION

The maximum power that can be safely dissipated by the AD8051/AD8052/AD8054 is limited by the associated rise in junction temperature. The maximum safe junction temperature for plastic encapsulated devices is determined by the glass transition temperature of the plastic, approximately 150°C. Temporarily exceeding this limit can cause a shift in parametric performance due to a change in the stresses exerted on the die by the package. Exceeding a junction temperature of 175°C for an extended period can result in device failure.

While the AD8051/AD8052/AD8054 are internally short-circuit protected, this cannot be sufficient to guarantee that the maximum junction temperature (150°C) is not exceeded under all conditions. To ensure proper operation, it is necessary to observe the maximum power derating curves.

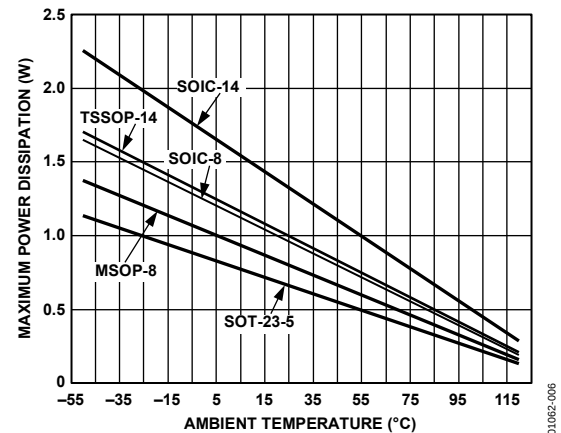


Figure 6. Maximum Power Dissipation vs. Temperature for AD8051/AD8052/AD8054

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TYPICAL PERFORMANCE CHARACTERISTICS

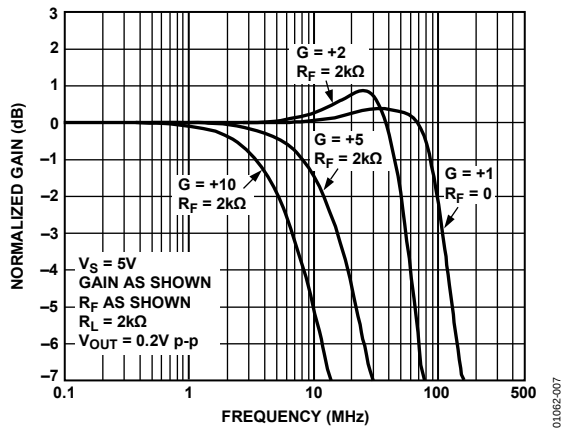


Figure 7. AD8051/AD8052 Normalized Gain vs. Frequency;  $V_S = 5V$

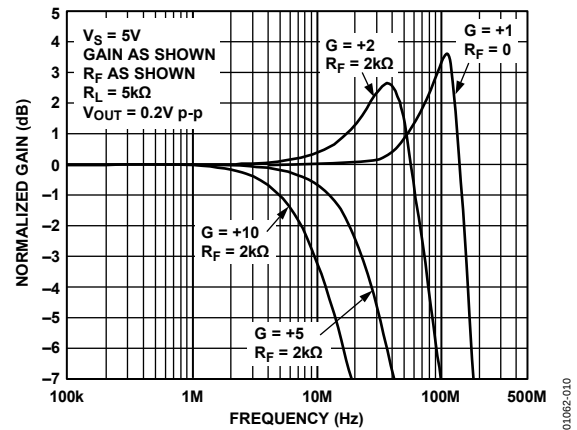


Figure 10. AD8054 Normalized Gain vs. Frequency;  $V_S = 5V$

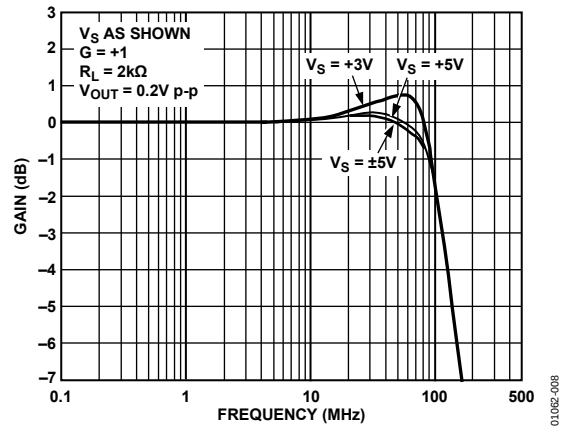


Figure 8. AD8051/AD8052 Gain vs. Frequency vs. Supply

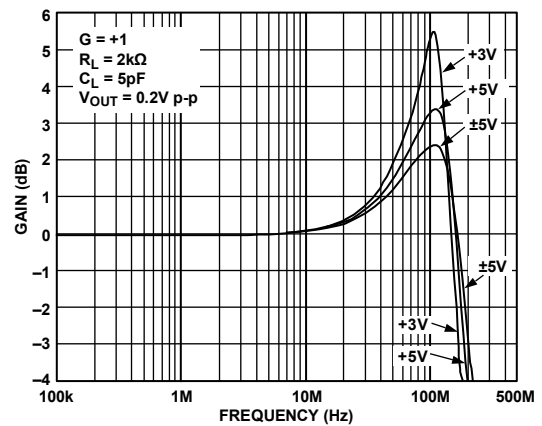


Figure 11. AD8054 Gain vs. Frequency vs. Supply

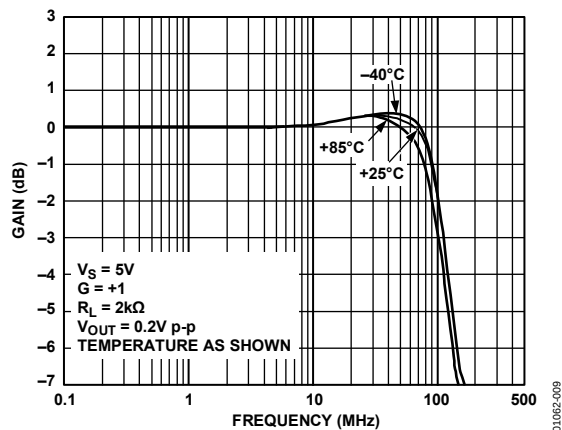


Figure 9. AD8051/AD8052 Gain vs. Frequency vs. Temperature

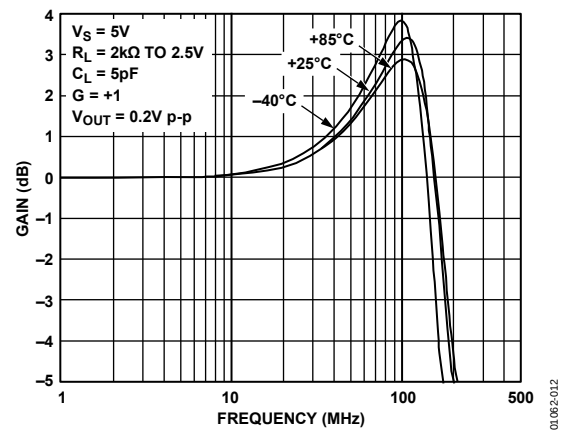


Figure 12. AD8054 Gain vs. Frequency vs. Temperature

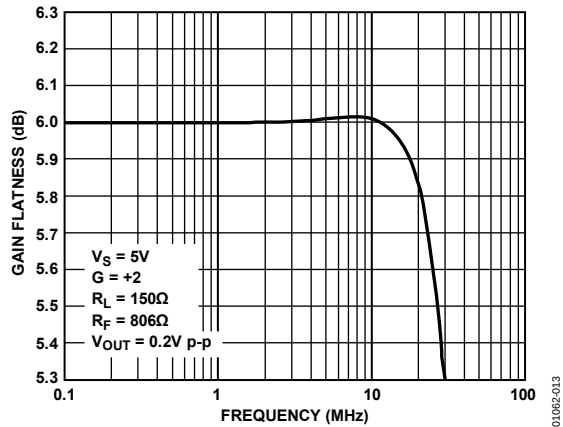


Figure 13. AD8051/AD8052 0.1 dB Gain Flatness vs. Frequency;  $G = +2$

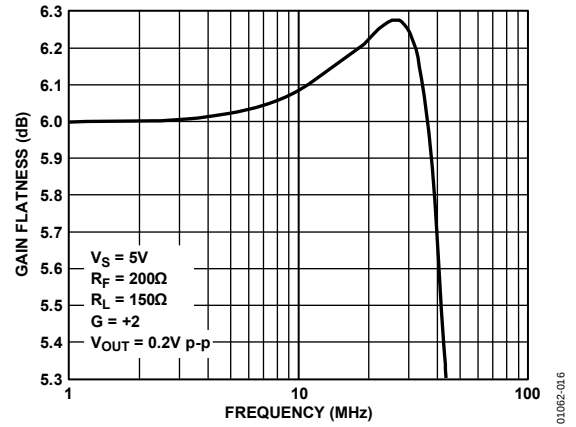


Figure 16. AD8054 0.1 dB Gain Flatness vs. Frequency;  $G = +2$

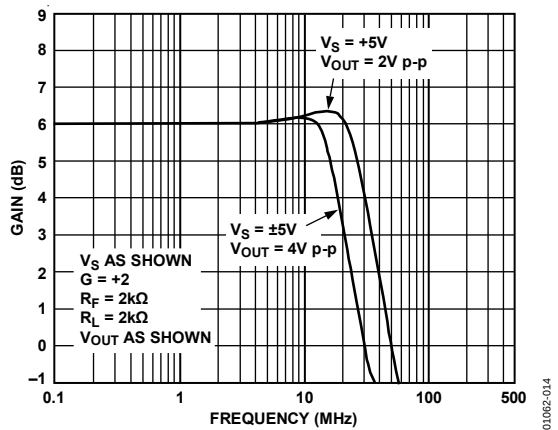


Figure 14. AD8051/AD8052 Large Signal Frequency Response;  $G = +2$

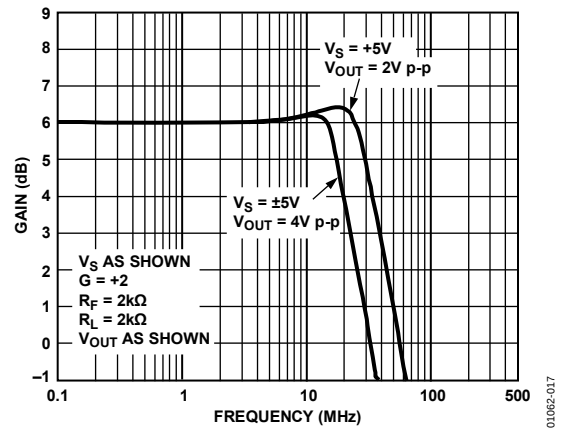


Figure 17. AD8054 Large Signal Frequency Response;  $G = +2$

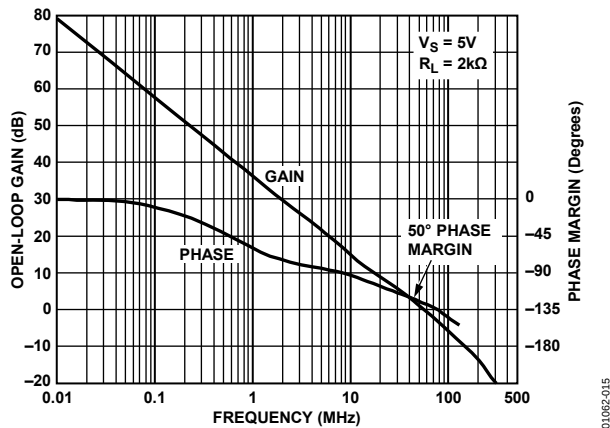


Figure 15. AD8051/AD8052 Open-Loop Gain and Phase vs. Frequency

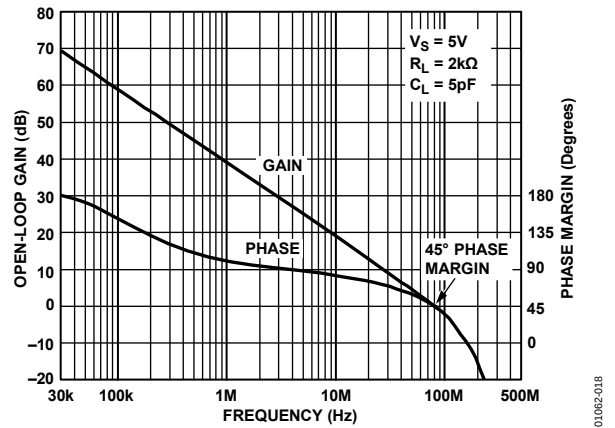


Figure 18. AD8054 Open-Loop Gain and Phase Margin vs. Frequency

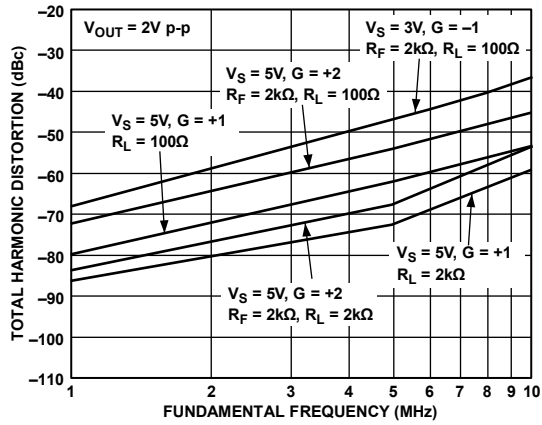


Figure 19. Total Harmonic Distortion

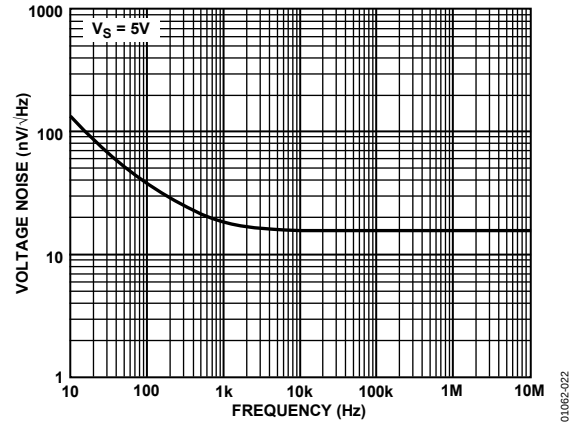


Figure 22. Input Voltage Noise vs. Frequency

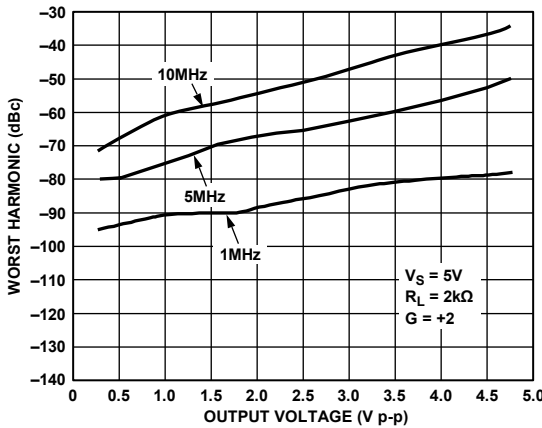


Figure 20. Worst Harmonic vs. Output Voltage

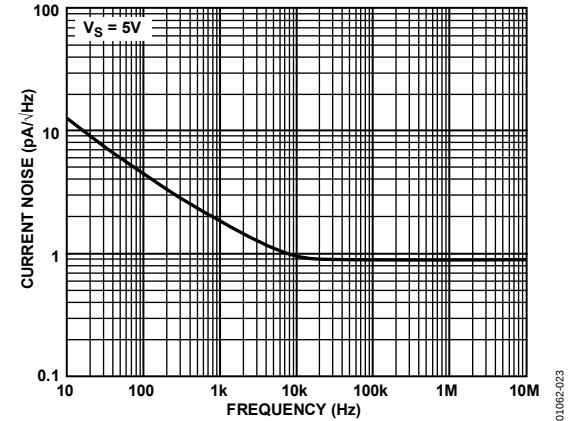


Figure 23. Input Current Noise vs. Frequency

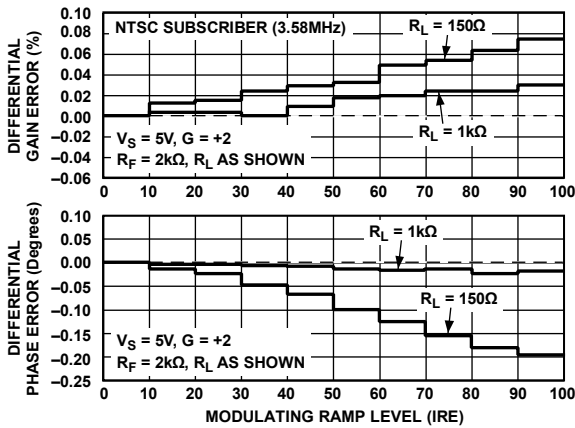


Figure 21. AD8051/AD8052 Differential Gain and Phase Errors

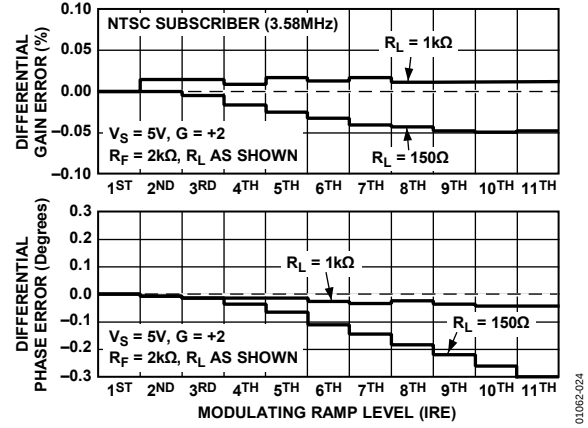


Figure 24. AD8054 Differential Gain and Phase Errors

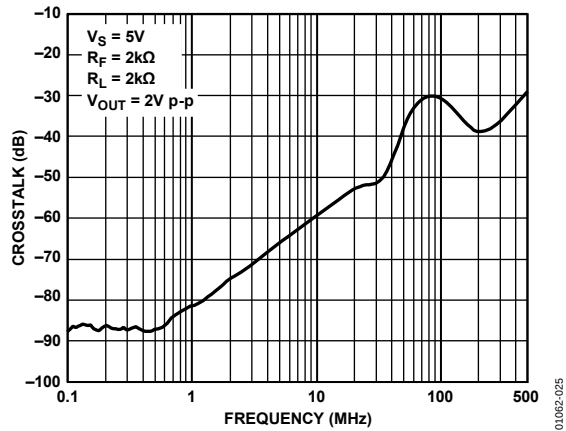


Figure 25. AD8052 Crosstalk (Output-to-Output) vs. Frequency

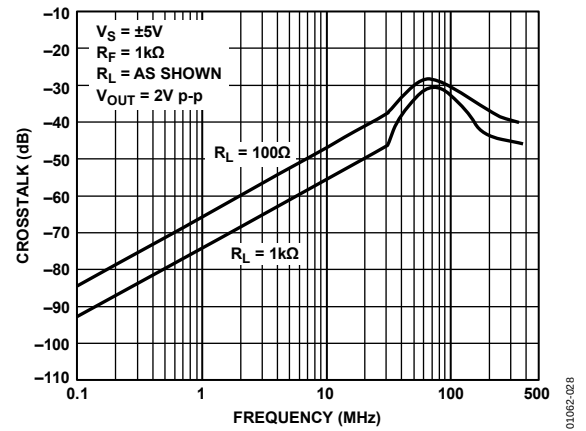


Figure 28. AD8054 Crosstalk (Output-to-Output) vs. Frequency

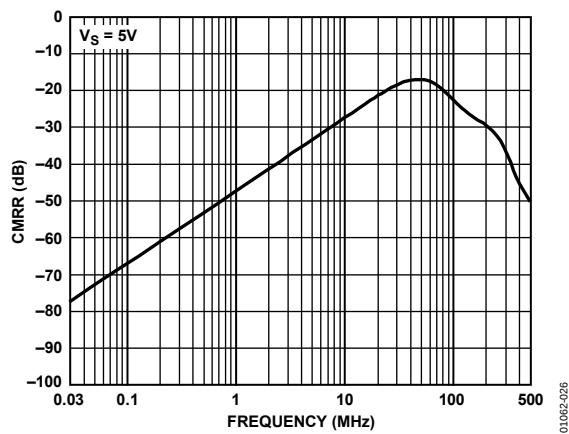


Figure 26. CMRR vs. Frequency

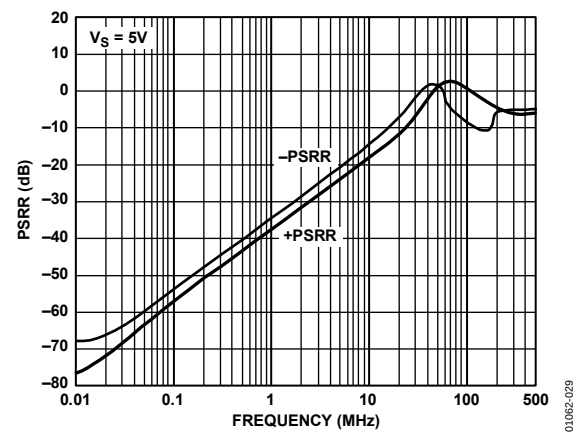


Figure 29. PSRR vs. Frequency

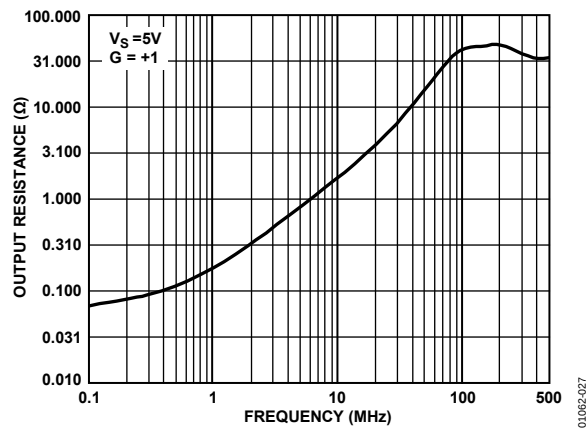


Figure 27. Closed-Loop Output Resistance vs. Frequency

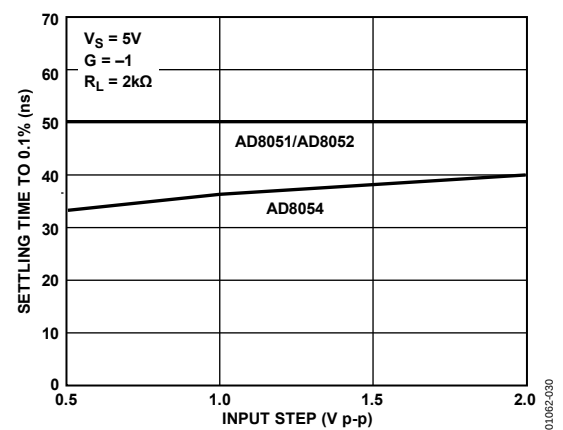


Figure 30. Settling Time vs. Input Step

# AD8051/AD8052/AD8054

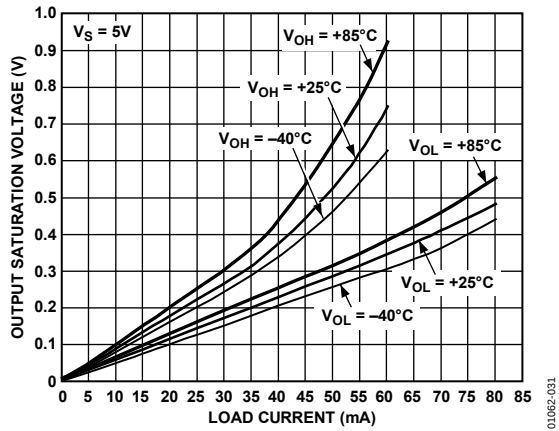


Figure 31. AD8051/AD8052 Output Saturation Voltage vs. Load Current

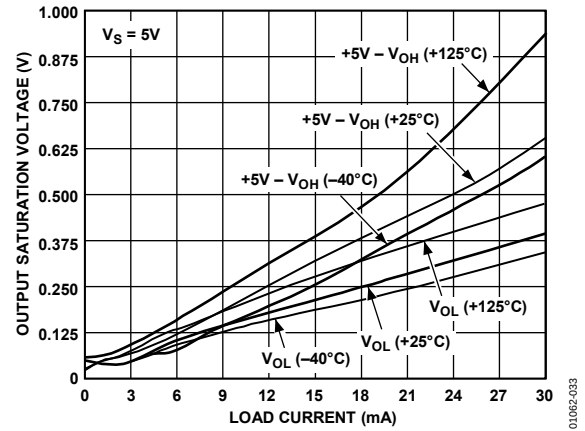


Figure 33. AD8054 Output Saturation Voltage vs. Load Current

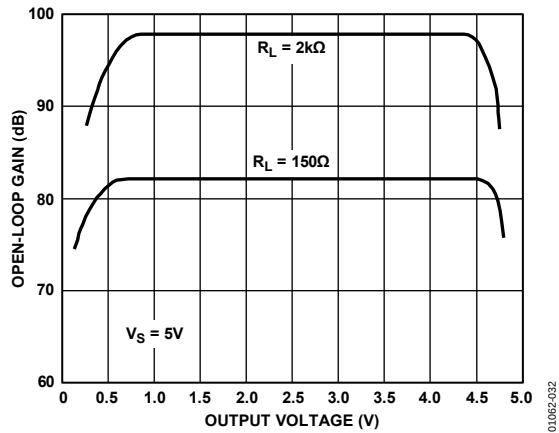


Figure 32. Open-Loop Gain vs. Output Voltage

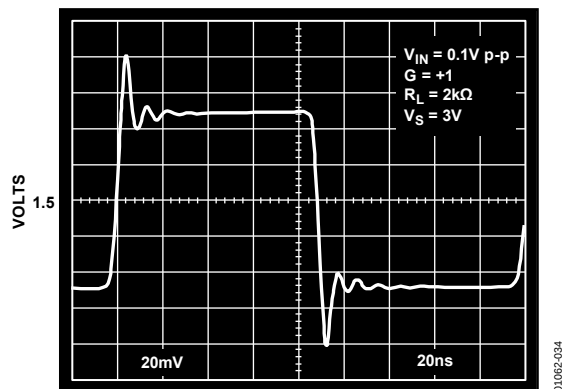


Figure 34. 100 mV Step Response,  $G = +1$

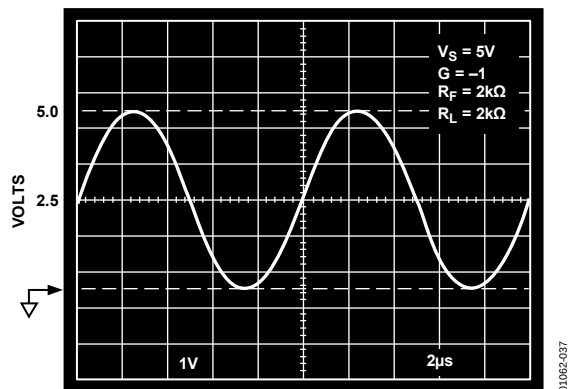


Figure 37. Output Swing;  $G = -1$ ,  $R_L = 2k\Omega$

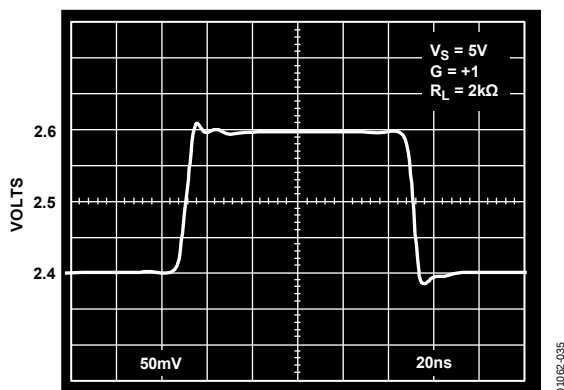


Figure 35. AD8051/AD8052 200 mV Step Response;  $V_S = 5V$ ,  $G = +1$

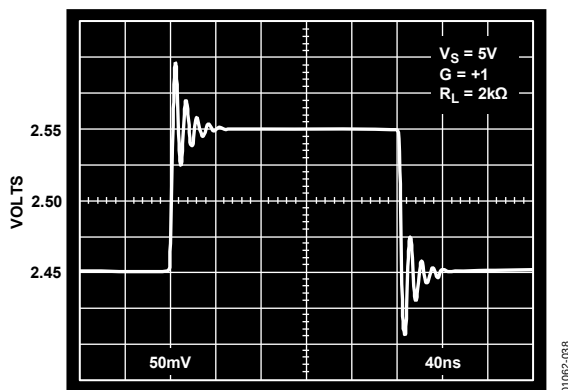


Figure 38. AD8054 100 mV Step Response;  $V_S = 5V$ ,  $G = +1$

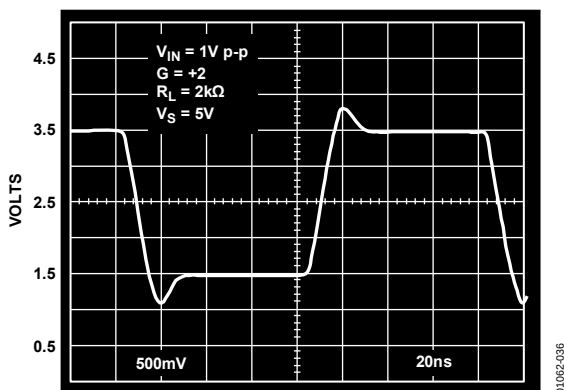


Figure 36. Large Signal Step Response;  $V_S = 5V$ ,  $G = +2$

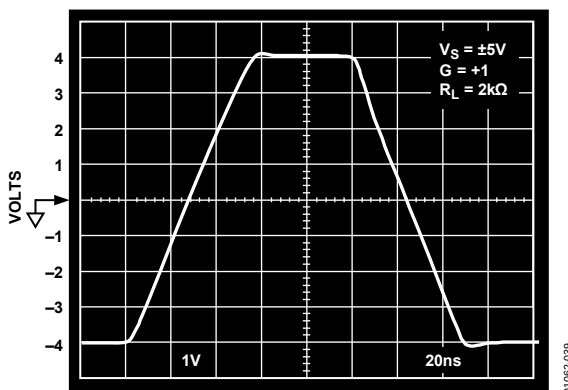


Figure 39. Large Signal Step Response;  $V_S = \pm 5V$ ,  $G = +1$



## APPLICATION INFORMATION

### OVERDRIVE RECOVERY

Overdrive of an amplifier occurs when the output and/or input range is exceeded. The amplifier must recover from this overdrive condition. As shown in Figure 41, the AD8051/AD8052/AD8054 recover within 60 ns from negative overdrive and within 45 ns from positive overdrive.

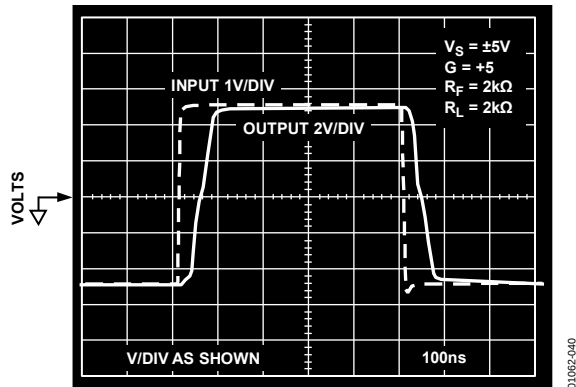


Figure 41. Overdrive Recovery

### DRIVING CAPACITIVE LOADS

Consider the AD8051/AD8052 in a closed-loop gain of +1 with  $V_S = 5\text{ V}$  and a load of  $2\text{ k}\Omega$  in parallel with  $50\text{ pF}$ . Figure 42 and Figure 43 show their frequency and time domain responses, respectively, to a small-signal excitation. The capacitive load drive of the AD8051/AD8052/AD8054 can be increased by adding a low value resistor in series with the load. Figure 44 and Figure 45 show the effect of a series resistor on the capacitive drive for varying voltage gains. As the closed-loop gain is increased, the larger phase margin allows for larger capacitive loads with less peaking. Adding a series resistor with lower closed-loop gains accomplishes the same effect. For large capacitive loads, the frequency response of the amplifier is dominated by the roll-off of the series resistor and the load capacitance.

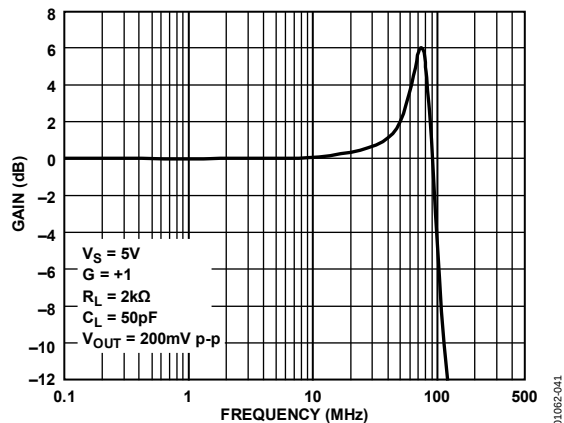


Figure 42. AD8051/AD8052 Closed-Loop Frequency Response;  $C_L = 50\text{ pF}$

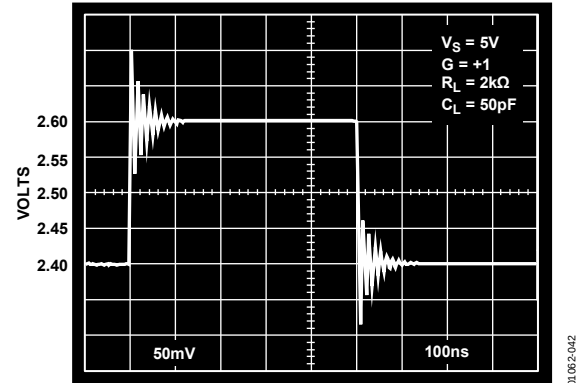


Figure 43. AD8051/AD8052 200 mV Step Response;  $C_L = 50\text{ pF}$

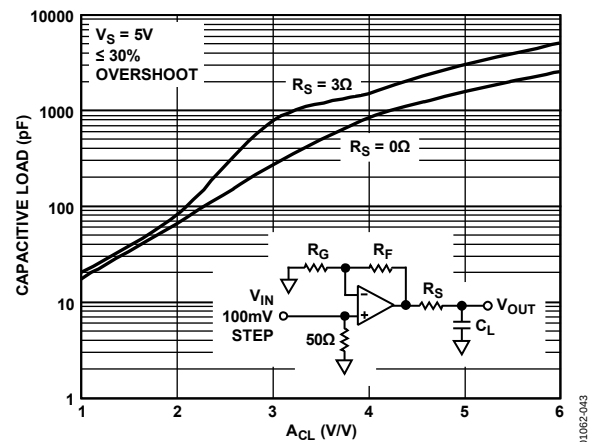


Figure 44. AD8051/AD8052 Capacitive Load Drive vs. Closed-Loop Gain

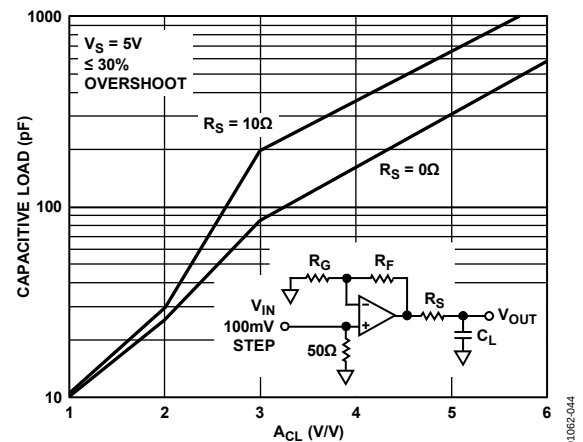


Figure 45. AD8054 Capacitive Load Drive vs. Closed-Loop Gain

# AD8051/AD8052/AD8054

## LAYOUT CONSIDERATIONS

The specified high speed performance of the AD8051/AD8052/AD8054 requires careful attention to board layout and component selection. Proper RF design techniques and low parasitic component selection are necessary.

The PCB should have a ground plane covering all unused portions of the component side of the board to provide a low impedance path. The ground plane should be removed from the area near the input pins to reduce parasitic capacitance.

Chip capacitors should be used for supply bypassing. One end should be connected to the ground plane and the other within 3 mm of each power pin. An additional large (4.7  $\mu\text{F}$  to 10  $\mu\text{F}$ ) tantalum electrolytic capacitor should be connected in parallel, but not necessarily so close, to supply current for fast, large signal changes at the output.

The feedback resistor should be located close to the inverting input pin to keep the parasitic capacitance at this node to a minimum. Parasitic capacitance of less than 1 pF at the inverting input can significantly affect high speed performance.

Stripline design techniques should be used for long signal traces (greater than about 25 mm). These should be designed with a characteristic impedance of 50  $\Omega$  or 75  $\Omega$  and be properly terminated at each end.

## ACTIVE FILTERS

Active filters at higher frequencies require wider bandwidth op amps to work effectively. Excessive phase shift produced by lower frequency op amps can significantly affect active filter performance.

Figure 46 shows an example of a 2 MHz biquad bandwidth filter that uses three op amps of an AD8054. Such circuits are sometimes used in medical ultrasound systems to lower the

noise bandwidth of the analog signal before analog-to-digital conversion.

Note that the unused amplifier's inputs should be tied to ground.

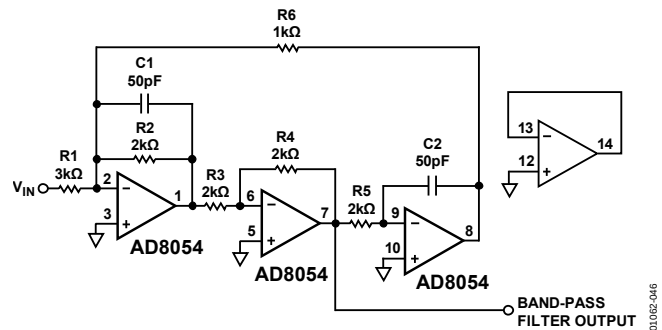


Figure 46. 2 MHz Biquad Band-Pass Filter Using AD8054

The frequency response of the circuit is shown in Figure 47.

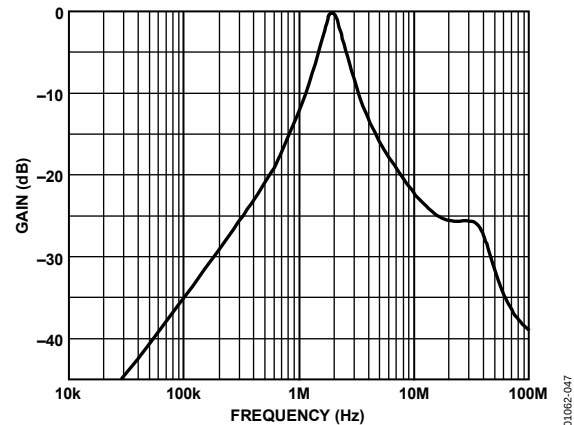


Figure 47. Frequency Response of 2 MHz Band-Pass Biquad Filter

## ANALOG-TO-DIGITAL AND DIGITAL-TO-ANALOG APPLICATIONS

Figure 50 is a schematic showing the AD8051 used as a driver for an AD9201, a 10-bit, 20 MSPS, dual analog-to-digital converter. This converter is designed to convert I and Q signals in communications systems. In this application, only the I channel is being driven. The I channel is enabled by applying a logic high to SELECT (Pin 13).

The AD8051 is running from a dual supply and is configured for a gain of +2. The input signal is terminated in  $50\ \Omega$  and the output is 2 V p-p, which is the maximum input range of the AD9201. The  $22\ \Omega$  series resistor limits the maximum current that flows and helps to lower the distortion of the ADC.

The AD9201 has differential inputs for each channel. These are designated the A and B inputs. The B inputs of each channel are connected to VREF (Pin 22), which supplies a positive reference of 2.5 V. Each of the B inputs has a small low-pass filter that also helps to reduce distortion.

The output of the op amp is ac-coupled into INA-I (Pin 16) via two parallel capacitors to provide good high frequency and low frequency coupling. The 1 k $\Omega$  resistor references the signal to VREF that is applied to INB-I. Thus, INA-I swings both positive and negative with respect to the bias voltage applied to INB-I.

With the sampling clock running at 20 MSPS, the analog-to-digital output was analyzed with a digital analyzer. Two input frequencies were used, 1 MHz and 9.5 MHz, which is just short of the Nyquist frequency. These signals were well filtered to minimize any harmonics.

Figure 48 shows the FFT response of the ADC for the case of a 1 MHz analog input. The SFDR is 71.66 dB, and the analog-to-digital is producing 8.8 ENOB (effective number of bits). When the analog frequency was raised to 9.5 MHz, the SFDR was

reduced to -60.18 dB and the ADC operated with 8.46 ENOBs as shown in Figure 49. The inclusion of the AD8051 in the circuit did not worsen the distortion performance of the AD9201.

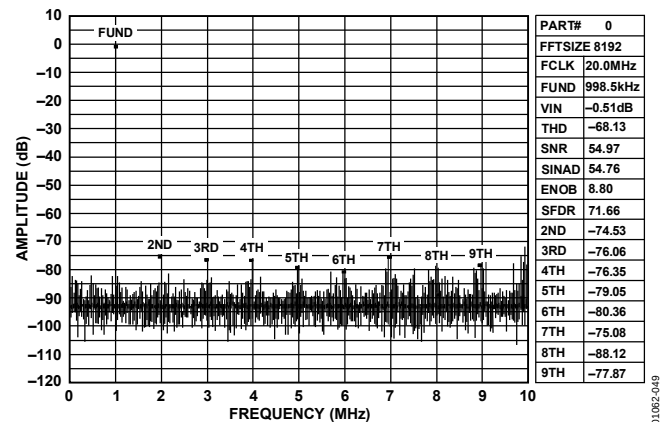


Figure 48. FFT Plot for AD8051 Driving the AD9201 at 1 MHz

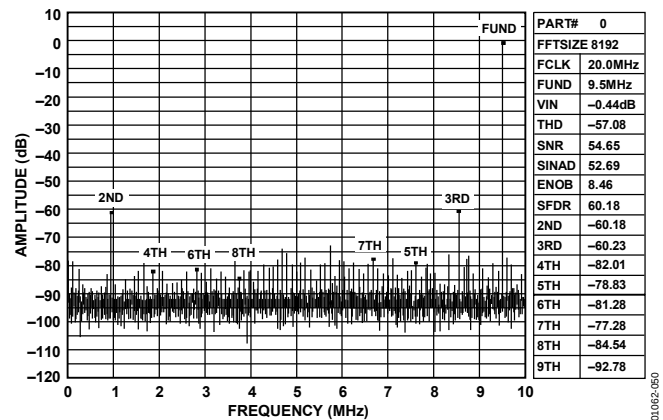


Figure 49. FFT Plot for AD8051 Driving the AD9201 at 9.5 MHz


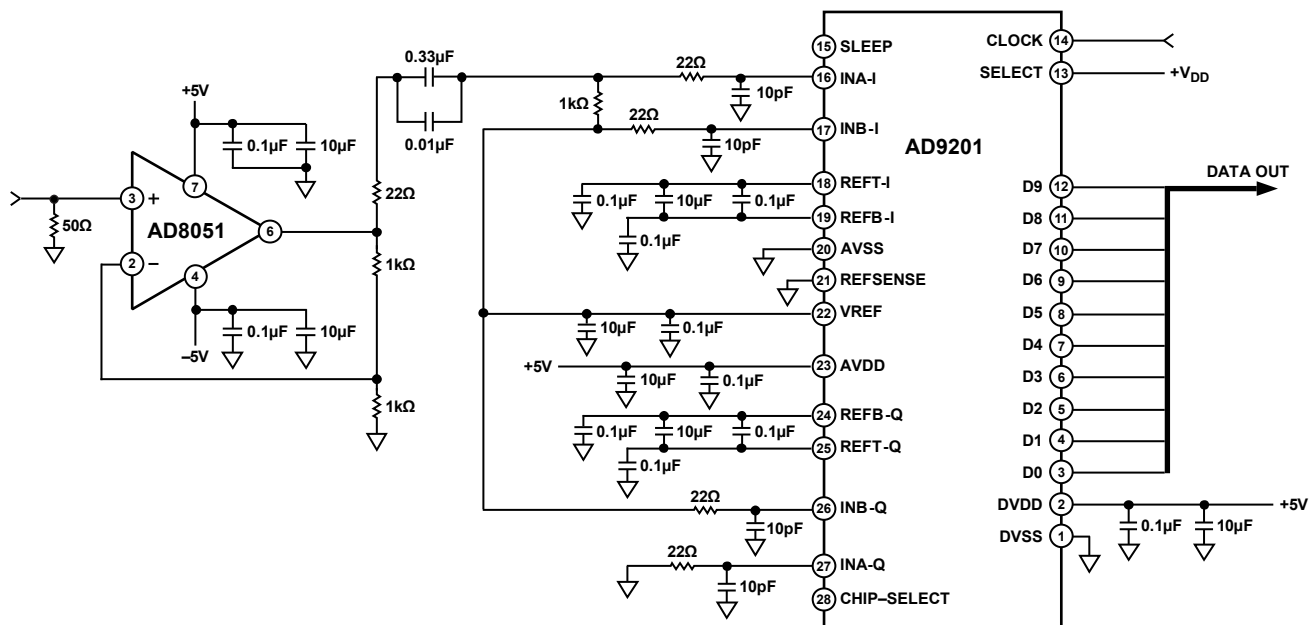


Figure 50. The AD8051 Driving an AD9201, a 10-Bit, 20 MSPS Analog-to-Digital Converter

Downloaded from [Arrow.com](https://arrow.com).


OUTLINE DIMENSIONS

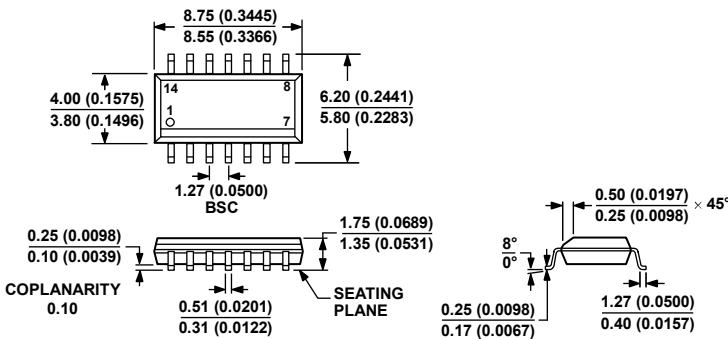

COMPLIANT TO JEDEC STANDARDS MS-012-AB  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.


Figure 53. 14-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body (R-14)  
Dimensions shown in millimeters and (inches)

060606-A

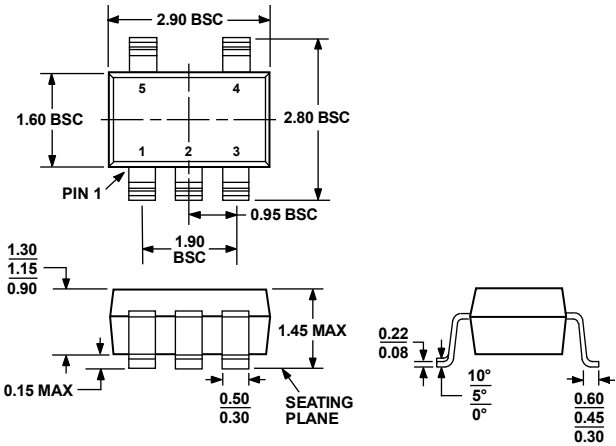

COMPLIANT TO JEDEC STANDARDS MO-178-AA  
Figure 54. 5-Lead Small Outline Transistor Package [SOT-23]  
(RJ-5)  
Dimensions shown in millimeters


# AD8051/AD8052/AD8054

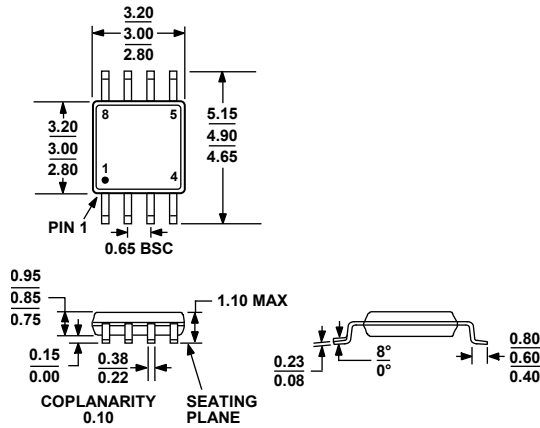

COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 55. 8-Lead Mini Small Outline Package [MSOP]  
(RM-8)

Dimensions shown in millimeters

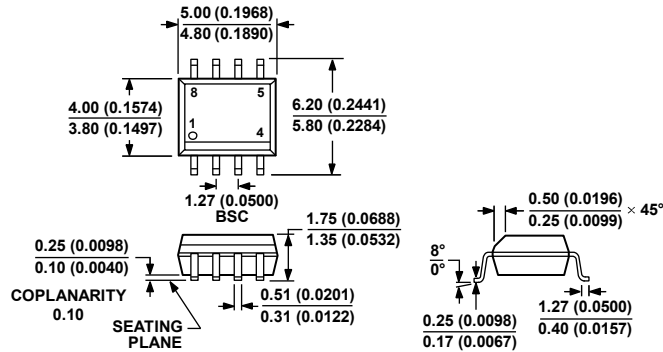


COMPLIANT TO JEDEC STANDARDS MS-012-AA

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 56. 8-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body (R-8)

Dimensions shown in millimeters and (inches)

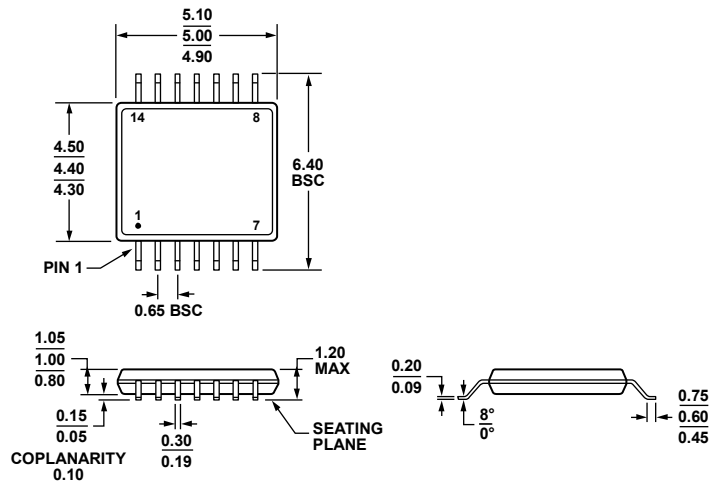

COMPLIANT TO JEDEC STANDARDS MO-153-AB-1

Figure 57. 14-Lead Thin Shrink Small Outline Package [TSSOP]  
(RU-14)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model                         | Temperature Range | Package Description               | Package Option | Branding |
|-------------------------------|-------------------|-----------------------------------|----------------|----------|
| AD8051AR                      | −40°C to +125°C   | 8-Lead SOIC_N                     | R-8            |          |
| AD8051AR-REEL                 | −40°C to +125°C   | 8-Lead SOIC_N, 13" Tape and Reel  | R-8            |          |
| AD8051AR-REEL7                | −40°C to +125°C   | 8-Lead SOIC_N, 7" Tape and Reel   | R-8            |          |
| AD8051ARZ <sup>1</sup>        | −40°C to +85°C    | 8-Lead SOIC_N                     | R-8            |          |
| AD8051ARZ-REEL <sup>1</sup>   | −40°C to +85°C    | 8-Lead SOIC_N, 13" Tape and Reel  | R-8            |          |
| AD8051ARZ-REEL7 <sup>1</sup>  | −40°C to +85°C    | 8-Lead SOIC_N, 7" Tape and Reel   | R-8            |          |
| AD8051ART-R2                  | −40°C to +85°C    | 5-Lead SOT-23, 7" Tape and Reel   | RJ-5           | H2A      |
| AD8051ART-REEL                | −40°C to +85°C    | 5-Lead SOT-23, 13" Tape and Reel  | RJ-5           | H2A      |
| AD8051ART-REEL7               | −40°C to +85°C    | 5-Lead SOT-23, 7" Tape and Reel   | RJ-5           | H2A      |
| AD8051ARTZ-R2 <sup>1</sup>    | −40°C to +85°C    | 5-Lead SOT-23, 7" Tape and Reel   | RJ-5           | H06      |
| AD8051ARTZ-REEL <sup>1</sup>  | −40°C to +85°C    | 5-Lead SOT-23, 13" Tape and Reel  | RJ-5           | H06      |
| AD8051ARTZ-REEL7 <sup>1</sup> | −40°C to +85°C    | 5-Lead SOT-23, 7" Tape and Reel   | RJ-5           | H06      |
| AD8052AR                      | −40°C to +125°C   | 8-Lead SOIC_N                     | R-8            |          |
| AD8052AR-REEL                 | −40°C to +125°C   | 8-Lead SOIC_N, 13" Tape and Reel  | R-8            |          |
| AD8052AR-REEL7                | −40°C to +125°C   | 8-Lead SOIC_N, 7" Tape and Reel   | R-8            |          |
| AD8052ARZ <sup>1</sup>        | −40°C to +125°C   | 8-Lead SOIC_N                     | R-8            |          |
| AD8052ARZ-REEL <sup>1</sup>   | −40°C to +125°C   | 8-Lead SOIC_N, 13" Tape and Reel  | R-8            |          |
| AD8052ARZ-REEL7 <sup>1</sup>  | −40°C to +125°C   | 8-Lead SOIC_N, 7" Tape and Reel   | R-8            |          |
| AD8052ARM                     | −40°C to +125°C   | 8-Lead MSOP                       | RM-8           | H4A      |
| AD8052ARM-REEL                | −40°C to +125°C   | 8-Lead MSOP, 13" Tape and Reel    | RM-8           | H4A      |
| AD8052ARM-REEL7               | −40°C to +125°C   | 8-Lead MSOP, 7" Tape and Reel     | RM-8           | H4A      |
| AD8052ARMZ <sup>1</sup>       | −40°C to +125°C   | 8-Lead MSOP                       | RM-8           | H4A#     |
| AD8052ARMZ-REEL7 <sup>1</sup> | −40°C to +125°C   | 8-Lead MSOP, 7" Tape and Reel     | RM-8           | H4A#     |
| AD8054AR                      | −40°C to +125°C   | 14-Lead SOIC_N                    | R-14           |          |
| AD8054AR-REEL                 | −40°C to +125°C   | 14-Lead SOIC_N, 13" Tape and Reel | R-14           |          |
| AD8054AR-REEL7                | −40°C to +125°C   | 14-Lead SOIC_N, 7" Tape and Reel  | R-14           |          |
| AD8054ARZ <sup>1</sup>        | −40°C to +125°C   | 14-Lead SOIC_N                    | R-14           |          |
| AD8054ARZ-REEL <sup>1</sup>   | −40°C to +125°C   | 14-Lead SOIC_N, 13" Tape and Reel | R-14           |          |
| AD8054ARZ-REEL7 <sup>1</sup>  | −40°C to +125°C   | 14-Lead SOIC_N, 7" Tape and Reel  | R-14           |          |
| AD8054ARU                     | −40°C to +125°C   | 14-Lead TSSOP                     | RU-14          |          |
| AD8054ARU-REEL                | −40°C to +125°C   | 14-Lead TSSOP, 13" Tape and Reel  | RU-14          |          |
| AD8054ARU-REEL7               | −40°C to +125°C   | 14-Lead TSSOP, 7" Tape and Reel   | RU-14          |          |
| AD8054ARUZ <sup>1</sup>       | −40°C to +125°C   | 14-Lead TSSOP                     | RU-14          |          |
| AD8054ARUZ-REEL <sup>1</sup>  | −40°C to +125°C   | 14-Lead TSSOP, 13" Tape and Reel  | RU-14          |          |
| AD8054ARUZ-REEL7 <sup>1</sup> | −40°C to +125°C   | 14-Lead TSSOP, 7" Tape and Reel   | RU-14          |          |

<sup>1</sup> Z = RoHS Compliant Part. # denotes lead-free product may be top or bottom marked.

## **NOTES**