Absolute Maximum Ratings

Power-Supply Voltage (V_{DD} to V_{SS}).....-0.3V to +6.0V
Analog Input Voltage (IN_+, IN_-).(V_{SS} - 0.3V) to (V_{DD} + 0.3V)
$\overline{SHDN}$ Input Voltage .....(V_{SS} - 0.3V) to +6.0V
Output Short-Circuit Duration to Either Supply .....Continuous
Continuous Input Current (IN+, IN-).....±10mA
Continuous Power Dissipation (T_A = +70°C)
6-Pin SOT23 (derate 5.4mW/°C above +70°C) 431.3mW
6-Pin TDFN (derate 18.2mW/°C above 70°C) 1454mW
8-Pin µMAX (derate 4.5mW/°C above +70°C).....362mW
8-Pin SO (derate 5.88mW/°C above +70°C).....471mW
14-Pin SO (derate 8.33mW/°C above +70°C).....667mW
14-Pin TSSOP (derate 9.1mW/°C above +70°C).....727mW
Operating Temperature Range..... -40°C to +125°C
Junction Temperature.....+150°C
Storage Temperature Range..... -65°C to +150°C
Lead Temperature (soldering, 10s) .....+300°C
Soldering Temperature (reflow).....+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Information

SOT23-6

PACKAGE CODE	U6F+6
Outline Number	21-0058
Land Pattern Number	90-0175
Thermal Resistance, Single-Layer Board	
Junction to Ambient (θ_{JA})	185.5°C/W
Junction to Case (θ_{JC})	75°C/W
Thermal Resistance, Multi-Layer Board	
Junction to Ambient (θ_{JA})	134.4°C/W
Junction to Case (θ_{JC})	39°C/W

µMAX-8

PACKAGE CODE	U8+4
Outline Number	21-0036
Land Pattern Number	90-0092
Thermal Resistance, Multi-Layer Board	
Junction to Ambient (θ_{JA})	206°C/W
Junction to Case (θ_{JC})	42

µMAX-8

PACKAGE CODE	U8+1
Outline Number	21-0036
Land Pattern Number	90-0092
Thermal Resistance, Single-Layer Board	
Junction to Ambient (θ_{JA})	221°C/W
Junction to Case (θ_{JC})	42°C/W
Thermal Resistance, Multi-Layer Board	
Junction to Ambient (θ_{JA})	206°C/W
Junction to Case (θ_{JC})	42°C/W

Downloaded from Arrow.com.

Package Information (continued)

TSSOP-14

PACKAGE CODE	U14+2
Outline Number	21-0066
Land Pattern Number	90-0113
Thermal Resistance, Single-Layer Board	
Junction to Ambient (θ_{JA})	110°C/W
Junction to Case (θ_{JC})	30°C/W
Thermal Resistance, Multi-Layer Board	
Junction to Ambient (θ_{JA})	100.4°C/W
Junction to Case (θ_{JC})	30°C/W

SO-8

PACKAGE CODE	S8+4
Outline Number	21-0041
Land Pattern Number	90-0096
Thermal Resistance, Single-Layer Board	
Junction to Ambient (θ_{JA})	170°C/W
Junction to Case (θ_{JC})	40
Thermal Resistance, Multi-Layer Board	
Junction to Ambient (θ_{JA})	132°C/W
Junction to Case (θ_{JC})	38

SO-14

PACKAGE CODE	S14+4
Outline Number	21-0041
Land Pattern Number	90-0112
Thermal Resistance, Single-Layer Board	
Junction to Ambient (θ_{JA})	120°C/W
Junction to Case (θ_{JC})	37°C/W
Thermal Resistance, Multi-Layer Board	
Junction to Ambient (θ_{JA})	84°C/W
Junction to Case (θ_{JC})	34°C/W

Downloaded from Arrow.com.

Package Information (continued)

TDFN-6

PACKAGE CODE	T633+2
Outline Number	21-0137
Land Pattern Number	90-0058
Thermal Resistance, Single-Layer Board	
Junction to Ambient (θ_{JA})	55°C/W
Junction to Case (θ_{JC})	9°C/W
Thermal Resistance, Multi-Layer Board	
Junction to Ambient (θ_{JA})	42°C/W
Junction to Case (θ_{JC})	9°C/W

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Downloaded from Arrow.com.

DC Electrical Characteristics

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L tied to V_{DD}/2, SHDN = V_{DD}, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	V_{DD}	(Note 3)		2.7		5.5	V
Quiescent Supply Current Per Amplifier	I_D	Normal mode	V_{DD} = 3V		2.2		mA
			V_{DD} = 5V		2.5	4.4	
		Shutdown mode ($\overline{SHDN}$ = V_{SS}) (Note 2)			0.01	1.0	µA
Input Offset Voltage	V_{OS}	T_A = +25°C			±70	±350	µV
		T_A = -40°C to +125°C				±750	
Input Offset Voltage Tempco	TC_{VOS}				±0.3	±6	µV/°C
Input Bias Current	I_B	(Note 4)			±1	±150	pA
Input Offset Current	I_{OS}	(Note 4)			±1	±150	pA
Differential Input Resistance	R_{IN}				1000		GΩ
Input Common-Mode Voltage Range	V_{CM}	Guaranteed by CMRR Test	T_A = +25°C	-0.2		V_{DD} - 1.6	V
			T_A = -40°C to +125°C	-0.1		V_{DD} - 1.7	
Common-Mode Rejection Ratio	CMRR	(V_{SS} - 0.2V) ≤ V_{CM} ≤ (V_{DD} – 1.6V)	T_A = +25°C	90	115		dB
		(V_{SS} - 0.1V) ≤ V_{CM} ≤ (V_{DD} – 1.7V)	T_A = -40°C to +125°C	90			
Power-Supply Rejection Ratio	PSRR	V_{DD} = 2.7 to 5.5V		90	120		dB
Large-Signal Voltage Gain	A_{VOL}	R_L = 10kΩ to V_{DD}/2; V_{OUT} = 100mV to (V_{DD} - 125mV)		90	120		dB
		R_L = 1kΩ to V_{DD}/2; V_{OUT} = 200mV to (V_{DD} - 250mV)		85	110		
		R_L = 500Ω to V_{DD}/2; V_{OUT} = 350mV to (V_{DD} - 500mV)		85	110		
Output Voltage Swing	V_{OUT}	$\lvert V_{IN+} - V_{IN-} \rvert$ ≥ 10mV, R_L = 10kΩ to V_{DD}/2	$V_{DD} - V_{OH}$		10	45	mV
			$V_{OL} - V_{SS}$		10	40	
		$\lvert V_{IN+} - V_{IN-} \rvert$ ≥ 10mV, R_L = 1kΩ to V_{DD}/2	$V_{DD} - V_{OH}$		80	200	
			$V_{OL} - V_{SS}$		50	150	
		$\lvert V_{IN+} - V_{IN-} \rvert$ ≥ 10mV, R_L = 500Ω to V_{DD}/2	$V_{DD} - V_{OH}$		100	300	
			$V_{OL} - V_{SS}$		80	250	
Output Short-Circuit Current	I_{SC}				48		mA
Output Leakage Current	I_{LEAK}	Shutdown mode ($\overline{SHDN}$ = V_{SS}), V_{OUT} = V_{SS} to V_{DD}			±0.001	±1.0	µA
$\overline{SHDN}$ Logic-Low	V_{IL}					0.3 x V_{DD}	V
$\overline{SHDN}$ Logic-High	V_{IH}			0.7 x V_{DD}			V
$\overline{SHDN}$ Input Current		$\overline{SHDN}$ = V_{SS} to V_{DD}			0.01	1	µA
Input Capacitance	C_{IN}				10		pF

Downloaded from Arrow.com.

AC Electrical Characteristics

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L tied to V_{DD}/2, $\overline{SHDN}$ = V_{DD}, T_A = +25°C.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Gain-Bandwidth Product	GBWP	MAX4475–MAX4478	A_V = +1V/V		10		MHz
		MAX4488/MAX4489	A_V = +5V/V		42		
Slew Rate	SR	MAX4475–MAX4478	A_V = +1V/V		3		V/µs
		MAX4488/MAX4489	A_V = +5V/V		10		
Full-Power Bandwidth (Note 5)		MAX4475–MAX4478	A_V = +1V/V		0.4		MHz
		MAX4488/MAX4489	A_V = +5V/V		1.25		
Peak-to-Peak Input Noise Voltage	$e_{n(P-P)}$	f = 0.1Hz to 10Hz			260		nV_{P-P}
Input Voltage-Noise Density	e_n	f = 10Hz			21		nV/√Hz
		f = 1kHz			4.5		
		f = 30kHz			3.5		
Input Current-Noise Density	i_n	f = 1kHz			0.5		fA/√Hz
Total Harmonic Distortion Plus Noise (Note 6)	THD + N	V_{OUT} = $2V_{P-P}$, A_V = +1V/V (MAX4475–MAX4478), R_L = 10kΩ to GND	f = 1kHz		0.0002		%
			f = 20kHz		0.0007		
		V_{OUT} = $2V_{P-P}$, A_V = +1V/V (MAX4475–MAX4478), R_L = 1kΩ to GND	f = 1kHz		0.0002		
			f = 20kHz		0.001		
		V_{OUT} = $2V_{P-P}$, A_V = +5V/V (MAX4488/MAX4489), R_L = 10kΩ to GND	f = 1kHz		0.0004		
			f = 20kHz		0.0006		
Total Harmonic Distortion Plus Noise (Note 6)	THD + N	V_{OUT} = $2V_{P-P}$, A_V = +5V/V (MAX4488/MAX4489), R_L = 1kΩ to GND	f = 1kHz		0.0005		%
			f = 20kHz		0.008		
Capacitive-Load Stability		No sustained oscillations			200		pF
Gain Margin	GM				12		dB
Phase Margin	ΦM	MAX4475–MAX4478, A_V = +1V/V			70		degrees
		MAX4488/MAX4489, A_V = +5V/V			80		
Settling Time		To 0.01%, V_{OUT} = 2V step			2		µs
Delay Time to Shutdown	t_{SH}				1.5		µs
Enable Delay Time from Shutdown	t_{EN}	V_{OUT} = 2.5V, V_{OUT} settles to 0.1%			10		µs
Power-Up Delay Time		V_{DD} = 0 to 5V step, V_{OUT} stable to 0.1%			13		µs

Note 1: All devices are 100% tested at T_A = +25°C. Limits over temperature are guaranteed by design.
Note 2: $\overline{SHDN}$ is available on the MAX4475/MAX4488 only.
Note 3: Guaranteed by the PSRR test.
Note 4: Guaranteed by design.
Note 5: Full-power bandwidth for unity-gain stable devices (MAX4475–MAX4478) is measured in a closed-loop gain of +2V/V to accommodate the input voltage range, V_{OUT} = $4V_{P-P}$.
Note 6: Lowpass-filter bandwidth is 22kHz for f = 1kHz and 80kHz for f = 20kHz. Noise floor of test equipment = 10nV/√Hz.

Downloaded from Arrow.com.

Typical Operating Characteristics

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L tied to V_{DD}/2, input noise floor of test equipment =10nV/√Hz for all distortion measurements, T_A = +25°C, unless otherwise noted.)

INPUT OFFSET VOLTAGE DISTRIBUTION

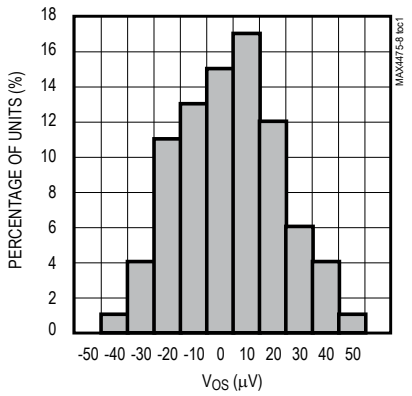

OFFSET VOLTAGE vs. TEMPERATURE

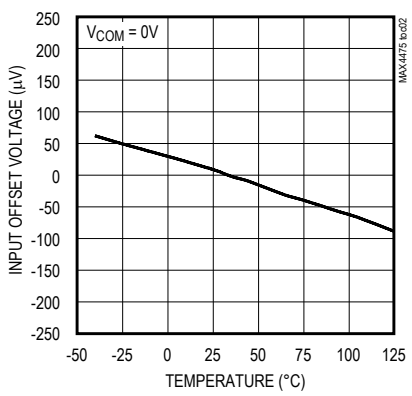

INPUT OFFSET VOLTAGE vs. INPUT COMMON-MODE VOLTAGE

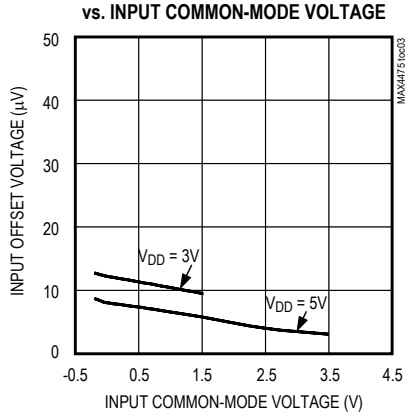

OUTPUT VOLTAGE vs. OUTPUT LOAD CURRENT

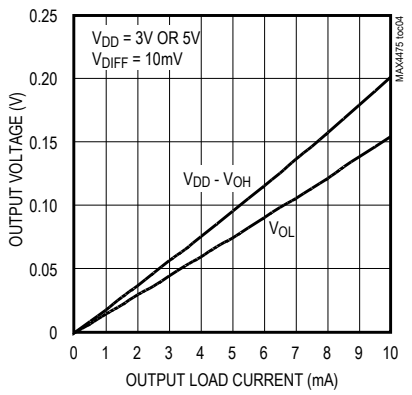

OUTPUT VOLTAGE SWING (V_{OH}) vs. TEMPERATURE

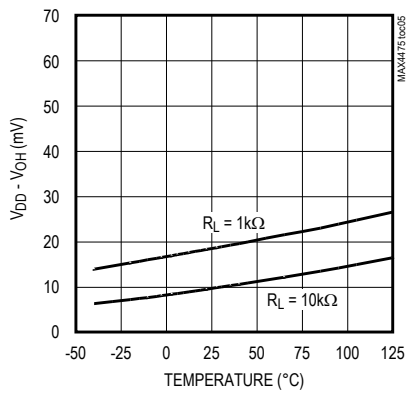

OUTPUT VOLTAGE SWING (V_{OL}) vs. TEMPERATURE

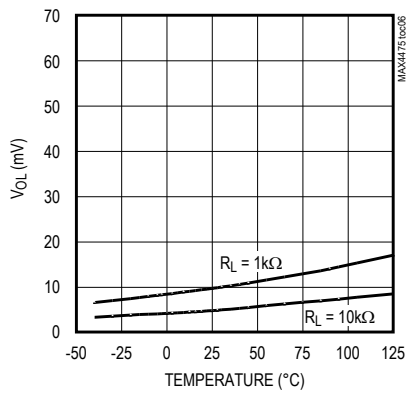

LARGE-SIGNAL VOLTAGE GAIN vs. OUTPUT VOLTAGE SWING

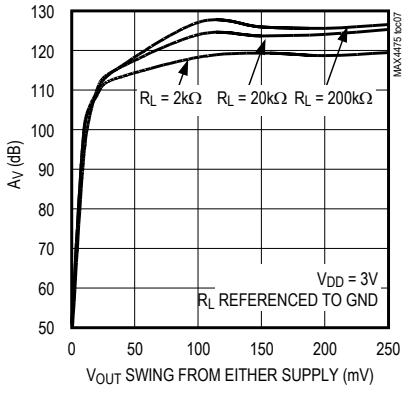

LARGE-SIGNAL VOLTAGE GAIN vs. OUTPUT VOLTAGE SWING

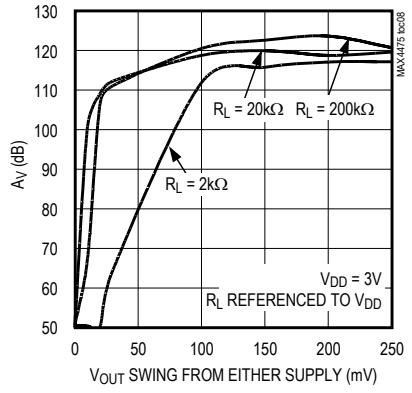

LARGE-SIGNAL VOLTAGE GAIN vs. OUTPUT VOLTAGE SWING

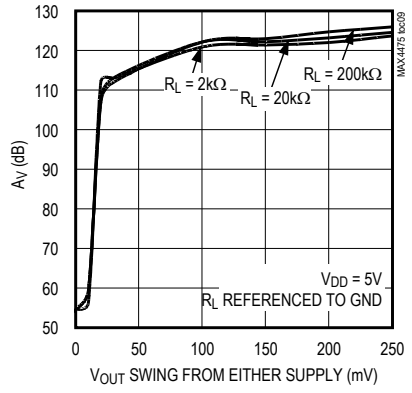

Downloaded from Arrow.com.

Typical Operating Characteristics (continued)

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L tied to V_{DD}/2, input noise floor of test equipment =10nV/√Hz for all distortion measurements, T_A = +25°C, unless otherwise noted.)

LARGE-SIGNAL VOLTAGE GAIN vs. OUTPUT VOLTAGE SWING

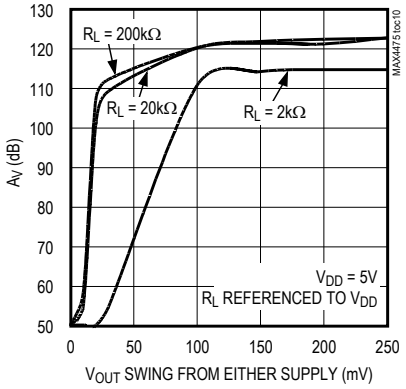

LARGE-SIGNAL VOLTAGE GAIN vs. TEMPERATURE

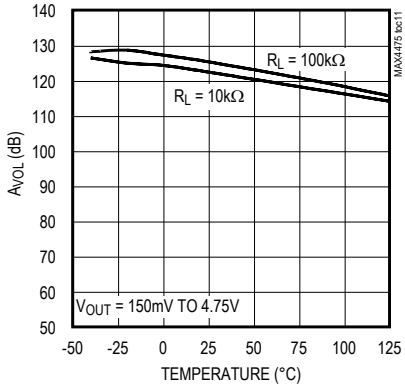

SUPPLY CURRENT vs. TEMPERATURE

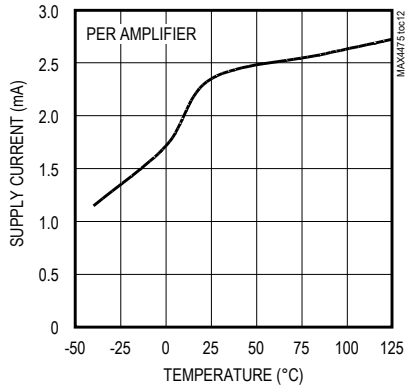

SUPPLY CURRENT vs. SUPPLY VOLTAGE

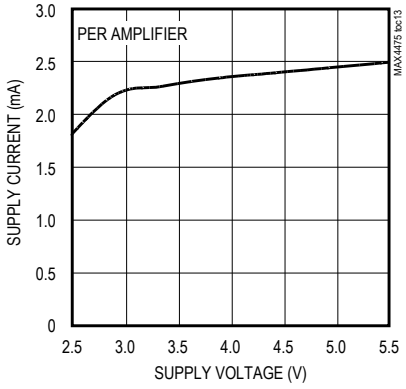

SUPPLY CURRENT vs.OUTPUT VOLTAGE

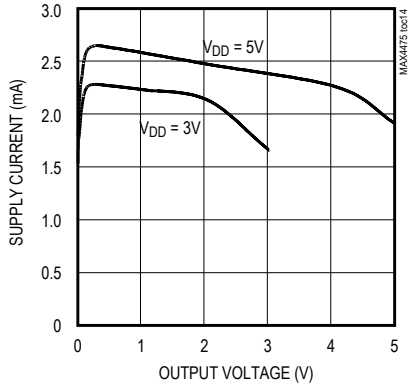

INPUT OFFSET VOLTAGE vs. SUPPLY VOLTAGE

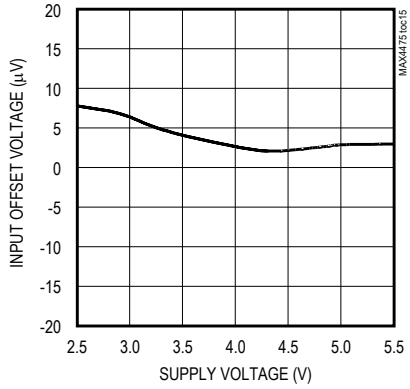

MAX4475–MAX4478 GAIN AND PHASE vs. FREQUENCY

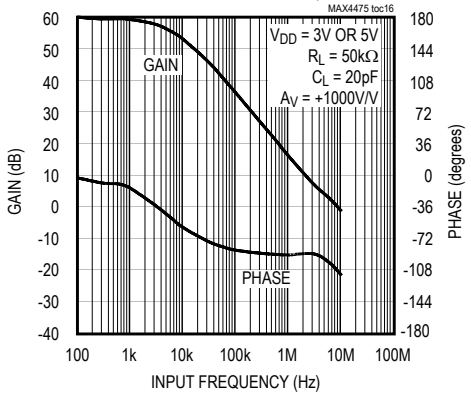

MAX4488/MAX4489 GAIN AND PHASE vs. FREQUENCY

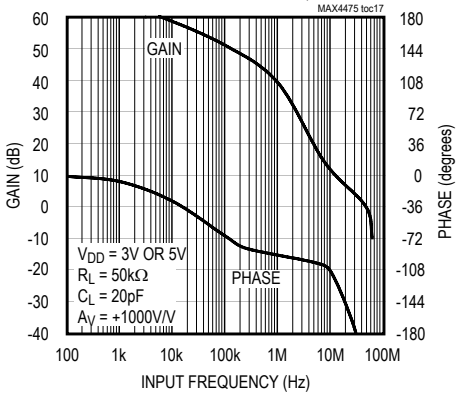

Downloaded from Arrow.com.

Typical Operating Characteristics (continued)

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L tied to V_{DD}/2, input noise floor of test equipment =10nV/√Hz for all distortion measurements, T_A = +25°C, unless otherwise noted.)

MAX4475–MAX4478
POWER-SUPPLY REJECTION RATIO vs. FREQUENCY

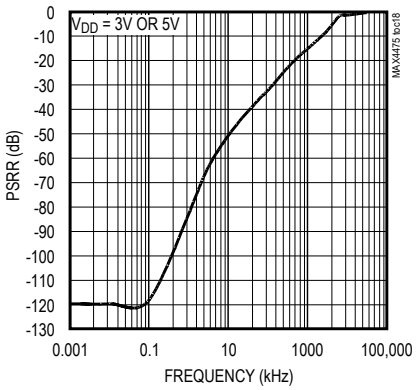

OUTPUT IMPEDANCE vs. FREQUENCY

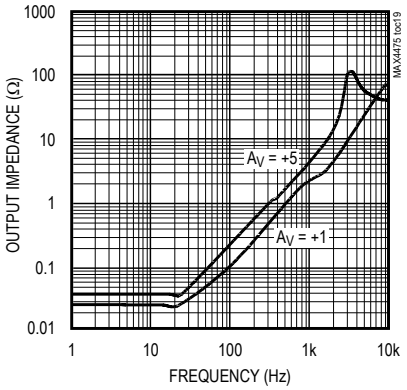

INPUT VOLTAGE-NOISE DENSITY vs. FREQUENCY

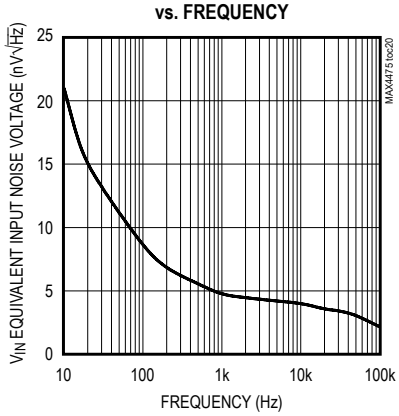

0.1Hz TO 10HzP-P NOISE

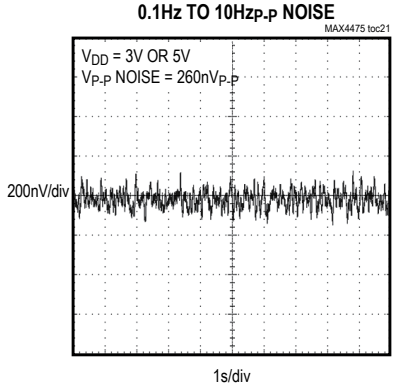

MAX4475
TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT VOLTAGE SWING

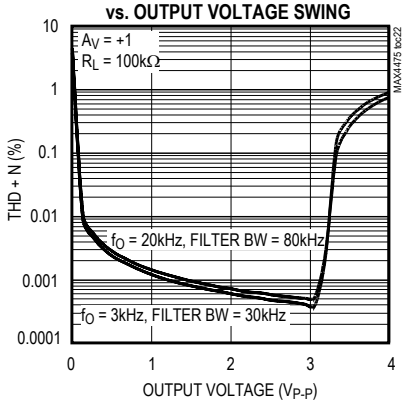

MAX4488/MAX4489
TOTAL HARMONIC DISTORTION PLUS NOISE vs. OUTPUT VOLTAGE SWING

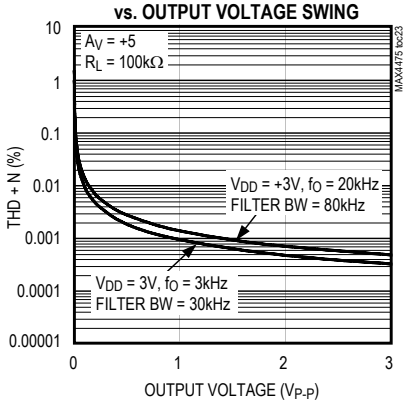

MAX4488/MAX4489
TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

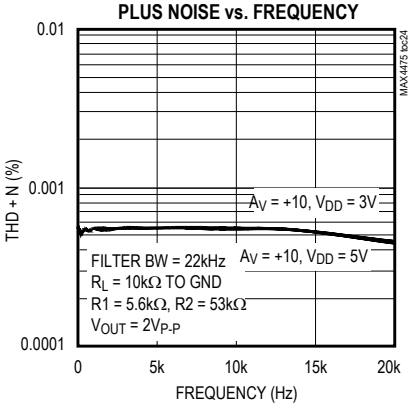

MAX4475–MAX4478
TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

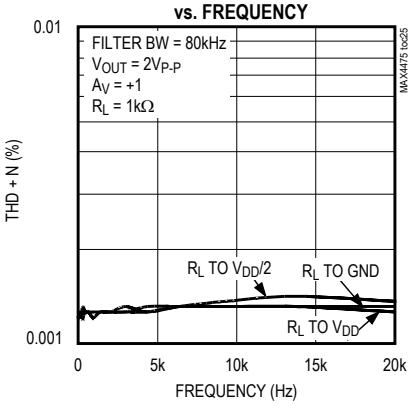

Downloaded from Arrow.com.

Typical Operating Characteristics (continued)

(V_{DD} = +5V, V_{SS} = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L tied to V_{DD}/2, input noise floor of test equipment =10nV/√Hz for all distortion measurements, T_A = +25°C, unless otherwise noted.)

MAX4488/MAX4489
TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

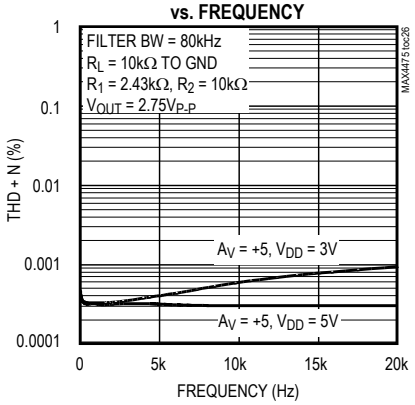

MAX4475–MAX4478
LARGE-SIGNAL PULSE RESPONSE

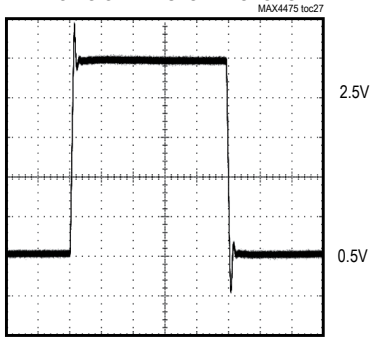

VDD = 3V, RL = 10kΩ, CL = 100pF
VIN = 2V

MAX4475–MAX4478
SMALL-SIGNAL PULSE RESPONSE

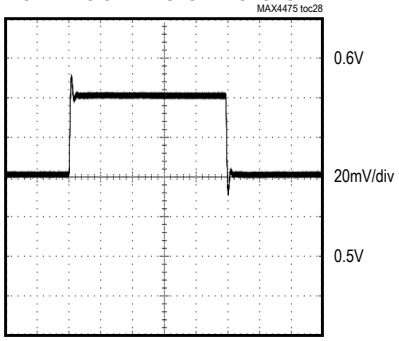

VDD = 3V, RL = 10kΩ, CL = 100pF
VIN = 100mV PULSE

MAX4488/MAX4489
LARGE-SIGNAL PULSE RESPONSE

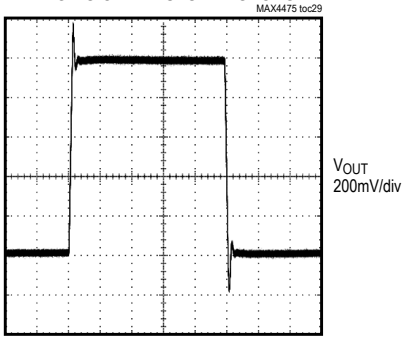

VDD = 3V, RL = 10kΩ, CL = 50pF
VIN = 20mV PULSE, AV = +5V/V

MAX4488/MAX4489
SMALL-SIGNAL PULSE RESPONSE

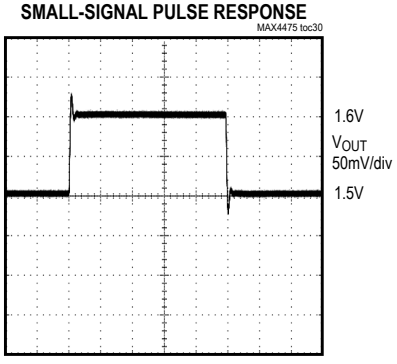

VDD = 3V, RL = 10kΩ, CL = 50pF
VIN = 20mV PULSE, AV = +5V/V

MAX4477/MAX4478/MAX4489
CROSSTALK vs. FREQUENCY

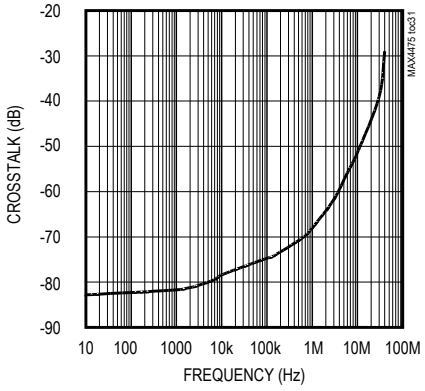

Downloaded from Arrow.com.

Pin Description

PIN					NAME	FUNCTION
MAX4475/ MAX4488	MAX4475/ MAX4488	MAX4476	MAX4477/ MAX4489	MAX4478		
SOT23/TDFN	SO/µMAX	SOT23/TDFN	SO/µMAX	SO/TSSOP		
1	6	1	1, 7	1, 7, 8, 14	OUT, OUTA, OUTB, OUTC, OUTD	Amplifier Output
2	4	2	4	11	V_{SS}	Negative Supply. Connect to ground for single-supply operation
3	3	3	3, 5	3, 5, 10, 12	IN+, INA+, INB+, INC+, IND+	Noninverting Amplifier Input
4	2	4	2, 6	2, 6, 9, 13	IN-, INA-, INB-, INC-, IND-	Inverting Amplifier Input
6	7	6	8	4	V_{DD}	Positive Supply
5	8	—	—	—	$\overline{SHDN}$	Shutdown Input. Connect to V_{DD} for normal operation (amplifier(s) enabled).
—	1, 5	5	—	—	N.C.	No Connection. Not internally connected.
EP	—	EP	—	—	EP	Exposed Paddle (TDFN Only). Connect to V_{SS}.

Downloaded from Arrow.com.

Detailed Description

The MAX4475–MAX4478/MAX4488/MAX4489 single-supply operational amplifiers feature ultra-low noise and distortion. Their low distortion and low noise make them ideal for use as preamplifiers in wide dynamic-range applications, such as 16-bit analog-to-digital converters (see *Typical Operating Circuit*). Their high-input impedance and low noise are also useful for signal conditioning of high-impedance sources, such as piezoelectric transducers.

These devices have true rail-to-rail output operation, drive loads as low as 1kΩ while maintaining DC accuracy, and can drive capacitive loads up to 200pF without oscillation. The input common-mode voltage range extends from (V_{DD} - 1.6V) to 200mV below the negative rail. The push-pull output stage maintains excellent DC characteristics, while delivering up to ±5mA of current.

The MAX4475–MAX4478 are unity-gain stable, while the MAX4488/MAX4489 have a higher slew rate and are stable for gains ≥ 5V/V. The MAX4475/MAX4488 feature a low-power shutdown mode, which reduces the supply current to 0.01µA and disables the outputs.

Low Distortion

Many factors can affect the noise and distortion that the device contributes to the input signal. The following guidelines offer valuable information on the impact of design choices on Total Harmonic Distortion (THD).

Choosing proper feedback and gain resistor values for a particular application can be a very important factor in reducing THD. In general, the smaller the closed-loop gain, the smaller the THD generated, especially when driving heavy resistive loads. The THD of the part normally increases at approximately 20dB per decade, as a function of frequency. Operating the device near or above the full-power bandwidth significantly degrades distortion.

Referencing the load to either supply also improves the part's distortion performance, because only one of the MOSFETs of the push-pull output stage drives the output. Referencing the load to midsupply increases the part's distortion for a given load and feedback setting. (See the Total Harmonic Distortion vs. Frequency graph in the *Typical Operating Characteristics*.)

For gains ≥ 5V/V, the decompensated devices MAX4488/MAX4489 deliver the best distortion performance, since they have a higher slew rate and provide a higher amount of loop gain for a given closed-loop gain setting. Capacitive loads below 100pF do not significantly affect distortion results. Distortion performance is relatively constant over supply voltages.

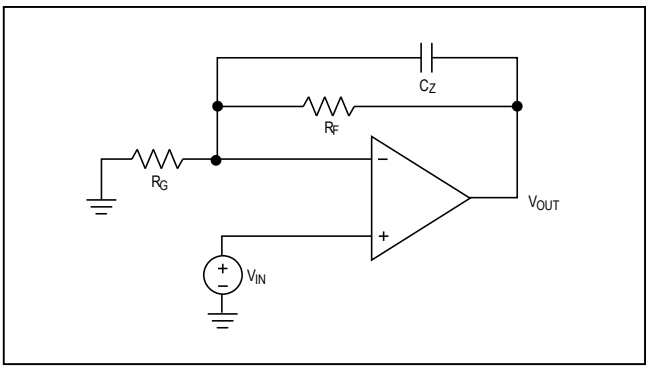

Figure 1. Adding Feed-Forward Compensation

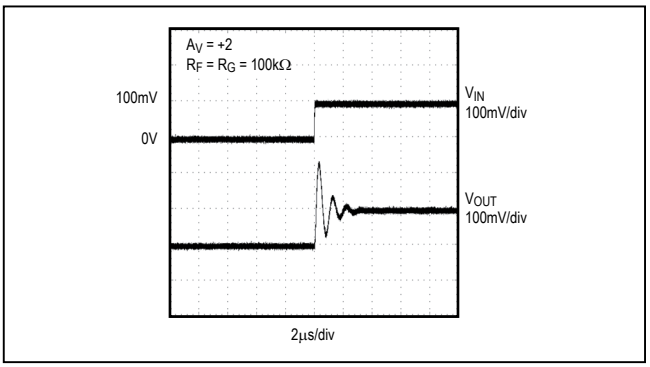

Figure 2a. Pulse Response with No Feed-Forward Compensation

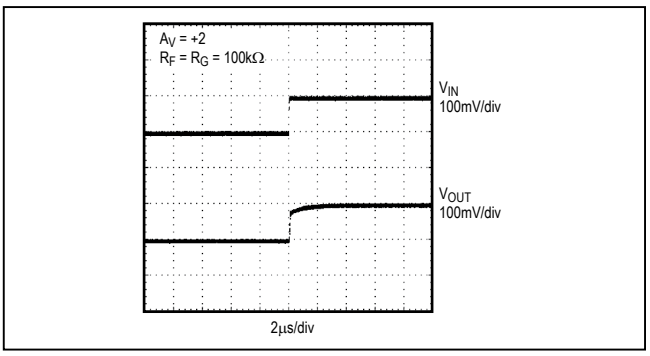

Figure 2b. Pulse Response with 10pF Feed-Forward Compensation

Downloaded from Arrow.com.

Low Noise

The amplifier's input-referred noise-voltage density is dominated by flicker noise at lower frequencies, and by thermal noise at higher frequencies. Because the thermal noise contribution is affected by the parallel combination of the feedback resistive network (R_F || R_G, Figure 1), these resistors should be reduced in cases where the system bandwidth is large and thermal noise is dominant. This noise contribution factor decreases, however, with increasing gain settings.

For example, the input noise-voltage density of the circuit with R_F = 100kΩ, R_G = 11kΩ (A_V = +5V/V) is e_n = 14nV/√Hz, e_n can be reduced to 6nV/√Hz by choosing R_F = 10kΩ, R_G = 1.1kΩ (A_V = +5V/V), at the expense of greater current consumption and potentially higher distortion. For a gain of 100V/V with R_F = 100kΩ, R_G = 1.1kΩ, the e_n is still a low 6nV/√Hz.

Using a Feed-Forward Compensation Capacitor, CZ

The amplifier's input capacitance is 10pF. If the resistance seen by the inverting input is large (feedback network), this can introduce a pole within the amplifier's bandwidth resulting in reduced phase margin. Compensate the reduced phase margin by introducing a feed-forward capacitor (C_Z) between the inverting input and the output (Figure 1). This effectively cancels the pole from the inverting input of the amplifier. Choose the value of C_Z as follows:

$$C_Z = 10 \times (R_F / R_G)\ [pF]$$

In the unity-gain stable MAX4475–MAX4478, the use of a proper C_Z is most important for A_V = +2V/V, and A_V = -1V/V. In the decompensated MAX4488/MAX4489, C_Z is most important for A_V = +10V/V. Figures 2a and 2b show transient response both with and without C_Z.

Using a slightly smaller C_Z than suggested by the formula above achieves a higher bandwidth at the expense of reduced phase and gain margin. As a general guideline, consider using C_Z for cases where R_G || R_F is greater than 20kΩ (MAX4475–MAX4478) or greater than 5kΩ (MAX4488/MAX4489).

Applications Information

The MAX4475–MAX4478/MAX4488/MAX4489 combine good driving capability with ground-sensing input and rail-to-rail output operation. With their low distortion and low noise, they are ideal for use in ADC buffers, medical instrumentation systems and other noise-sensitive applications.

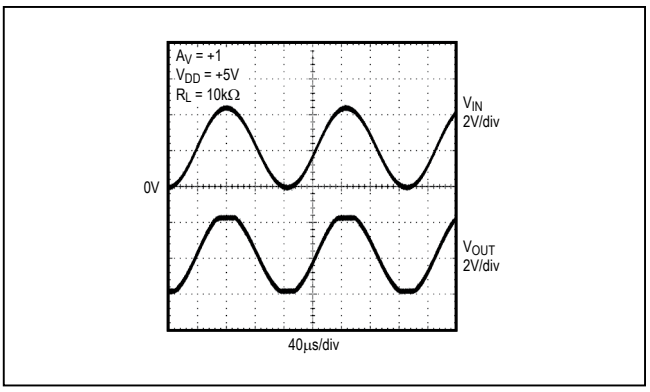

Figure 3. Overdriven Input Showing No Phase Reversal

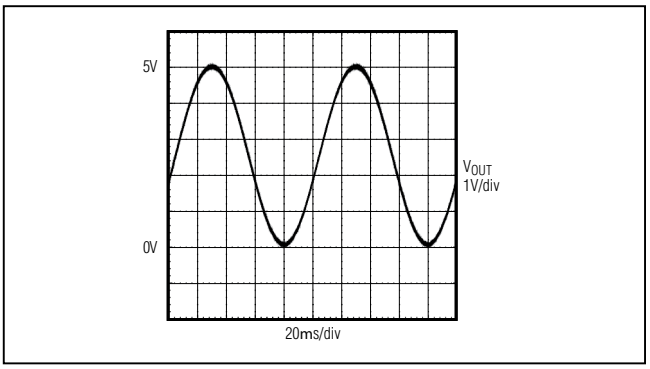

Figure 4. Rail-to-Rail Output Operation

Ground-Sensing and Rail-to-Rail Outputs

The common-mode input range of these devices extends below ground, and offers excellent common-mode rejection. These devices are guaranteed not to undergo phase reversal when the input is overdriven (Figure 3).

Figure 4 showcases the true rail-to-rail output operation of the amplifier, configured with A_V = 5V/V. The output swings to within 8mV of the supplies with a 10kΩ load, making the devices ideal in low-supply voltage applications.

Power Supplies and Layout

The MAX4475–MAX4478/MAX4488/MAX4489 operate from a single +2.7V to +5.5V power supply or from dual supplies of ±1.35V to ±2.75V. For single-supply operation, bypass the power supply with a 0.1µF ceramic

Downloaded from Arrow.com.

Typical Application Circuit

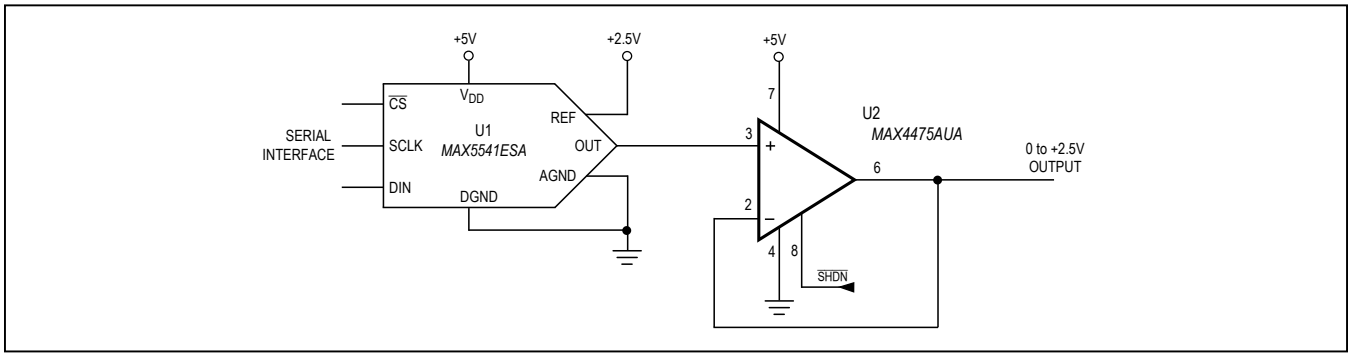

Typical Operating Circuit

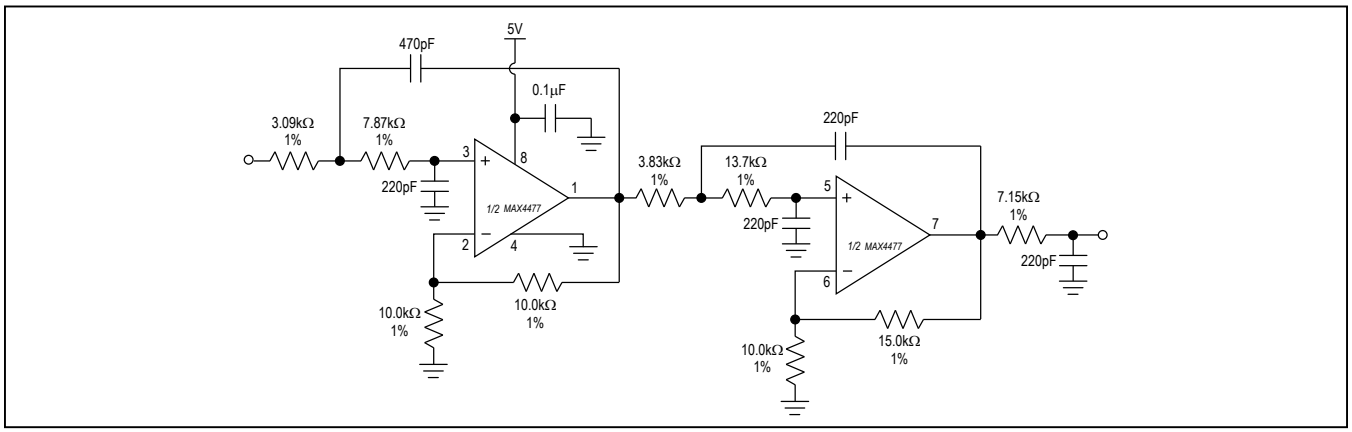

capacitor placed close to the V_{DD} pin. If operating from dual supplies, bypass each supply to ground.

Good layout improves performance by decreasing the amount of stray capacitance and noise at the op amp's inputs and output. To decrease stray capacitance, minimize PC board trace lengths and resistor leads, and place external components close to the op amp's pins.

Typical Application Circuit

The *Typical Application Circuit* shows the single MAX4475 configured as an output buffer for the MAX5541 16-bit DAC. Because the MAX5541 has an unbuffered voltage output, the input bias current of the op amp used must be less than 6nA to maintain 16-bit accuracy. The MAX4475 has an input bias current of only 150pA (max), virtually eliminating this as a source of error. In addition, the MAX4475 has excellent open-loop gain and common-mode rejection, making this an excellent output buffer amplifier.

DC-Accurate Lowpass Filter

The MAX4475–MAX4478/MAX4488/MAX4489 offer a unique combination of low noise, wide bandwidth, and high gain, making them an excellent choice for active filters up to 1MHz. The *Typical Operating Circuit* shows the dual MAX4477 configured as a 5th order Chebyschev filter with a cutoff frequency of 100kHz. The circuit is implemented in the Sallen-Key topology, making this a DC-accurate filter.

Downloaded from Arrow.com.

Pin Configurations

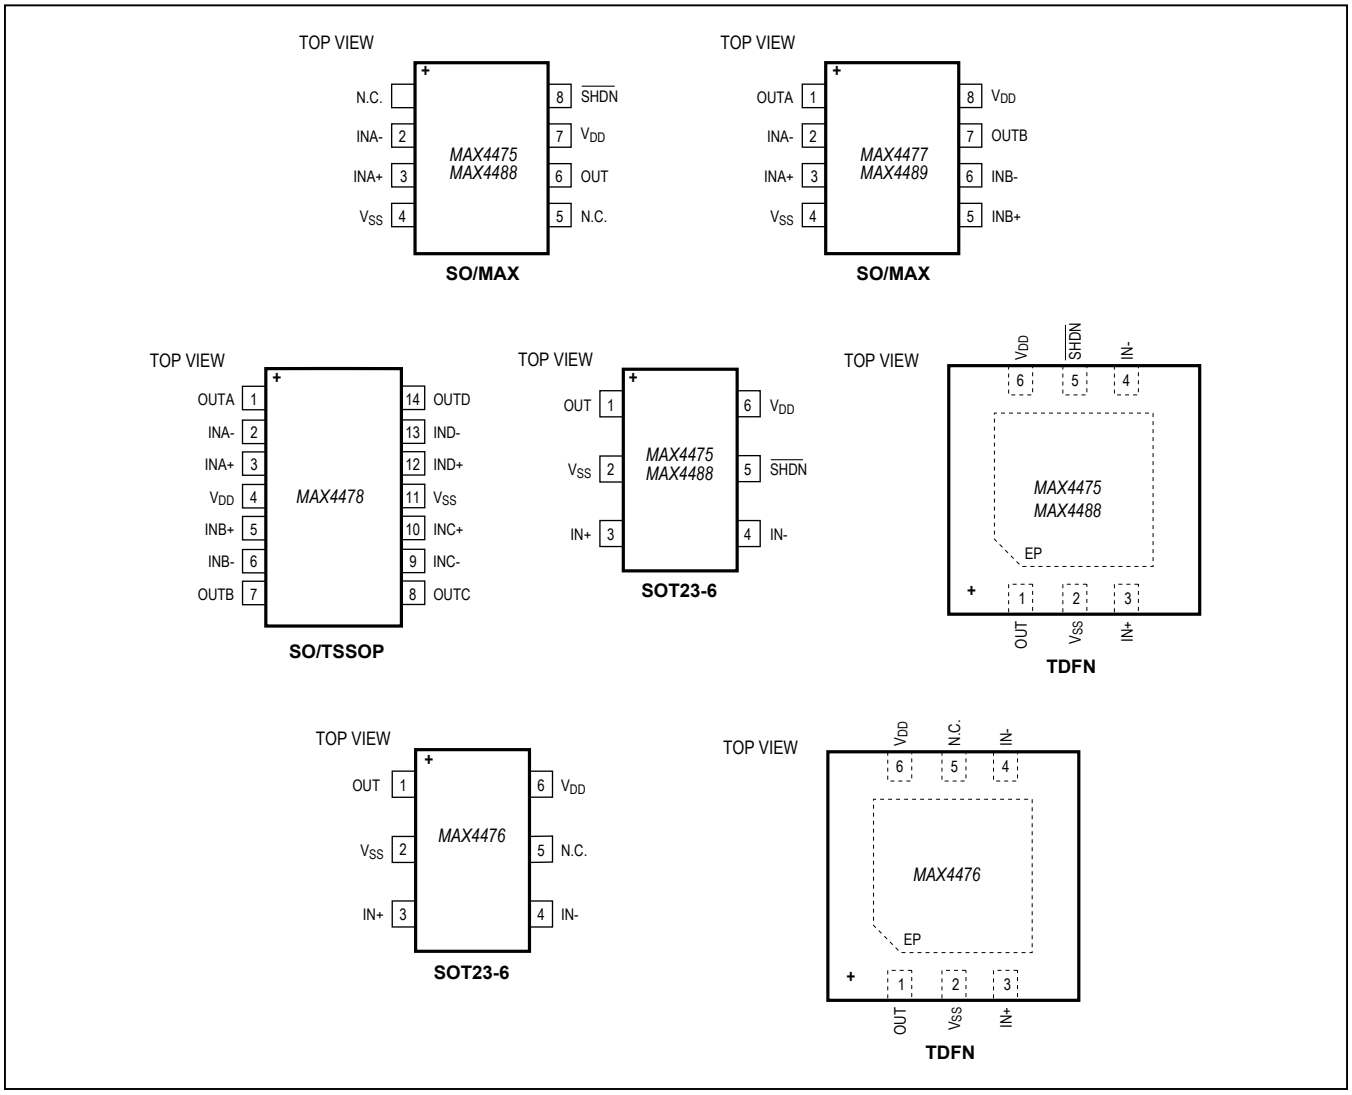

Downloaded from Arrow.com.

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX4475AUT+T	-40°C to +125°C	6 SOT23	AAZV
MAX4475AUA+	-40°C to +125°C	8 µMAX	—
MAX4475ASA+	-40°C to +125°C	8 SO	—
MAX4475ATT+T	-40°C to +125°C	6 TDFN-EP*	+ADD
MAX4475AUT/V+T	-40°C to +125°C	6 SOT23	+ACQQ
MAX4476AUT+T	-40°C to +125°C	6 SOT23	AAZX
MAX4476ATT+T	-40°C to +125°C	6 TDFN-EP*	+ADF
MAX4477AUA+	-40°C to +125°C	8 µMAX	—
MAX4477AUA+	-40°C to +125°C	8 µMAX	—
MAX4477AUA/V+T	-40°C to +125°C	8 µMAX	+AA/V
MAX4477ASA+	-40°C to +125°C	8 SO	—
MAX4478AUD+	-40°C to +125°C	14 TSSOP	—
MAX4478AUD/V+	-40°C to +125°C	14 TSSOP	—
MAX4478ASD+	-40°C to +125°C	14 SO	—
MAX4488AUT+T	-40°C to +125°C	6 SOT23	AAZW
MAX4488AUA+	-40°C to +125°C	8 µMAX	—
MAX4488ASA+	-40°C to +125°C	8 SO	—
MAX4488ATT+T	-40°C to +125°C	6 TDFN-EP*	+ADE
MAX4489AUA+	-40°C to +125°C	8 µMAX	—
MAX4489AUA/V+T	-40°C to +125°C	8 µMAX	—
MAX4489ASA+	-40°C to +125°C	8 SO	—

+Denotes a lead(Pb)-free/RoHS-compliant package.
**EP = Exposed pad (connect to V_{SS}).*
/V denotes an automotive qualified part.
T = Tape and reel.

Chip Information

PROCESS: BiCMOS

Selector Guide

PART	GAIN BW (MHz)	STABLE GAIN (V/V)	NO. OF AMPS	$\overline{SHDN}$
MAX4475	10	1	1	Yes
MAX4476	10	1	1	—
MAX4477	10	1	2	—
MAX4478	10	1	4	—
MAX4488	42	5	1	Yes
MAX4489	42	5	2	—

Downloaded from Arrow.com.

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
4	12/09	Added lead-free designations and an automotive part to the Ordering Information and added input current spec in Absolute Maximum Ratings section	1, 2, 13
5	7/10	Added /V designation to the MAX4475 product and soldering temperature	1, 2
6	6/12	Added /V designation for MAX4489.	13
7	1/18	Added AEC statement to *Features* section	1
8	7/18	Updated *Ordering Information* table	14
9	7/18	Updated *Absolute Maximum Rating* and *Package Information*	2, 14
10	8/18	Updated *Package Information* section	2–4
11	4/19	Updated *General Description* and *Ordering Information* section	1, 16

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at https://www.maximintegrated.com/en/storefront/storefront.html.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Downloaded from Arrow.com.