

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## ABSOLUTE MAXIMUM RATINGS

AVDD, DVDD to AGND, DGND ..... -0.3V to +6V  
 Digital Input to DGND ..... -0.3V to +6V  
 OUT1P, OUT1N, OUT2P, OUT2N, CREF1, CREF2 to AGND ..... -0.3V to +6V  
 REF0, REFR to AGND ..... -0.3V to +6V  
 AGND to DGND ..... -0.3V to +0.3V  
 AVDD to DVDD .....  $\pm 3.3V$   
 Maximum Current into Any Pin ..... 50mA

Continuous Power Dissipation ( $T_A = +70^\circ C$ )  
 28-Pin QSOP (derate 10.8mW/ $^\circ C$  above  $+70^\circ C$ ) .... 860.2mW  
 Operating Temperature Ranges  
 MAX518\_BEEI .....  $-40^\circ C$  to  $+85^\circ C$   
 Storage Temperature Range .....  $-65^\circ C$  to  $+150^\circ C$   
 Lead Temperature (soldering, 10s) .....  $+300^\circ C$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(AVDD = DVDD = 3V, AGND = DGND = 0, fCLK = 40MHz, IFS = 1mA, 400 $\Omega$  differential output, CL = 5pF, TA = TMIN to TMAX, unless otherwise noted.  $\geq +25^\circ C$  guaranteed by production test,  $< +25^\circ C$  guaranteed by design and characterization. Typical values are at TA =  $+25^\circ C$ .)

| PARAMETER                              | SYMBOL | CONDITIONS                        | MIN                               | TYP        | MAX     | UNITS           |
|----------------------------------------|--------|-----------------------------------|-----------------------------------|------------|---------|-----------------|
| Resolution                             | N      |                                   | 8                                 |            |         | Bits            |
| Integral Nonlinearity                  | INL    |                                   | -1                                | $\pm 0.25$ | +1      | LSB             |
| Differential Nonlinearity              | DNL    | Guaranteed monotonic              | -1                                | $\pm 0.25$ | +1      | LSB             |
| Offset Error                           |        | MAX5186                           | -1                                |            | +1      | LSB             |
|                                        |        | MAX5189                           | -4                                |            | +4      |                 |
| Gain Error                             |        | (Note 1)                          | -20                               | $\pm 4$    | +20     | LSB             |
| <b>DYNAMIC PERFORMANCE</b>             |        |                                   |                                   |            |         |                 |
| Output Settling Time                   |        | To $\pm 0.5$ LSB error band       |                                   | 25         |         | ns              |
| Glitch Impulse                         |        |                                   |                                   | 10         |         | pV-s            |
| Spurious-Free Dynamic Range to Nyquist | SFDR   | fCLK = 40MHz                      | fOUT = 550kHz                     | 72         |         | dBc             |
|                                        |        |                                   | fOUT = 2.2MHz, TA = $+25^\circ C$ | 57         | 70      |                 |
| Total Harmonic Distortion to Nyquist   | THD    | fCLK = 40MHz                      | fOUT = 550kHz                     | -70        |         | dBc             |
|                                        |        |                                   | fOUT = 2.2MHz, TA = $+25^\circ C$ | -68        | -60     |                 |
| Signal-to-Noise-Ratio to Nyquist       | SNR    | fCLK = 40MHz                      | fOUT = 550kHz                     | 52         |         | dB              |
|                                        |        |                                   | fOUT = 2.2MHz, TA = $+25^\circ C$ | 46         | 52      |                 |
| DAC-to-DAC Output Isolation            |        | fOUT = 2.2MHz                     |                                   | -60        |         | dB              |
| Clock and Data Feedthrough             |        | All 0s to all 1s                  |                                   | 50         |         | pV-s            |
| Output Noise                           |        |                                   |                                   | 10         |         | pA/ $\sqrt{Hz}$ |
| Gain Mismatch Between DAC Outputs      |        | fOUT = 2.2MHz, TA = $+25^\circ C$ |                                   | $\pm 0.5$  | $\pm 1$ | % FSR           |
| Phase Mismatch Between DAC Outputs     |        | fOUT = 2.2MHz                     |                                   | $\pm 0.15$ |         | degrees         |

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

MAX5186/MAX5189

## ELECTRICAL CHARACTERISTICS (continued)

(AVDD = DVDD = 3V, AGND = DGND = 0, fCLK = 40MHz, IFS = 1mA, 400Ω differential output, CL = 5pF, TA = TMIN to TMAX, unless otherwise noted. ≥ +25°C guaranteed by production test, < +25°C guaranteed by design and characterization. Typical values are at TA = +25°C.)

| PARAMETER                              | SYMBOL   | CONDITIONS                                                      | MIN  | TYP | MAX  | UNITS  |
|----------------------------------------|----------|-----------------------------------------------------------------|------|-----|------|--------|
| <b>ANALOG OUTPUT</b>                   |          |                                                                 |      |     |      |        |
| Differential Full-Scale Output Voltage | VFS      |                                                                 |      | 400 |      | mV     |
| Voltage Compliance Range               |          |                                                                 | -0.3 |     | 0.8  | V      |
| Output Leakage Current                 |          | DACEN = 0, MAX5186 only                                         | -1   |     | 1    | μA     |
| Full-Scale Output Current              | IFS      | MAX5186 only                                                    | 0.5  | 1   | 1.5  | mA     |
| DAC External Output Resistor Load      | RL       | MAX5186 only                                                    |      | 400 |      | Ω      |
| <b>REFERENCE</b>                       |          |                                                                 |      |     |      |        |
| Output Voltage Range                   | VREFO    |                                                                 | 1.12 | 1.2 | 1.28 | V      |
| Output Voltage Temperature Drift       | TCVREFO  |                                                                 |      | 50  |      | ppm/°C |
| Reference Output Drive Capability      | IREFO    |                                                                 |      | 10  |      | μA     |
| Reference Supply Rejection             |          |                                                                 |      | 0.5 |      | mV/V   |
| Current Gain (IFS / IREF)              |          |                                                                 |      | 8   |      | mA/mA  |
| <b>POWER REQUIREMENTS</b>              |          |                                                                 |      |     |      |        |
| Analog Power-Supply Voltage            | AVDD     |                                                                 | 2.7  |     | 3.3  | V      |
| Analog Supply Current                  | IAVDD    | PD = 0, DACEN = 1, digital inputs at 0 or DVDD                  |      | 2.7 | 5.0  | mA     |
| Digital Power-Supply Voltage           | DVDD     |                                                                 | 2.7  |     | 3.3  | V      |
| Digital Supply Current                 | IDVDD    | PD = 0, DACEN = 1, digital inputs at 0 or DVDD                  |      | 4.2 | 5.0  | mA     |
| Standby Current                        | ISTANDBY | PD = 0, DACEN = 0, digital inputs at 0 or DVDD                  |      | 1.0 | 1.5  | mA     |
| Shutdown Current                       | ISHDN    | PD = 1, DACEN = X, digital inputs at 0 or DVDD (X = don't care) |      | 0.5 | 1    | μA     |
| <b>LOGIC INPUTS AND OUTPUTS</b>        |          |                                                                 |      |     |      |        |
| Digital Input Voltage High             | VIH      |                                                                 | 2    |     |      | V      |
| Digital Input Voltage Low              | VIL      |                                                                 |      |     | 0.8  | V      |
| Digital Input Current                  | IIN      | VIN = 0 or DVDD                                                 |      |     | ±1   | μA     |
| Digital Input Capacitance              | CIN      |                                                                 |      | 10  |      | pF     |
| <b>TIMING CHARACTERISTICS</b>          |          |                                                                 |      |     |      |        |
| DAC1 DATA to CLK Rise Setup Time       | tDS1     |                                                                 |      | 10  |      | ns     |
| DAC2 DATA to CLK Fall Setup Time       | tDS2     |                                                                 |      | 10  |      | ns     |
| DAC1 CLK Rise to DATA Hold Time        | tDH1     |                                                                 |      | 0   |      | ns     |
| DAC2 CLK Fall to DATA Hold Time        | tDH2     |                                                                 |      | 0   |      | ns     |

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## ELECTRICAL CHARACTERISTICS (continued)


( $AV_{DD} = DV_{DD} = 3V$ ,  $AGND = DGND = 0$ ,  $f_{CLK} = 40MHz$ ,  $I_{FS} = 1mA$ ,  $400\Omega$  differential output,  $C_L = 5pF$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.  $\geq +25^\circ C$  guaranteed by production test,  $< +25^\circ C$  guaranteed by design and characterization. Typical values are at  $T_A = +25^\circ C$ .)

| PARAMETER                             | SYMBOL    | CONDITIONS | MIN | TYP | MAX | UNITS   |
|---------------------------------------|-----------|------------|-----|-----|-----|---------|
| $\overline{CS}$ Fall to CLK Rise Time |           |            |     | 5   |     | ns      |
| $\overline{CS}$ Fall to CLK Fall Time |           |            |     | 5   |     | ns      |
| DACEN Rise Time to $V_{OUT}$          |           |            |     | 0.5 |     | $\mu s$ |
| PD Fall Time to $V_{OUT}$             |           |            |     | 50  |     | $\mu s$ |
| Clock Period                          | $t_{CLK}$ |            | 25  |     |     | ns      |
| Clock High Time                       | $t_{CH}$  |            | 10  |     |     | ns      |
| Clock Low Time                        | $t_{CL}$  |            | 10  |     |     | ns      |

**Note 1:** Excludes reference and reference resistor (MAX5189) tolerance.

## Typical Operating Characteristics

( $AV_{DD} = DV_{DD} = 3V$ ,  $AGND = DGND = 0$ ,  $400\Omega$  differential output,  $I_{FS} = 1mA$ ,  $C_L = 5pF$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)









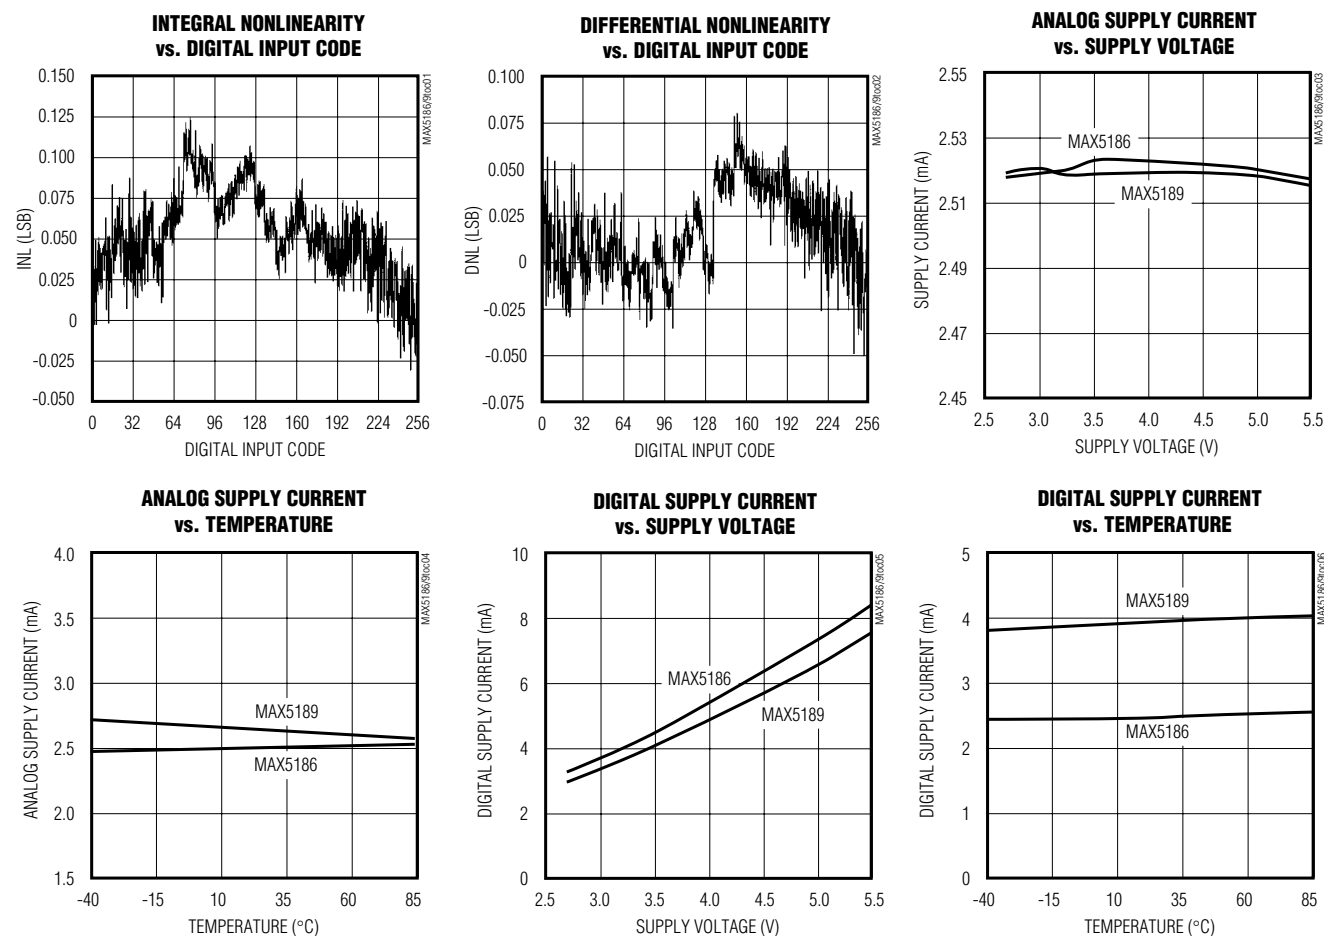


# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## Typical Operating Characteristics (continued)

( $V_{DD} = DV_{DD} = 3V$ ,  $AGND = DGND = 0$ ,  $400\Omega$  differential output,  $I_{FS} = 1mA$ ,  $C_L = 5pF$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)








MAX5186/MAX5189

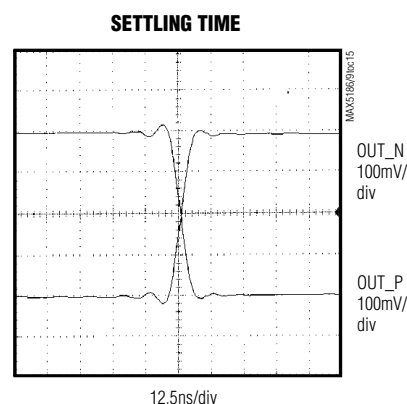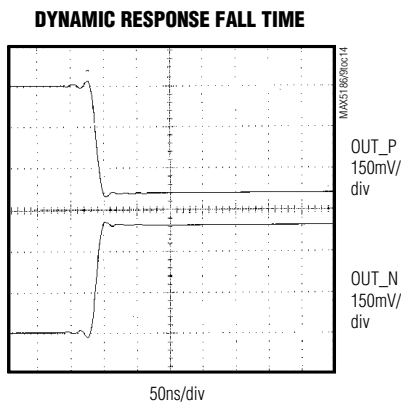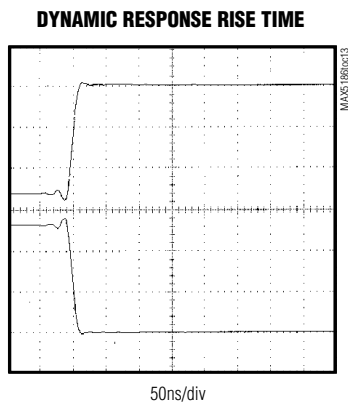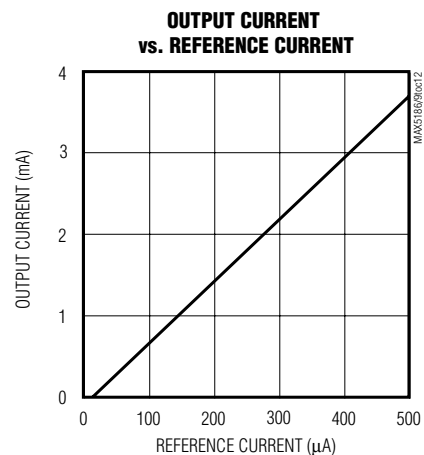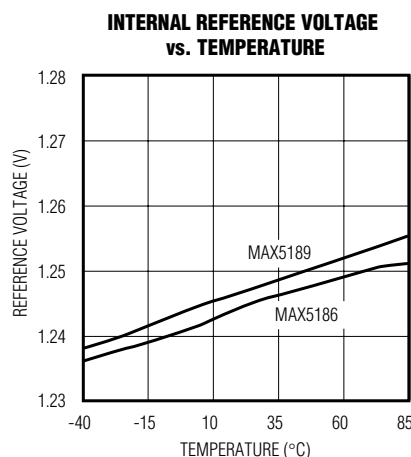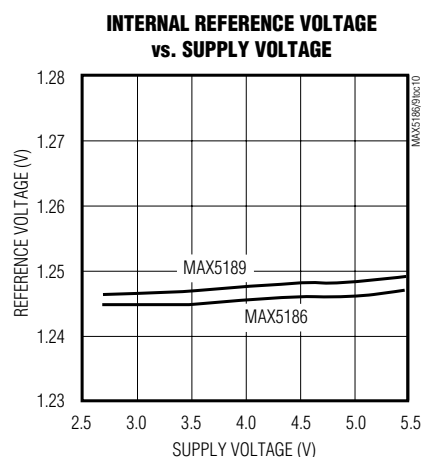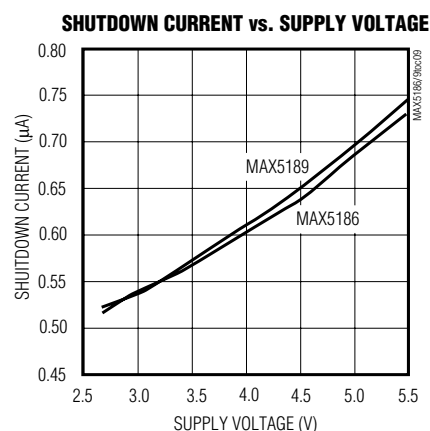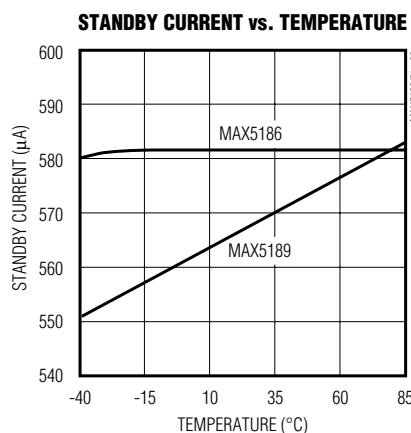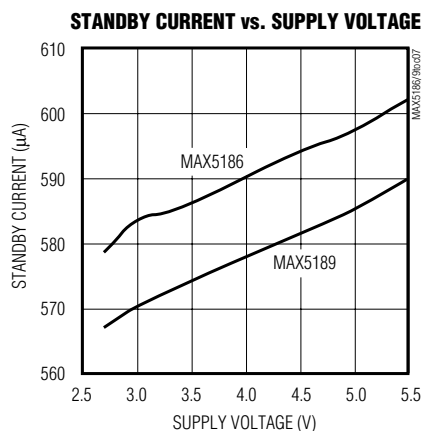

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## Typical Operating Characteristics (continued)

( $AV_{DD} = DV_{DD} = 3V$ ,  $AGND = DGND = 0$ ,  $400\Omega$  differential output,  $I_{FS} = 1mA$ ,  $C_L = 5pF$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

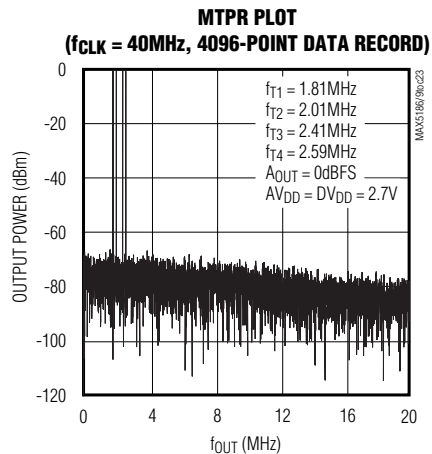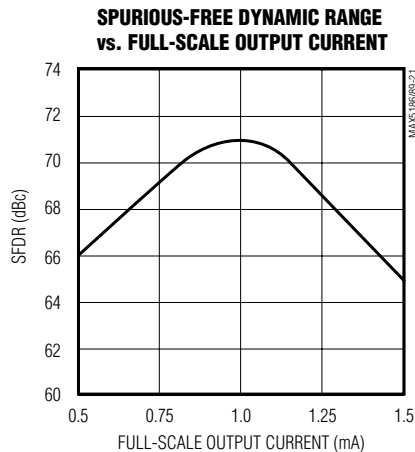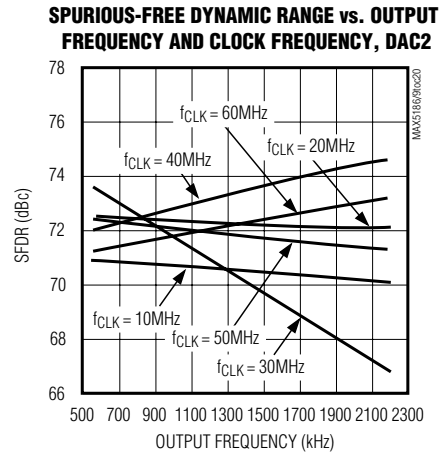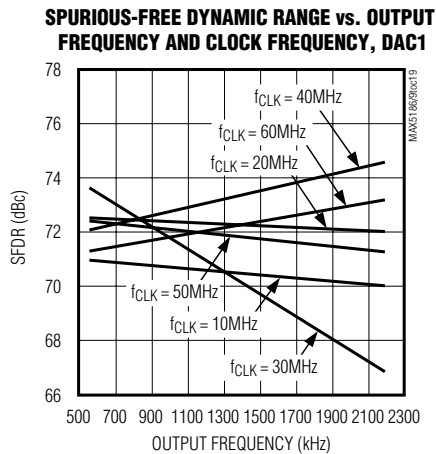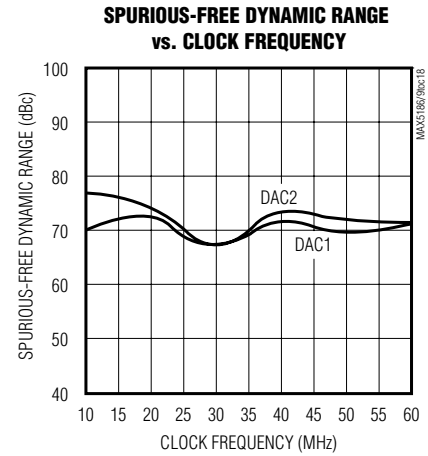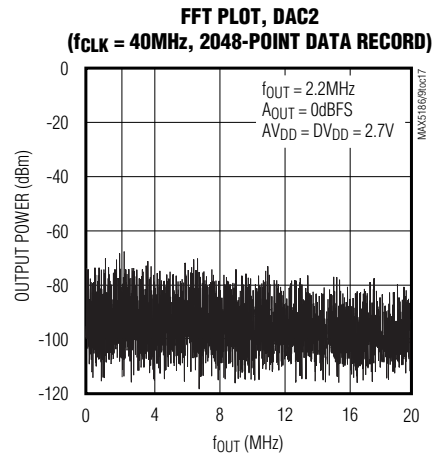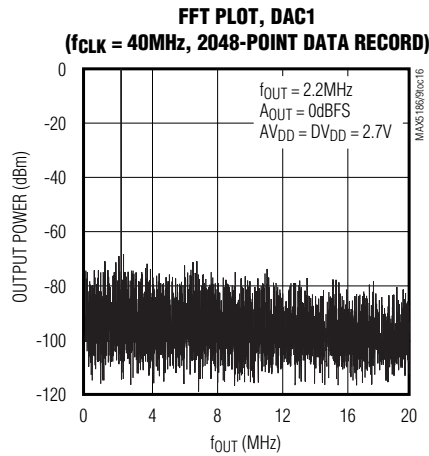

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## Pin Description

MAX5186/MAX5189

| PIN   | NAME                    | FUNCTION                                                                                                                                                             |
|-------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | CREF1                   | Reference Bias Bypass, DAC1                                                                                                                                          |
| 2     | OUT1P                   | Positive Analog Output, DAC1. Current output for MAX5186; voltage output for MAX5189.                                                                                |
| 3     | OUT1N                   | Negative Analog Output, DAC1. Current output for MAX5186; voltage output for MAX5189.                                                                                |
| 4     | AGND                    | Analog Ground                                                                                                                                                        |
| 5     | AVDD                    | Analog Positive Supply, 2.7V to 3.3V                                                                                                                                 |
| 6     | DACEN                   | DAC Enable, Digital Input<br>0: Enter DAC standby mode with PD = DGND.<br>1: Power-up DAC with PD = DGND.<br>X: Enter shutdown mode with PD = DVDD (X = don't care). |
| 7     | PD                      | Power-Down Select<br>0: Enter DAC standby mode (DACEN = DGND) or power-up DAC (DACEN = DVDD).<br>1: Enter shutdown mode.                                             |
| 8     | $\overline{\text{CS}}$  | Active-Low Chip Select                                                                                                                                               |
| 9     | CLK                     | Clock input                                                                                                                                                          |
| 10    | N.C.                    | No Connect. Do not connect to this pin.                                                                                                                              |
| 11    | $\overline{\text{REN}}$ | Active-Low Reference Enable. Connect to DGND to activate on-chip 1.2V reference.                                                                                     |
| 12    | DGND                    | Digital Ground                                                                                                                                                       |
| 13    | DGND                    | Digital Ground                                                                                                                                                       |
| 14    | D0                      | Data Bit D0 (LSB)                                                                                                                                                    |
| 15–20 | D1–D6                   | Data Bits D1–D6                                                                                                                                                      |
| 21    | D7                      | Data Bit D7 (MSB)                                                                                                                                                    |
| 22    | DVDD                    | Digital Supply, 2.7V to 3.3V                                                                                                                                         |
| 23    | DGND                    | Digital Ground                                                                                                                                                       |
| 24    | REFR                    | Reference Input                                                                                                                                                      |
| 25    | REFO                    | Reference Output                                                                                                                                                     |
| 26    | OUT2N                   | Negative Analog Output, DAC2. Current output for MAX5186; voltage output for MAX5189.                                                                                |
| 27    | OUT2P                   | Positive Analog Output, DAC2. Current output for MAX5186; voltage output for MAX5189.                                                                                |
| 28    | CREF2                   | Reference Bias Bypass, DAC2                                                                                                                                          |

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## Detailed Description

The MAX5186/MAX5189 are dual, 8-bit digital-to-analog converters (DACs) capable of operating with clock speeds up to 40MHz. Each of these dual converters consists of separate input and DAC registers, followed by a current source array capable of generating up to 1.5mA full-scale output current (Figure 1). An integrated 1.2V voltage reference and control amplifier determine the data converters' full-scale output currents/voltages. Careful reference design ensures close gain matching and excellent drift characteristics. The MAX5189's voltage output operation features matched 400Ω on-chip resistors that convert the current array current into a voltage.

### Internal Reference and Control Amplifier

The MAX5186/MAX5189 provide an integrated 50ppm/°C, 1.2V, low-noise bandgap reference that can be disabled and overridden by an external reference voltage. REFO serves either as an external reference input or an integrated reference output. If  $\overline{\text{REN}}$  is connected to DGND, the internal reference is selected and REFO provides a 1.2V output. Due to its limited 10μA output drive capability, REFO must be buffered with an external amplifier if heavier loading is required.

The MAX5186/MAX5189 also employ a control amplifier designed to simultaneously regulate the full-scale output current ( $I_{\text{FS}}$ ) for both outputs of the devices. The output current is calculated as follows:

$$I_{\text{FS}} = 8 \times I_{\text{REF}}$$

where  $I_{\text{REF}}$  is the reference output current ( $I_{\text{REF}} = V_{\text{REFO}}/R_{\text{SET}}$ ) and  $I_{\text{FS}}$  is the full-scale output current.  $R_{\text{SET}}$  is the reference resistor that determines the amplifier's output current on the MAX5186 (Figure 2). This current is mirrored into the current source array where it is equally distributed between matched current segments and summed to valid output current readings for the DACs.

The MAX5189 converts each output current (DAC1 and DAC2) into an output voltage ( $V_{\text{OUT1}}$ ,  $V_{\text{OUT2}}$ ) with two internal, ground-referenced 400Ω load resistors. Using the internal 1.2V reference voltage, the MAX5189's integrated reference output-current resistor ( $R_{\text{SET}} = 9.6\text{k}\Omega$ ) sets  $I_{\text{REF}}$  to 125μA and  $I_{\text{FS}}$  to 1mA.

## External Reference

To disable the MAX5186/MAX5189's internal reference, connect  $\overline{\text{REN}}$  to  $\text{DV}_{\text{DD}}$ . A temperature-stable, external reference may now be applied to drive the REFO pin to set the full-scale output (Figure 3). Choose a reference capable of supplying at least 150μA to drive the bias circuit that generates the cascode current for the current array. For improved accuracy and drift performance, choose a fixed output voltage reference such as the 1.2V, 25ppm/°C MAX6520 bandgap reference.

## Standby Mode

To enter the lower power standby mode, connect digital inputs PD and DACEN to DGND. In standby, both the reference and the control amplifier are active with the current array inactive. To exit this condition, DACEN must be pulled high with PD held at DGND. Both the MAX5186/MAX5189 typically require 50μs to wake up and let both outputs and reference settle.

## Shutdown Mode

For lowest power consumption, the MAX5186/MAX5189 provide a power-down mode in which the reference, control amplifier, and current array are inactive and the DACs' supply current is reduced to 1μA. To enter this mode, connect PD to  $\text{DV}_{\text{DD}}$ . To return to active mode, connect PD to DGND and DACEN to  $\text{DV}_{\text{DD}}$ . About 50μs are required for the parts to leave shutdown mode and settle to their outputs' values prior to shutdown. Table 1 lists the power-down mode selection.


## Timing Information

The MAX5186/MAX5189 dual DACs write to their outputs simultaneously (Figure 4). On the falling edge of the clock, the input data for DAC2 is preloaded into a latch. On the rising edge of the clock, input data for DAC1 is loaded to the DAC1 register, and the preloaded DAC2 data in the latch is loaded to the DAC2 register.

## Outputs

The MAX5186 outputs are designed to supply full-scale output currents of 1mA into 400Ω loads in parallel with a capacitive load of 5pF. The MAX5189 features integrated 400Ω resistors that restore the array currents to proportional, differential voltages of 400mV. These differential output voltages can then be used to drive a balun transformer or a low-distortion, high-speed operational amplifier to convert the differential voltage into a single-ended voltage.

**MAX5186/MAX5189**



### ***Integral Nonlinearity (INL)***

### Differential Nonlinearity (DNL)

### Offset Error

transfer function determined by the endpoints of a straight-line endpoint fit. This error affects all codes by the same amount.

### Gain Error

Gain error is the difference between the ideal and the actual output value range. This range represents the output when all digital inputs are set to 1 minus the output when all digital inputs are set to 0.

## Glitch Impulse

A glitch is generated when a DAC switches between two codes. The largest glitch is usually generated around the midscale transition, when the input pattern transitions from 011...111 to 100...000. This occurs due to timing variations between the bits. The glitch impulse is found by integrating the voltage of the glitch at the midscale transition over time. The glitch impulse is usually specified in pV-s.

### Settling Time

The settling time is the amount of time required from the start of a transition until the DAC output settles its new output value to within the converter's specified accuracy.

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

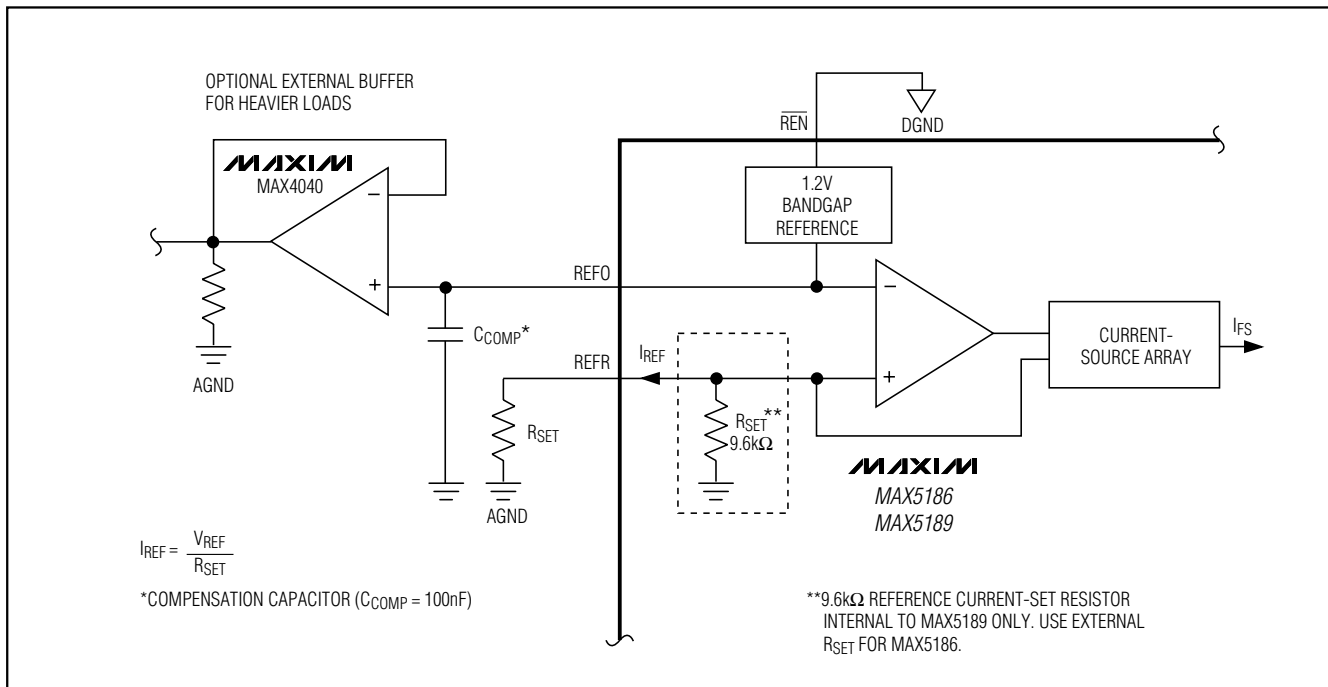


Figure 2. Setting  $I_{FS}$  with the Internal 1.2V Reference and the Control Amplifier

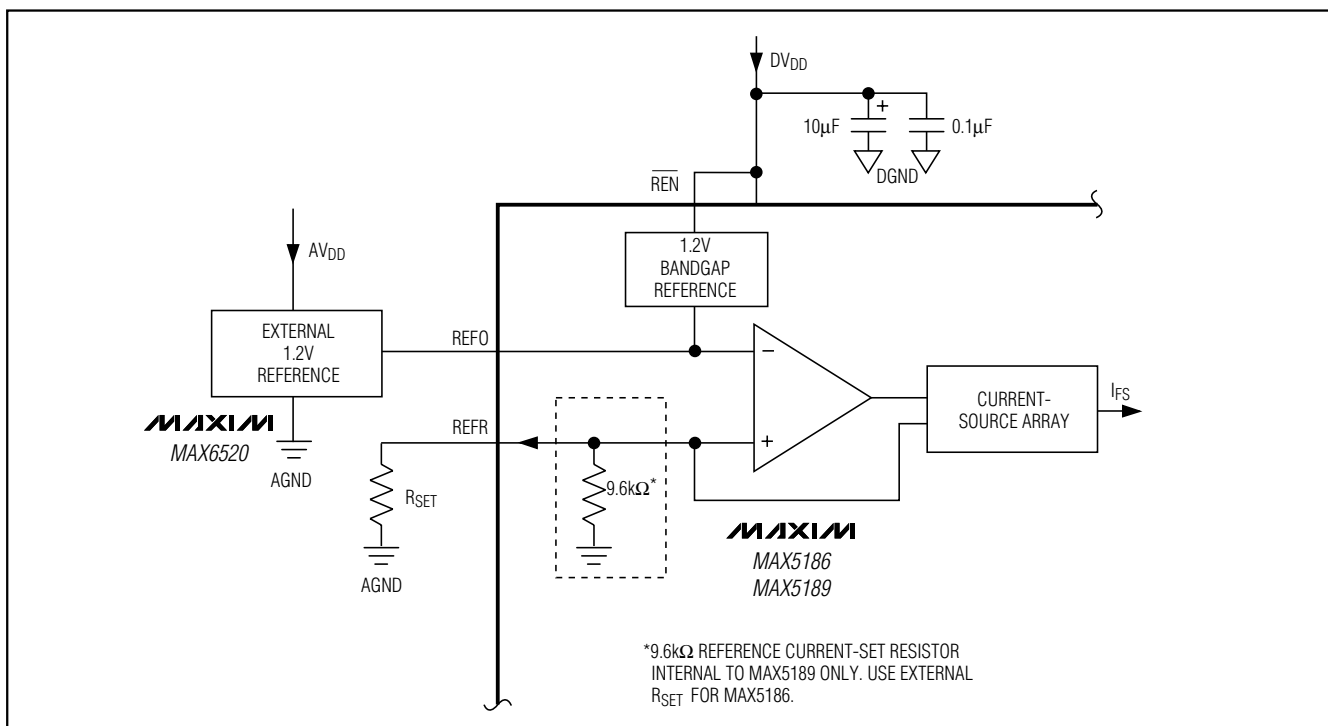


Figure 3. MAX5186/MAX5189 with External Reference

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

**Table 1. Power-Down Mode Selection**

| PD<br>(POWER-DOWN SELECT) | DACEN (DAC<br>ENABLE) | POWER-DOWN<br>MODE | OUTPUT STATE                     |        |
|---------------------------|-----------------------|--------------------|----------------------------------|--------|
| 0                         | 0                     | Standby            | MAX5186                          | High-Z |
|                           |                       |                    | MAX5189                          | AGND   |
| 0                         | 1                     | Wake-Up            | Last state prior to standby mode |        |
| 1                         | X                     | Shutdown           | MAX5186                          | High-Z |
|                           |                       |                    | MAX5189                          | AGND   |

X = Don't care

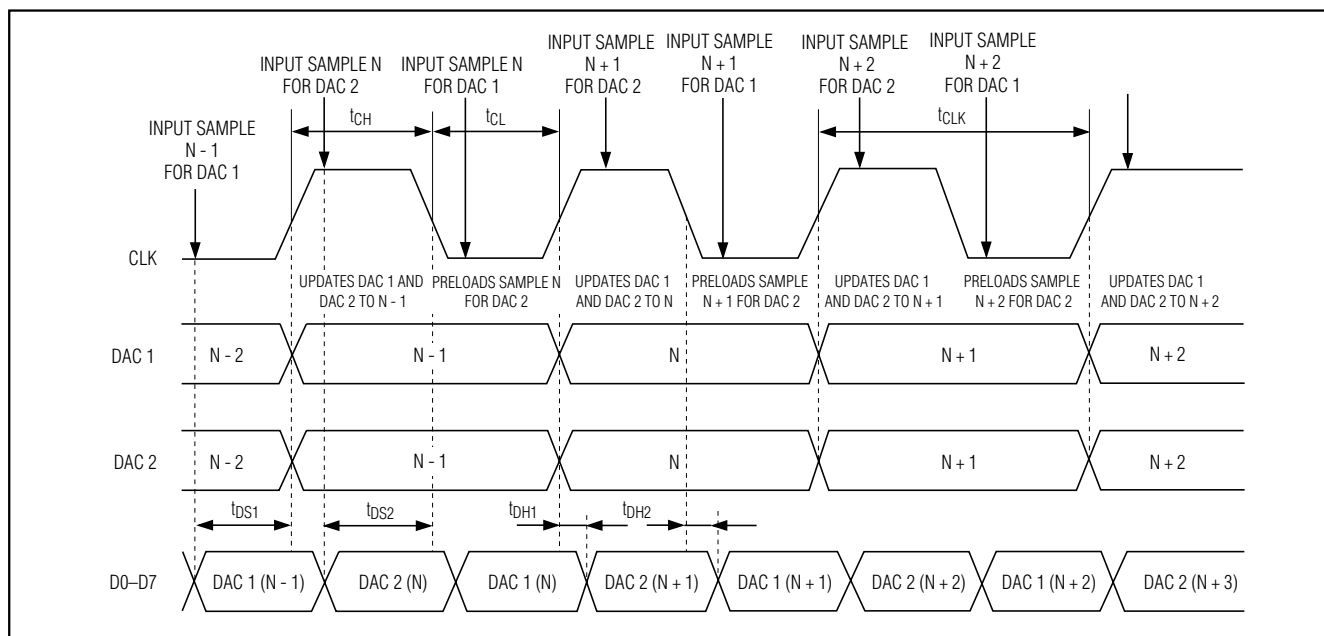


Figure 4. Timing Diagram

## Digital Feedthrough

Digital feedthrough is the noise generated on a DAC's output when any digital input transitions. Proper board layout and grounding will significantly reduce this noise, but there will always be some feedthrough caused by the DAC itself.

## Total Harmonic Distortion

Total harmonic distortion (THD) is the ratio of the RMS sum of the input signal's N harmonics to the fundamental itself. This is expressed as:

$$THD = 20 \times \log \left( \frac{\sqrt{V_2^2 + V_3^2 + V_4^2 + \dots + V_N^2}}{V_1} \right)$$

where  $V_1$  is the fundamental amplitude, and  $V_2$  through  $V_N$  are the amplitudes of the 2nd- through Nth-order harmonics.

## Spurious-Free Dynamic Range (SFDR)

SFDR is the ratio of RMS amplitude of the carrier frequency (maximum signal component) to the RMS value of the next largest noise or harmonic distortion component. SFDR is usually measured in dBc with respect to the carrier frequency amplitude or in dBFS with respect to the DAC's full-scale range. Depending on its test condition, SFDR is observed within a predefined window or to Nyquist. In the case of the MAX5186/MAX5189, the SFDR performance is measured for a 0dBFS output amplitude and analyzed within the Nyquist window.

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## Differential to Single-Ended Conversion

The MAX4108 low-distortion, high-input bandwidth amplifier may be used to generate a voltage from the array current output of the MAX5186. The differential voltage across OUT1P (or OUT2P) and OUT1N (or OUT2N) is converted into a single-ended voltage by designing an appropriate operational amplifier configuration (Figure 5).

## I/Q Reconstruction in a QAM Application

The MAX5186/MAX5189's low distortion supports analog reconstruction of in-phase (I) and quadrature (Q) carrier components typically used in quadrature amplitude modulation (QAM) architectures where I and Q data are interleaved on a common data bus. A QAM

signal is both amplitude and phase modulated, created by summing two independently modulated carriers of identical frequency but different phase (90° phase difference).

In a typical QAM application (Figure 6), the modulation occurs in the digital domain and the MAX5186/MAX5189's dual DACs may be used to reconstruct the analog I and Q components.

The I/Q reconstruction system is completed by a quadrature modulator that combines the reconstructed I and Q components with in-phase and quadrature carrier frequencies and then sums both outputs to provide the QAM signal.

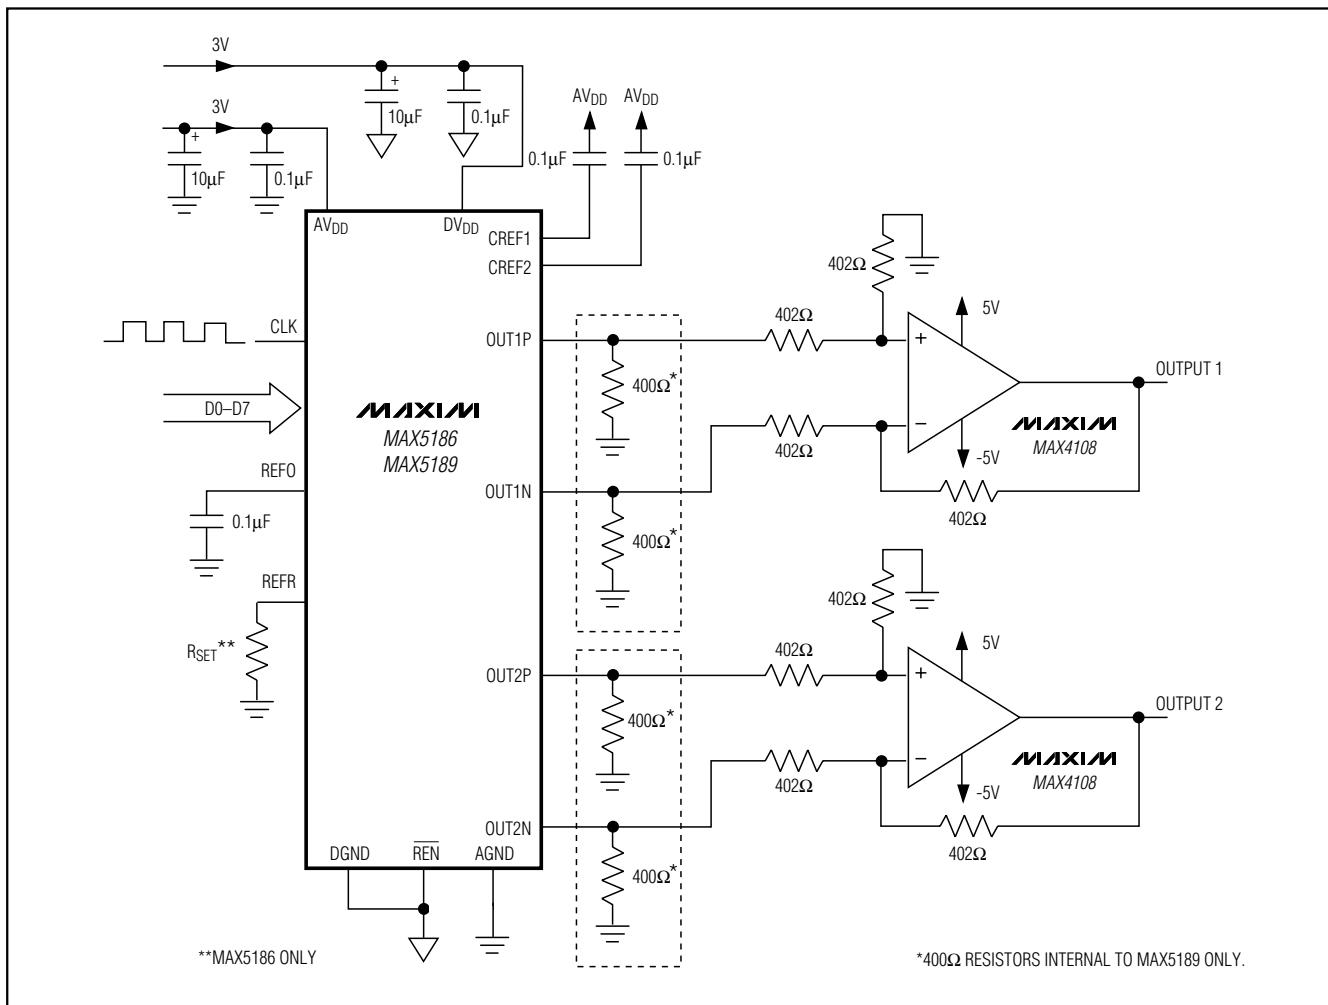


Figure 5. Differential to Single-Ended Conversion Using a Low-Distortion Amplifier

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

MAX5186/MAX5189

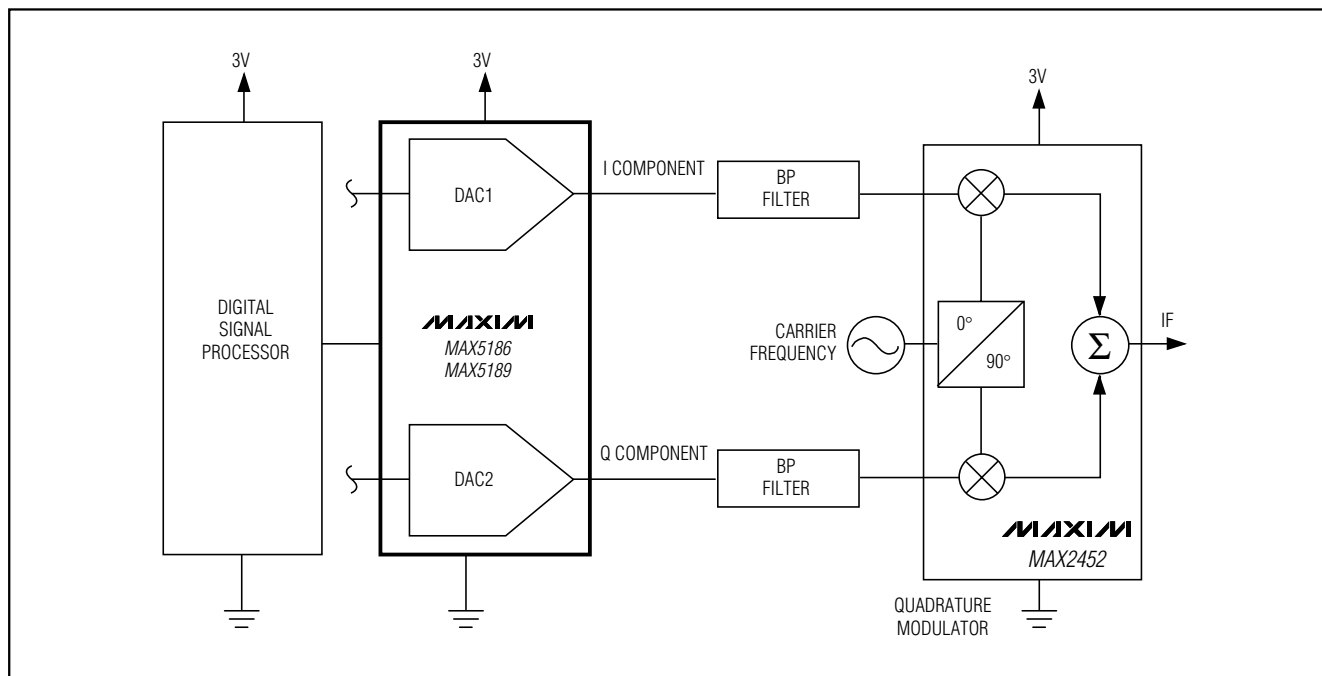


Figure 6. Using the MAX5186/MAX5189 for I/Q Signal Reconstruction

## Grounding and Power-Supply Decoupling

Grounding and power-supply decoupling strongly influence the MAX5186/MAX5189's performance. Unwanted digital crosstalk may couple through the input, reference, power-supply, and ground connections, which may affect dynamic specifications like signal-to-noise ratio or SFDR. In addition, electromagnetic interference (EMI) can either couple into or be generated by the MAX5186/MAX5189. Therefore, grounding and power-supply decoupling guidelines for high-speed, high-frequency applications should be closely followed.

First, a multilayer printed circuit (PC) board with separate ground and power-supply planes is recommended. High-speed signals should be run on controlled impedance lines directly above the ground plane. Since the MAX5186/MAX5189 have separate analog and digital ground buses (AGND and DGND, respectively), the PC board should also have separate analog and digital ground sections with only one point connecting the two. Digital signals should run above the digital ground plane, and analog signals should run above the analog ground plane. Digital signals should be kept far away from the sensitive analog reference and clock input.

Both devices have two power-supply inputs: analog  $V_{DD}$  ( $AV_{DD}$ ) and digital  $V_{DD}$  ( $DV_{DD}$ ). Each  $AV_{DD}$  input should be decoupled with parallel 10 $\mu$ F and 0.1 $\mu$ F ceramic-chip capacitors. These capacitors should be as close to the pin as possible, and their opposite ends should be as close to the ground plane as possible. The  $DV_{DD}$  pins should also have separate 10 $\mu$ F and 0.1 $\mu$ F capacitors adjacent to their respective pins. Try to minimize analog load capacitance for proper operation. For best performance, it is recommended to bypass CREF1 and CREF2 with low-ESR 0.1 $\mu$ F capacitors to  $AV_{DD}$ .

The power-supply voltages should also be decoupled with large tantalum or electrolytic capacitors at the point they enter the PC board. Ferrite beads with additional decoupling capacitors forming a pi network can also improve performance.

## Chip Information


TRANSISTOR COUNT: 9464

SUBSTRATE CONNECTED TO AGND

# Dual, 8-Bit, 40MHz, Current/Voltage, Simultaneous-Output DACs

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

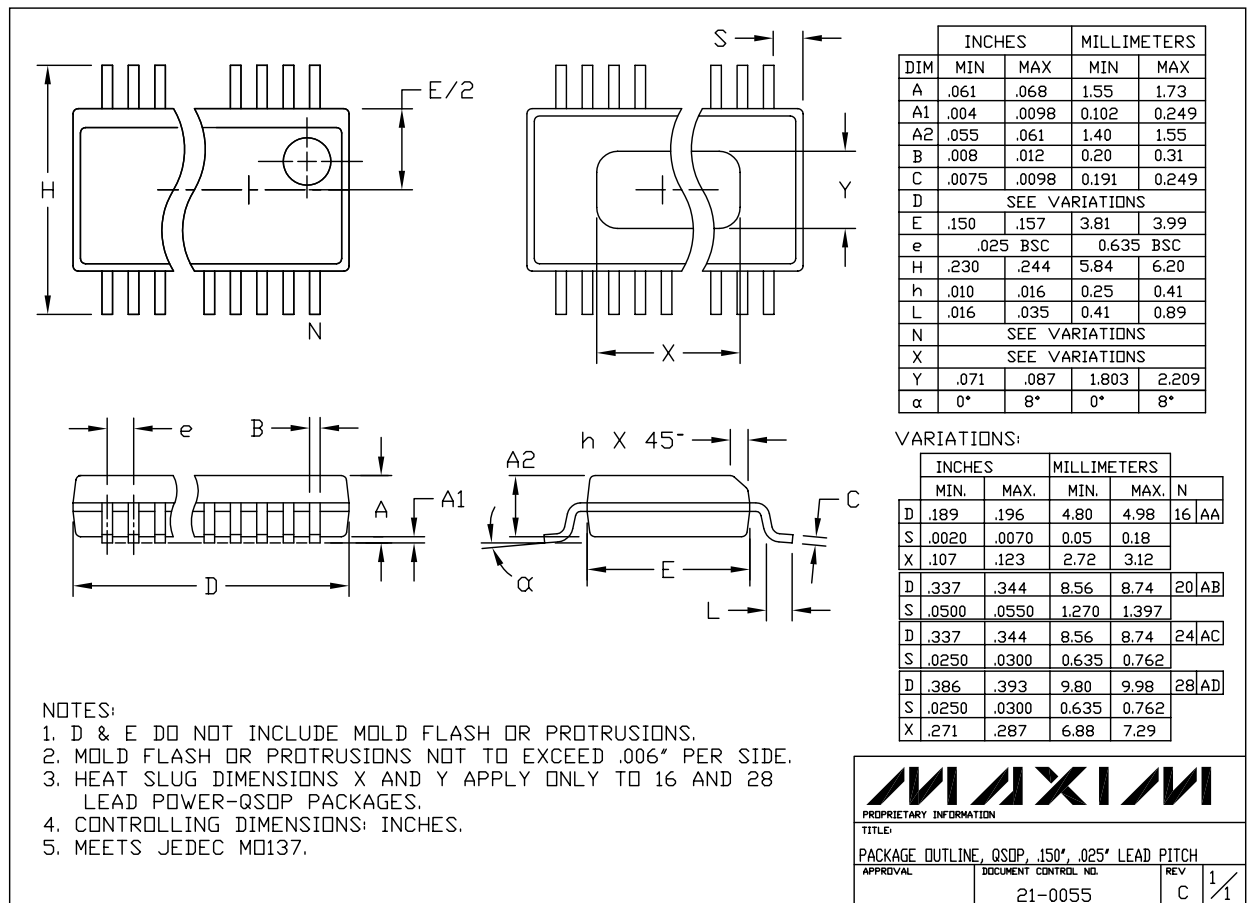

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

14 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600