

Maximum Ratings:

Sub-Component Device: Discrete NPN Transistor (Q1, Q2) @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	50	V
Collector-Emitter Voltage	V _{CEO}	50	V
Emitter-Base Voltage	V _{EBO}	6	V
Collector Current (dc)	I _{C(max)}	50	mA

Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Off Characteristics						
Collector-Base Cut Off Current	I _{CBO}	—	—	100	nA	V _{CB} = 50V, I _E = 0
Collector-Emitter Cut Off Current, I _{O(OFF)}	I _{CEO}	—	—	500	nA	V _{CE} = 50V, I _B = 0
Emitter-Base Cut Off Current	I _{EBO}	—	—	500	nA	V _{EB} = 5V, I _C = 0
Collector-Base Breakdown Voltage	V _{(BR)CBO}	50	—	—	V	I _C = 50uA, I _E = 0
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	50	—	—	V	I _C = 1 mA, I _B = 0
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	6	—	—	V	I _E = 50uA, I _C = 0
Output Voltage (Transistor is off)	V _{OH}	4.6	4.45	—	V	V _{CC} = 5V, V _B = 0.05V, R _L = 1KΩ
Input Voltage (load is off)	V _{I(OFF)}	—	0.6	0.4	—	V _{CE} = 5V, I _C = 100uA
Output Current (leakage same as I _{CEO})	I _{O(OFF)}	—	—	850	nA	V _{CC} = 50V, V _I = 0V
On Characteristics*						
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	—	0.03	0.1	V	I _C = 2.5 mA, I _B = 0.25 mA
		—	0.075	0.1	V	I _C = 10mA, I _B = 0.5mA
		—	0.05	0.1	V	I _C = 10mA, I _B = 1mA
		—	0.2	0.3	V	I _C = 50mA, I _B = 5mA
DC Current Gain	h _{FE}	150	400	—	—	V _{CE} = 5V, I _C = 1 mA
		150	400	—	—	V _{CE} = 5V, I _C = 10 mA
		150	350	—	—	V _{CE} = 5V, I _C = 25 mA
		150	300	—	—	V _{CE} = 5V, I _C = 50 mA
		50	110	—	—	V _{CE} = 5V, I _C = 100 mA
Output Voltage (equivalent to V _{CE(SAT)} or V _{O(on)})	V _{OL}	—	0.2	0.25	Vdc	V _{CC} = 5V, V _B = 2.5V, R _L = 10KΩ
Input Voltage	V _{I(ON)}	1.5	0.95	—	Vdc	V _O = 0.3V, I _C = 2mA
Input Current	I _i	—	19.2	28	mA	V _I = 5V
Base-Emitter Turn-on Voltage	V _{BE(ON)}	—	—	1.2	V	V _{CE} = 5V, I _C = 2mA
Base-Emitter Saturation Voltage	V _{BE(SAT)}	—	—	1.6	V	I _C = 200uA, I _B = 20uA
Input Resistor +/- 30% (Base)	R ₁	—	47	—	KΩ	—
Small Signal Characteristics						
Transition Frequency (gain-bandwidth product)	f _T	—	250	—	MHz	V _{CE} = 10V, I _E = 5mA, f = 100MHz
Collector Capacitance, (C _{cb0} -Output Capacitance)	C _C	—	—	5	pF	V _{CB} = 10V, I _E = 0, f = 1MHz

*Pulse Test: Pulse width, tp < 300 uS, Duty Cycle, d <= 0.02

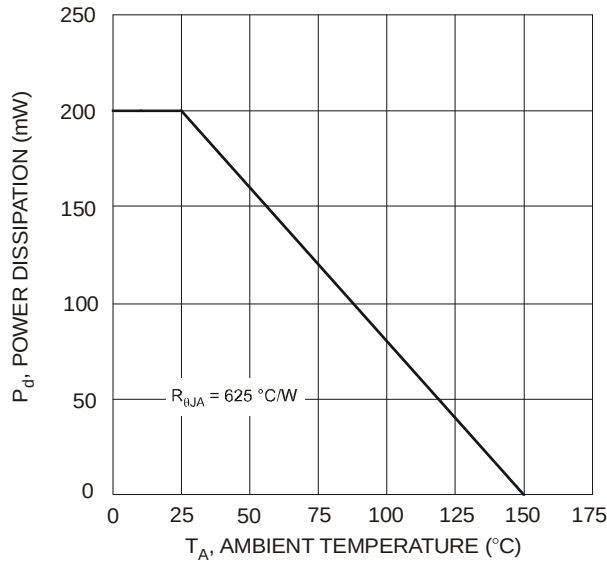


Fig. 3 Maximum Power Derating Curve

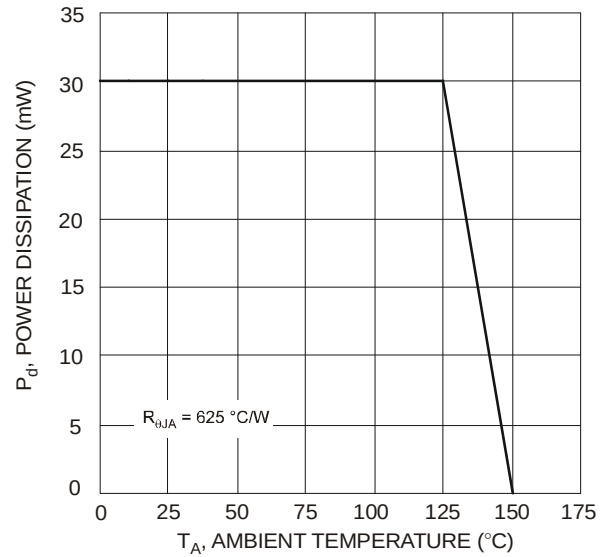


Fig. 4 Power Derating for Nominal Operation

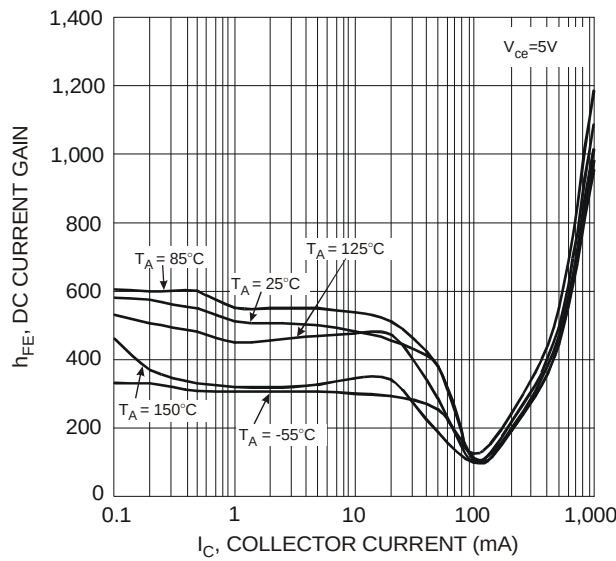


Fig. 5 DC Current Gain

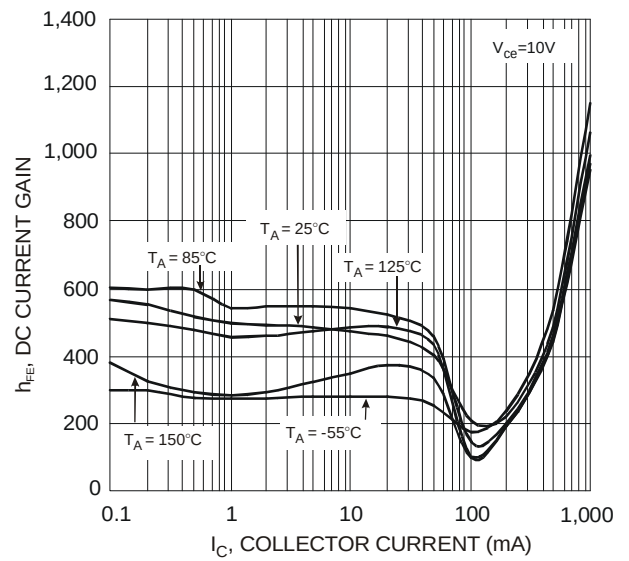


Fig. 6 DC Current Gain

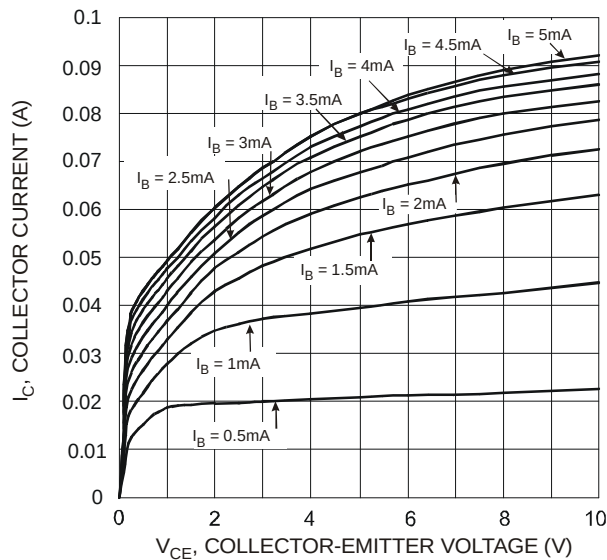


Fig. 7 I_C vs. V_{CE}

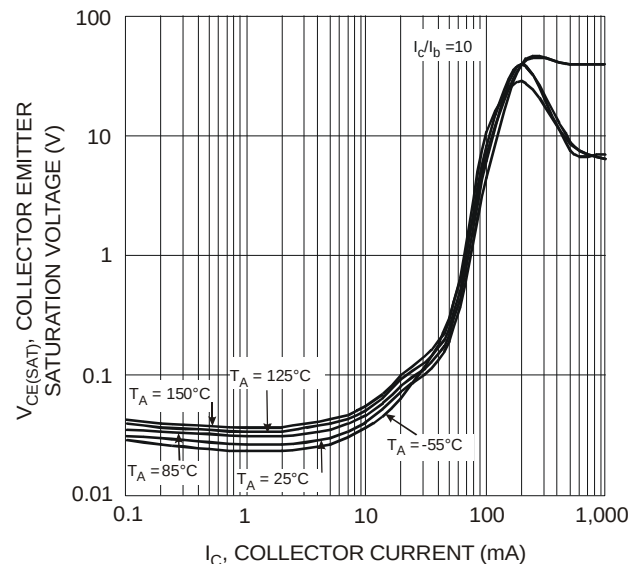


Fig. 8 $V_{CE(SAT)}$ vs I_C

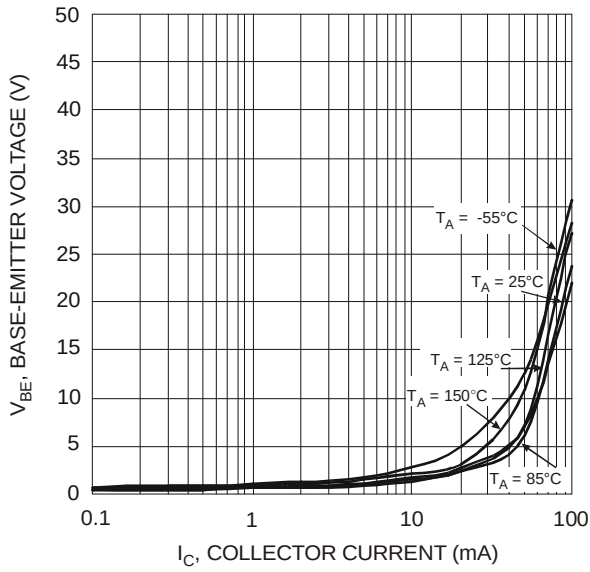


Fig. 9 V_{BE} vs I_C

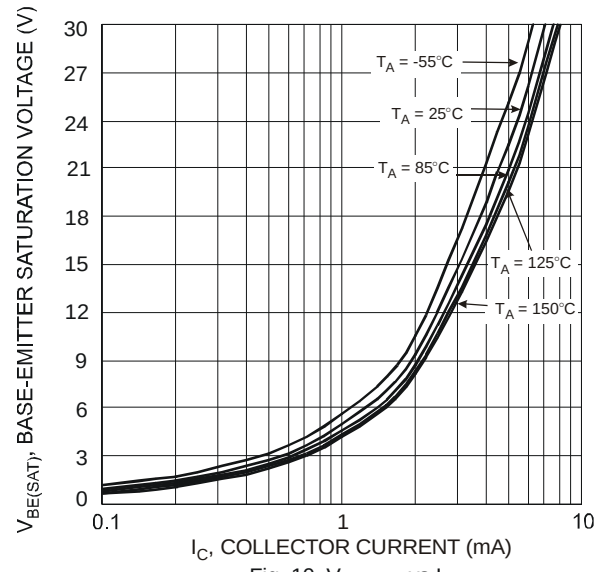


Fig. 10 $V_{BE(SAT)}$ vs I_C

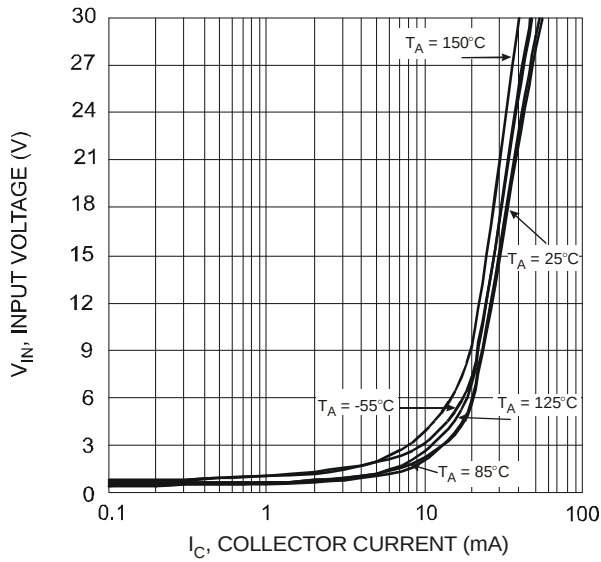



Fig. 11 Input Voltage vs Output Current

Ordering Information (Note 4)

Device	Marking Code	Packaging	Shipping
DDC144TU-7	N21	SOT-363	3000/Tape & Reel

Notes: 4. For packaging details, please see below or go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



N21 = Product Type Marking Code
 YM = Date Code Marking
 Y = Year e.g., U = 2007
 M = Month e.g., 9 = September

Fig. 12

Date Code Key

Year	2006	2007	2008	2009	2010	2011	2012
Code	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

Mechanical Details

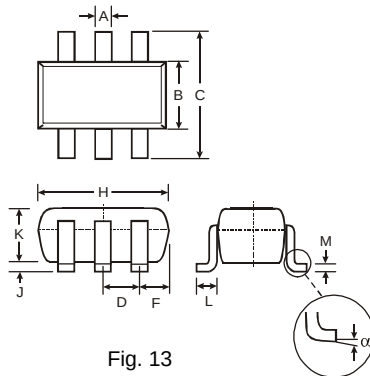


Fig. 13

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
α	0°	8°
All Dimensions in mm		

Suggested Pad Layout: (Based on IPC-SM-782)

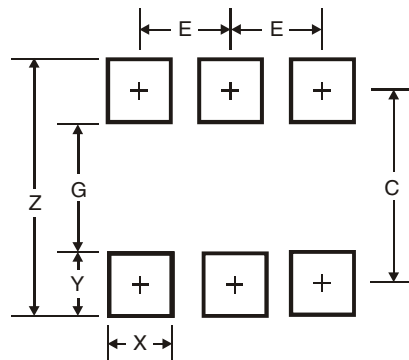


Fig. 14

Figure 14 Dimensions	SOT-363
Z	2.5
G	1.3
X	0.42
Y	0.6
C	1.9
E	0.65
All Dimensions in mm	

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.