

# Low-Voltage, High-Accuracy, Quad Voltage Monitors in $\mu$ MAX Package

## ABSOLUTE MAXIMUM RATINGS

All Pins to GND ..... -0.3V to +6V  
 Input/Output Current (all pins) ..... 20mA  
 Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )  
 10-Pin  $\mu$ MAX (derate 5.6mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 444mW

Operating Temperature Range .....  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$   
 Storage Temperature Range .....  $-65^\circ\text{C}$  to  $+150^\circ\text{C}$   
 Junction Temperature .....  $+150^\circ\text{C}$   
 Lead Temperature (soldering, 10s) .....  $+300^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS (MAX6709)

( $V_{CC} = 2.0\text{V}$  to  $5.5\text{V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ , unless otherwise noted. Typical values are at  $V_{CC} = 5\text{V}$  and  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                                 | SYMBOL     | CONDITIONS                                                                                  | MIN                 | TYP                 | MAX   | UNITS                 |
|-------------------------------------------|------------|---------------------------------------------------------------------------------------------|---------------------|---------------------|-------|-----------------------|
| Supply Voltage Range                      | $V_{CC}$   |                                                                                             | 2.0                 |                     | 5.5   | V                     |
| Supply Current                            | $I_{CC}$   | $V_{CC} = 3\text{V}$                                                                        |                     | 25                  | 50    | $\mu\text{A}$         |
|                                           |            | $V_{CC} = 5\text{V}$                                                                        |                     | 35                  | 65    |                       |
| Input Current                             | $I_{IN\_}$ | $V_{IN\_} = \text{input threshold voltage}$                                                 |                     | 25                  | 40    | $\mu\text{A}$         |
|                                           |            | $V_{IN\_} = 0$ to $0.85\text{V}$ (for adjustable threshold)                                 |                     |                     | 0.2   |                       |
| Threshold Voltage                         | $V_{TH}$   | $I_{N\_}$ decreasing                                                                        | 5.0V (-5%)          | 4.50                | 4.63  | V                     |
|                                           |            |                                                                                             | 5.0V (-10%)         | 4.25                | 4.38  |                       |
|                                           |            |                                                                                             | 3.3V (-5%)          | 3.00                | 3.08  |                       |
|                                           |            |                                                                                             | 3.3V (-10%)         | 2.85                | 2.93  |                       |
|                                           |            |                                                                                             | 3.0V (-5%)          | 2.70                | 2.78  |                       |
|                                           |            |                                                                                             | 3.0V (-10%)         | 2.55                | 2.63  |                       |
|                                           |            |                                                                                             | 2.5V (-5%)          | 2.25                | 2.32  |                       |
|                                           |            |                                                                                             | 2.5V (-10%)         | 2.13                | 2.19  |                       |
|                                           |            |                                                                                             | 1.8V (-5%)          | 1.62                | 1.67  |                       |
|                                           |            |                                                                                             | 1.8V (-10%)         | 1.53                | 1.58  |                       |
| Adjustable Threshold                      | $V_{TH}$   | $I_{N\_}$ decreasing                                                                        | 0.609               | 0.623               | 0.635 | V                     |
| Threshold Voltage Temperature Coefficient | $TCV_{TH}$ |                                                                                             |                     | 60                  |       | ppm/ $^\circ\text{C}$ |
| Threshold Hysteresis                      | $V_{HYST}$ |                                                                                             |                     | $0.3 \times V_{TH}$ |       | %                     |
| Propagation Delay                         | $t_{PD}$   | $V_{IN\_}$ falling at $10\text{mV}/\mu\text{s}$ from $V_{TH}$ to ( $V_{TH} - 50\text{mV}$ ) |                     | 30                  |       | $\mu\text{s}$         |
|                                           |            | $V_{IN\_}$ rising at $10\text{mV}/\mu\text{s}$ from $V_{TH}$ to ( $V_{TH} + 50\text{mV}$ )  |                     | 5                   |       |                       |
| Output Low Voltage                        | $V_{OL}$   | $V_{CC} = 5\text{V}$ , $I_{SINK} = 2\text{mA}$                                              |                     |                     | 0.3   | V                     |
|                                           |            | $V_{CC} = 2.5\text{V}$ , $I_{SINK} = 1.2\text{mA}$                                          |                     |                     | 0.3   |                       |
|                                           |            | $V_{CC} = 1\text{V}$ , $I_{SINK} = 50\mu\text{A}$ (Note 2)                                  |                     |                     | 0.3   |                       |
| Output High Voltage                       | $V_{OH}$   | $V_{CC} \geq 2.0\text{V}$ , $I_{SOURCE} = 6\mu\text{A}$ (min), PWRGD_ unasserted            | $0.8 \times V_{CC}$ |                     |       | V                     |
| Output High Source Current                | $I_{OH}$   | $V_{CC} \geq 2.0\text{V}$ , PWRGD_ unasserted                                               |                     | 10                  |       | $\mu\text{A}$         |

# Low-Voltage, High-Accuracy Quad, Voltage Monitors in $\mu$ MAX Package

## ELECTRICAL CHARACTERISTICS (MAX6714)

( $V_{CC} = 2.0V$  to  $5.5V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $V_{CC} = 5V$  and  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                   | SYMBOL            | CONDITIONS                                                                                                 |                 | MIN                   | TYP                   | MAX   | UNITS |
|---------------------------------------------|-------------------|------------------------------------------------------------------------------------------------------------|-----------------|-----------------------|-----------------------|-------|-------|
| Supply Voltage Range                        | V <sub>CC</sub>   |                                                                                                            |                 | 2.0                   |                       | 5.5   | V     |
| Supply Current (Note 3)                     | I <sub>CC</sub>   | V <sub>CC</sub> = 3V                                                                                       |                 |                       | 60                    | 90    | μA    |
|                                             |                   | V <sub>CC</sub> = 5V                                                                                       |                 |                       | 80                    | 105   |       |
| Power-Fail Input Current                    | I <sub>PFI_</sub> | V <sub>PFI_</sub> = 0 to 0.85V                                                                             |                 |                       |                       | 0.2   | μA    |
| V <sub>CC</sub> Reset Threshold             | V <sub>TH</sub>   | V <sub>CC</sub> decreasing                                                                                 | MAX6714B (-5%)  | 4.50                  | 4.63                  | 4.75  | V     |
|                                             |                   |                                                                                                            | MAX6714A (-10%) | 4.25                  | 4.38                  | 4.50  |       |
|                                             |                   |                                                                                                            | MAX6714D (-5%)  | 3.00                  | 3.08                  | 3.15  |       |
|                                             |                   |                                                                                                            | MAX6714C (-10%) | 2.85                  | 2.93                  | 3.00  |       |
| Power-Fail Input Threshold                  | V <sub>PFI</sub>  | V <sub>PFI_</sub> decreasing                                                                               |                 | 0.609                 | 0.623                 | 0.635 | V     |
| Threshold Hysteresis                        | V <sub>HYST</sub> | V <sub>PFI_</sub> increasing relative to V <sub>PFI_</sub> decreasing                                      |                 |                       | 0.3 x V <sub>TH</sub> |       | %     |
| Reset Timeout Period                        | t <sub>RP</sub>   |                                                                                                            |                 | 140                   | 210                   | 280   | ms    |
| Reset Delay                                 | t <sub>RD</sub>   | V <sub>CC</sub> falling at 10mV/μs from (V <sub>TH</sub> + 100mV) to (V <sub>TH</sub> - 100mV)             |                 |                       | 30                    |       | μs    |
| Power-Fail Propagation Delay                | t <sub>PFD</sub>  | V <sub>PFI_</sub> falling at 10mV/μs from V <sub>TH</sub> to (V <sub>TH</sub> - 50mV)                      |                 |                       | 30                    |       | μs    |
|                                             |                   | V <sub>CC</sub> falling at 10mV/μs from (V <sub>TH</sub> + 100mV) to (V <sub>TH</sub> - 100mV)             |                 |                       | 5                     |       |       |
| $\overline{MR}$ Input Voltage               | V <sub>IL</sub>   |                                                                                                            |                 | 0.3 x V <sub>CC</sub> |                       |       | V     |
|                                             | V <sub>IH</sub>   |                                                                                                            |                 | 0.7 x V <sub>CC</sub> |                       |       |       |
| $\overline{MR}$ Minimum Input Pulse         |                   |                                                                                                            |                 | 1                     |                       |       | μs    |
| $\overline{MR}$ Glitch Rejection            |                   |                                                                                                            |                 |                       | 100                   |       | ns    |
| $\overline{MR}$ to $\overline{RESET}$ Delay | t <sub>MRD</sub>  |                                                                                                            |                 |                       | 200                   |       | ns    |
| $\overline{MR}$ Pullup Resistance           |                   | $\overline{MR}$ to V <sub>CC</sub>                                                                         |                 | 10                    | 20                    | 50    | kΩ    |
| Output Low Voltage                          | V <sub>OL</sub>   | V <sub>CC</sub> = 5V, I <sub>SINK</sub> = 2mA                                                              |                 |                       |                       | 0.3   | V     |
|                                             |                   | V <sub>CC</sub> = 2.5V, I <sub>SINK</sub> = 1.2mA                                                          |                 |                       |                       | 0.3   |       |
|                                             |                   | V <sub>CC</sub> = 1V, I <sub>SINK</sub> = 50μA (Note 2)                                                    |                 |                       |                       | 0.3   |       |
| Output High Voltage                         | V <sub>OH</sub>   | V <sub>CC</sub> ≥ 2.0V, I <sub>SOURCE</sub> = 6mA (min), $\overline{RESET}$ , $\overline{PFO_}$ unasserted |                 | 0.8 x V <sub>CC</sub> |                       |       | V     |
| Output High Source Current                  | I <sub>OH</sub>   | V <sub>CC</sub> ≥ 2.0V, $\overline{RESET}$ and $\overline{PFO_}$ unasserted                                |                 | 10                    |                       |       | μA    |

**Note 1:** 100% production tested at  $T_A = +25^\circ C$ . Overtemperature limits guaranteed by design.










**Note 2:** Condition at  $V_{CC} = 1V$  is guaranteed only from  $T_A = 0^\circ C$  to  $+70^\circ C$ .

**Note 3:** Monitored voltage 5V/3.3V is also the device supply. In the typical condition, supply current splits as follows: 25 $\mu A$  for the resistor-divider, and the rest for other circuitry.

# Low-Voltage, High-Accuracy, Quad Voltage Monitors in $\mu$ MAX Package

## Typical Operating Characteristics




( $V_{CC} = 5V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

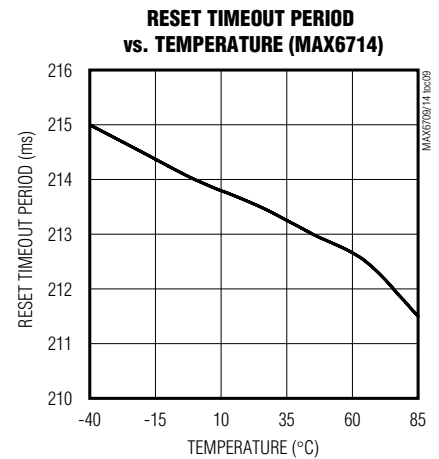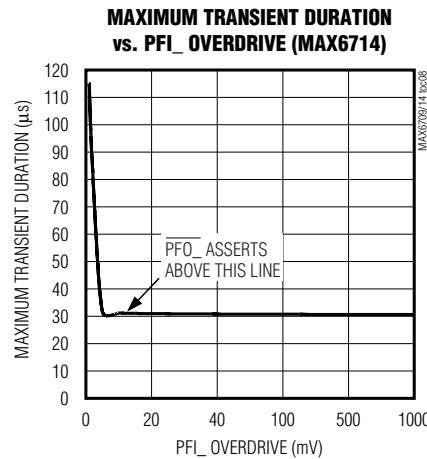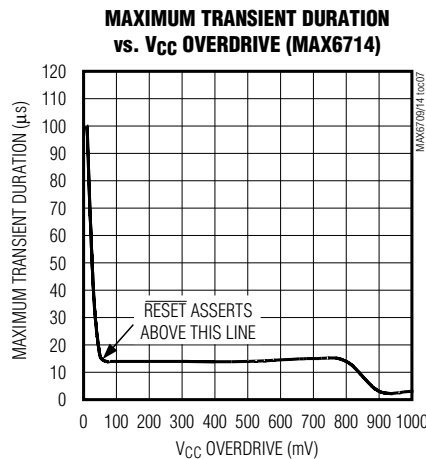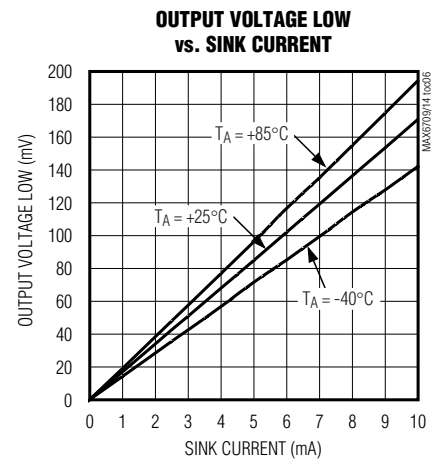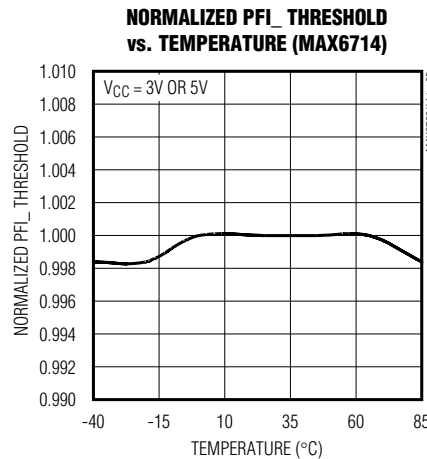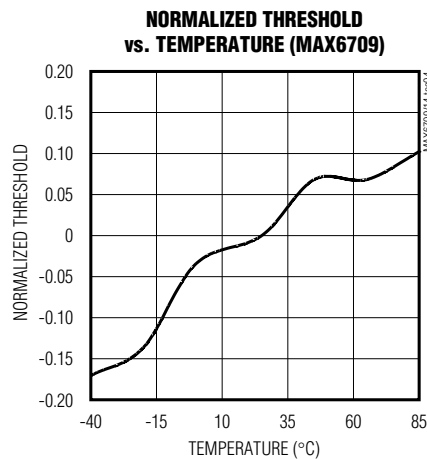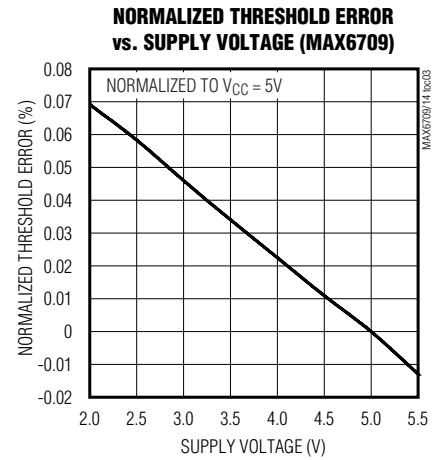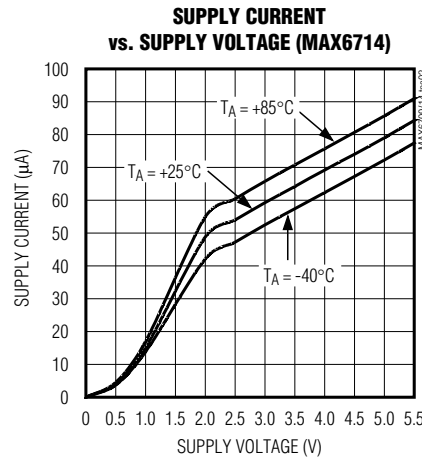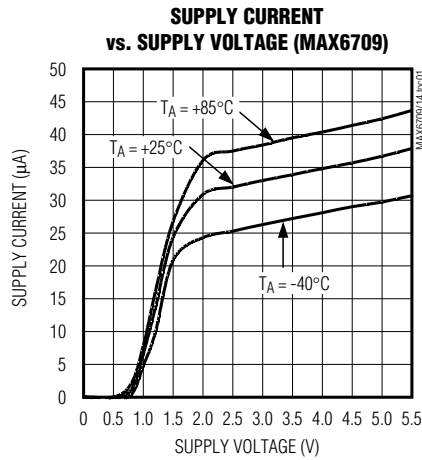

# Low-Voltage, High-Accuracy Quad, Voltage Monitors in $\mu$ MAX Package

## Typical Operating Characteristics (continued)

( $V_{CC} = 5V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

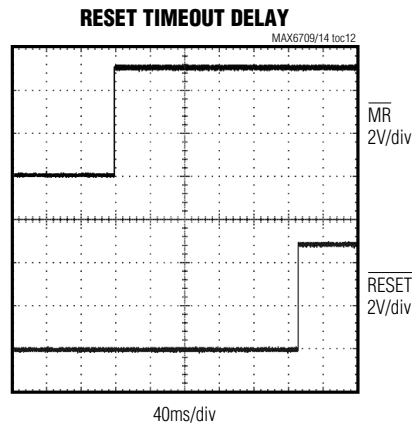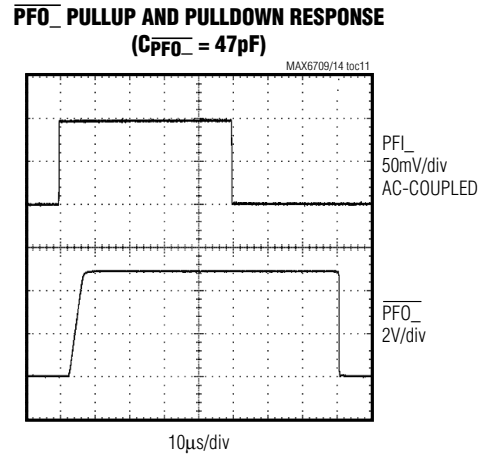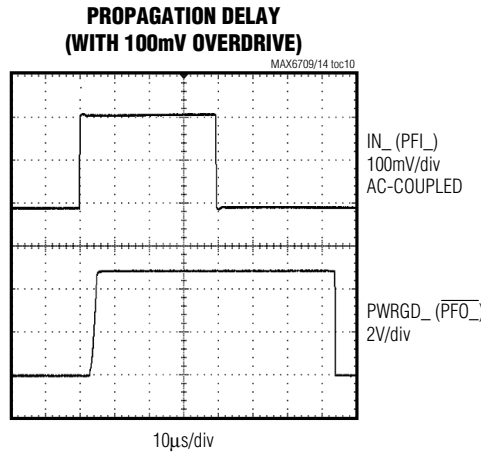

MAX6709/MAX6714

# Low-Voltage, High-Accuracy, Quad Voltage Monitors in $\mu$ MAX Package

## Pin Description

| PIN     |         | NAME                      | FUNCTION                                                                                                                                                                                                                                                                                                                                                               |
|---------|---------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX6709 | MAX6714 |                           |                                                                                                                                                                                                                                                                                                                                                                        |
| 1       | —       | IN1                       | Input Voltage 1. See <i>Selector Guide</i> for monitored voltages.                                                                                                                                                                                                                                                                                                     |
| 2       | —       | IN2                       | Input Voltage 2. See <i>Selector Guide</i> for monitored voltages.                                                                                                                                                                                                                                                                                                     |
| 3       | —       | IN3                       | Input Voltage 3. See <i>Selector Guide</i> for monitored voltages.                                                                                                                                                                                                                                                                                                     |
| 4       | —       | IN4                       | Input Voltage 4. See <i>Selector Guide</i> for monitored voltages.                                                                                                                                                                                                                                                                                                     |
| 5       | 5       | GND                       | Ground                                                                                                                                                                                                                                                                                                                                                                 |
| 6       | —       | PWRGD4                    | Output 4. PWRGD4 asserts low when IN4 falls below its threshold voltage. PWRGD4 is open drain with a 10 $\mu$ A internal pullup current source to V <sub>CC</sub> .                                                                                                                                                                                                    |
| 7       | —       | PWRGD3                    | Output 3. PWRGD3 asserts low when IN3 falls below its threshold voltage. PWRGD3 is open drain with a 10 $\mu$ A internal pullup current source to V <sub>CC</sub> .                                                                                                                                                                                                    |
| 8       | —       | PWRGD2                    | Output 2. PWRGD2 asserts low when IN2 falls below its threshold voltage. PWRGD2 is open drain with a 10 $\mu$ A internal pullup current source to V <sub>CC</sub> .                                                                                                                                                                                                    |
| 9       | —       | PWRGD1                    | Output 1. PWRGD1 asserts low when IN1 falls below its threshold voltage. PWRGD1 is open drain with a 10 $\mu$ A internal pullup current source to V <sub>CC</sub> .                                                                                                                                                                                                    |
| 10      | 10      | V <sub>CC</sub>           | Power-Supply Input. Connect V <sub>CC</sub> to a 2.0V to 5.5V supply. An undervoltage lockout circuit forces all PWRGD_ outputs low when V <sub>CC</sub> drops below the minimum operating voltage. V <sub>CC</sub> is not a monitored voltage for the MAX6709. For the MAX6714, $\overline{\text{RESET}}$ asserts low when V <sub>CC</sub> drops below its threshold. |
| —       | 1       | $\overline{\text{MR}}$    | Manual Reset Input. Force $\overline{\text{MR}}$ low to assert the $\overline{\text{RESET}}$ output. $\overline{\text{RESET}}$ remains asserted for the reset timeout period after $\overline{\text{MR}}$ goes high. $\overline{\text{MR}}$ is internally pulled up to V <sub>CC</sub> .                                                                               |
| —       | 2       | PFI1                      | Power-Fail Input 1. Input to noninverting input of the power-fail comparator. PFI1 is compared to an internal 0.62V reference. Use an external resistor-divider network to adjust the monitor threshold.                                                                                                                                                               |
| —       | 3       | PFI2                      | Power-Fail Input 2. Input to noninverting input of the power-fail comparator. PFI2 is compared to an internal 0.62V reference. Use an external resistor-divider network to adjust the monitor threshold.                                                                                                                                                               |
| —       | 4       | PFI3                      | Power-Fail Input 3. Input to noninverting input of the power-fail comparator. PFI3 is compared to an internal 0.62V reference. Use an external resistor-divider network to adjust the monitor threshold.                                                                                                                                                               |
| —       | 6       | $\overline{\text{PFO3}}$  | Power-Fail Output 3. $\overline{\text{PFO3}}$ is an active-low, open-drain output with a 10 $\mu$ A internal pullup to V <sub>CC</sub> . $\overline{\text{PFO3}}$ asserts low when PFI3 is below the selected threshold.                                                                                                                                               |
| —       | 7       | $\overline{\text{PFO2}}$  | Power-Fail Output 2. $\overline{\text{PFO2}}$ is an active-low, open-drain output with a 10 $\mu$ A internal pullup to V <sub>CC</sub> . $\overline{\text{PFO2}}$ asserts low when PFI2 is below the selected threshold.                                                                                                                                               |
| —       | 8       | $\overline{\text{PFO1}}$  | Power-Fail Output 1. $\overline{\text{PFO1}}$ is an active-low, open-drain output with a 10 $\mu$ A internal pullup to V <sub>CC</sub> . $\overline{\text{PFO1}}$ asserts low when PFI1 is below the selected threshold.                                                                                                                                               |
| —       | 9       | $\overline{\text{RESET}}$ | Reset Output. $\overline{\text{RESET}}$ is an active-low, open-drain output that asserts low when V <sub>CC</sub> drops below its preset threshold voltage or when a manual reset is initiated. $\overline{\text{RESET}}$ remains low for the reset timeout period after V <sub>CC</sub> exceeds the selected reset threshold or $\overline{\text{MR}}$ is released.   |

# Low-Voltage, High-Accuracy Quad, Voltage Monitors in $\mu$ MAX Package

## Detailed Description

The MAX6709/MAX6714 are low-power, quad voltage monitors designed for multivoltage systems. Preset voltage options for 5.0V, 3.3V, 3.0V, 2.5V, and 1.8V make these quad monitors ideal for applications such as telecommunications, desktop and notebook computers, high-end printers, data storage equipment, and networking equipment.

The MAX6709/MAX6714 have an internally trimmed threshold that minimizes or eliminates the need for external components. The four open-drain outputs have weak ( $10\mu\text{A}$ ) internal pullups to  $V_{CC}$ , allowing them to interface easily with other logic devices. The weak internal pullups can be overdriven by external pullups to any voltage from 0 to 5.5V. Internal circuitry prevents current

flow from the external pullup voltage to  $V_{CC}$ . The outputs can be wire-ORed for a single power-good signal.

The MAX6709 quad voltage monitor includes an accurate reference, four precision comparators, and a series of internally trimmed resistor-divider networks to set the factory-fixed threshold options. The resistor networks scale the specified  $\text{IN}_x$  reset voltages to match the internal reference/comparator voltage. Adjustable threshold options bypass the internal resistor networks and connect directly to one of the comparator inputs (an external resistor-divider network is required for threshold matching). The MAX6709 monitors power supplies with either 5% or 10% tolerance specifications, depending on the selected version. Additional high-input-impedance comparator options can be used

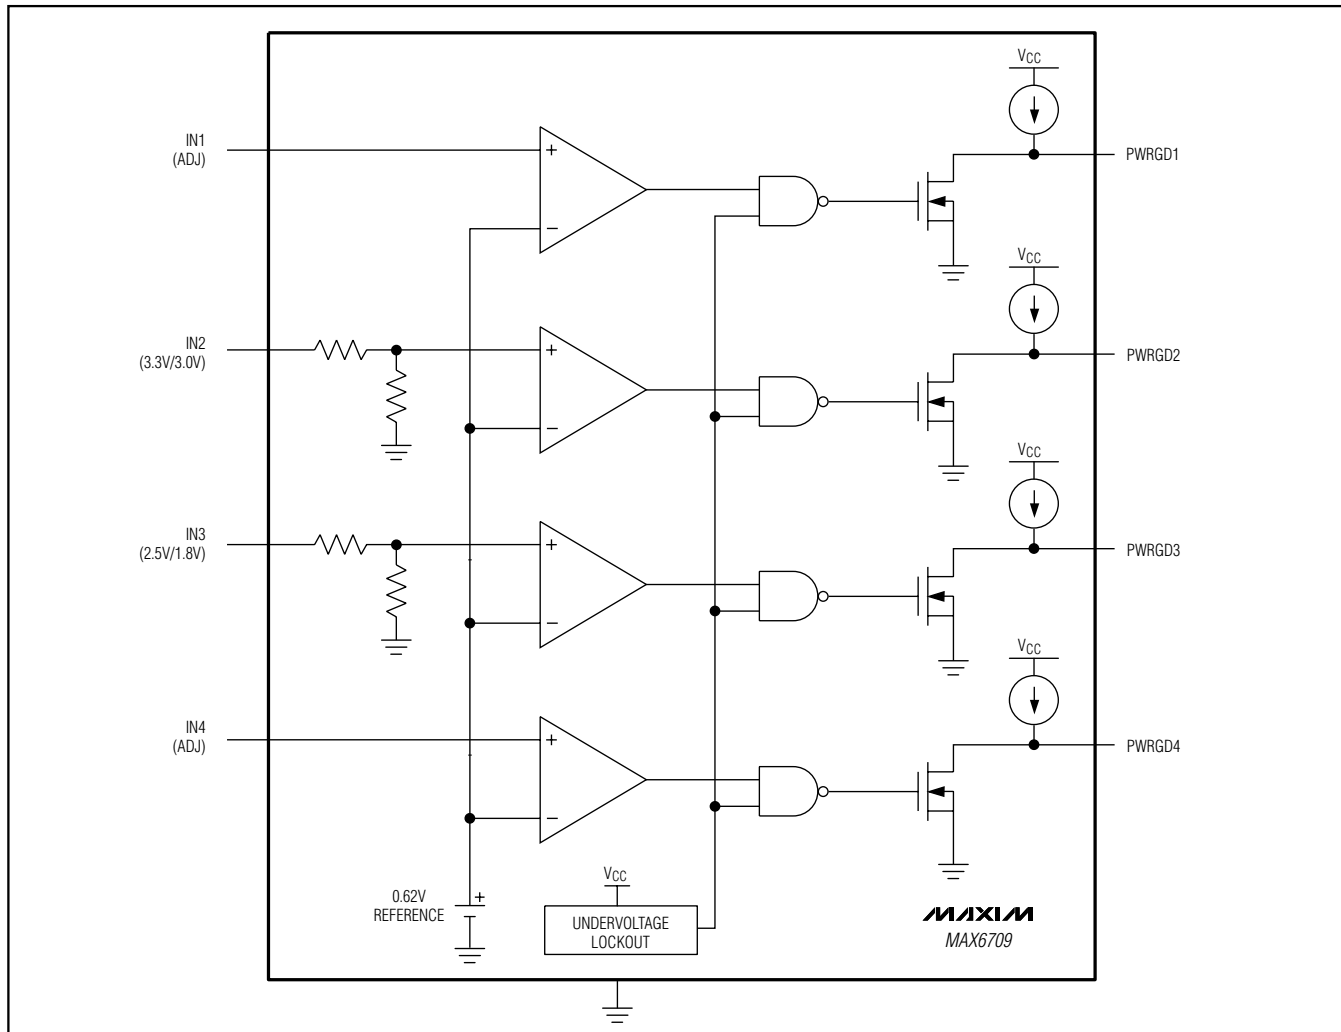


Figure 1. MAX6709 Functional Diagram

# Low-Voltage, High-Accuracy, Quad Voltage Monitors in $\mu$ MAX Package

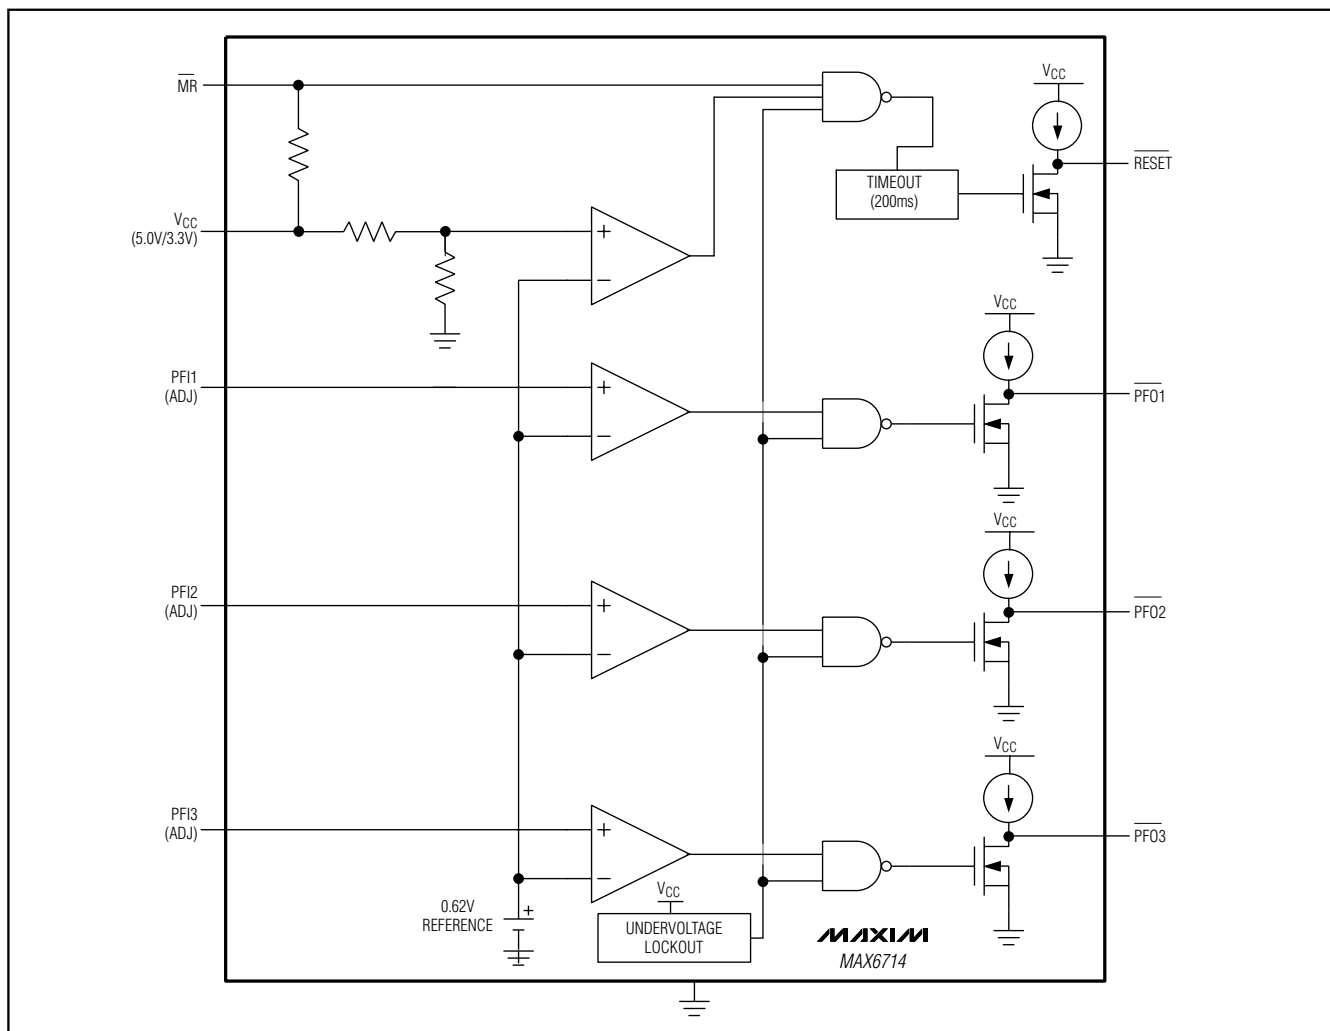


Figure 2. MAX6714 Functional Diagram

as an adjustable voltage monitor, general-purpose comparator, or digital-level translator.

The MAX6714 quad voltage monitor/reset offers one fixed input with internal timing for  $\mu$ P reset, three power-fail comparators, and a manual reset input (MR). RESET asserts low when VCC drops below its threshold or MR is driven low. Each of the three power-fail inputs connects directly to one of the comparator inputs.

When any input is higher than the threshold level, the output is high. The output goes low as the input drops below the threshold voltage. The undervoltage lockout circuitry remains active and all outputs remain low with VCC down to 1V (Figures 1 and 2).

## Applications Information

### Hysteresis

When the voltage on one comparator input is at or near the voltage on another input, ambient noise generally causes the comparator output to oscillate. The most common way to eliminate this problem is through hysteresis. When the two comparator input voltages are equal, hysteresis causes one comparator input voltage to move quickly past the other, thus taking the input out of the region where oscillation occurs. Standard comparators require hysteresis to be added through the use of external resistors. The external resistive network usually provides a positive feedback to the input in order to cause a jump in the threshold voltage when output toggles in one direction or the other. These

# Low-Voltage, High-Accuracy Quad, Voltage Monitors in $\mu$ MAX Package

MAX6709/MAX6714

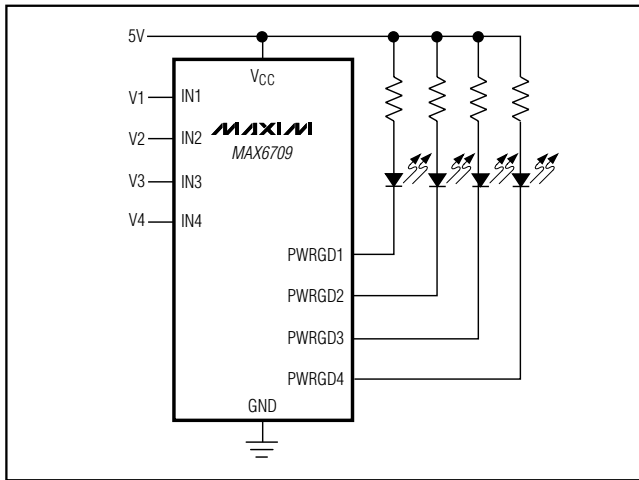


Figure 3. Quad Undervoltage Detector with LED Indicators

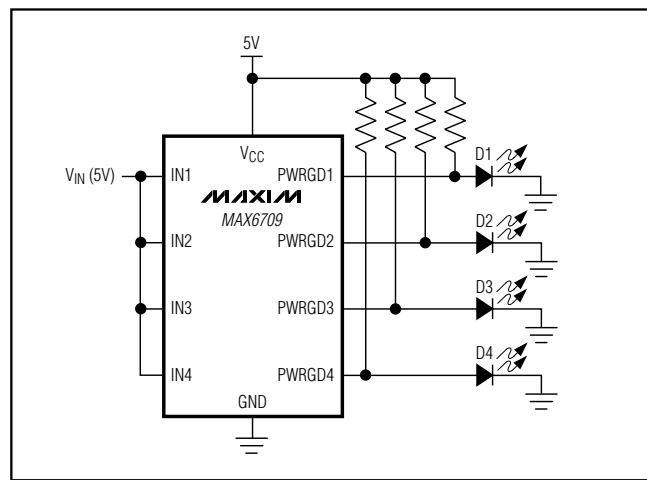


Figure 4.  $V_{CC}$  Bar Graph Monitoring

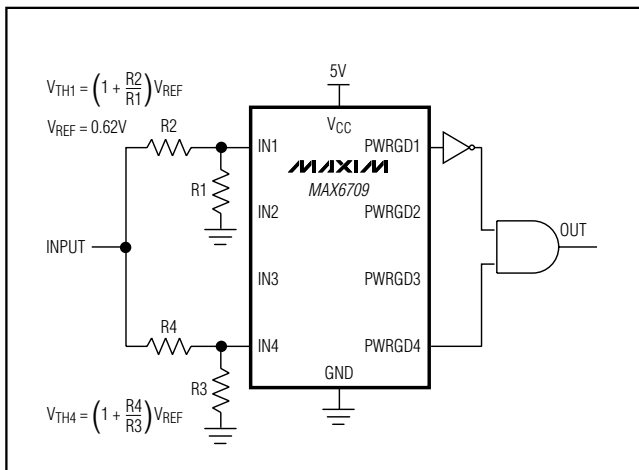


Figure 5. Window Detection

resistors are not required when using the MAX6709/MAX6714 because hysteresis is built into the device. MAX6709/MAX6714 hysteresis is typically 0.3% of the threshold voltage.

## Undervoltage Detection Circuit

The open-drain outputs of the MAX6709/MAX6714 can be configured to detect an undervoltage condition. Figure 3 shows a configuration where an LED turns on when the comparator output is low, indicating an undervoltage condition.

The MAX6709/MAX6714 can also be used in applications such as system supervisory monitoring, multivoltage level detection, and  $V_{CC}$  bar graph monitoring (Figure 4).

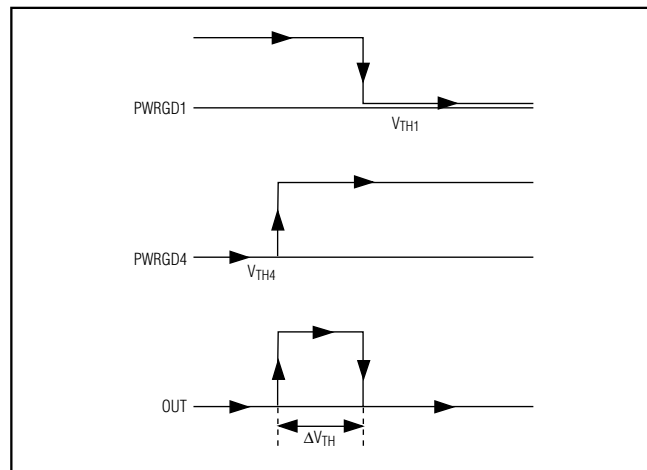


Figure 6. Output Response of Window Detector Circuit

## Window Detection

A window detector circuit uses two auxiliary inputs in a configuration such as the one shown in Figure 5. External resistors R1–R4 set the two threshold voltages ( $V_{TH1}$  and  $V_{TH4}$ ) of the window detector circuit. Window width ( $\Delta V_{TH}$ ) is the difference between the threshold voltages (Figure 6).

## Adjustable Input

The MAX6709 offers several monitor options with adjustable reset thresholds. The MAX6714 has three monitored inputs with adjustable thresholds. The threshold voltage at each adjustable  $IN_+$  ( $PFL_+$ ) input is typically 0.62V. To monitor a voltage  $>0.62V$ , connect a resistor-divider network to the circuit as shown in Figure 7.

$$V_{INTH} = 0.62V \times (R1 + R2) / R2$$



# Low-Voltage, High-Accuracy, Quad Voltage Monitors in $\mu$ MAX Package

Or, solved in terms of R1:

$$R1 = R2 ((V_{INTH} / 0.62V) - 1)$$

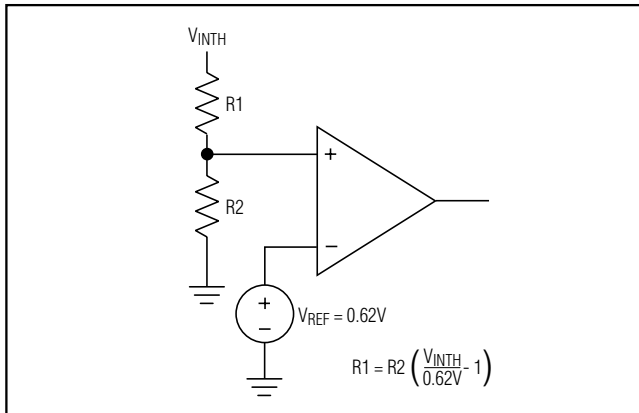


Figure 7. Setting the Auxiliary Monitor

## Unused Inputs

The unused inputs (except the adjustable) are internally connected to ground through the lower resistors of the threshold-setting resistor pairs. The adjustable input, however, must be connected to ground if unused.

## Reset Output

The MAX6714  $\overline{\text{RESET}}$  output asserts low when  $V_{CC}$  drops below its specified threshold or  $\overline{\text{MR}}$  asserts low and remains low for the reset timeout period (140ms min) after  $V_{CC}$  exceeds its threshold or  $\overline{\text{MR}}$  deasserts (Figure 8). The output is open drain with a weak (10 $\mu$ A) internal pullup to  $V_{CC}$ . For many applications, no external pullup resistor is required to interface with other logic devices. An external pullup resistor to any voltage from 0 to 5.5V overdrives the internal pullup if interfacing to different logic supply voltages (Figure 9). Internal circuitry prevents reverse current flow from the external pullup voltage to  $V_{CC}$ .

## Manual Reset Input

Many  $\mu$ P-based products require manual reset capability, allowing the operator, a test technician, or external logic circuitry to initiate a reset. A logic low on  $\overline{\text{MR}}$  asserts  $\overline{\text{RESET}}$  low.  $\overline{\text{RESET}}$  remains asserted while  $\overline{\text{MR}}$  is low, and during the reset timeout period (140ms min) after  $\overline{\text{MR}}$  returns high. The  $\overline{\text{MR}}$  input has an internal 20k $\Omega$  pullup resistor to  $V_{CC}$ , so it can be left open if unused. Drive  $\overline{\text{MR}}$  with TTL or CMOS-logic levels, or with open-drain/collector outputs. Connect a normally open momentary switch from  $\overline{\text{MR}}$  to GND to create a manual reset function; external debounce circuitry is not required. If  $\overline{\text{MR}}$  is driven from long cables or if the device is used in a

noisy environment, connecting a 0.1 $\mu$ F capacitor from  $\overline{\text{MR}}$  to GND provides additional noise immunity.

## Resetting the $\mu$ P from a 2nd Voltage (MAX6714)

The MAX6714 can be configured to assert a reset from a second voltage by connecting the power-fail output to manual reset. As the  $V_{PFL}$  falls below its threshold,  $\overline{\text{PFO}}$  goes low and asserts the reset output for the reset time-out period after the manual reset input is deasserted. (See Typical Operating Circuit.)

## Power-Supply Bypassing and Grounding

The MAX6709/MAX6714 operate from a single 2.0V to 5.5V supply. In noisy applications, bypass  $V_{CC}$  with a 0.1 $\mu$ F capacitor as close to  $V_{CC}$  as possible.

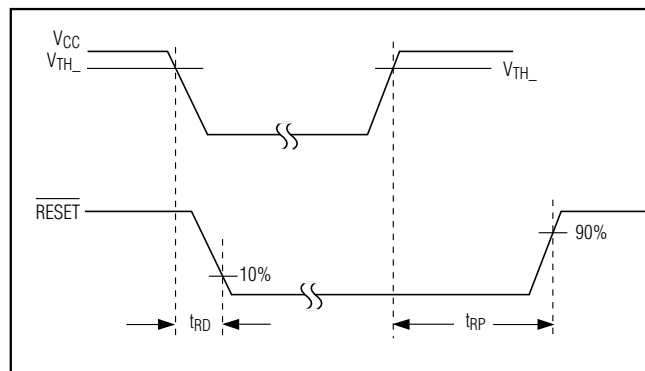


Figure 8.  $\overline{\text{RESET}}$  Output Timing Diagram

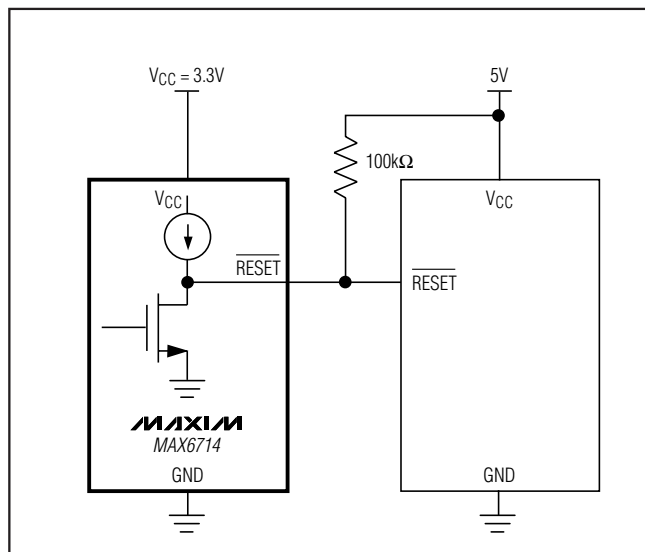


Figure 9. Interfacing to Different Logic Supply Voltage

# Low-Voltage, High-Accuracy Quad, Voltage Monitors in $\mu$ MAX Package

## Selector Guide (MAX6709)

| PART       | NOMINAL INPUT VOLTAGE |         |         |         |                      |
|------------|-----------------------|---------|---------|---------|----------------------|
|            | IN1 (V)               | IN2 (V) | IN3 (V) | IN4 (V) | SUPPLY TOLERANCE (%) |
| MAX6709AUB | 5                     | 3.3     | 2.5     | Adj*    | 10                   |
| MAX6709BUB | 5                     | 3.3     | 2.5     | Adj*    | 5                    |
| MAX6709CUB | 5                     | 3.3     | 1.8     | Adj*    | 10                   |
| MAX6709DUB | 5                     | 3.3     | 1.8     | Adj*    | 5                    |
| MAX6709EUB | Adj*                  | 3.3     | 2.5     | 1.8     | 10                   |
| MAX6709FUB | Adj*                  | 3.3     | 2.5     | 1.8     | 5                    |
| MAX6709GUB | 5                     | 3.3     | Adj*    | Adj*    | 10                   |
| MAX6709HUB | 5                     | 3.3     | Adj*    | Adj*    | 5                    |
| MAX6709IUB | Adj*                  | 3.3     | 2.5     | Adj*    | 10                   |
| MAX6709JUB | Adj*                  | 3.3     | 2.5     | Adj*    | 5                    |
| MAX6709KUB | Adj*                  | 3.3     | 1.8     | Adj*    | 10                   |
| MAX6709LUB | Adj*                  | 3.3     | 1.8     | Adj*    | 5                    |
| MAX6709MUB | Adj*                  | 3       | Adj*    | Adj*    | 10                   |
| MAX6709NUB | Adj*                  | 3       | Adj*    | Adj*    | 5                    |
| MAX6709OUB | Adj*                  | Adj*    | Adj*    | Adj*    | N/A                  |


\*Adjustable voltage based on 0.62V internal threshold. External threshold voltage can be set using an external resistor-divider.

## Selector Guide (MAX6714)

| PART       | NOMINAL INPUT VOLTAGE |          |          |          |                      |
|------------|-----------------------|----------|----------|----------|----------------------|
|            | V <sub>CC</sub> (V)   | PFI1 (V) | PFI2 (V) | PFI3 (V) | SUPPLY TOLERANCE (%) |
| MAX6714AUB | 5                     | Adj*     | Adj*     | Adj*     | 10                   |
| MAX6714BUB | 5                     | Adj*     | Adj*     | Adj*     | 5                    |
| MAX6714CUB | 3.3                   | Adj*     | Adj*     | Adj*     | 10                   |
| MAX6714DUB | 3.3                   | Adj*     | Adj*     | Adj*     | 5                    |

\*Adjustable voltage based on 0.62V internal threshold. External threshold voltage can be set using an external resistor-divider.

## Pin Configurations (continued)

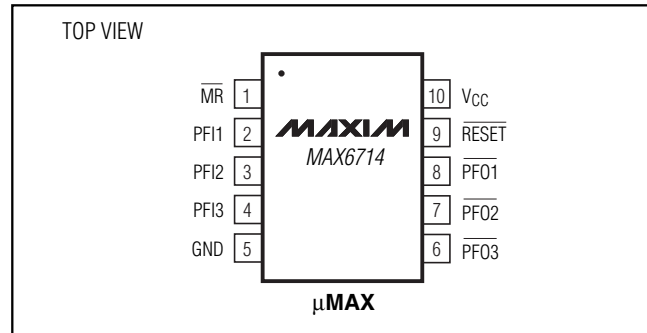


## Chip Information

TRANSISTOR COUNT: 1029


PROCESS: BiCMOS

# Low-Voltage, High-Accuracy, Quad Voltage Monitors in $\mu$ MAX Package

## Typical Operating Circuit (MAX6709)

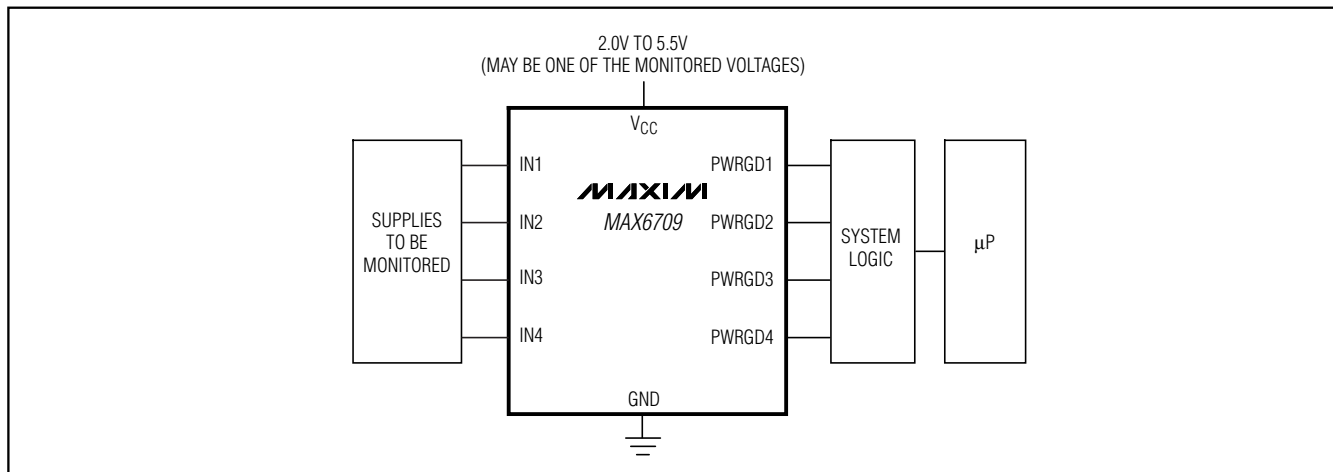


## Typical Operating Circuit (MAX6714)

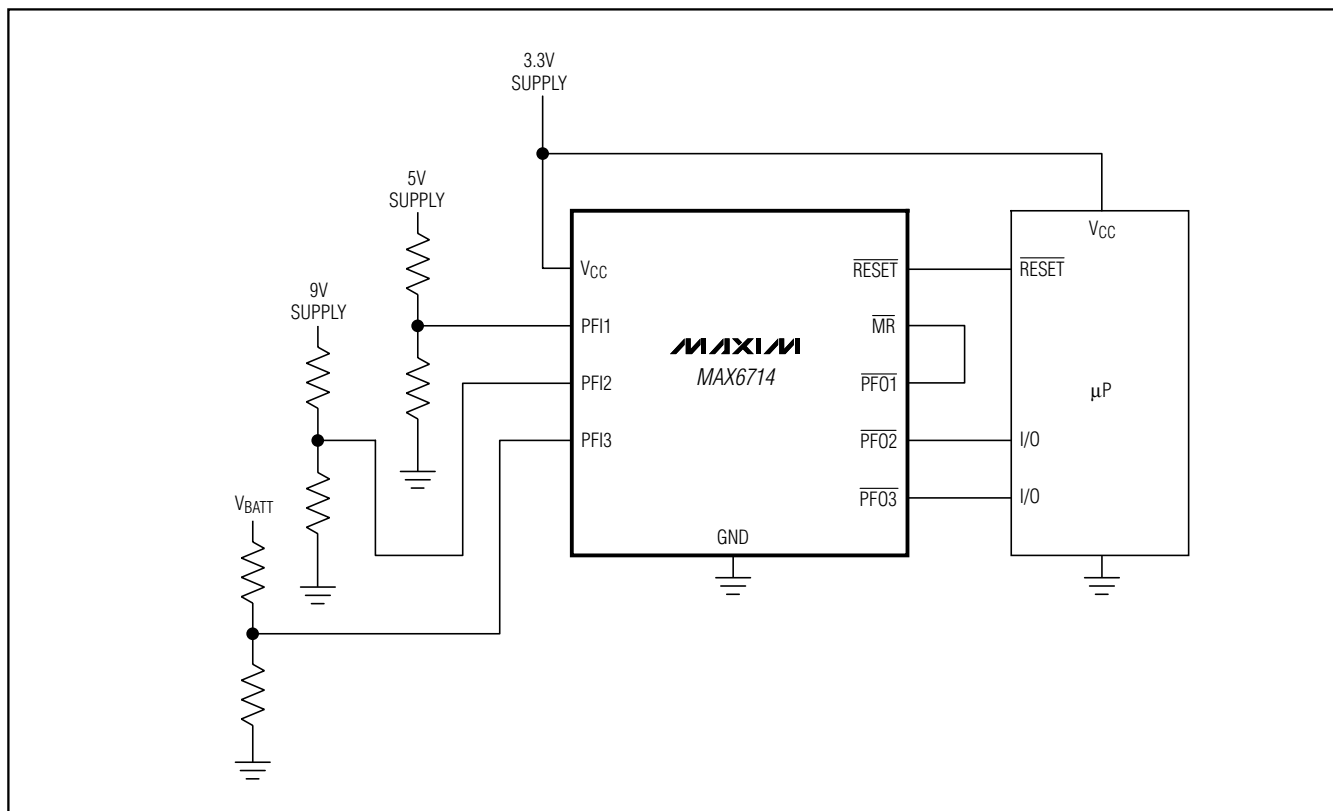

# Low-Voltage, High-Accuracy, Quad Voltage Monitors in $\mu$ MAX Package

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

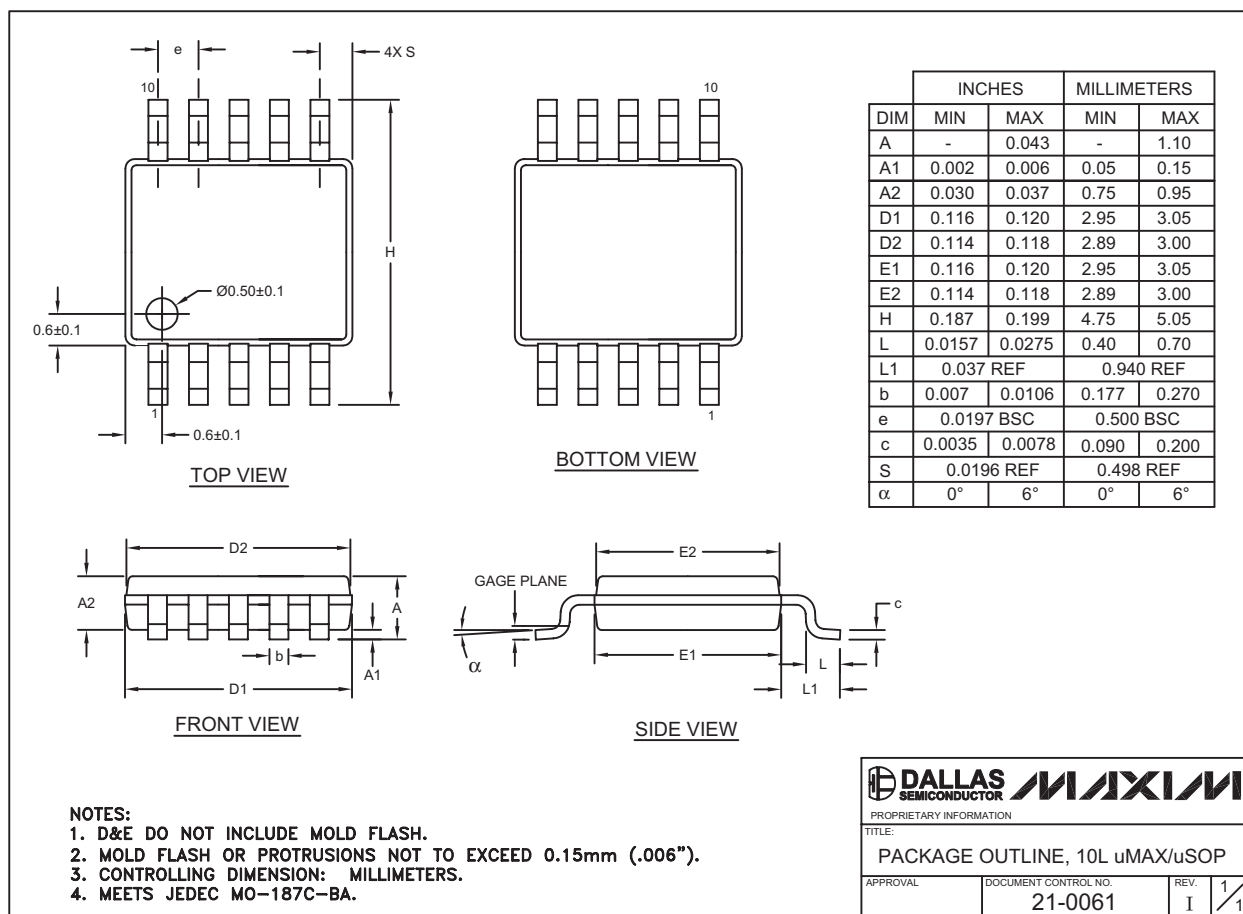

10L  $\mu$ MAX/EP

MAX6709/MAX6714

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 13

© 2005 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products, Inc.