


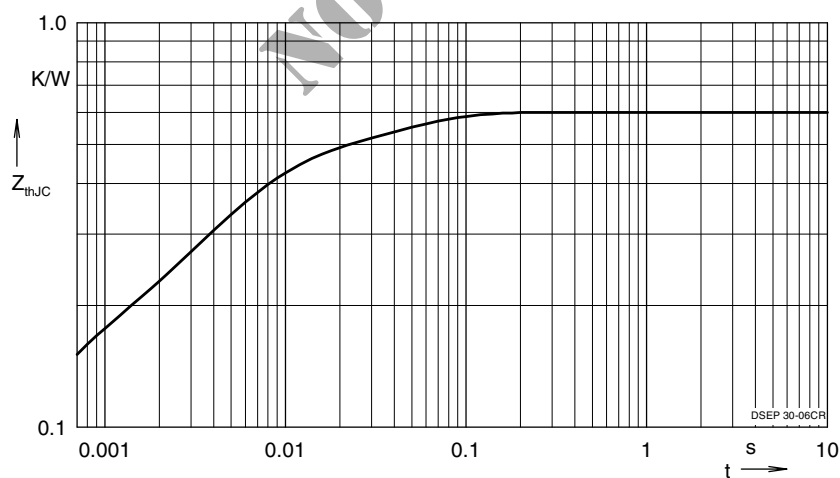

Constants for  $Z_{thJC}$  calculation:

| i | $R_{thi}$ (K/W) | $t_i$ (s) |
|---|-----------------|-----------|
| 1 | 0.31            | 0.005     |
| 2 | 0.1193          | 0.0003    |
| 3 | 0.1707          | 0.04      |

Fig. 7 Transient thermal resistance junction to case