

1A Avg.

40 Volts


SBD

EC10QS04

最大定格 Maximum Ratings

Item	Symbol	Conditions	Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	V_{RRM}	40	V
非くり返しピーク逆電圧 Non-repetitive Peak Reverse Voltage	V_{RSM}	45	V
平均整流電流 Average Rectified Forward Current	I_O	50Hz、正弦半波通電抵抗負荷 50Hz Half Sine Wave Resistive Load	$T_a=28^{\circ}\text{C}^{*1}$ 0.91 A
			$T_a=53^{\circ}\text{C}^{*2}$ 1.0 A
実効順電流 R.M.S. Forward Current	$I_F(\text{RMS})$	1.57	A
サージ順電流 Surge Forward Current	I_{FSM}	20 50Hz正弦半波, 1サイクル, 非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	T_{jw}	$-40 \sim +150$	$^{\circ}\text{C}$
保存温度範囲 Storage Temperature Range	T_{stg}	$-40 \sim +150$	$^{\circ}\text{C}$

OUTLINE DRAWING(mm)

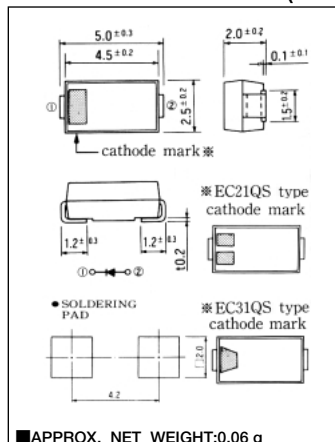

■APPROX. NET WEIGHT:0.06 g

電氣的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	I_{RM}	$T_j=25^{\circ}\text{C}$, $V_{RM}=V_{RRM}$	—	—	1	mA
ピーク順電圧 Peak Forward Voltage	V_{FM}	$T_j=25^{\circ}\text{C}$, $I_{FM}=1\text{A}$	—	—	0.55	V
熱抵抗 Thermal Resistance	$R_{th(j-a)}$	接合部・周囲間 Junction to Ambient	Glass Epoxy Substrate Mounted ^{*1}		157	$^{\circ}\text{C}/\text{W}$
			Alumina Substrate Mounted ^{*2}		108	$^{\circ}\text{C}/\text{W}$

*1: プリント基板実装/Glass-Epoxy Substrate mounted (Soldering Lands= $2 \times 2\text{ mm}$, Both Sides)

*2: アルミナ基板実装/Alumina Substrate mounted (Soldering Lands= $2 \times 2\text{ mm}$, Both Sides)

定格・特性曲線

