

BLOCK DIAGRAM



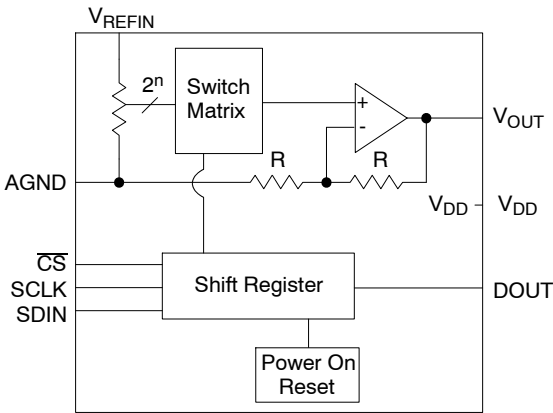


Figure 1. Block Diagram

PIN CONFIGURATION

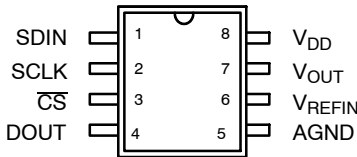

8 Lead SOIC (Jedec, 0.150")



8 Lead PDIP (0.300")

PIN DESCRIPTION

| Pin # | Symbol | Description               |
|-------|--------|---------------------------|
| 1     | SDIN   | Serial Data Input         |
| 2     | SCLK   | Serial Data Clock         |
| 3     | CS     | Chip Select (Active High) |
| 4     | DOUT   | Serial Data Output        |
| 5     | AGND   | Analog Ground             |
| 6     | VREFIN | Voltage Reference Input   |
| 7     | VOUT   | DAC Output                |
| 8     | VDD    | Supply Voltage            |

## ELECTRICAL CHARACTERISTICS

Test Conditions:  $V_{DD} = 5V$ ,  $GND = 0V$ ,  $REFIN = 2.048V$  (External),  $R_L = 10k\Omega$ ,  $C_L = 100pF$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , Unless Otherwise Noted.

| Symbol                     | Parameter                                 | Min. | Typ. | Max. | Unit   | Conditions                                    |
|----------------------------|-------------------------------------------|------|------|------|--------|-----------------------------------------------|
| Static Performance XRD5408 |                                           |      |      |      |        |                                               |
| N                          | Resolution                                | 8    |      |      | Bits   | Guaranteed Monotonic                          |
| INL                        | Relative Accuracy                         |      | 0.25 | 0.5  | LSB    |                                               |
| DNL                        | Differential Nonlinearity                 |      | 0.25 | 0.5  | LSB    |                                               |
| V <sub>OS</sub>            | Offset Error                              | 0    | 3    | 8    | mV     |                                               |
| TCV <sub>OS</sub>          | Offset Tempco                             |      | 2    |      | ppm/°C | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V                 |
| PSRR                       | Offset-Error Power-Supply Rejection Ratio |      | 0.5  | 1    | mV     |                                               |
| GE                         | Gain Error                                |      | 0.1  | 0.4  | %FS    |                                               |
| TCGE                       | Gain-Error Tempco                         |      | 10   |      | ppm/°C | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V, Measured at FS |
| PSRR                       | Power-Supply Rejection Ratio              |      | 0.1  | 1.25 | mV     |                                               |
| Static Performance XRD5410 |                                           |      |      |      |        |                                               |
| N                          | Resolution                                | 10   |      |      | Bits   | Guaranteed Monotonic                          |
| INL                        | Relative Accuracy                         |      | 0.5  | 1    | LSB    |                                               |
| DNL                        | Differential Nonlinearity                 |      | 0.25 | 0.5  | LSB    |                                               |
| V <sub>OS</sub>            | Offset Error                              | 0    | 3    | 8    | mV     |                                               |
| TCV <sub>OS</sub>          | Offset Tempco                             |      | 2    |      | ppm/°C | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V                 |
| PSRR                       | Offset-Error Power-Supply Rejection Ratio |      | 0.5  | 1    | mV     |                                               |
| GE                         | Gain Error                                |      | 0.1  | 0.4  | %FS    |                                               |
| TCGE                       | Gain-Error Tempco                         |      | 10   |      | ppm/°C | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V, Measured at FS |
| PSRR                       | Power-Supply Rejection Ratio              |      | 0.1  | 1.25 | mV     |                                               |
| Static Performance XRD5412 |                                           |      |      |      |        |                                               |
| N                          | Resolution                                | 12   |      |      | Bits   | Guaranteed Monotonic                          |
| INL                        | Relative Accuracy                         |      | 2    | 4    | LSB    |                                               |
| DNL                        | Differential Nonlinearity                 |      | 0.5  | -1   | LSB    |                                               |
| V <sub>OS</sub>            | Offset Error                              | 0    | 3    | 8    | mV     |                                               |
| TCV <sub>OS</sub>          | Offset Tempco                             |      | 2    |      | ppm/°C | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V                 |
| PSRR                       | Offset-Error Power-Supply Rejection Ratio |      | 0.5  | 1    | mV     |                                               |
| GE                         | Gain Error                                |      | 0.1  | 0.4  | %FS    |                                               |
| TCGE                       | Gain-Error Tempco                         |      | 10   |      | ppm/°C | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V, Measured at FS |
| PSRR                       | Power-Supply Rejection Ratio              |      | 0.1  | 1.25 | mV     |                                               |

## ELECTRICAL CHARACTERISTICS (CONT'D)

Test Conditions:  $V_{DD} = 5V$ ,  $GND = 0V$ ,  $REFIN = 2.048V$  (External),  $R_L = 10k\Omega$ ,  $C_L = 100pF$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , Unless Otherwise Noted.

| Symbol                                                                                                 | Parameter                                   | Min.       | Typ. | Max.         | Unit             | Conditions                                                                              |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------|------------|------|--------------|------------------|-----------------------------------------------------------------------------------------|
| <b>Voltage Output (<math>V_{OUT}</math>) XRD5408/10/12</b>                                             |                                             |            |      |              |                  |                                                                                         |
| $V_O$                                                                                                  | Output Voltage Range                        | 0          |      | $V_{DD}-0.4$ | V                |                                                                                         |
| $V_{REG}$                                                                                              | Output Load Regulation                      |            | 2    | 4            | mV               | $V_{OUT} = 2V$ , $R_L = 2k\Omega$                                                       |
| $+I_{SC}$                                                                                              | Short-Circuit Current, Sink                 |            | 13   |              | mA               | $V_{OUT} = V_{DD}$                                                                      |
| $-I_{SC}$                                                                                              | Short-Circuit Current, Source               |            | 7    |              | mA               | $V_{OUT} = GND$                                                                         |
| <b>Voltage Reference Input (<math>V_{REFIN}</math>) XRD5408/10/12</b>                                  |                                             |            |      |              |                  |                                                                                         |
| $V_{REFIN}$                                                                                            | Voltage Range                               | 0          |      | $V_{DD}$     | V                | Output Swing Limited, Not Code Dependent                                                |
| $R_{IN}$                                                                                               | Input Resistance                            | 40         | 65   |              | $k\Omega$        |                                                                                         |
| $TCR_{IN}$                                                                                             | Input Resistance Tempco                     |            | 1500 |              | ppm/ $^{\circ}C$ |                                                                                         |
| $C_{IN}$                                                                                               | Input Capacitance                           |            | 32   | 40           | pF               | Not Code Dependent                                                                      |
| $AC_{FT}$                                                                                              | AC Feedthrough                              |            | -80  |              | dB               | $REFIN = 1kHz$ , $2V_{p-p}$ , $SD_{IN} = 000h$                                          |
| <b>Digital Inputs (<math>SDIN</math>, <math>SCLK</math>, <math>\overline{CS}</math>) XRD5408/10/12</b> |                                             |            |      |              |                  |                                                                                         |
| $V_{IH}$                                                                                               | Input High                                  | 3.5        |      |              | V                |                                                                                         |
| $V_{IL}$                                                                                               | Input Low                                   |            |      | 1            | V                |                                                                                         |
| $I_{IN}$                                                                                               | Input Current                               |            |      | 1            | $\mu A$          | $V_{IN} = 0V$ or $V_{DD}$                                                               |
| $C_{IN}$                                                                                               | Input Capacitance                           |            | 10   |              | pF               |                                                                                         |
| <b>Digital Output (<math>DO_{OUT}</math>) XRD5408/10/12</b>                                            |                                             |            |      |              |                  |                                                                                         |
| $V_{OH}$                                                                                               | Output High                                 | $V_{DD}-1$ |      |              | V                | $I_{SOURCE} = 4mA$                                                                      |
| $V_{OL}$                                                                                               | Output Low                                  |            |      | 0.4          | V                | $I_{SINK} = 4mA$                                                                        |
| <b>Dynamic Performance XRD5408/10/12</b>                                                               |                                             |            |      |              |                  |                                                                                         |
| SR                                                                                                     | Voltage-Output Slew Rate                    | 0.13       | 0.21 |              | V/ $\mu s$       | $T_A = +25^{\circ}C$                                                                    |
| $t_s$                                                                                                  | Voltage-Output Settling Time                |            | 13   | 15           | $\mu s$          | 1/2LSB, $V_{OUT} = 2V$                                                                  |
| $D_{FT}$                                                                                               | Digital Feedthrough                         |            | 1    |              | nV-s             | $\overline{CS} = V_{DD}$ , $SDIN = SCLK = 100kHz$                                       |
| SINAD                                                                                                  | Signal-to-Noise Plus Distortion             |            | 68   |              | dB               | $V_{REFIN} = 1kHz$ , $2V_{p-p}$ F.S., $SDIN = Full$ Scale, -3dB BW=250kHz               |
| <b>Power Supply XRD5408/10/12</b>                                                                      |                                             |            |      |              |                  |                                                                                         |
| $V_{DD}$                                                                                               | Positive Supply Voltage                     | 4.5        |      | 5.5          | V                |                                                                                         |
| $I_{DD}$                                                                                               | Power Supply Current                        |            | 35   | 60           | $\mu A$          | All Inputs=0V or $V_{DD}$ , Output=No Load, $I_{REF}$ Not Included, $V_O = 0V$ (Note 1) |
| <b>Switching Characteristics XRD5408/10/12</b>                                                         |                                             |            |      |              |                  |                                                                                         |
| $t_{CSS}$                                                                                              | $\overline{CS}$ Setup Time                  | 10         | 20   |              | ns               |                                                                                         |
| $t_{CSH0}$                                                                                             | SCLK Fall to $\overline{CS}$ Fall Hold Time | 5          |      |              | ns               |                                                                                         |
| $t_{CSH1}$                                                                                             | SCLK Fall to $\overline{CS}$ Rise Hold Time | 0          |      |              | ns               |                                                                                         |
| $t_{CH}$                                                                                               | SCLK High Width                             | 20         | 35   |              | ns               |                                                                                         |
| $t_{CL}$                                                                                               | SCLK Low Width                              | 20         | 35   |              | ns               |                                                                                         |

### Notes:

<sup>1</sup> Total supply current consumption =  $I_{DD} + I_{REF} + (V_O / 70K.)$

## ELECTRICAL CHARACTERISTICS (CONT'D)

Test Conditions:  $V_{DD} = 5V$ ,  $GND = 0V$ ,  $REFIN = 2.048V$  (External),  $R_L = 10k\Omega$ ,  $C_L = 100pF$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , Unless Otherwise Noted.

| Symbol    | Parameter                                    | Min. | Typ. | Max. | Unit | Conditions   |
|-----------|----------------------------------------------|------|------|------|------|--------------|
| $t_{DS}$  | $D_{IN}$ Setup Time                          | 10   | 45   |      | ns   | $C_L = 50pF$ |
| $t_{DH}$  | $D_{IN}$ Hold Time                           | 0    |      |      | ns   |              |
| $t_{DO}$  | $D_{OUT}$ Valid Propagation Delay            |      | 8    | 15   | ns   |              |
| $t_{CSW}$ | $\overline{CS}$ High Pulse Width             | 20   | 40   |      | ns   |              |
| $t_{CS1}$ | $\overline{CS}$ Rise to SCLK Rise Setup Time | 10   | 20   |      | ns   |              |

Specifications are subject to change without notice

## ABSOLUTE MAXIMUM RATINGS

$V_{DD}$  to GND ..... -0.3V, +7V  
 Digital Input Voltage to GND ..... -0.3V,  $V_{DD} + 0.3V$   
 $V_{REFIN}$  ..... -0.3V,  $V_{DD} + 0.3V$   
 $V_{OUT}^1$  .....  $V_{DD}$ , GND  
 Continuous Current, Any Pin ..... -20mA, +20mA

Package Power Dissipation Ratings ( $T_A = +70^\circ C$ )  
     PDIP (derate 9mW/ $^\circ C$  above  $+70^\circ C$ ) .... 117mW  
     SOIC (derate 6mW/ $^\circ C$  above  $+70^\circ C$ ) ... 155mW  
 Operating Temperature Range .....  $-40^\circ C$  to  $+85^\circ C$   
 Storage Temperature Range .....  $-65^\circ C$  to  $+165^\circ C$   
 Lead Temperature (soldering, 10 sec) .....  $+300^\circ C$

### Notes

<sup>1</sup> Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation at or above this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

<sup>2</sup> Any input pin which can see a value outside the absolute maximum ratings should be protected by Schottky diode clamps (HP5082-2835) from input pin to the supplies. All inputs have protection diodes which will protect the device from short transients outside the supplies of less than 100mA for less than 100 $\mu s$ .

## TIMING

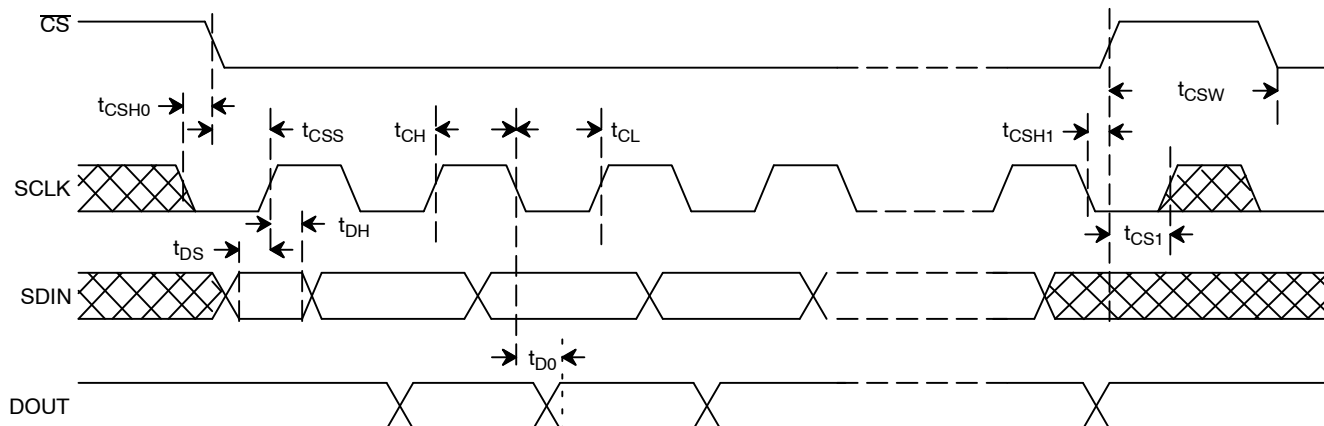


Figure 2. Timing Diagram

| Input |      |        | Output                                          |
|-------|------|--------|-------------------------------------------------|
| 1111  | 1111 | (0000) | $+ 2 (V_{REFIN}) \frac{255}{256}$               |
| 1000  | 0001 | (0000) | $+ 2 (V_{REFIN}) \frac{129}{256}$               |
| 1000  | 0000 | (0000) | $+ 2 (V_{REFIN}) \frac{128}{256} = + V_{REFIN}$ |
| 0111  | 1111 | (0000) | $+ 2 (V_{REFIN}) \frac{127}{256}$               |
| 0000  | 0001 | (0000) | $+ 2 (V_{REFIN}) \frac{1}{256}$                 |
| 0000  | 0000 | (0000) | 0V                                              |

**Note:**

Write 8-bit data words with four sub-LSB 0s because the DAC input latch is 12 bits wide.

Table 1. Binary Code Table


## THEORY OF OPERATION

### XRD5408/10/12 Description

The XRD5408/10/12 are micro-power, voltage output, serial daisy-chain programmable DACs operating from a single 5V power supply. The DACs are built on a 0.6 micron CMOS process. The features of these DACs make it well suited for industrial control, low distortion audio, battery operated devices and cost sensitive designs that want to minimize pin count on ICs.

### Resistor String DAC

A resistor string architecture converts digital data using a switch matrix to an analog signal as shown in *Figure 3*.

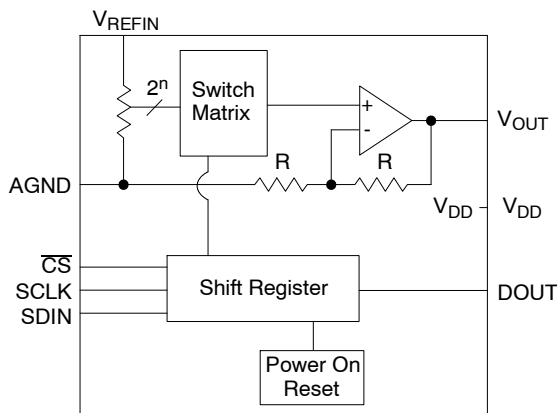

**Figure 3. XRD5408/10/12 DAC Architecture**

The resistor string architecture provides a non-inverted output voltage ( $V_{OUT}$ ) of the reference input ( $V_{REFIN}$ ) for single supply operation while maintaining a constant input resistance. Unlike inverted R-2R architectures the reference input resistance will remain constant independent of code. This greatly simplifies the analog driving source requirements for the reference voltage and minimizes distortion. Similarly input capacitance varies only approximately 4pF over all codes.

### Fixed Gain +2 Voltage Output Amplifier

A high open-loop gain operational amplifier buffers the resistor string with a stable, fixed gain of +2. The voltage output will settle within 13 $\mu$ s. The output is short circuit protected and can regulate an output load of 2V into 2k $\Omega$  within 2mV at 25°C.

While the reference input will accept a voltage from rail-to-rail, the linear input voltage range is constrained by the output swing of the fixed +2 closed-loop gain amplifier. Full scale output swing is achieved with an external reference of approximately 1/2  $V_{DD}$ . The reference voltage must be positive because the XRD5408/10/12 DAC is non-inverting.

### Serial Daisy-Chainable Digital Interface

The three wire serial interface includes a DOUT to enable daisy-chaining of several DACs. This minimizes pin count necessary of digital asics or controllers to address multiple DACs. The serial interface is designed for CMOS logic levels. Timing is shown in *Figure 2*. The binary coding table (*Table 1*) shows the DAC transfer function.

A power on reset circuit forces the DAC to reset to all "0"s on power up.

## APPLICATION NOTES

### Serial Interface

The XRD5408/10/12 family has a three wire serial interface that is compatible with Microwire™, SPI™ and QSPI™ standards. Typical configurations are shown in *Figure 4* and *Figure 5*. Maximum serial port clock rate is limited by the minimum pulse width of  $t_{CH}$  and  $t_{CL}$ . Feedthrough noise from the serial port to the analog output ( $V_{OUT}$ ) is minimized by lowering the frequency of the serial port and holding the digital edges to >5ns.

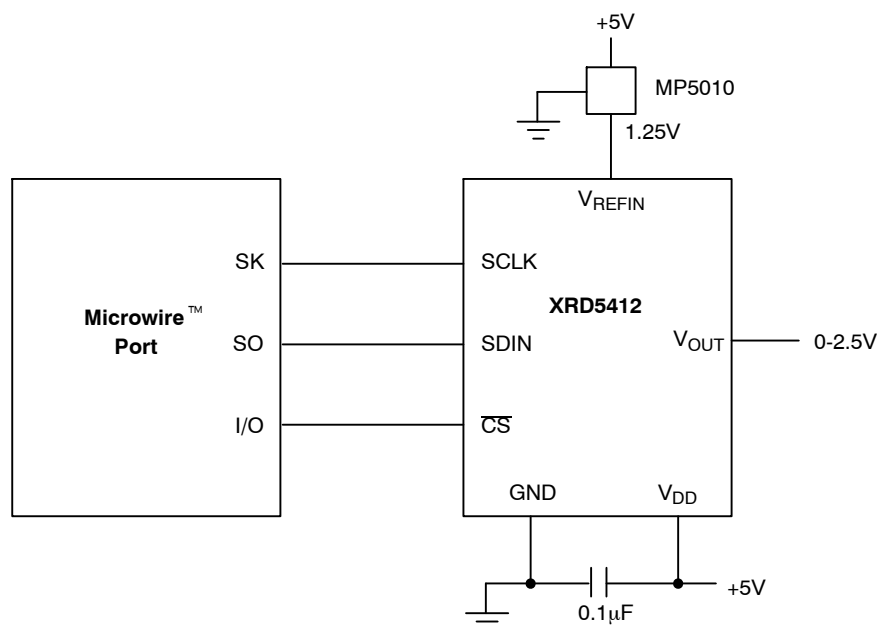


Figure 4. Typical Microwire™ Application Circuit

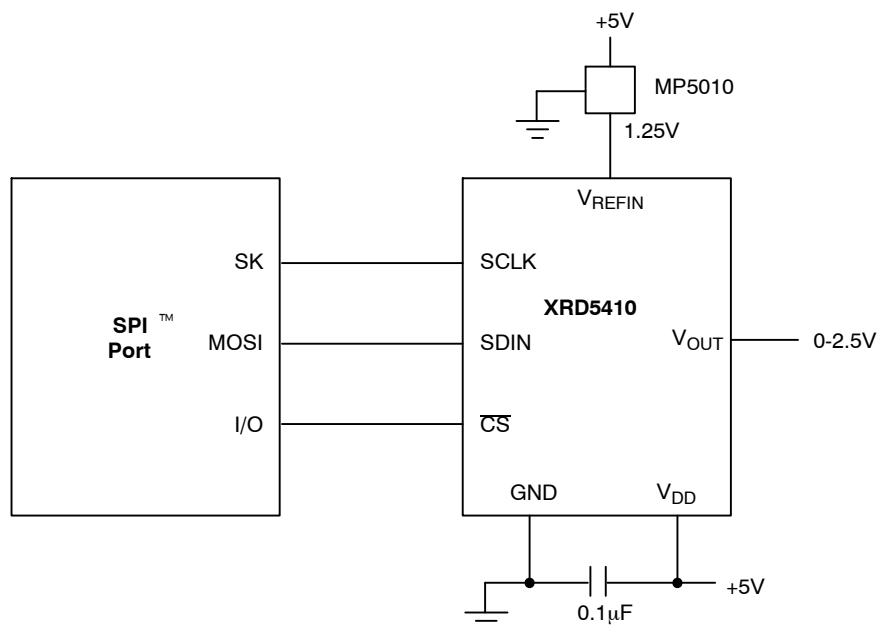


Figure 5. Typical SPI™ Application Circuit

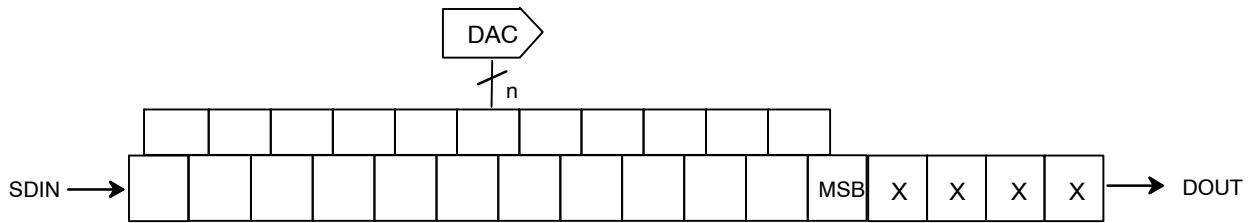


Figure 6. Shift Register Format

The DACs are programmed by a 16 bit word of serial data. The format of the serial input register is shown in Figure 6. The leading 4 bits are not used to update the DAC. If the DAC is not daisy-chained then only a 12 bit serial word is needed to program the DAC. The next 8, 10 or 12 bits after the 4 leading bits are data bits. The XRD5408's first 8 bits are valid data and the trailing 4 bits must be set to 0. Figure 7 demonstrates the 16 bit digital word for the 8, 10, 12 bit DACs.

| Part    | Leading Unused Bits | Data Bits<br>MSB      LSB | Trailing "0" Bits |
|---------|---------------------|---------------------------|-------------------|
| XRD5412 | XXXX                | XXXXXXXX                  | None              |
| XRD5410 | XXXX                | XXXXXXXX                  | 00                |
| XRD5408 | XXXX                | XXXXXXXX                  | 0000              |

Table 2. 16-Bit Digital Word Register for XRD5408, XRD5410, XRD5412.

SCLK should be held low when  $\overline{CS}$  transitions low. Data is clocked in on the rising edge of SCLK when  $\overline{CS}$  is low. SDIN data is held in a 16 bit serial shift register. The DAC is updated with the data bits on the rising edge of  $\overline{CS}$ . When  $\overline{CS}$  is high data is not shifted into the XRD5408/10/12.

### Daisy-Chaining

The digital output port (DOUT) has a 4mA drive for greater fan-out capability when daisy-chaining. DOUT allows cascading of multiple DACs with the same serial data stream. The data at SDIN appears at DOUT after 16 clock cycles plus one clock width ( $t_{CH}$ ) and a propagation delay ( $t_{DO}$ ). DOUT remains in the state of the last data bit when  $\overline{CS}$  is high. DOUT changes on the falling edge of SCLK when  $\overline{CS}$  is low.

Any number of DACs can be connected in this way by connecting DOUT of one DAC to SDIN of the next DAC.

### AC<sub>FT</sub> Feedthrough (DAC Code = 0)

AC Feedthrough from  $V_{REFIN}$  to  $V_{OUT}$  is minimized with low impedance grounding as shown in Figure 7. If the DAC data is set to all "0"s then  $V_{OUT}$  is a function of the divider between the DAC string impedance and ground impedance. See the Power Supply and Grounding section for recommendations. The typical AC feedthrough for a 1kHz 2Vpp signal with code = 0 is -80dB.

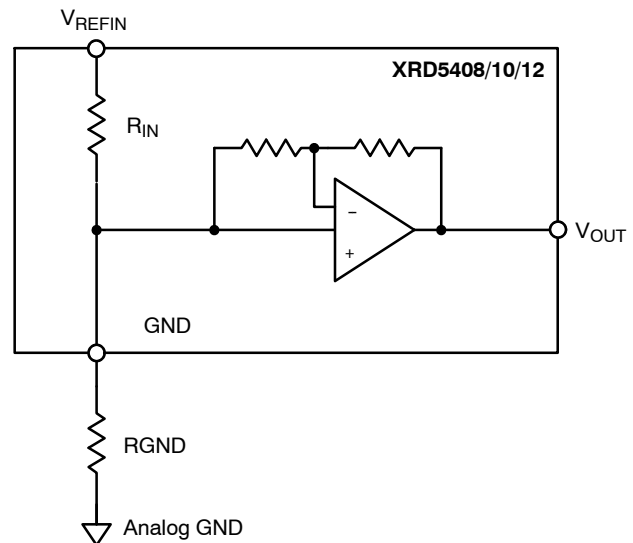


Figure 7. AC<sub>FT</sub> Feedthrough Equivalent Circuit, DAC Code = 0

### Compatible with MAX515 & MAX539

The XRD5408/10/12 family of DACs are functionally compatible with the MAX515 & MAX539 while providing significant improvements. The XRD5408/10/12 DACs have lower power, faster serial ports, and a constant reference impedance to minimize the reference driving requirements and maximize system linearity. The DOUT

port also has 4mA driving capability for greater fan-out when daisy-chaining to other digital inputs.

## Monotonicity

The XRD5408/10/12 family of DACs are monotonic over the entire temperature range.

## Micro-Power Operation

The XRD5408 is the lowest power in their class. The quiescent current rating does not include the reference ladder current. Power can be saved when the part is not in use by setting the DAC code to all “0”s assuming the output load is referenced to ground. This minimizes the DAC output load current. An analog switch placed in series with the reference ladder can toggle the reference voltage off when the circuit is inactive to minimize power consumption.

## Power Supply and Grounding

Best parametric results are obtained by powering the XRD5408/10/12 family of DACs from an analog +5V power supply and analog ground. Digital power supplies and grounds should be separated or connected to the analog supplies and grounds only at the low-impedance power-supply source. This is best accomplished on a multilayer PCB with dedicated planes to ground and power. The DACs should be locally bypassed with both 0.1  $\mu$ F and 2.2  $\mu$ F capacitors mounted as close as possible to the power supply pin ( $V_{DD}$ ). Surface mount ceramic capacitors are recommended for low impedance, wide band power supply bypass. If only one +5V power supply is available for both analog and digital circuitry isolate the analog power supply to the XRD5408/10/12 DAC with an inductor or ferrite bead before the local bypass capacitors.

## PERFORMANCE CHARACTERISTICS

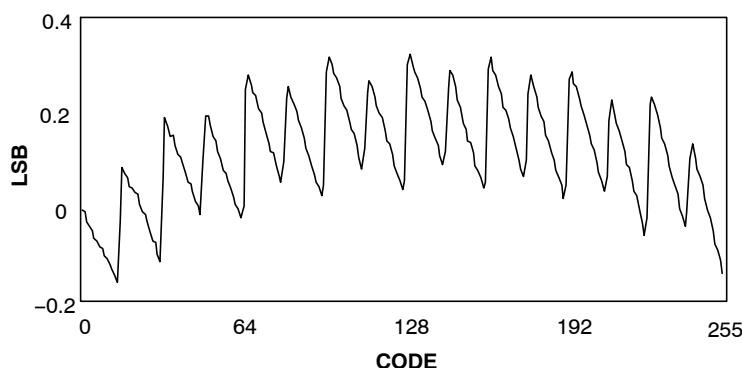


Figure 8. XRD5408 INL



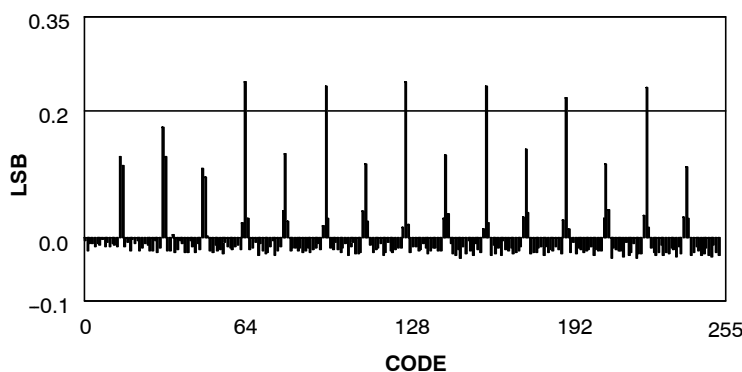



Figure 9. XRD5408 DNL

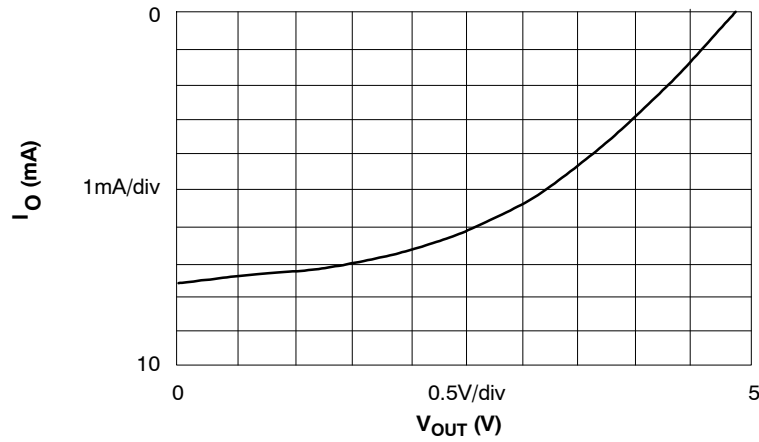

**Figure 10. Output Source Current vs. Output Voltage**

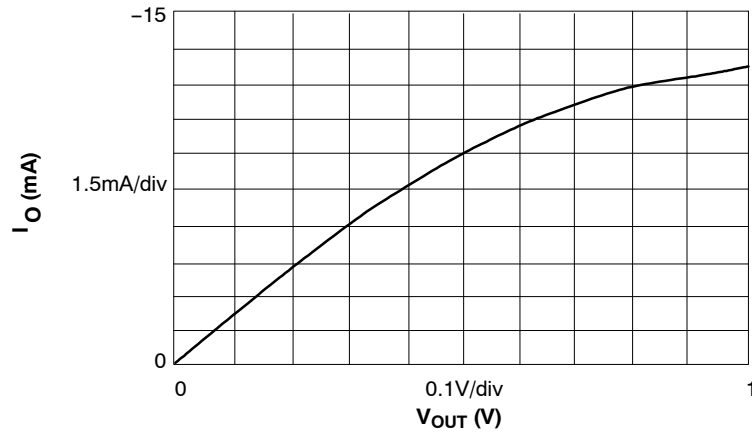

**Figure 11. Output Sink Current vs. Output Voltage**

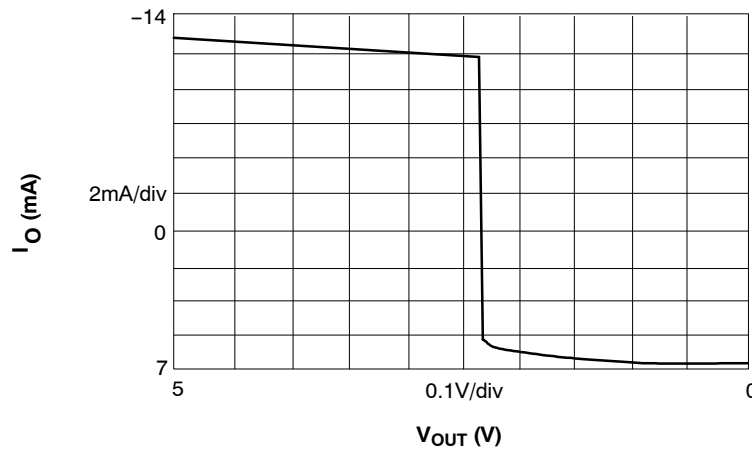

**Figure 12. Output Sink and Source Current vs. Output Voltage**

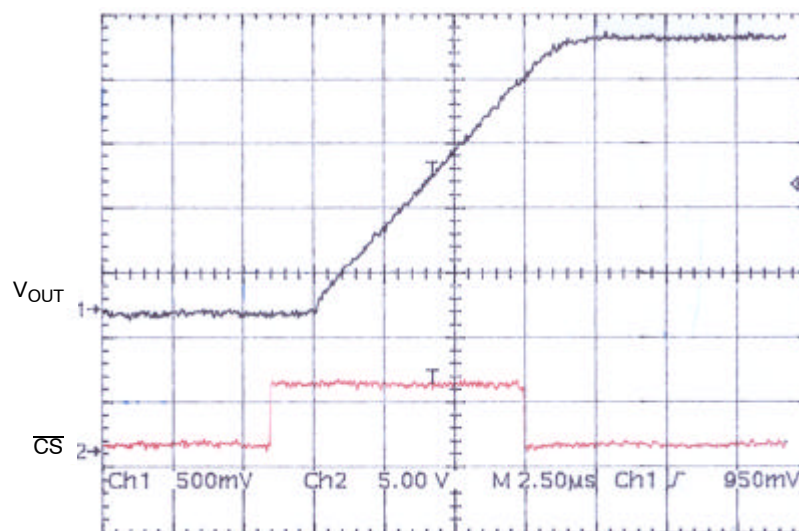


Figure 13. Voltage Output Settling Time ( $t_s$ ),  
 $V_{DD} = 5V$ ,  $V_{REFIN} = 1V$ , No Load



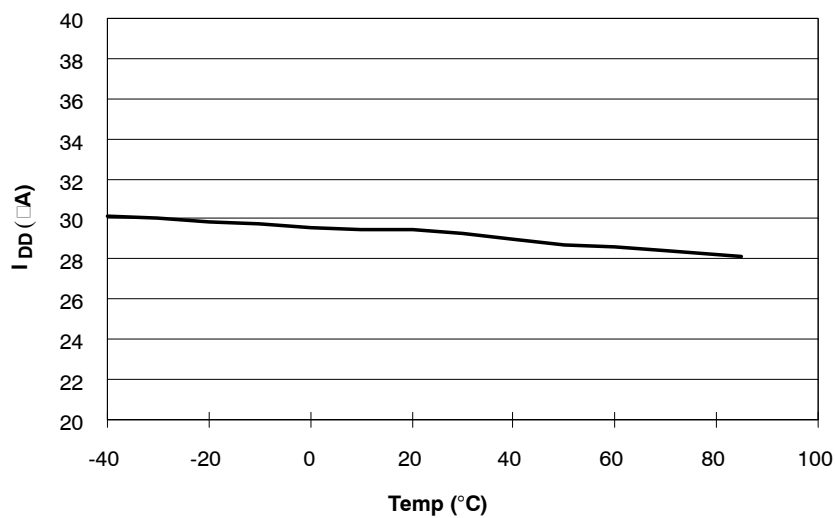


Figure 14.  $I_{DD}$  vs. Temperature

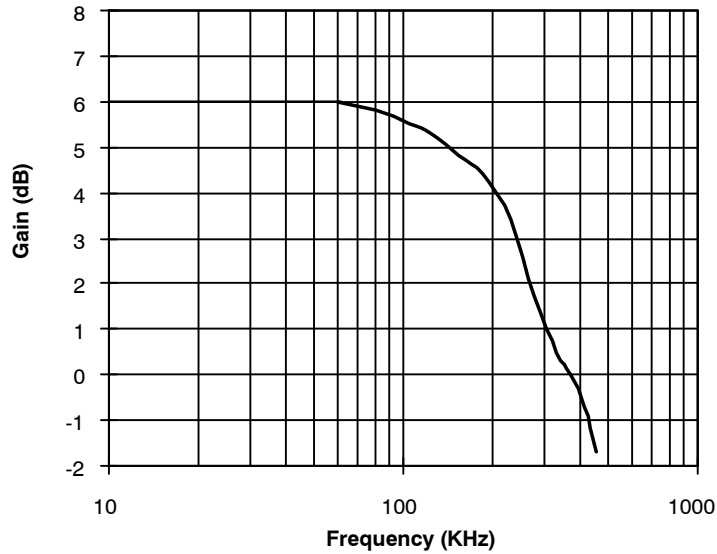

**Figure 15. Closed Loop Gain vs. Frequency**

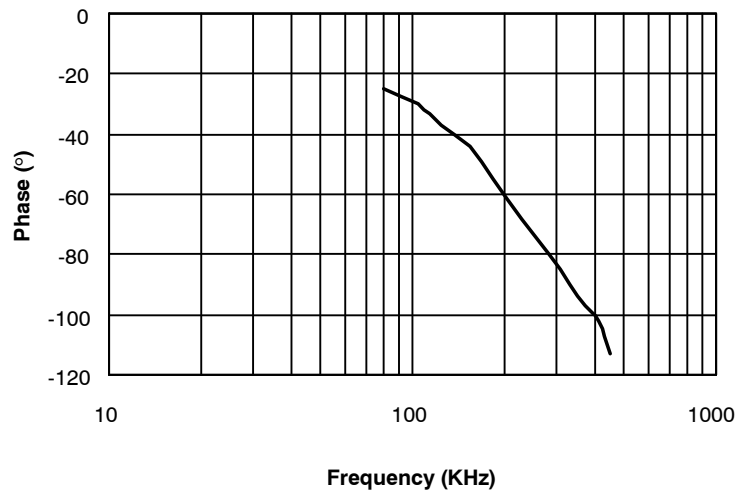


**Figure 16. Closed Loop Phase vs. Frequency**

**Microwire™** is a trademark of National Semiconductor Corporation.

**SPI™** and **QSPI™** are trademarks of Motorola Corporation.

## 8 LEAD SMALL OUTLINE (150 MIL JEDEC SOIC)

Rev. 1.00

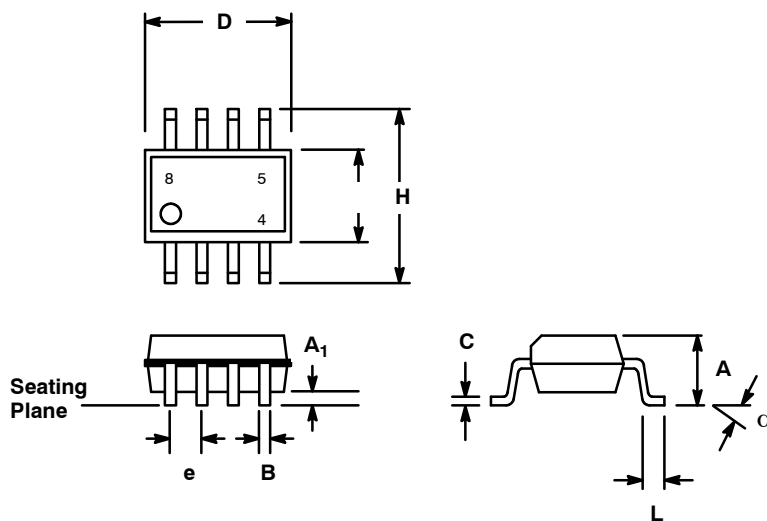


| SYMBOL         | INCHES    |       | MILLIMETERS |      |
|----------------|-----------|-------|-------------|------|
|                | MIN       | MAX   | MIN         | MAX  |
| A              | 0.053     | 0.069 | 1.35        | 1.75 |
| A <sub>1</sub> | 0.004     | 0.010 | 0.10        | 0.25 |
| B              | 0.013     | 0.020 | 0.33        | 0.51 |
| C              | 0.007     | 0.010 | 0.19        | 0.25 |
| D              | 0.189     | 0.197 | 4.80        | 5.00 |
| E              | 0.150     | 0.157 | 3.80        | 4.00 |
| e              | 0.050 BSC |       | 1.27 BSC    |      |
| H              | 0.228     | 0.244 | 5.80        | 6.20 |
| L              | 0.016     | 0.050 | 0.40        | 1.27 |
| α              | 0°        | 8°    | 0°          | 8°   |

Note: The control dimension is the millimeter column

**8 LEAD PLASTIC DUAL-IN-LINE  
(300 MIL PDIP)**

*Rev. 2.00*

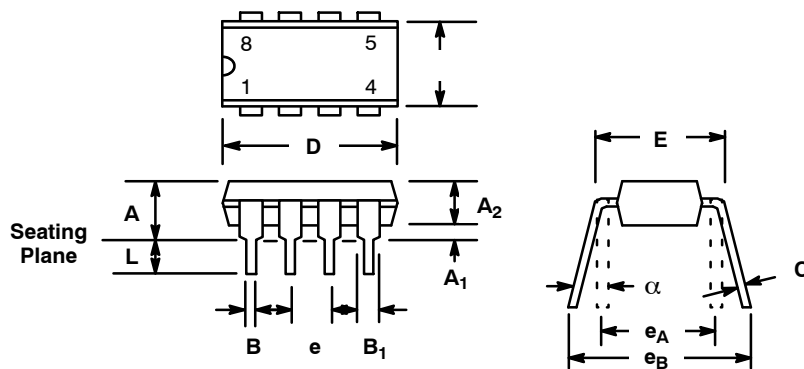

| SYMBOL         | INCHES    |       | MILLIMETERS |       |
|----------------|-----------|-------|-------------|-------|
|                | MIN       | MAX   | MIN         | MAX   |
| A              | 0.145     | 0.210 | 3.68        | 5.33  |
| A <sub>1</sub> | 0.015     | 0.070 | 0.38        | 1.78  |
| A <sub>2</sub> | 0.115     | 0.195 | 2.92        | 4.95  |
| B              | 0.014     | 0.024 | 0.36        | 0.56  |
| B <sub>1</sub> | 0.030     | 0.070 | 0.76        | 1.78  |
| C              | 0.008     | 0.014 | 0.20        | 0.38  |
| D              | 0.348     | 0.430 | 8.84        | 10.92 |
| E              | 0.300     | 0.325 | 7.62        | 8.26  |
| E <sub>1</sub> | 0.240     | 0.280 | 6.10        | 7.11  |
| e              | 0.100 BSC |       | 2.54 BSC    |       |
| e <sub>A</sub> | 0.300 BSC |       | 7.62 BSC    |       |
| e <sub>B</sub> | 0.310     | 0.430 | 7.87        | 10.92 |
| L              | 0.115     | 0.160 | 2.92        | 4.06  |
| α              | 0°        | 15°   | 0°          | 15°   |

*Note: The control dimension is the inch column*

## NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

All trademarks and registered trademarks are property of their respective owners.

Copyright 2000 EXAR Corporation

Datasheet May 2000

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.