



## ABSOLUTE MAXIMUM RATINGS

(Note 1)

$V_{IN}$ Voltage .....	8V
$C_T$ Voltage .....	6V
SW1, SW2 Voltage .....	36V
$V_{ON}$ , $V_{O2}$ Voltage .....	30V

FB1, FB2 .....	3V
SHDN .....	8V
Operating Temperature Range (Note 2) ..	–40°C to 85°C
Lead Temperature (Soldering, 10 sec) .....	300°C

## PACKAGE/ORDER INFORMATION
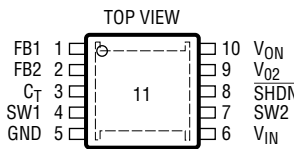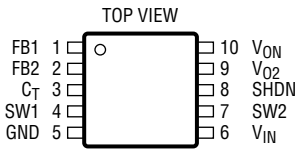
<div><p>TOP VIEW</p><p>MSE PACKAGE 10-LEAD PLASTIC MSOP EXPOSED PAD (PIN 11) IS GND MUST BE SOLDERED TO PCB <math>T_{JMAX} = 125^{\circ}\text{C}</math>, <math>\theta_{JA} = 40^{\circ}\text{C/W}</math></p></div>	<div><p>ORDER PART NUMBER</p><p>LT1947EMSE</p><p>MSE PART MARKING</p><p>LTBQW</p></div>	<div><p>TOP VIEW</p><p>MS PACKAGE 10-LEAD PLASTIC MSOP <math>T_{JMAX} = 125^{\circ}\text{C}</math>, <math>\theta_{JA} = 120^{\circ}\text{C/W}</math></p></div>	<div><p>ORDER PART NUMBER</p><p>LT1947EMS</p><p>MS PART MARKING</p><p>LTUE</p></div>
<p><b>Order Options</b> Tape and Reel: Add #TR, Lead Free: Add #PBF, Lead Free Tape and Reel: Add #TRPBF Lead Free Part Marking: <a href="http://www.linear.com/leadfree/">http://www.linear.com/leadfree/</a></p>			

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^{\circ}\text{C}$ .  $V_{IN} = 3.3\text{V}$ ,  $V_{SHDN} = 3.3\text{V}$  unless otherwise specified.

SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range		2.7		8	V
Supply Current	SHDN = 2.4V SHDN = 0V		9.5	12.5 1	mA $\mu\text{A}$
FB1 Voltage		● 1.240 1.225	1.26	1.280 1.295	V V
FB2 Voltage		● 1.225 1.210	1.26	1.295 1.310	V V
Reference Line Regulation	$V_{IN} = 2.7\text{V}$ to $8\text{V}$		0.01	0.05	%/V

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{IN} = 3.3\text{V}$ ,  $V_{\overline{\text{SHDN}}} = 3.3\text{V}$  unless otherwise specified.

SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Error Amplifier Voltage Gain	EA1 and EA2		100		V/V
$C_T$ Current Source	$V_{\overline{\text{FB1}}} = 1.3\text{V}$	4	5.5	6.5	$\mu\text{A}$
$C_T$ Threshold to Turn On Q3		1.25	1.28	1.30	V
FB1 Voltage to Begin $C_T$ Charge		1.17	1.2	1.23	V
SW1 Current Limit	(Note 3)	1.1	1.4	2	A
SW2 Current Limit	(Note 3)	0.35	0.6	1	A
SW1 Saturation Voltage	$I_{\text{SW1}} = 800\text{mA}$		0.230	0.280	V
SW2 Saturation Voltage	$I_{\text{SW2}} = 300\text{mA}$		0.3	0.36	V
SW1 Maximum Duty Cycle		82			%
SW2 Maximum Duty Cycle			85		%
Oscillator Frequency		● 2.3	3	3.5	MHz
$V_{\text{ON}}$ Switch Drop	$I_{\text{Q3}} = 7\text{mA}$		160	200	mV
SW1 Leakage Current	Switch Off, $\text{SW1} = 3.3\text{V}$		0.01	5	$\mu\text{A}$
SW2 Leakage Current	Switch Off, $\text{SW2} = 3.3\text{V}$		0.01	5	$\mu\text{A}$
$\overline{\text{SHDN}}$ Pin Bias Current	$V_{\overline{\text{SHDN}}} = 2.4\text{V}$		10	25	$\mu\text{A}$
$\overline{\text{SHDN}}$ Pin High	Active Mode	2.4			V
$\overline{\text{SHDN}}$ Pin Low	Shutdown Mode			0.4	V




**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** The LT1947 is guaranteed to meet performance specifications from  $0^\circ\text{C}$  to  $70^\circ\text{C}$ . Specifications over the  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  operating







temperature range are assured by design, characterization and correlation with statistical process controls.

**Note 3:** Switch current limit guaranteed by design and/or correlation to static tests.

## TYPICAL PERFORMANCE CHARACTERISTICS

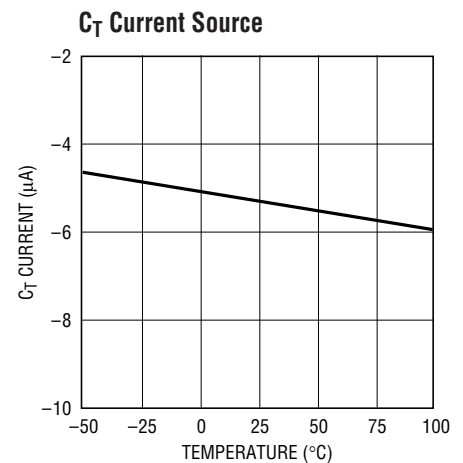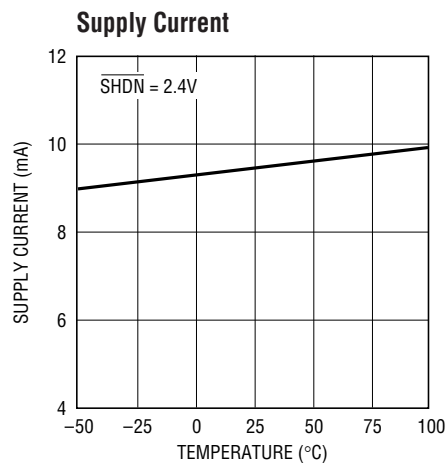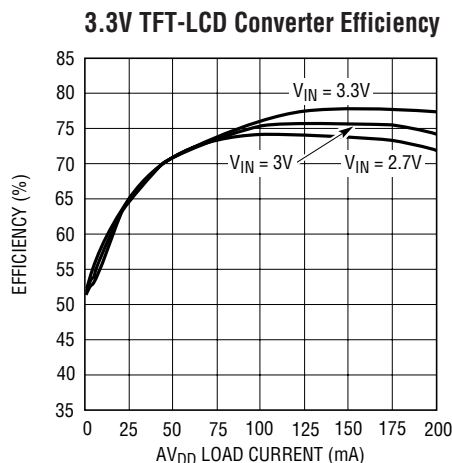

TYPICAL PERFORMANCE CHARACTERISTICS

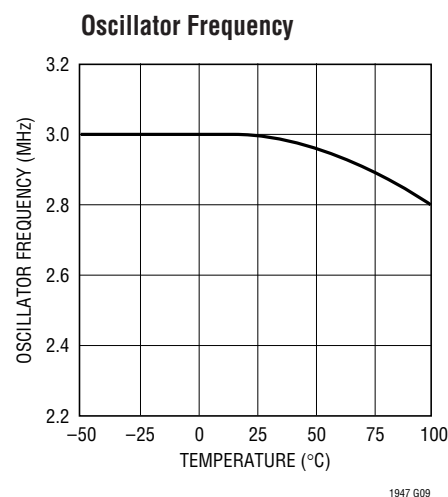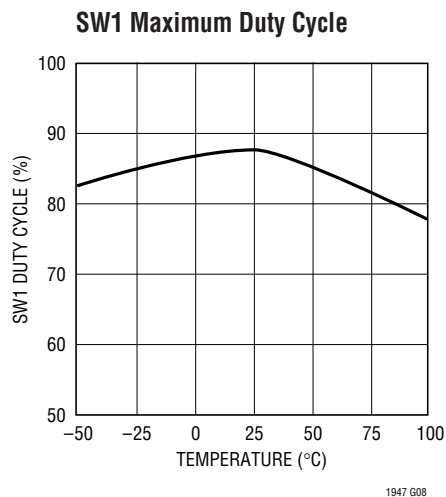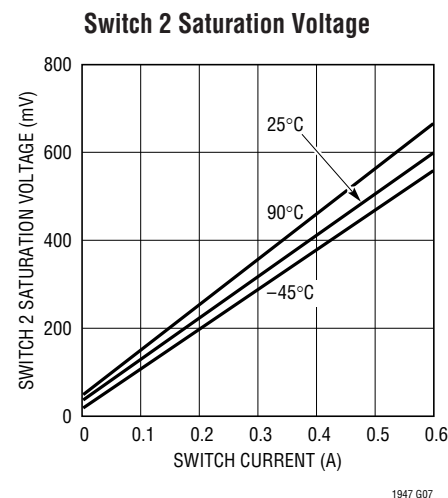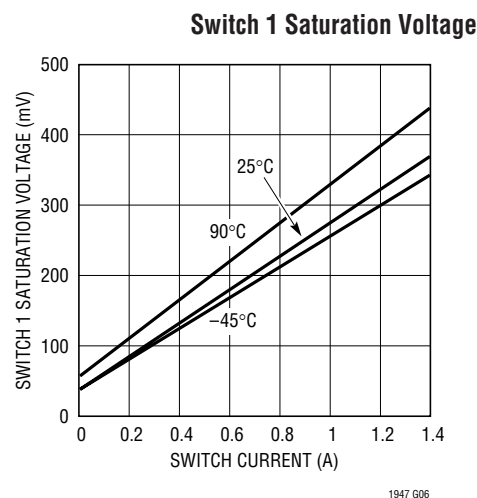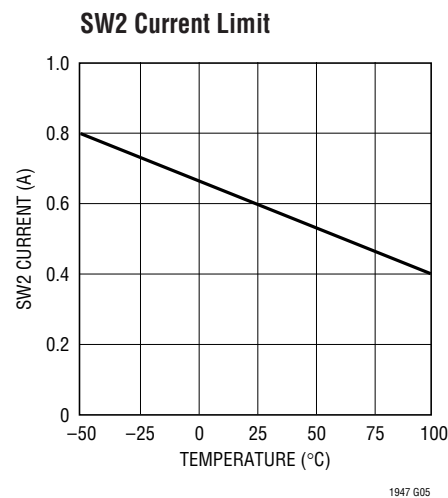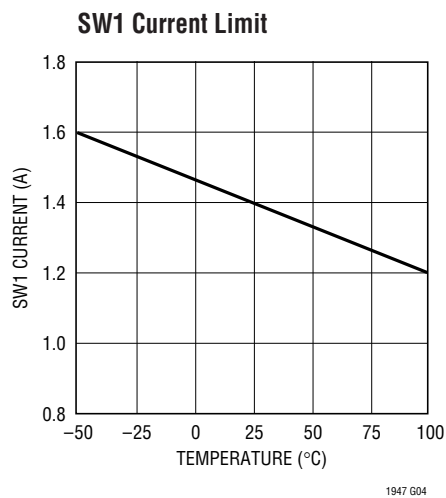

## PIN FUNCTIONS

**FB1 (Pin 1):** Feedback Pin for First Switcher. Connect resistor divider tap here. Set  $AV_{DD}$  according to:  $AV_{DD} = 1.26V(1 + R1/R2)$ .

**FB2 (Pin 2):** Feedback Pin for Second Switcher. Connect resistor divider 2 here and set  $V_{ON}$  using:  $V_{ON} = 1.26V(1 + R3/R4) - 160mV$ .

**$C_T$  (Pin 3):** Timing Capacitor Pin. Connect a 10nF capacitor from  $C_T$  to ground to program a 2.3ms delay from FB1 reaching 1.26V to  $V_{ON}$  turning on.

**SW1 (Pin 4):**  $AV_{DD}$  Switch Node. Connect L1 and D1 here (see Figure 1). Minimize trace area at this pin to keep EMI down.

**GND (Pin 5):** Ground. Connect directly to local ground plane.

**$V_{IN}$  (Pin 6):** Input Supply Pin. Must be bypassed with a ceramic capacitor close to the pin.

**SW2 (Pin 7):**  $V_{O2}$  Switch Node. Connect L2 and D2 here. Minimize trace area at this pin to keep EMI down.


**$\overline{SHDN}$  (Pin 8):** Pull this pin low for shutdown mode. For normal operation, tie to a voltage between 2.4V and 8V.

**$V_{O2}$  (Pin 9):** SW2 Output. This node is also internally connected to the emitter of Q3 (see Block Diagram), the high side switch between  $V_{O2}$  and  $V_{ON}$ .

**$V_{ON}$  (Pin 10):** This is the delayed output for second Switcher.  $V_{ON}$  reaches its programmed voltage after the internal timer times out.

**Exposed Pad (Pin 11):** Ground (MSE package only). The exposed pad must be soldered to the PCB and electrically connected to ground.

BLOCK DIAGRAM

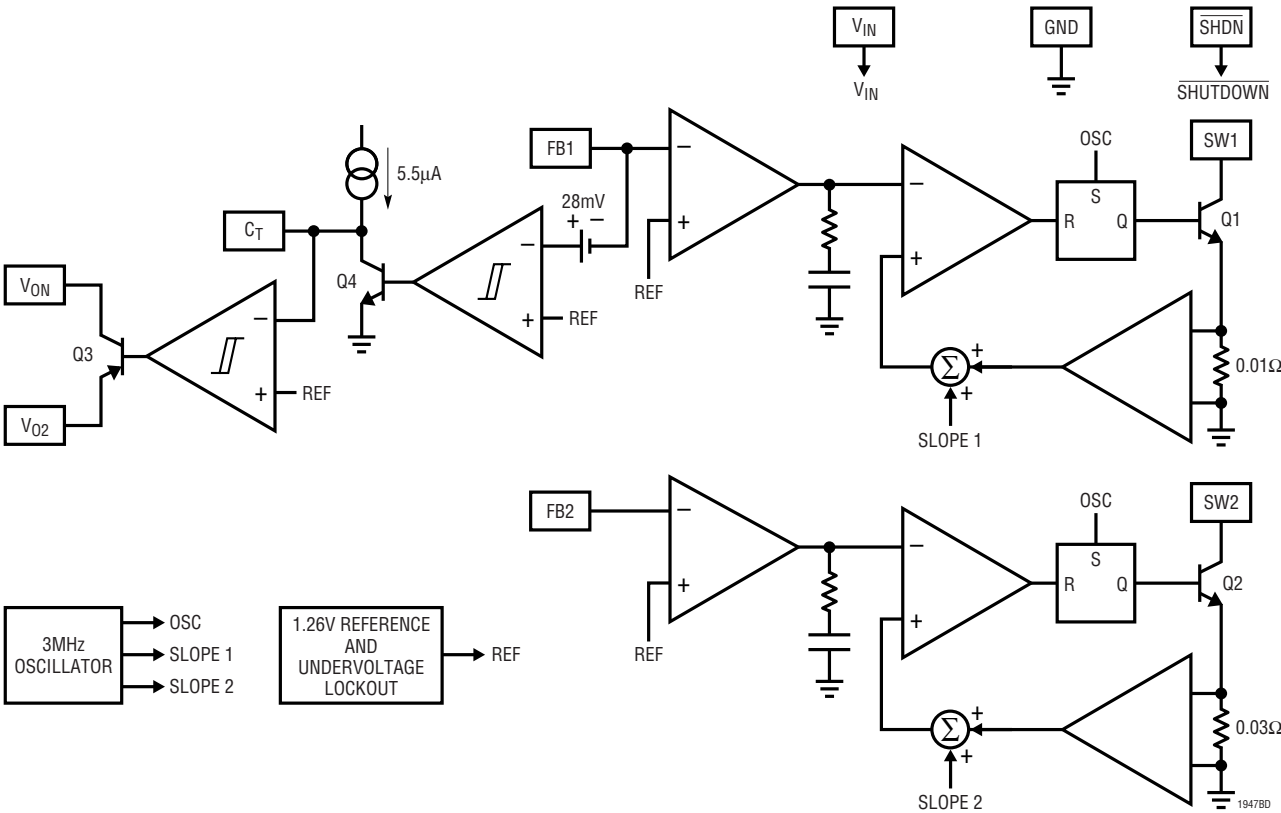



OPERATION

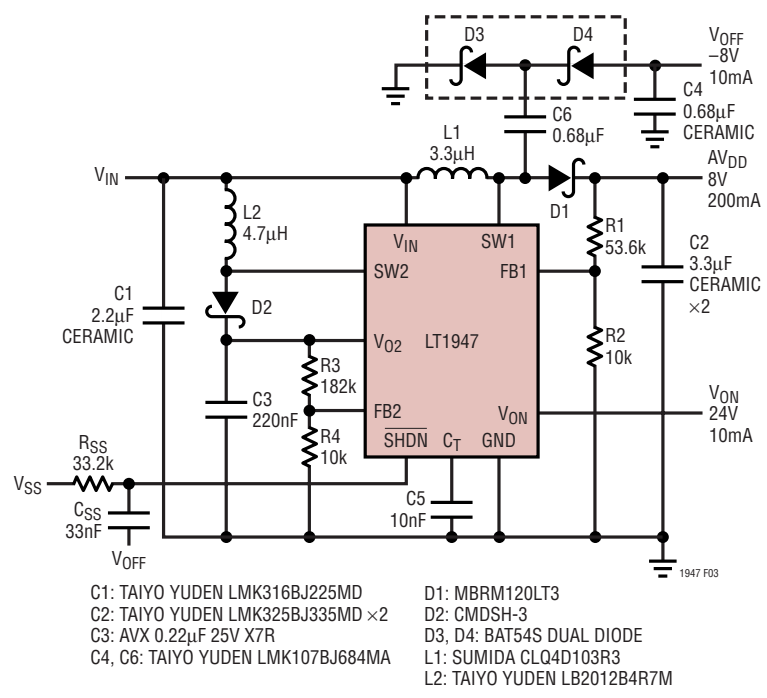


Figure 3. R<sub>SS</sub> and C<sub>SS</sub> at SHDN Pin Provide Soft-Start


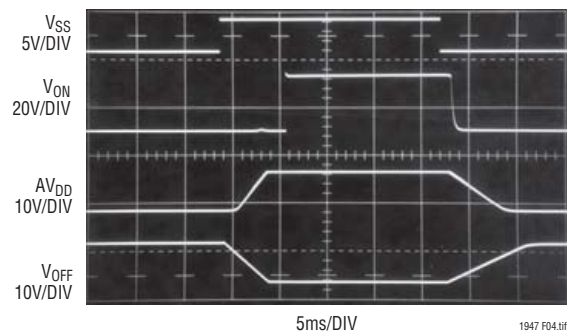



Figure 4. Start-Up Waveforms with Soft-Start Circuit Added

# TYPICAL APPLICATIONS

TFT-LCD Bias Generator: 12V, 20V, -6V Output

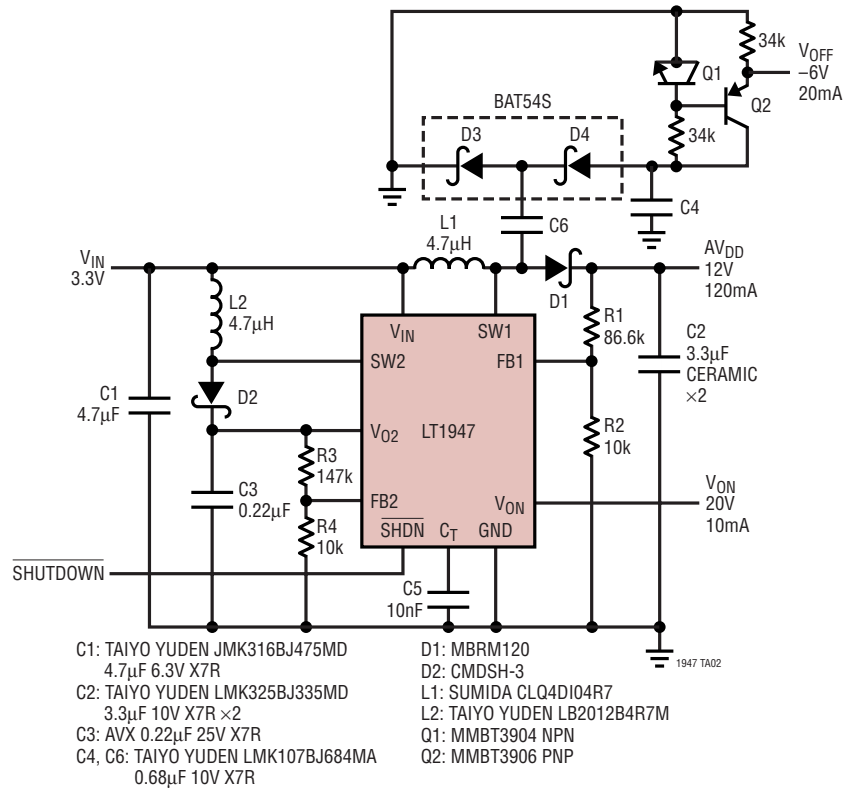

TFT-LCD Bias Generator: 10V, 24V, -6V Output

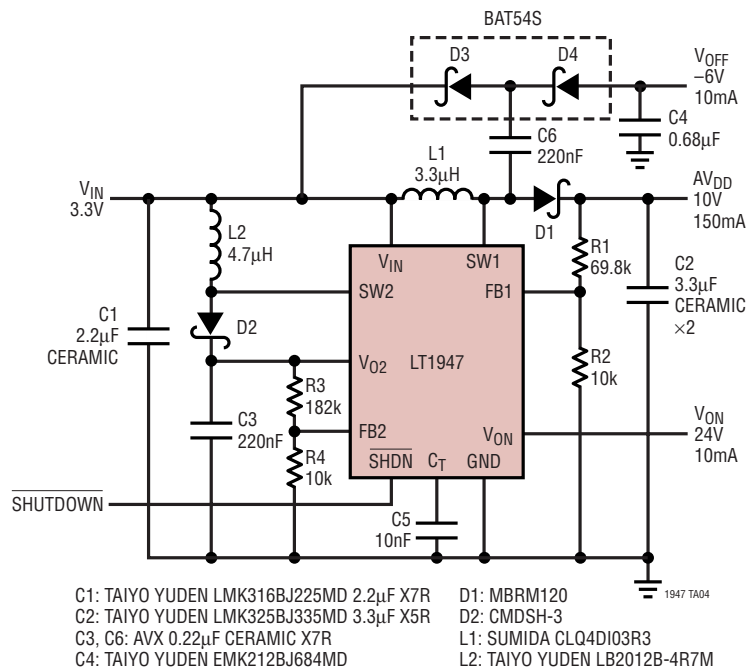




## PACKAGE DESCRIPTION

**MS Package**  
**10-Lead Plastic MSOP**


(Reference LTC DWG # 05-08-1661)

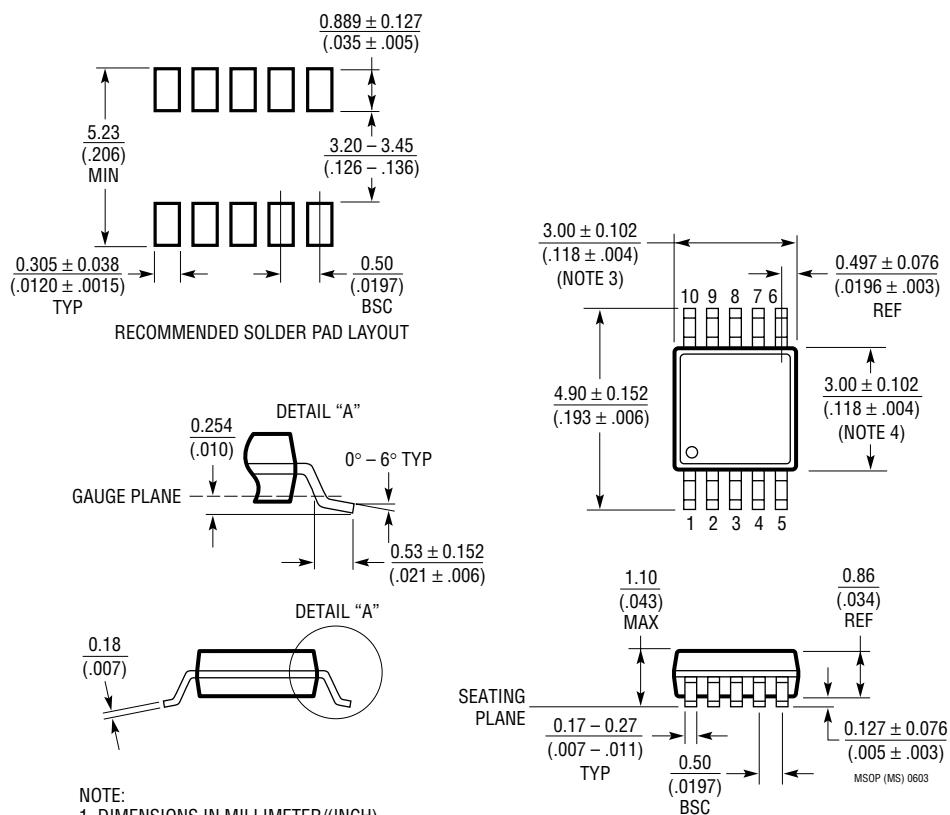

- NOTE: (0.0197)  
BSC
1. DIMENSIONS IN MILLIMETER/(INCH)
  2. DRAWING NOT TO SCALE
  3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
  4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.  
INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
  5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX

# PACKAGE DESCRIPTION


## MSE Package 10-Lead Plastic MSOP (Reference LTC DWG # 05-08-1663)

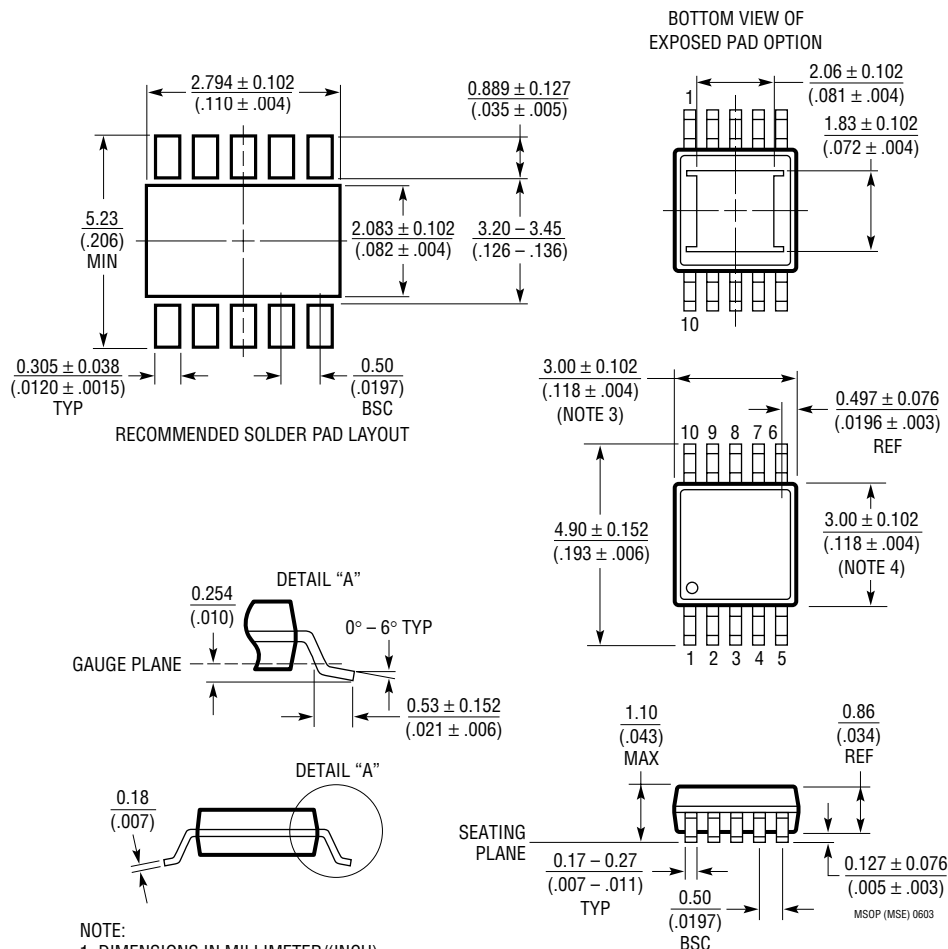

- NOTE:
1. DIMENSIONS IN MILLIMETER/(INCH)
  2. DRAWING NOT TO SCALE
  3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
  4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.  
INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
  5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX

## TYPICAL APPLICATION

TFT-LCD Bias Generator: 7.5V, 15V, -10V Output

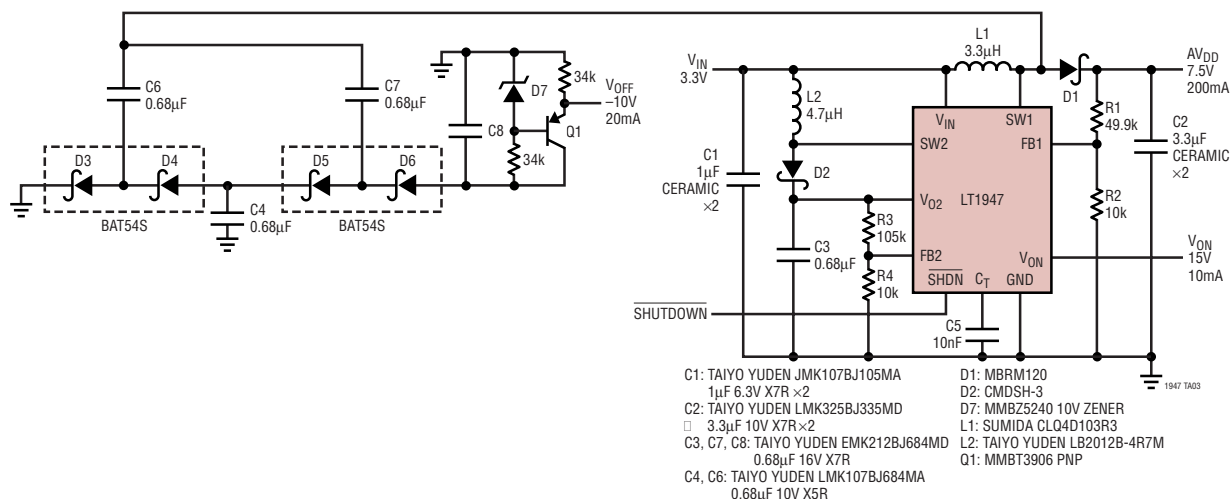

## RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1310	1.5A $I_{SW}$ , 4.5MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 2.75V$ to 18V, $V_{OUT}$ Max = 35V, $I_Q = 12mA$ , $I_{SHDN} < 1\mu A$ , MS10E
LT1613	550mA $I_{SW}$ , 1.4MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 0.9V$ to 10V, $V_{OUT}$ Max = 34V, $I_Q = 3mA$ , $I_{SHDN} < 1\mu A$ , ThinSOT
LT1615/LT1615-1	300mA/80mA $I_{SW}$ , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, $V_{OUT}$ Max = 34V, $I_Q = 20\mu A$ , $I_{SHDN} < 1\mu A$ , ThinSOT
LT1940	Dual Output 1.4A $I_{OUT}$ , Constant 1.1MHz, High Efficiency Step-Down DC/DC Converter	$V_{IN} = 3V$ to 25V, $V_{OUT}$ Min = 1.2V, $I_Q = 2.5mA$ , $I_{SHDN} < 1\mu A$ , TSSOP-16E
LT1944	Dual Output 350mA $I_{SW}$ , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, $V_{OUT}$ Max = 34V, $I_Q = 20\mu A$ , $I_{SHDN} < 1\mu A$ , MS10
LT1944-1	Dual Output 150mA $I_{SW}$ , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, $V_{OUT}$ Max = 34V, $I_Q = 20\mu A$ , $I_{SHDN} < 1\mu A$ , MS10
LT1945	Dual Output, Pos/Neg 350mA $I_{SW}$ , Constant Off-Time, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.2V$ to 15V, $V_{OUT}$ Max = $\pm 34V$ , $I_Q = 20\mu A$ , $I_{SHDN} < 1\mu A$ , MS10
LT1946/LT1946A	1.5A $I_{SW}$ , 1.2MHz/2.7MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 2.45V$ to 16V, $V_{OUT}$ Max = 34V, $I_Q = 3.2mA$ , $I_{SHDN} < 1\mu A$ , MS8
LT1949/LT1949-1	550mA $I_{SW}$ , 600kHz/1.1MHz, High Efficiency Step-Up DC/DC Converter	$V_{IN} = 1.5V$ to 12V, $V_{OUT}$ Max = 28V, $I_Q = 4.5mA$ , $I_{SHDN} < 25\mu A$ , MS8, S8
LTC3400/LTC3400B	600mA $I_{SW}$ , 1.2MHz, Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.85V$ to 5V, $V_{OUT}$ Max = 5V, $I_Q = 19\mu A/300\mu A$ , $I_{SHDN} < 1\mu A$ , ThinSOT
LTC3401	1A $I_{SW}$ , 3MHz, Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, $V_{OUT}$ Max = 6V, $I_Q = 38\mu A$ , $I_{SHDN} < 1\mu A$ , MS10
LTC3402	2A $I_{SW}$ , 3MHz, Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, $V_{OUT}$ Max = 6V, $I_Q = 38\mu A$ , $I_{SHDN} < 1\mu A$ , MS10
LTC3423	1A $I_{SW}$ , 3MHz, Low $V_{OUT}$ , Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, $V_{OUT}$ Max = 6V, $I_Q = 38\mu A$ , $I_{SHDN} < 1\mu A$ , MS10
LTC3424	2A $I_{SW}$ , 3MHz, Low $V_{OUT}$ , Synchronous Step-Up DC/DC Converter	$V_{IN} = 0.5V$ to 5V, $V_{OUT}$ Max = 6V, $I_Q = 38\mu A$ , $I_{SHDN} < 1\mu A$ , MS10

1947fa