


Applications

- Light detecting portion of remote control
- AV instruments such as Audio, TV, VCR, CD, MD, etc
- Home appliances such as Air-conditioner, Fan, etc
- Other devices using IR remote control
- CATV set top boxes
- Multi-media Equipment

Application Circuit

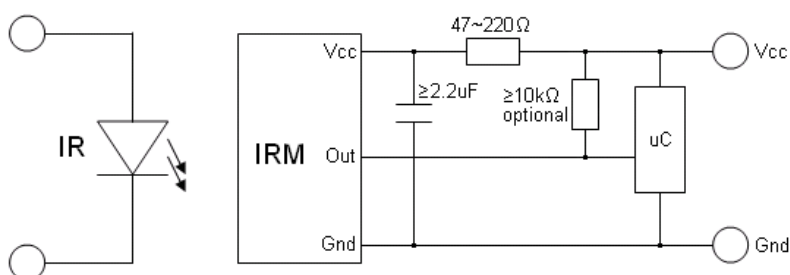

RC Filter should be connected closely between Vcc pin and GND pin.

Parts Table

Model No.	Carrier Frequency
IRM-H636M3/TR2	36 kHz
IRM-H638M3/TR2	38 kHz

Absolute Maximum Ratings (T_a=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	V _{CC}	6	V
Operating Temperature	T _{opr}	-20 ~ +80	°C
Storage Temperature	T _{stg}	-40 ~ +85	°C
Soldering Temperature ^{*1}	T _{sol}	260	°C

^{*1} 4mm from mold body less than 5 seconds

Electro-Optical Characteristics (T_a=25°C and V_{CC}=3.0V)


Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Current Consumption	I _{CC}	-	0.4	0.6	mA	No signal input
Supply Voltage	V _{CC}	2.7	-	5.5	V	
Peak Wavelength	λ _p	-	940	-	nm	
Reception Distance	L ₀	8	-	-	m	See chapter ,Test method'
	L ₄₅	5	-	-		
Half Angle (Horizontal)	Θ _h	-	45	-	deg	
Half Angle (Vertical)	Θ _v	-	45	-	deg	
High Level Pulse Width	T _{WH}	450	-	750	μs	Test signal according to figure 1
Low Level Pulse Width	T _{WL}	450	-	750	μs	
High Level Output Voltage	V _H	V _{CC} -0.4	-	-	V	
Low Level Output Voltage	V _L	-	0.2	0.5	V	I _{SINK} ≤ 2mA

Test Method

The specified electro-optical characteristic is satisfied under the following Conditions:

1. Measurement environment
A place without extreme light reflected
2. External light
Ordinary white fluorescent lamps (Light source temperature 2856°K, $E_e \leq 10\text{Lux}$) without high frequency modulation
3. Standard transmitter
The test transmitter is calibrated by using the circuit shown in figure 2. The radiation intensity of the transmitter is adjusted until $V_o=400\text{mVp-p}$. Both, the test transmitter and the photo diode, have a peak wavelength of 940nm. The photo diode for calibration is PD438B ($\lambda_p=940\text{nm}$, $V_r=5\text{V}$).
4. Measuring system According to the measuring system shown in Fig.-3

Fig.-1 Transmitter Wave Form

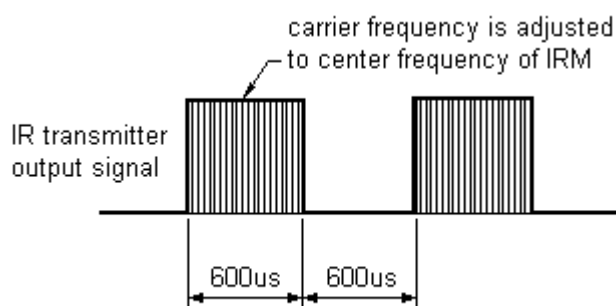

D.U.T output Pulse

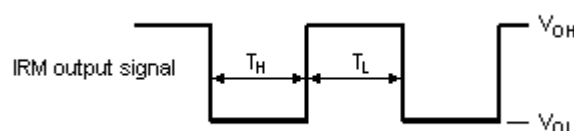


Fig.-2 Measuring Method


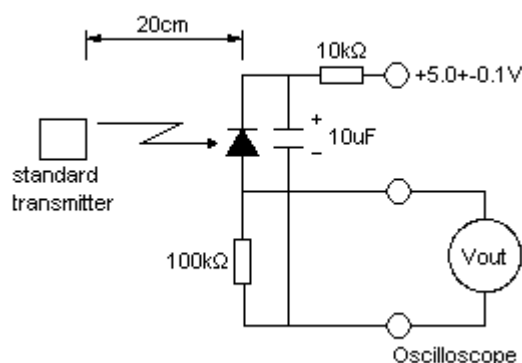


Fig.-3 Measuring System

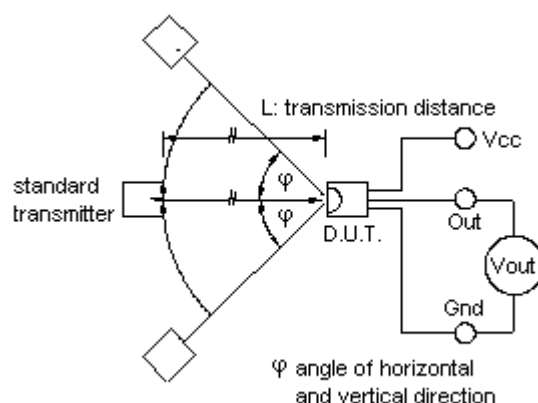

Typical Performance Curves

Fig.4 Relative Responsibility vs. Wavelength

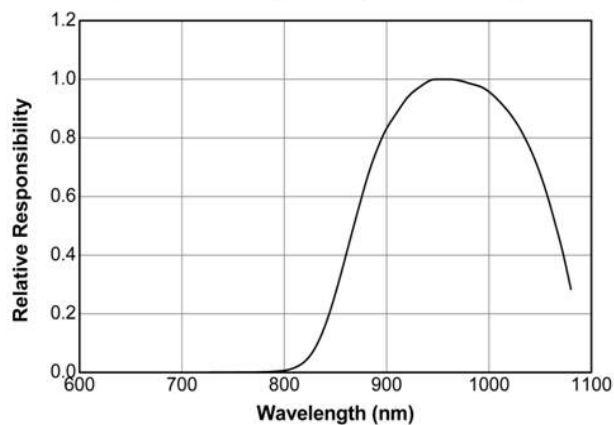


Fig.-5 Relative Sensitivity vs. Horizontal Angle

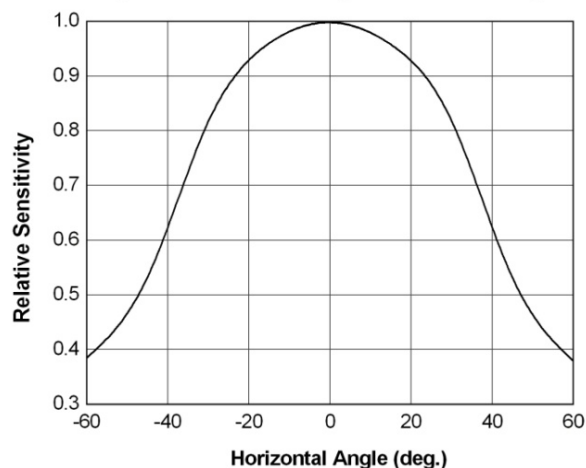


Fig.6 Variation Output Pulse Width vs. Distance

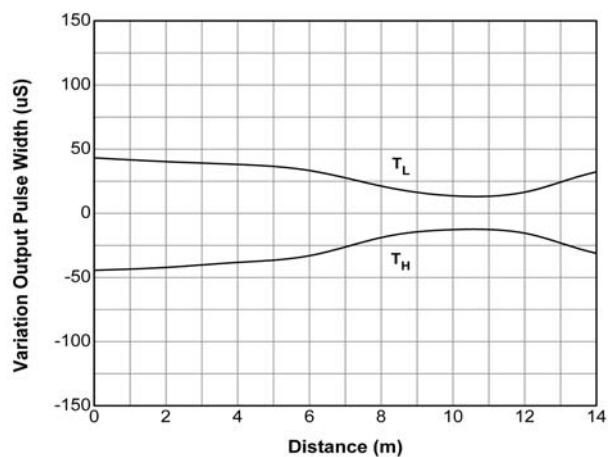


Fig.-7 Relative Transmission Distance vs. Supply Voltage



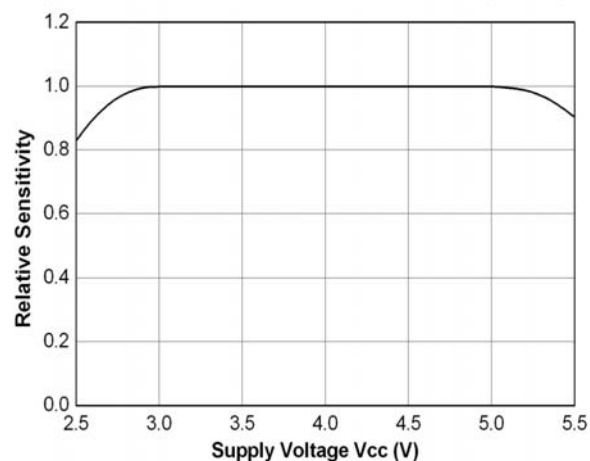


Fig.8 Relative Sensitivity vs. Carrier Frequency

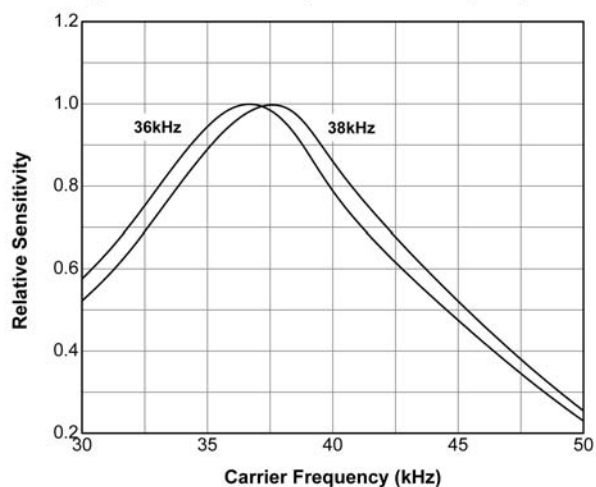

Package Dimensions

(Dimensions in mm)

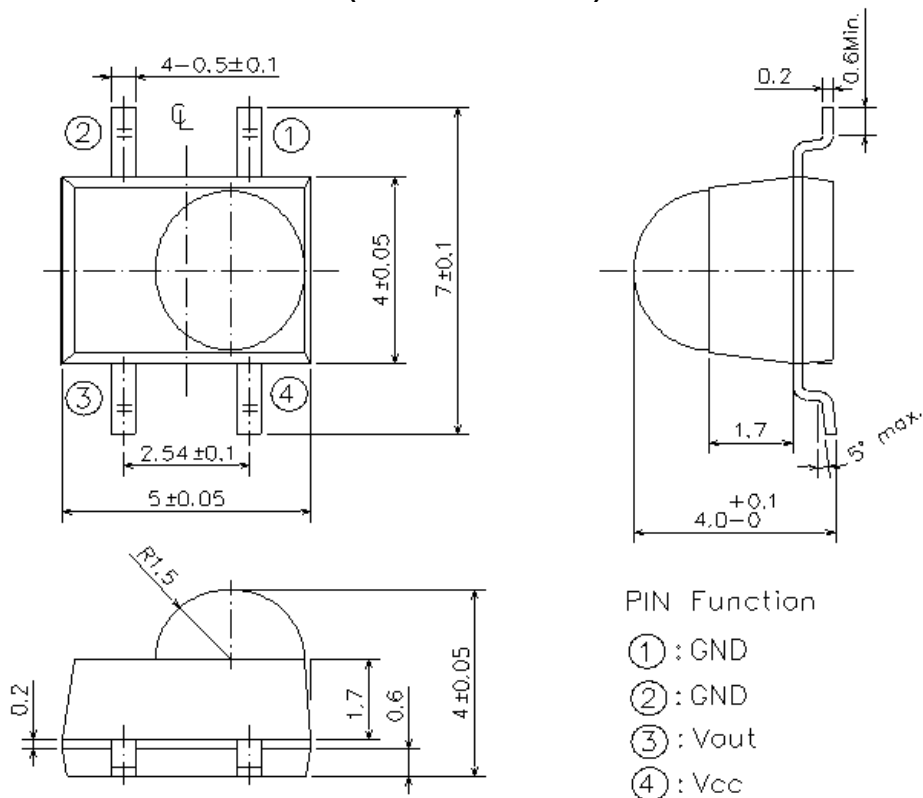


Notes:

Tolerances unless mentioned $\pm 0.2\text{mm}$. Unit: mm

Recommend soldering patterns

The following soldering patterns are recommended for reflow-soldering

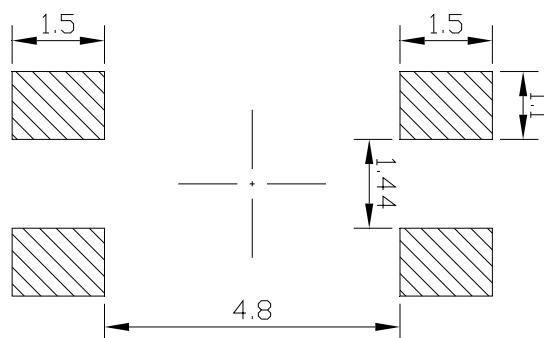

Notice: Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.


Code information

Protocol	Suitable	Protocol	Suitable
JVC	Yes	RCA	No
Matsushita	Yes	Sharp	Yes
Mitsubishi	No	Sony 12 bit ²⁾	Yes
NEC	Yes	Sony 15 bit	No
RC5	Yes	Sony 20 bit	No
RC6 ¹⁾	Yes	Toshiba	Yes
RCMM	No	Continuous Code	No

1) Best choice depends on RC6 mode. If data low time is below 22ms, M2 is the best choice, otherwise M3.

2) If only Sony 12 bit version is used, M3 is recommended otherwise M2 is the best choice.

Device Marking

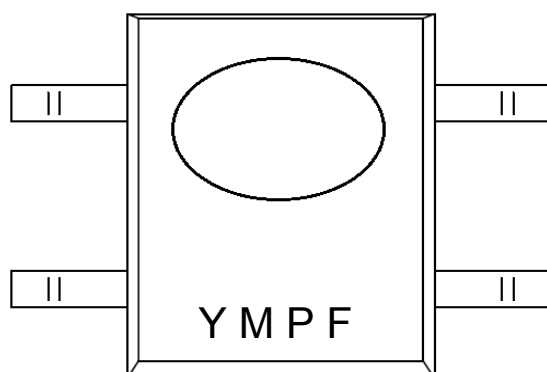

Notes

- Y denotes Years code
- M denotes Month code
- P denotes Device number
- F denotes Carrier frequency (2: 36 kHz, 4: 38 kHz)

Technical drawing of a mechanical part, showing a top view and a side view. The drawing includes dimensions and tolerances.

Top View Dimensions:



- Overall width: 2 ± 0.05
- Distance between first two holes: 4 ± 0.1
- Distance between last two holes: 8 ± 0.1
- Distance between hole centers: $\phi 1.5 \begin{smallmatrix} +0.1 \\ 0 \end{smallmatrix}$
- Distance between hole centers: $\phi 1.2 \begin{smallmatrix} +0.25 \\ 0 \end{smallmatrix}$
- Overall height: 16 ± 0.3
- Distance from top edge to hole center line: 7.5 ± 0.1
- Distance from bottom edge to hole center line: 7.5 ± 0.1

Side View Dimensions:

- Overall height: 1.75 ± 0.1
- Distance from top edge to hole center line: 7.5 ± 0.1
- Distance from bottom edge to hole center line: 4.3 ± 0.1
- Distance between hole centers: 3.3 ± 0.1
- Distance between hole centers: 4.3 ± 0.1
- Distance between hole centers: 1.5 ± 0.1
- Distance between hole centers: 5.4 ± 0.1
- Overall width: 0.4 ± 0.05

1000 pcs / Reel
5 Reels / Carton

Label format

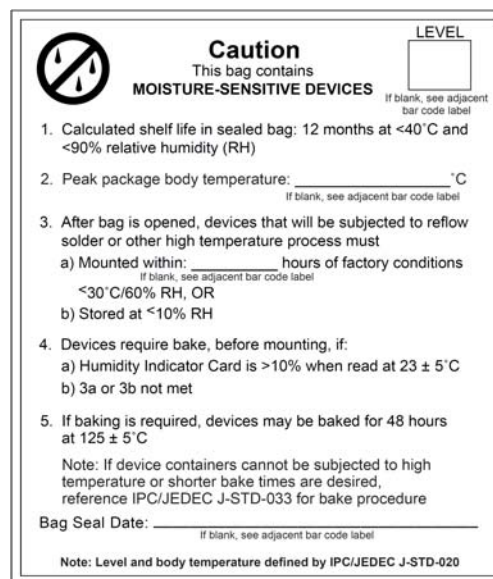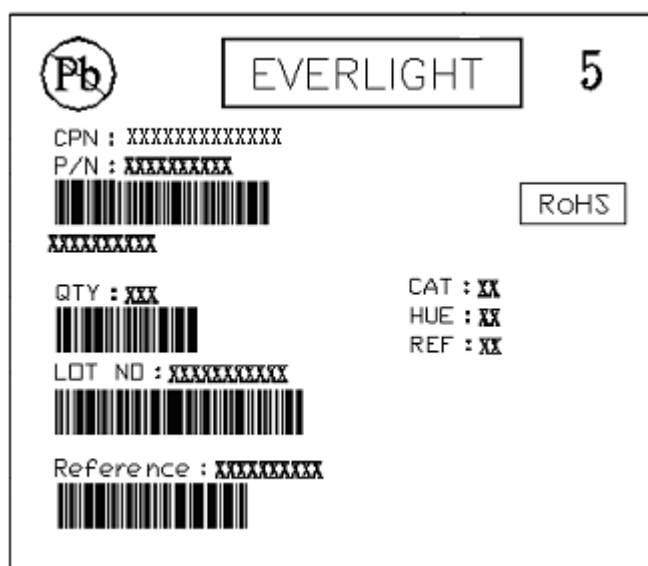

Moisture Classification-storage and used condition label

Recommended method of storage


The following are general recommendations for moisture sensitive level (MSL) 4 storage and use:

1. Do not open moisture proof bag before devices are ready to use.
2. Shelf life in sealed bag from the bag seal date: 12 months at 10°C~30°C and < 90% RH.
3. After opening the package, the devices must be stored at 10°C~30°C and ≤ 60%RH, and used within 72 hours (floor life).
4. If the moisture absorbent material (desiccant material) has faded or unopened bag has exceeded the shelf life or devices (out of bag) have exceeded the floor life, baking treatment is required.
5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure or recommend the following conditions: 96 hours at 60°C ± 5°C and < 5 % RH.

ESD Precaution

Proper storage and handing procedures should be followed to prevent ESD damage to the devices especially when they are removed from the Anti-static bag. Electro-Static Sensitive Devices warning labels are on the packing.

Solder Reflow Temperature Profile

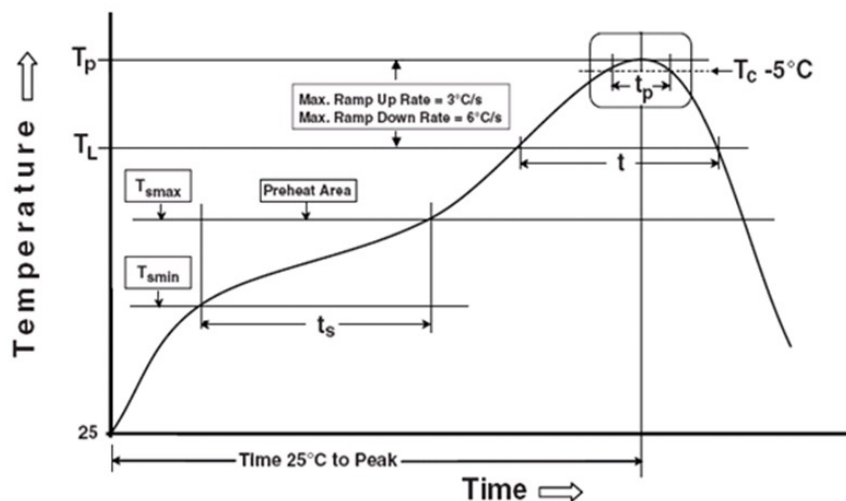

Note:

Reference: IPC/JEDEC J-STD-020D

Preheat

Temperature min (T_{smin})	150 °C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds
Average ramp-up rate (T_{smax} to T_P)	3 °C/second max

Other

Liquidus Temperature (T_L)	217 °C
Time above Liquidus Temperature (t_L)	60-100 sec
Peak Temperature (T_P)	260°C
Time within 5 °C of Actual Peak Temperature: $T_P - 5^\circ\text{C}$	30 s
Ramp- Down Rate from Peak Temperature	6°C /second max.
Time 25°C to peak temperature	8 minutes max.
Reflow times	2 times

Note:

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the IRM device during heating.
3. After soldering, do not warp the circuit board.

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.