


| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)                                                                         | Characteristic Values |      |                         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|-------------------------|
|              |                                                                                                                                                     | Min.                  | Typ. | Max.                    |
| $g_{fs}$     | $V_{DS} = 20\text{V}$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1                                                                                          | 9                     | 16   | S                       |
| $C_{iss}$    | $V_{GS} = 0\text{V}$ , $V_{DS} = 25\text{V}$ , $f = 1\text{MHz}$                                                                                    |                       | 2480 | pF                      |
| $C_{oss}$    |                                                                                                                                                     |                       | 237  | pF                      |
| $C_{rss}$    |                                                                                                                                                     |                       | 18   | pF                      |
| $t_{d(on)}$  | <b>Resistive Switching Times</b><br>$V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$<br>$R_G = 10\Omega$ (External) |                       | 23   | ns                      |
| $t_r$        |                                                                                                                                                     |                       | 25   | ns                      |
| $t_{d(off)}$ |                                                                                                                                                     |                       | 70   | ns                      |
| $t_f$        |                                                                                                                                                     |                       | 22   | ns                      |
| $Q_{g(on)}$  | $V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$                                                                    |                       | 43   | nC                      |
| $Q_{gs}$     |                                                                                                                                                     |                       | 15   | nC                      |
| $Q_{gd}$     |                                                                                                                                                     |                       | 12   | nC                      |
| $R_{thJC}$   |                                                                                                                                                     |                       |      | 0.42 $^\circ\text{C/W}$ |
| $R_{thCS}$   | (TO-3P)                                                                                                                                             |                       | 0.25 | $^\circ\text{C/W}$      |
|              | (TO-220)                                                                                                                                            |                       | 0.50 | $^\circ\text{C/W}$      |

## Source-Drain Diode

| Symbol   | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)                           | Characteristic Values |      |       |
|----------|-------------------------------------------------------------------------------------------------------|-----------------------|------|-------|
|          |                                                                                                       | Min.                  | Typ. | Max.  |
| $I_s$    | $V_{GS} = 0\text{V}$                                                                                  |                       |      | 16 A  |
| $I_{SM}$ | Repetitive, Pulse Width Limited by $T_{JM}$                                                           |                       |      | 64 A  |
| $V_{SD}$ | $I_F = 16\text{A}$ , $V_{GS} = 0\text{V}$ , Note 1                                                    |                       |      | 1.5 V |
| $t_{rr}$ | $I_F = 16\text{A}$ , $-di/dt = 100\text{A}/\mu\text{s}$<br>$V_R = 100\text{V}$ , $V_{GS} = 0\text{V}$ |                       | 400  | ns    |

Note 1: Pulse Test,  $t \leq 300\mu\text{s}$ ; Duty Cycle,  $d \leq 2\%$ .


## TO-263 (IXTA) Outline

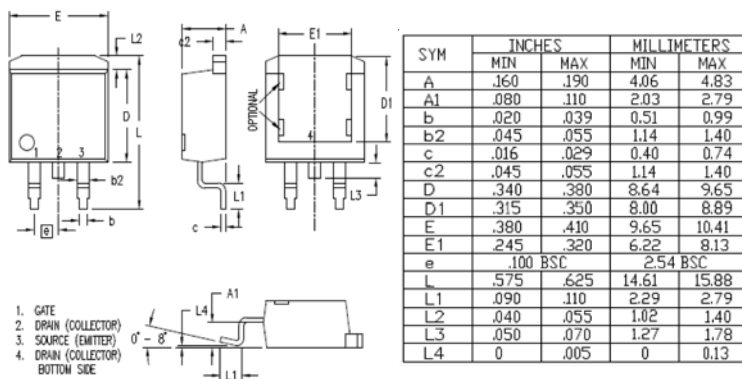

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

|                                                                                  |           |           |           |           |              |              |              |              |              |             |
|----------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|--------------|-------------|
| IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: | 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665    | 6,404,065 B1 | 6,683,344    | 6,727,585    | 7,005,734 B2 | 7,157,338B2 |
|                                                                                  | 4,850,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343    | 6,710,405 B2 | 6,759,692    | 7,063,975 B2 |             |
|                                                                                  | 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505    | 6,710,463    | 6,771,478 B2 | 7,071,537    |             |


## TO-3P (IXTQ) Outline

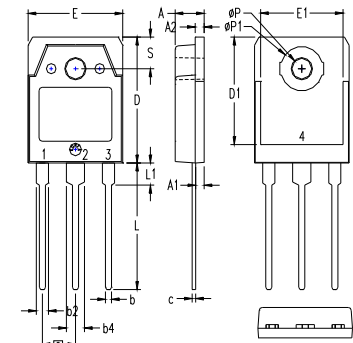

- 1 - GATE  
2 - DRAIN (COLLECTOR)  
3 - SOURCE (EMITTER)  
4 - DRAIN (COLLECTOR)

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .185     | .193 | 4.70        | 4.90  |
| A1  | .051     | .059 | 1.30        | 1.50  |
| A2  | .057     | .065 | 1.45        | 1.65  |
| b   | .035     | .045 | 0.90        | 1.15  |
| b2  | .075     | .087 | 1.90        | 2.20  |
| b4  | .114     | .126 | 2.90        | 3.20  |
| c   | .022     | .031 | 0.55        | 0.80  |
| D   | .780     | .799 | 19.80       | 20.30 |
| D1  | .665     | .677 | 16.90       | 17.20 |
| E   | .610     | .622 | 15.50       | 15.80 |
| E1  | .531     | .539 | 13.50       | 13.70 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| L   | .779     | .795 | 19.80       | 20.20 |
| L1  | .134     | .142 | 3.40        | 3.60  |
| L2  | .126     | .134 | 3.20        | 3.40  |
| ØP1 | .272     | .280 | 6.90        | 7.10  |
| S   | .193     | .201 | 4.90        | 5.10  |


## TO-220 (IXTP) Outline

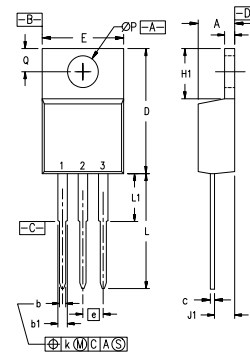


- Pins: 1 - Gate 2 - Drain  
3 - Source 4 - Drain

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .170     | .190 | 4.32        | 4.83  |
| b   | .025     | .040 | 0.64        | 1.02  |
| b1  | .045     | .065 | 1.15        | 1.65  |
| c   | .014     | .022 | 0.35        | 0.56  |
| D   | .580     | .630 | 14.73       | 16.00 |
| E   | .390     | .420 | 9.91        | 10.66 |
| e   | .100 BSC |      | 2.54 BSC    |       |
| F   | .045     | .055 | 1.14        | 1.40  |
| H1  | .230     | .270 | 5.85        | 6.85  |
| J1  | .090     | .110 | 2.29        | 2.79  |
| k   | 0        | .015 | 0           | 0.38  |
| L   | .500     | .550 | 12.70       | 13.97 |
| L1  | .110     | .230 | 2.79        | 5.84  |
| ØP  | .139     | .161 | 3.53        | 4.08  |
| Q   | .100     | .125 | 2.54        | 3.18  |


**Fig. 1. Output Characteristics  
@ 25°C**

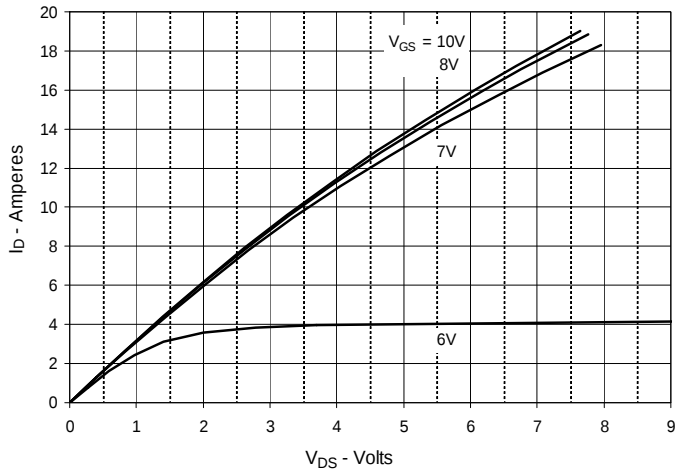


**Fig. 2. Output Characteristics  
@ 125°C**

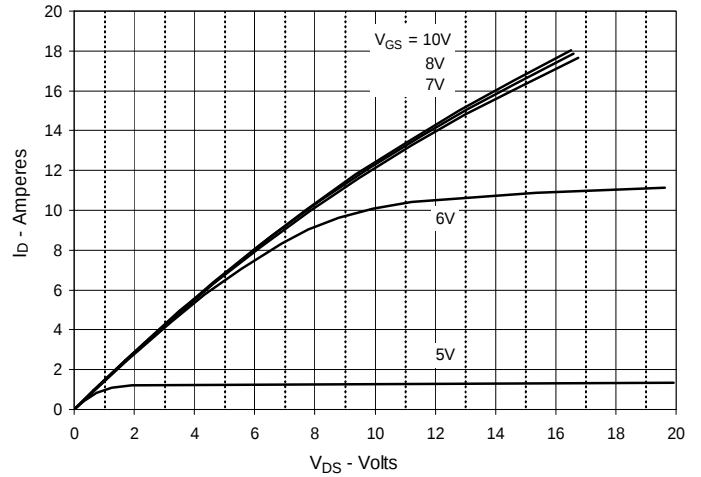


**Fig. 3.  $R_{DS(on)}$  Normalized to  $I_D = 8A$  Value  
vs. Junction Temperature**

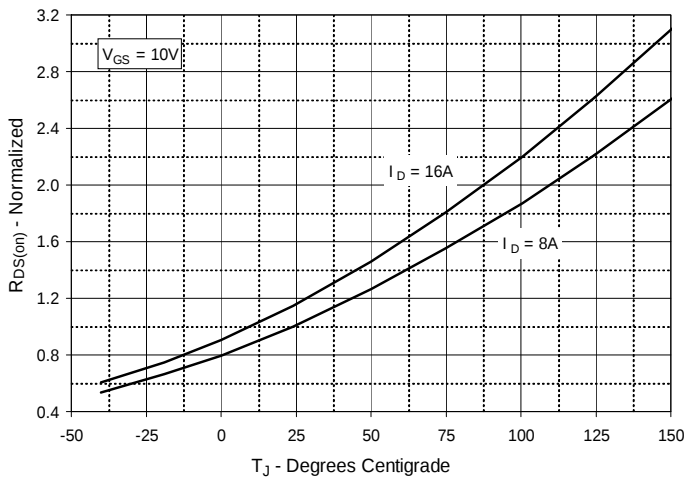

**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 8A$  Value  
vs. Drain Current**

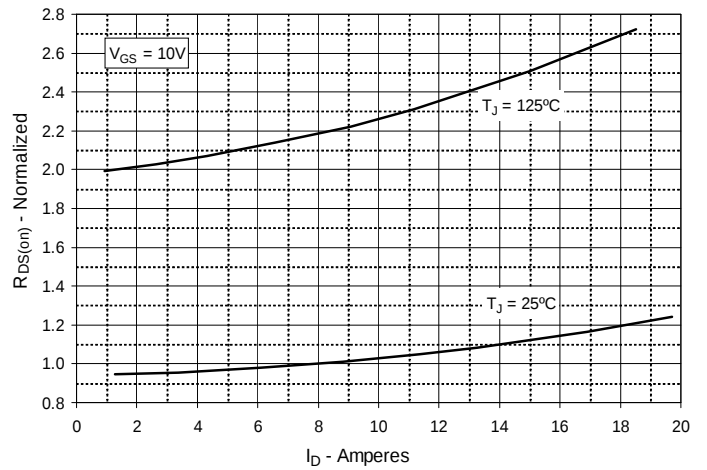

**Fig. 5. Maximum Drain Current vs.  
Case Temperature**

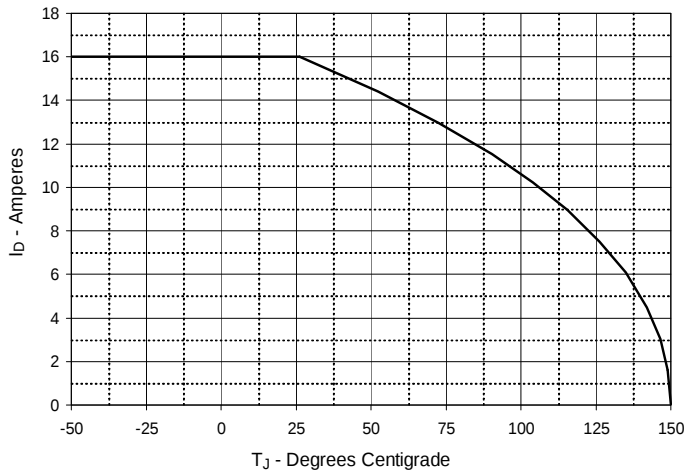

**Fig. 6. Input Admittance**

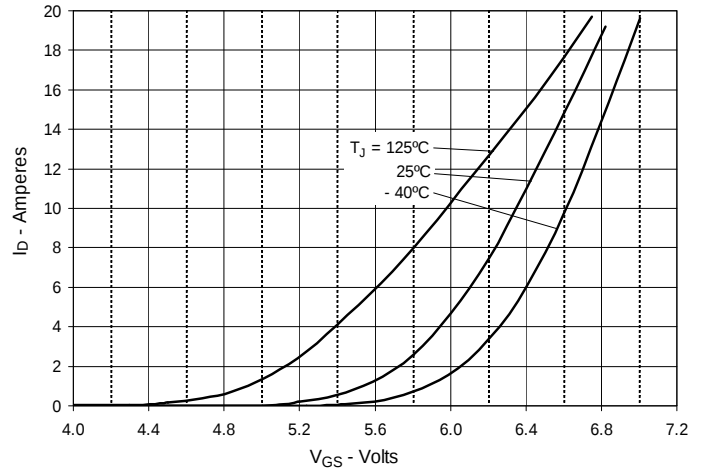


Fig. 7. Transconductance

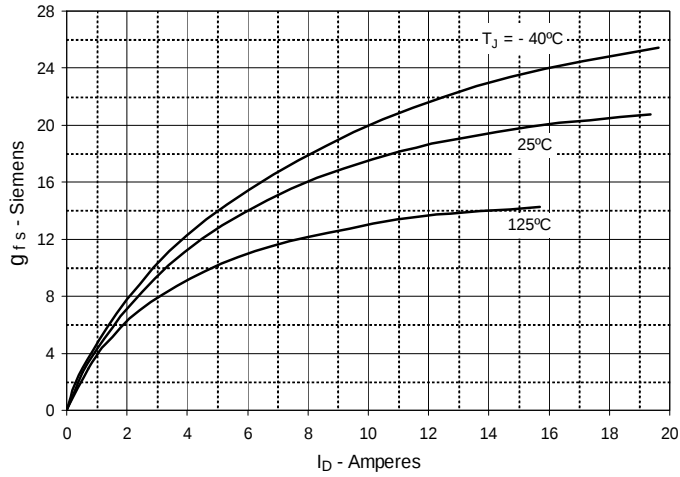


Fig. 8. Forward Voltage Drop of Intrinsic Diode

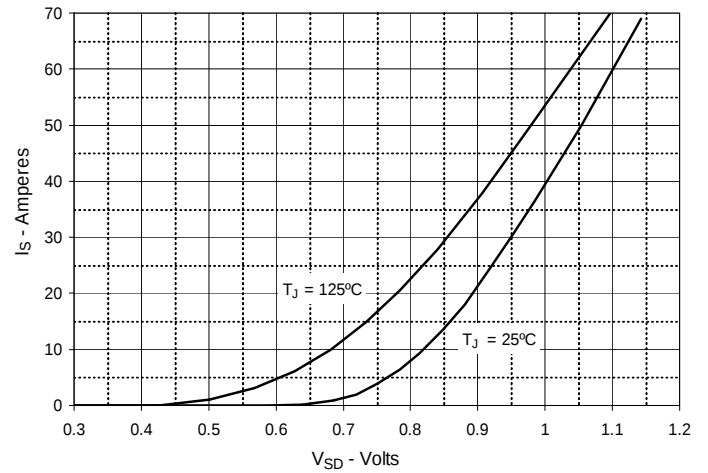


Fig. 9. Gate Charge

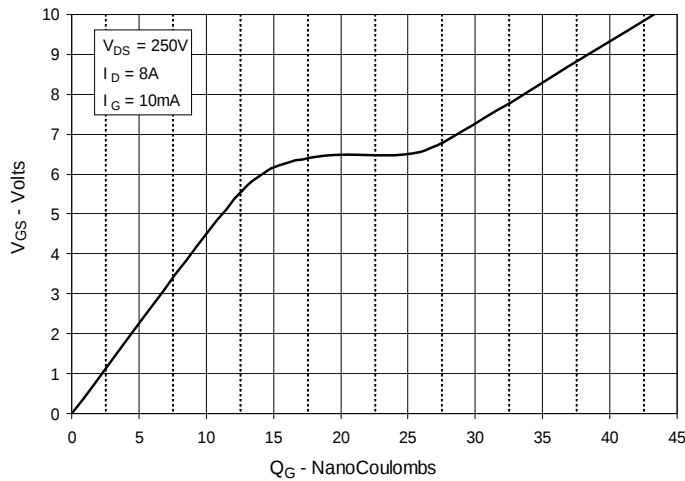


Fig. 10. Capacitance

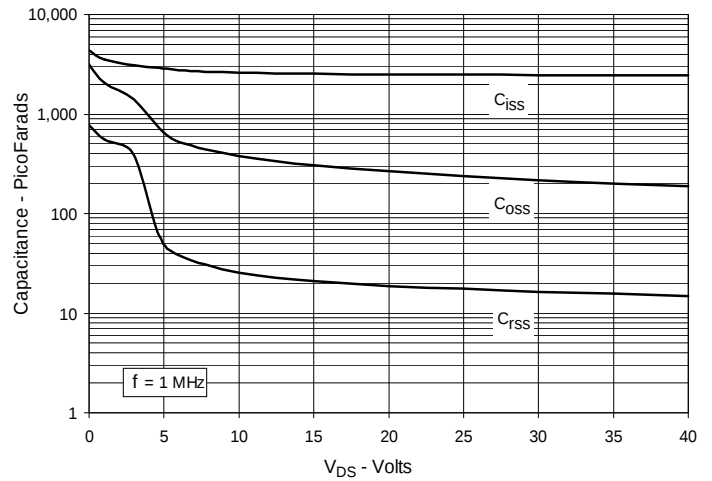


Fig. 11. Forward-Bias Safe Operating Area


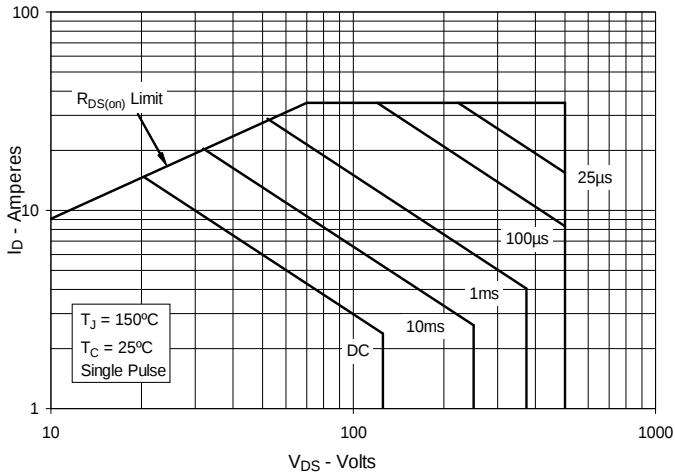


Fig. 12. Maximum Transient Thermal Impedance



IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

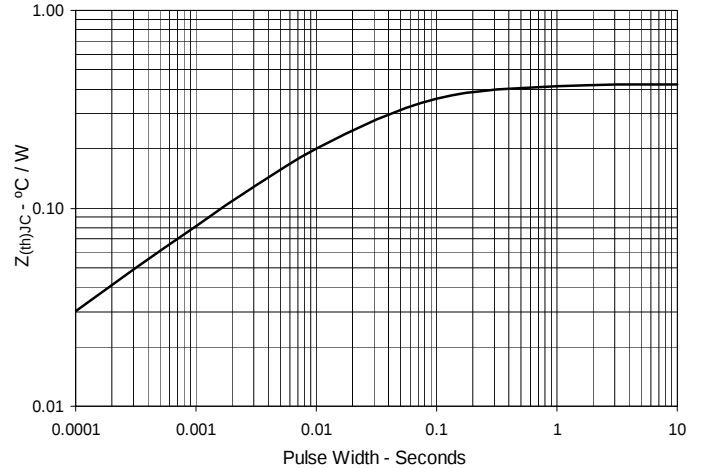

---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).