

# Contents

|          |                                                  |           |
|----------|--------------------------------------------------|-----------|
| <b>1</b> | <b>Overview</b>                                  | <b>5</b>  |
| 1.1      | Block diagram and application circuit            | 5         |
| <b>2</b> | <b>Pin description</b>                           | <b>8</b>  |
| <b>3</b> | <b>Electrical specifications</b>                 | <b>10</b> |
| 3.1      | Absolute maximum ratings                         | 10        |
| 3.2      | Thermal data                                     | 10        |
| 3.3      | Electrical characteristics                       | 11        |
| <b>4</b> | <b>Electrical characteristics typical curves</b> | <b>13</b> |
| <b>5</b> | <b>General information</b>                       | <b>16</b> |
| 5.1      | Operation                                        | 16        |
| 5.2      | Battery variations                               | 17        |
| 5.2.1    | Low voltage operation                            | 17        |
| 5.2.2    | Cranks                                           | 17        |
| 5.2.3    | Advanced battery management (hybrid vehicles)    | 18        |
| 5.3      | Protections                                      | 19        |
| 5.3.1    | Short circuits and open circuit operation        | 19        |
| 5.3.2    | Over-voltage and load dump protection            | 19        |
| 5.3.3    | Thermal protection                               | 19        |
| 5.4      | Warnings                                         | 20        |
| 5.4.1    | DC offset detection (OD pin)                     | 20        |
| 5.4.2    | Clipping detection and diagnostics (CD-DIAG pin) | 20        |
| 5.5      | Heat sink definition                             | 21        |
| <b>6</b> | <b>Package information</b>                       | <b>22</b> |
| <b>7</b> | <b>Revision history</b>                          | <b>24</b> |

List of tables

Table 1. Device summary . . . . . 1

Table 2. Pin functions . . . . . 9

Table 3. Absolute maximum ratings . . . . . 10

Table 4. Thermal data . . . . . 10

Table 5. Electrical characteristics . . . . . 11

Table 6. Document revision history . . . . . 24

## List of figures

|            |                                                                                              |    |
|------------|----------------------------------------------------------------------------------------------|----|
| Figure 1.  | Block diagram . . . . .                                                                      | 5  |
| Figure 2.  | Standard test and application circuit (Flexiwatt25 with OD) . . . . .                        | 6  |
| Figure 3.  | Standard test and application circuit (Flexiwatt27 with CD) . . . . .                        | 6  |
| Figure 4.  | Standard test and application circuit (Flexiwatt27 with HSD) . . . . .                       | 7  |
| Figure 5.  | Pin connections (top view) . . . . .                                                         | 8  |
| Figure 6.  | Quiescent current vs. supply voltage . . . . .                                               | 13 |
| Figure 7.  | Output power vs. supply voltage (4 $\Omega$ ) . . . . .                                      | 13 |
| Figure 8.  | Output power vs. supply voltage (2 $\Omega$ ) . . . . .                                      | 13 |
| Figure 9.  | Distortion vs. output power (4 $\Omega$ ) . . . . .                                          | 13 |
| Figure 10. | Distortion vs. output power (2 $\Omega$ ) . . . . .                                          | 13 |
| Figure 11. | Distortion vs. frequency (4 $\Omega$ ) . . . . .                                             | 13 |
| Figure 12. | Distortion vs. frequency (2 $\Omega$ ) . . . . .                                             | 14 |
| Figure 13. | Distortion vs. output power (4 $\Omega$ , $V_s = 6$ V) . . . . .                             | 14 |
| Figure 14. | Distortion vs. output power (2 $\Omega$ , $V_s = 6$ V) . . . . .                             | 14 |
| Figure 15. | Supply voltage rejection vs. frequency . . . . .                                             | 14 |
| Figure 16. | Crosstalk vs. frequency . . . . .                                                            | 14 |
| Figure 17. | Total power dissipation & efficiency vs. $P_o$ (4 $\Omega$ , Sine) . . . . .                 | 14 |
| Figure 18. | Power dissipation vs. average output power (4 $\Omega$ , audio program simulation) . . . . . | 15 |
| Figure 19. | Power dissipation vs. average output power (2 $\Omega$ , audio program simulation) . . . . . | 15 |
| Figure 20. | ITU R-ARM frequency response, weighting filter for transient pop. . . . .                    | 15 |
| Figure 21. | SVR charge diagram . . . . .                                                                 | 16 |
| Figure 22. | Battery cranking curve example 1 . . . . .                                                   | 17 |
| Figure 23. | Battery cranking curve example 2 . . . . .                                                   | 18 |
| Figure 24. | Upwards fast battery transitions diagram . . . . .                                           | 18 |
| Figure 25. | Load dump protection diagram . . . . .                                                       | 19 |
| Figure 26. | Thermal protection diagram . . . . .                                                         | 19 |
| Figure 27. | Audio section waveforms . . . . .                                                            | 20 |
| Figure 28. | Flexiwatt25 (vertical) mechanical data and package dimensions . . . . .                      | 22 |
| Figure 29. | Flexiwatt27 (Vertical) mechanical data and package dimensions . . . . .                      | 23 |

# 1 Overview

The STPA003 is a complementary quad audio power amplifier. It is available in two different packages, Flexiwatt25 and Flexiwatt27. It embeds four independent amplifiers working in class AB, a standby, a mute pin and an offset detector output. In the Flexiwatt27 package also a high side driver or a clipping detection pin with diagnostics information is present. In Flexiwatt25, the user can choose to have the offset detector or the high side driver on pin 25. The amplifier is fully operational down to a battery voltage of 6 V, without producing pop noise and continuing to play during battery transitions.

The STPA003 can drive 2 ohm loads and has a very high immunity to disturbs without need of external components or compensation. It is protected against any kind of short or open circuit, over-voltage and over-temperature.

## 1.1 Block diagram and application circuit

Figure 1. Block diagram

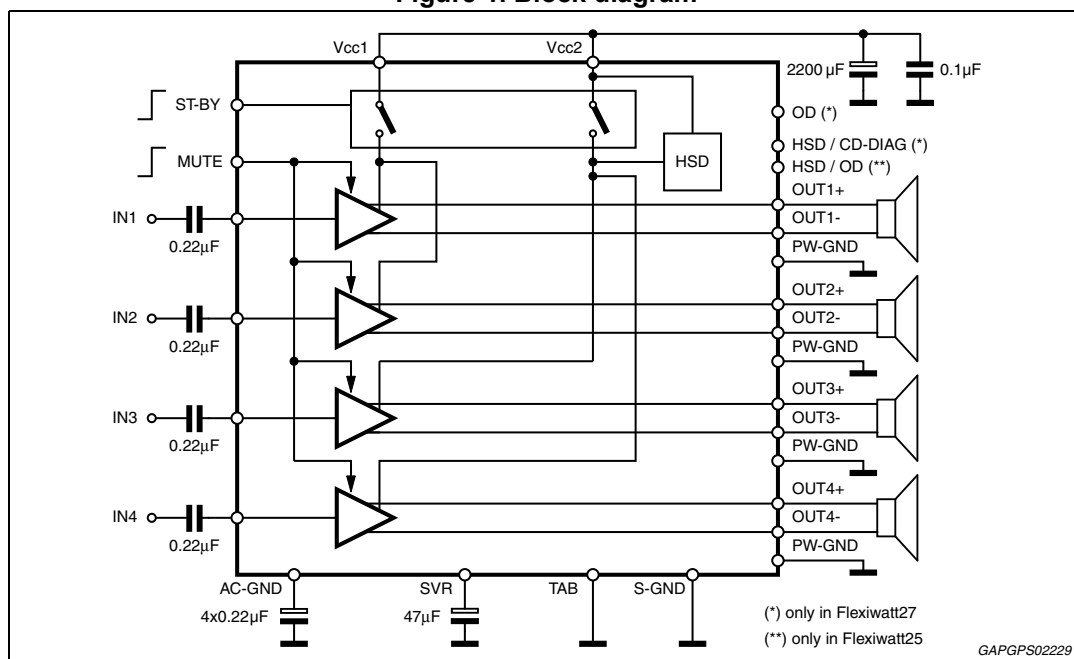


Figure 2. Standard test and application circuit (Flexiwatt25 with OD)

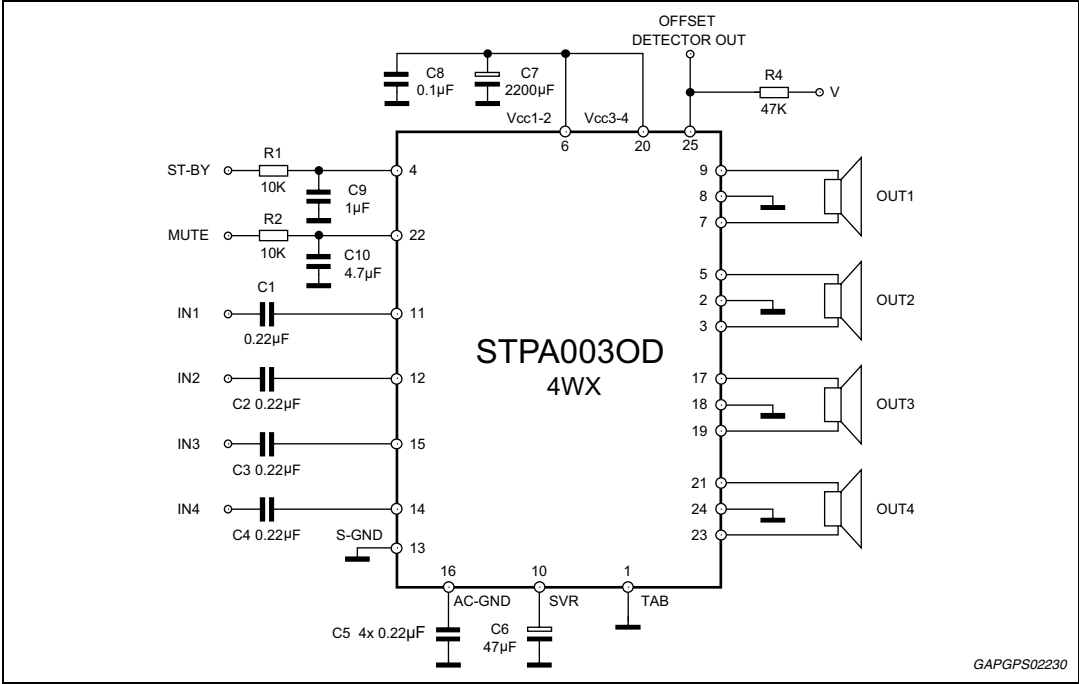


Figure 3. Standard test and application circuit (Flexiwatt27 with CD)


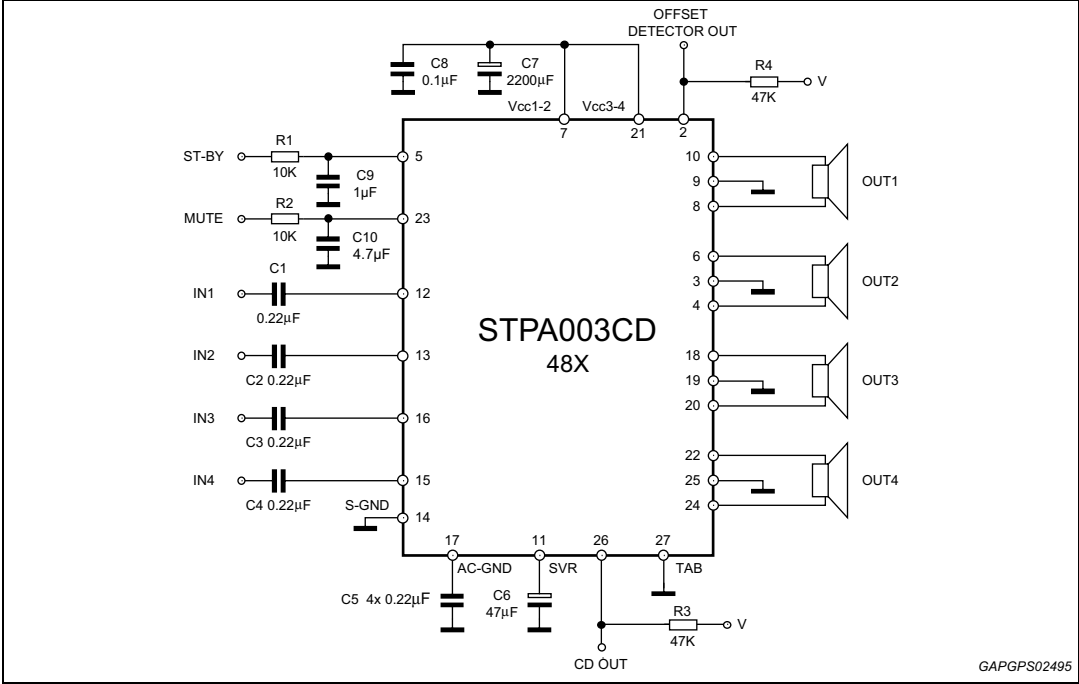


Figure 4. Standard test and application circuit (Flexiwatt27 with HSD)

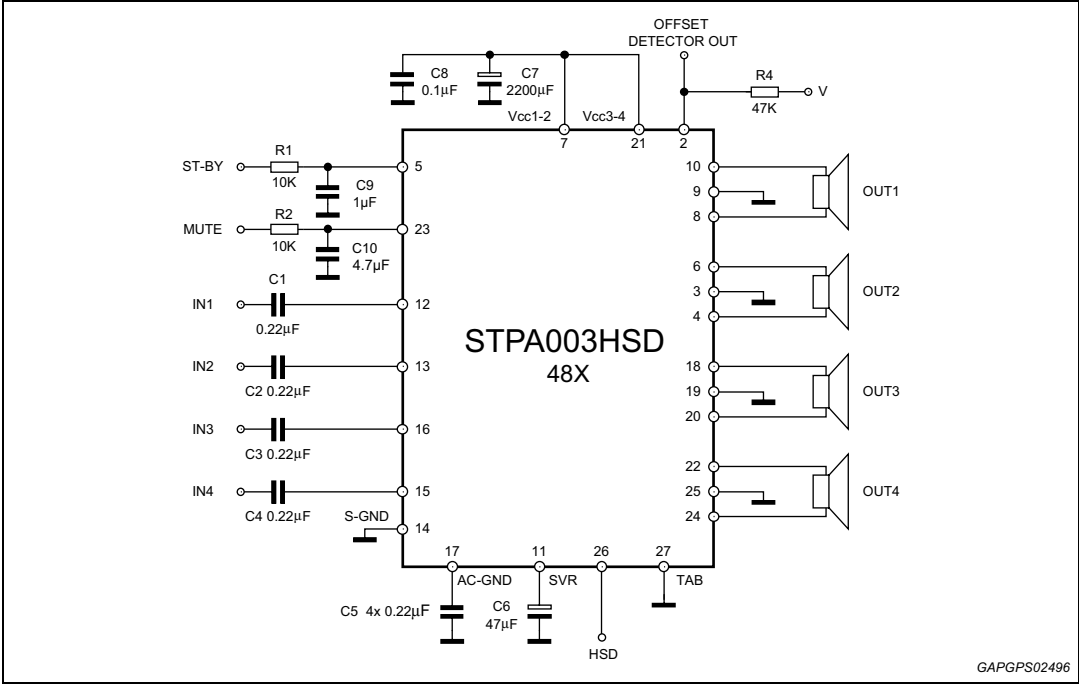

2 Pin description

Figure 5. Pin connections (top view)

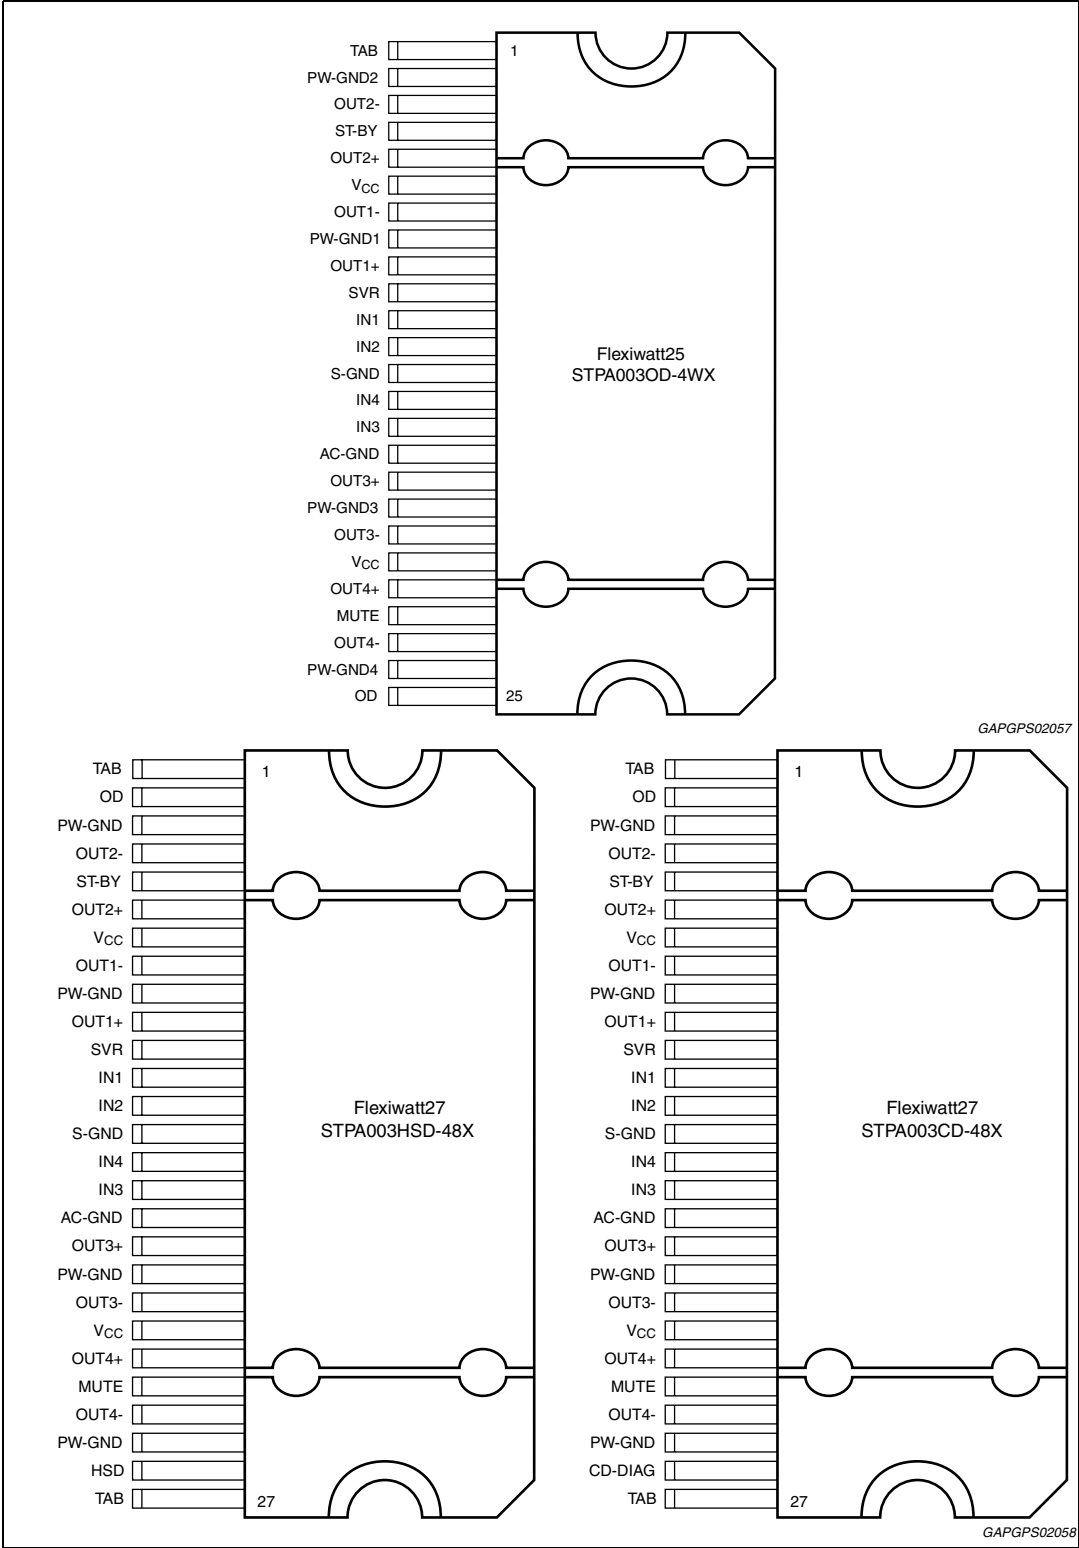


Table 2. Pin functions

| Pin #<br>FW27 | Pin #<br>FW25 | Pin name      | Description                                                  | Type                    |
|---------------|---------------|---------------|--------------------------------------------------------------|-------------------------|
| 1             | 1             | TAB           | Device slug connection                                       | -                       |
| 2             | 25            | OD/HSD        | Offset detector output or high side driver output            | Output (open collector) |
| 3             | 2             | PW-GND2       | Channel 2 power ground                                       | Ground                  |
| 4             | 3             | OUT2-         | Channel 2 negative output                                    | Output                  |
| 5             | 4             | ST-BY         | Standby                                                      | -                       |
| 6             | 5             | OUT2+         | Channel 2 positive output                                    | Output                  |
| 7             | 6             | VCC           | Supply voltage                                               | Supply                  |
| 8             | 7             | OUT1-         | Channel 1 negative output                                    | Output                  |
| 9             | 8             | PW-GND1       | Channel 1 power ground                                       | Ground                  |
| 10            | 9             | OUT1+         | Channel 1 positive output                                    | Output                  |
| 11            | 10            | SVR           | Supply voltage rejection pin                                 | Supply                  |
| 12            | 11            | IN1           | Channel 1 input                                              | Input                   |
| 13            | 12            | IN2           | Channel 2 input                                              | Input                   |
| 14            | 13            | S-GND         | Signal ground                                                | Ground                  |
| 15            | 14            | IN4           | Channel 4 input                                              | Input                   |
| 16            | 15            | IN3           | Channel 3 input                                              | Input                   |
| 17            | 16            | AC-GND        | AC ground                                                    | Ground                  |
| 18            | 17            | OUT3+         | Channel 3 positive output                                    | Output                  |
| 19            | 18            | PW-GND3       | Channel 3 power ground                                       | Ground                  |
| 20            | 19            | OUT3-         | Channel 3 negative output                                    | Output                  |
| 21            | 20            | VCC           | Supply voltage                                               | Supply                  |
| 22            | 21            | OUT4+         | Channel 4 positive output                                    | Output                  |
| 23            | 22            | MUTE          | Mute pin                                                     | Input                   |
| 24            | 23            | OUT4-         | Channel 4 negative output                                    | Output                  |
| 25            | 24            | PW-GND4       | Channel 4 power ground                                       | Ground                  |
| 26            | n.a           | HSD / CD-DIAG | High side driver or clipping detector and diagnostics output | Output (open collector) |
| 27            | n.a           | TAB           | Device slug connection                                       | -                       |

### 3 Electrical specifications

#### 3.1 Absolute maximum ratings

Table 3. Absolute maximum ratings

| Symbol         | Parameter                                                  | Value               | Unit |
|----------------|------------------------------------------------------------|---------------------|------|
| $V_S$          | Operating supply voltage                                   | 18                  | V    |
| $V_{S(DC)}$    | DC supply voltage                                          | 28                  | V    |
| $V_{S(pk)}$    | Peak supply voltage (for $t = 50$ ms)                      | 50                  | V    |
| $I_O$          | Output peak current<br>Non repetitive ( $t = 100$ $\mu$ s) | 10                  | A    |
|                | Repetitive (duty cycle 10 % at $f = 10$ Hz)                | 9                   | A    |
| $P_{tot}$      | Power dissipation $T_{case} = 70$ °C                       | 85                  | W    |
| $T_j$          | Junction temperature                                       | 150                 | °C   |
| $T_{stg}$      | Storage temperature                                        | -55 to 150          | °C   |
| $GND_{max}$    | Ground pin voltage                                         | -0.3 to 0.3         | V    |
| $V_{in max}$   | Input pin max voltage                                      | -0.3 to 8           | V    |
| $V_{SB max}$   | ST-BY pin max voltage                                      | -0.3 to $V_{S(pk)}$ | V    |
| $V_{mute max}$ | Mute pin max voltage                                       | -0.3 to 6           | V    |
| $T_{op}$       | Operating ambient temperature                              | -40 to 105          | °C   |

#### 3.2 Thermal data

Table 4. Thermal data

| Symbol          | Parameter                                | Value | Unit |
|-----------------|------------------------------------------|-------|------|
| $R_{th j-case}$ | Thermal resistance junction-to-case Max. | 1     | °C/W |

### 3.3 Electrical characteristics

Refer to the test and application diagram,  $V_S = 14.4\text{ V}$ ;  $R_L = 4\ \Omega$ ;  $R_g = 600\ \Omega$ ;  $f = 1\text{ kHz}$ ;  $T_{\text{amb}} = 25\text{ }^\circ\text{C}$ ; unless otherwise specified.

**Table 5. Electrical characteristics**

| Symbol                  | Parameter                                                | Test condition                                                             | Min. | Typ. | Max. | Unit |
|-------------------------|----------------------------------------------------------|----------------------------------------------------------------------------|------|------|------|------|
| General characteristics |                                                          |                                                                            |      |      |      |      |
| V <sub>S</sub>          | Supply voltage range                                     | -                                                                          | 6    | -    | 18   | V    |
| I <sub>q1</sub>         | Quiescent current                                        | R <sub>L</sub> = ∞                                                         | 100  | 200  | 400  | mA   |
| V <sub>OS</sub>         | Output offset voltage                                    | Mute mode                                                                  | -80  | -    | +80  | mV   |
| dV <sub>OS</sub>        | Output offset voltage when mute moves from ON to OFF     | ITU R-ARM weighted<br>(see <a href="#">Figure 20</a> )                     | -10  | -    | +10  | mV   |
|                         | Output offset voltage when stand-by moves from ON to OFF |                                                                            | -10  | -    | +10  | mV   |
| R <sub>i</sub>          | Input impedance                                          | -                                                                          | 50   | 55   | 60   | kΩ   |
| I <sub>SB</sub>         | Standby current consumption                              | V <sub>St-by</sub> = 0.8 V                                                 | -    | 0.2  | 2    | μA   |
|                         |                                                          | V <sub>St-by</sub> = 0                                                     | -    | 0.1  | 1    | μA   |
| Audio performances      |                                                          |                                                                            |      |      |      |      |
| P <sub>O</sub>          | Output power                                             | V <sub>S</sub> = 13.2 V; THD = 10 %, 2 Ω                                   | 42   | 45   | -    | W    |
|                         |                                                          | V <sub>S</sub> = 13.2 V; THD = 1 %, 2 Ω                                    | 32   | 34   |      | W    |
|                         |                                                          | V <sub>S</sub> = 13.2 V; THD = 10 %, 4 Ω                                   | 23   | 25   |      | W    |
|                         |                                                          | V <sub>S</sub> = 13.2 V; THD = 1 %, 4 Ω                                    | 16   | 19   |      | W    |
|                         |                                                          | V <sub>S</sub> = 14.4 V; THD = 10 %, 2 Ω                                   | 50   | 55   | -    | W    |
|                         |                                                          | V <sub>S</sub> = 14.4 V; THD = 1 %, 2 Ω                                    | 40   | 43   |      | W    |
|                         |                                                          | V <sub>S</sub> = 14.4 V; THD = 10 %, 4 Ω                                   | 27   | 30   |      | W    |
|                         |                                                          | V <sub>S</sub> = 14.4 V; THD = 1 %, 4 Ω                                    | 21   | 24   |      | W    |
| P <sub>O max.</sub>     | Max. output power <sup>(1)</sup>                         | V <sub>S</sub> = 14.4 V; R <sub>L</sub> = 4 Ω                              | -    | 50   | -    | W    |
|                         |                                                          | V <sub>S</sub> = 14.4 V; R <sub>L</sub> = 2 Ω                              |      | 85   |      | W    |
|                         |                                                          | V <sub>S</sub> = 15.2 V; R <sub>L</sub> = 4 Ω (square wave input (2 Vrms)) |      | 52   |      | W    |
| THD                     | Distortion                                               | P <sub>O</sub> = 4 W                                                       | -    | 0.01 | 0.02 | %    |
| G <sub>V</sub>          | Voltage gain                                             | -                                                                          | 25.5 | 26   | 26.5 | dB   |
| dG <sub>V</sub>         | Channel gain unbalance                                   | -                                                                          | -1   | -    | +1   | dB   |
| e <sub>No</sub>         | Output Noise                                             | "A" Weighted<br>Bw = 20 Hz to 20 kHz                                       | -    | 40   | 70   | μV   |
|                         |                                                          |                                                                            |      | 50   |      | μV   |
| SVR                     | Supply voltage rejection                                 | f = 100 Hz; V <sub>r</sub> = 1 Vrms                                        | 50   | 70   | -    | dB   |
| f <sub>ch</sub>         | High cut-off frequency                                   | P <sub>O</sub> = 0.5 W                                                     | 100  | 300  | -    | kHz  |
| C <sub>T</sub>          | Cross talk                                               | f = 1 kHz P <sub>O</sub> = 4 W                                             | 60   | 80   | -    | dB   |
|                         |                                                          | f = 10 kHz P <sub>O</sub> = 4 W                                            | 50   | 60   | -    | dB   |
| A <sub>M</sub>          | Mute attenuation                                         | P <sub>Oref</sub> = 4 W                                                    | 80   | 100  | -    | dB   |


Table 5. Electrical characteristics (continued)

| Symbol                             | Parameter                           | Test condition                                                                                      | Min.      | Typ.    | Max.      | Unit          |
|------------------------------------|-------------------------------------|-----------------------------------------------------------------------------------------------------|-----------|---------|-----------|---------------|
| <b>Control pin characteristics</b> |                                     |                                                                                                     |           |         |           |               |
| $I_{pin5}$                         | Standby pin current                 | $V_{St-by} = 0.8 \text{ V to } 2.2 \text{ V}$                                                       | -         | -       | 0.5       | $\mu\text{A}$ |
| $V_{SB\ out}$                      | Standby out threshold voltage       | (Amp: ON)                                                                                           | 2.2       | -       | -         | V             |
| $V_{SB\ in}$                       | Standby in threshold voltage        | (Amp: OFF)                                                                                          | -         | -       | 0.8       | V             |
| $V_{M\ out}$                       | Mute out threshold voltage          | (Amp: Play)                                                                                         | 2.3       | -       | -         | V             |
| $V_{M\ in}$                        | Mute in threshold voltage           | (Amp: Mute)                                                                                         | -         | -       | 0.8       | V             |
| $V_{AM\ in}$                       | $V_S$ automute threshold            | (Amp: Mute)<br>$Att \geq 80 \text{ dB}; P_{Oref} = 4 \text{ W}$                                     | 4.5       | 5       | 5.5       | V             |
|                                    |                                     | (Amp: Play)<br>$Att < 0.1 \text{ dB}; P_O = 0.5 \text{ W}$                                          | -         | -       | 6         | V             |
| $I_{pin23}$                        | Muting pin current                  | $V_{MUTE} = 0.8 \text{ V}$<br>(Sourced current)                                                     | -         | 9       | 14        | $\mu\text{A}$ |
| <b>HSD section</b>                 |                                     |                                                                                                     |           |         |           |               |
| $V_{dropout}$                      | Dropout voltage                     | $I_O = 0.35 \text{ A}$                                                                              | -         | 0.25    | 0.3       | V             |
| $I_{prot}$                         | Current limits                      | -                                                                                                   | 400       | -       | 800       | mA            |
| <b>Offset detector</b>             |                                     |                                                                                                     |           |         |           |               |
| $V_{OFF}$                          | Detected differential output offset | -                                                                                                   | $\pm 2.3$ | $\pm 3$ | $\pm 3.7$ | V             |
| $V_{OFF\_SAT}$                     | Off detector saturation voltage     | $V_O > \pm 3 \text{ V}, I_{off\ Det} = 1 \text{ mA}$<br>$0 \text{ V} < V_{off\ Det} < 18 \text{ V}$ | -         | 0.05    | 0.1       | V             |
| $V_{OFF\_LK}$                      | Off detector leakage current        | $V_O < \pm 1 \text{ V}$                                                                             | -         | 0       | 15        | $\mu\text{A}$ |
| <b>Clipping detector</b>           |                                     |                                                                                                     |           |         |           |               |
| $CD_{LK}$                          | Clip detector high leakage current  | Cd off                                                                                              | -         | 0       | 1         | $\mu\text{A}$ |
| $CD_{SAT}$                         | Clip detector saturation voltage    | DC On; $I_{CD} = 1 \text{ mA}$                                                                      | -         | 0.2     | 0.4       | V             |
| $CD_{THD}$                         | Clip detector THD level             | -                                                                                                   | -         | 1       | -         | %             |

1. Saturated square wave output


## 4 Electrical characteristics typical curves

Figure 6. Quiescent current vs. supply voltage

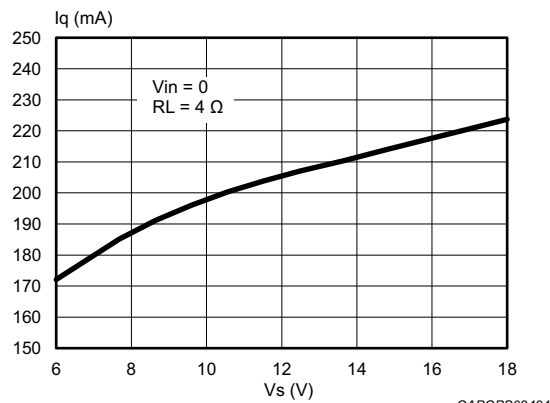


GAPGPS02484

Figure 7. Output power vs. supply voltage (4 Ω)

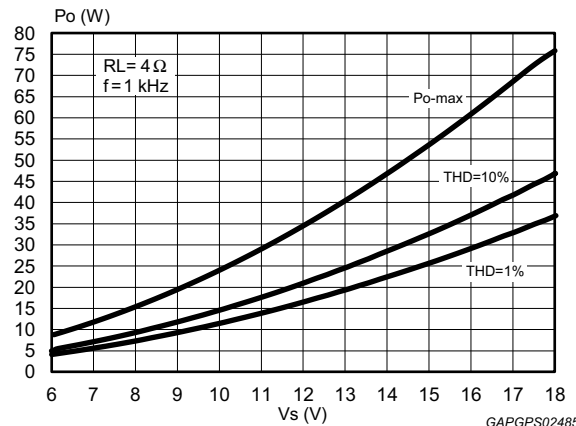


GAPGPS02485

Figure 8. Output power vs. supply voltage (2 Ω)

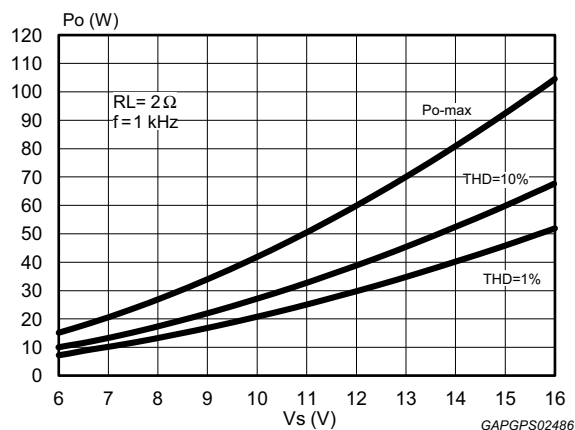


GAPGPS02486

Figure 9. Distortion vs. output power (4 Ω)

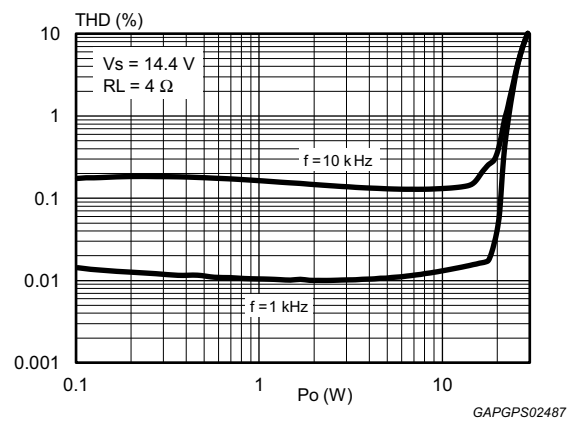


GAPGPS02487

Figure 10. Distortion vs. output power (2 Ω)

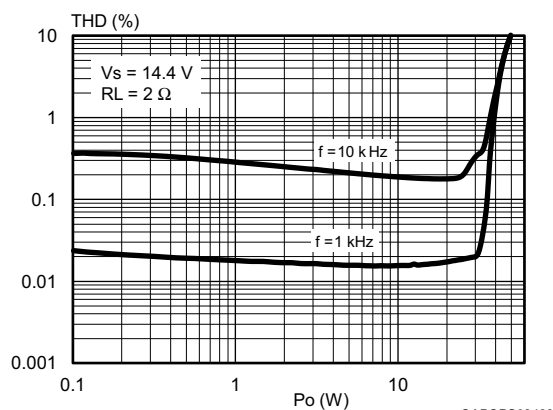

GAPGPS02488

Figure 11. Distortion vs. frequency (4 Ω)

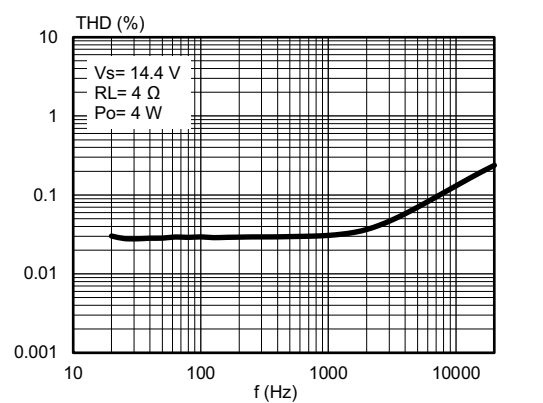

GAPGPS02489

Figure 12. Distortion vs. frequency (2  $\Omega$ )

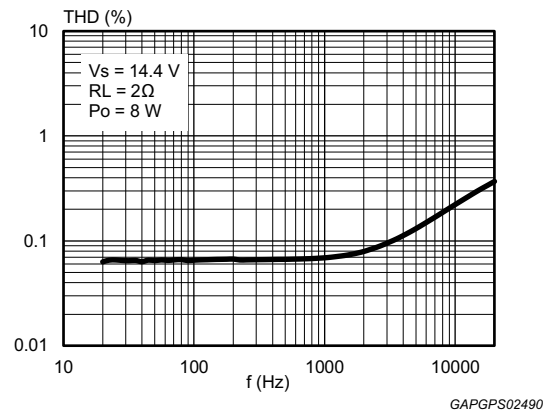


Figure 13. Distortion vs. output power (4  $\Omega$ ,  $V_s = 6\text{ V}$ )

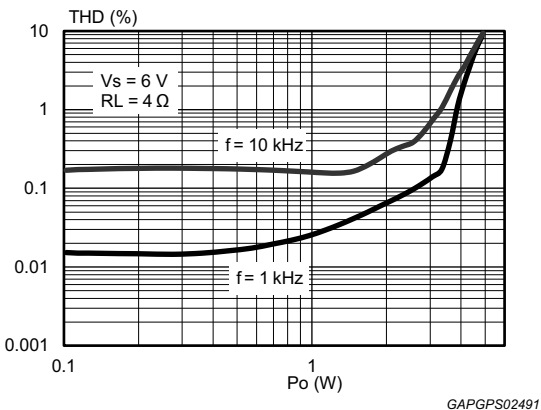


Figure 14. Distortion vs. output power (2  $\Omega$ ,  $V_s = 6\text{ V}$ )

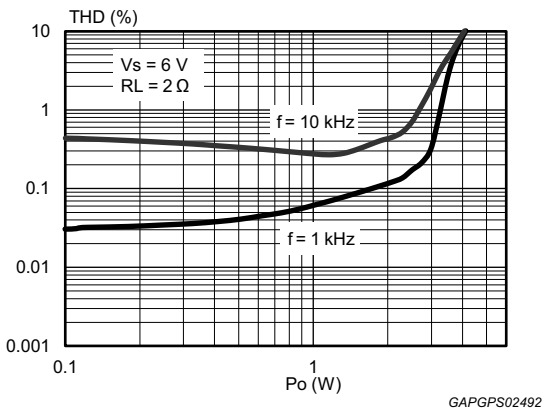


Figure 15. Supply voltage rejection vs. frequency

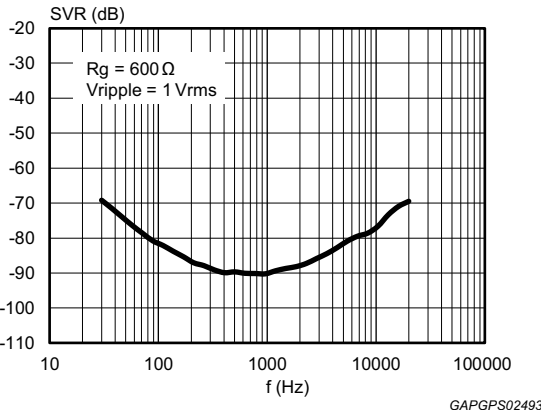


Figure 16. Crosstalk vs. frequency

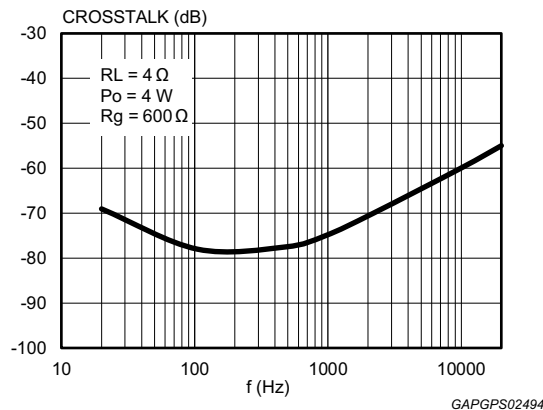


Figure 17. Total power dissipation & efficiency vs.  $P_o$  (4  $\Omega$ , Sine)



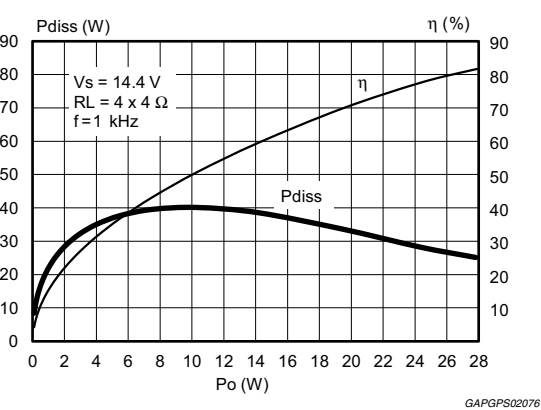


Figure 18. Power dissipation vs. average output power (4 Ω, audio program simulation)

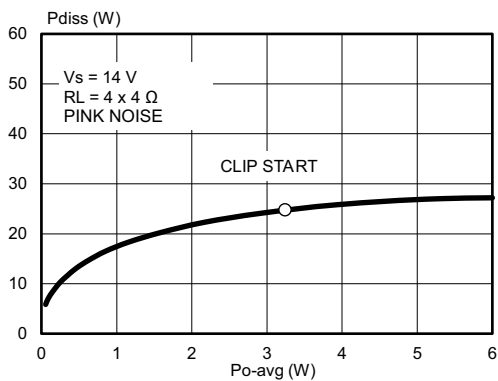


GAPGPS02077

Figure 19. Power dissipation vs. average output power (2 Ω, audio program simulation)

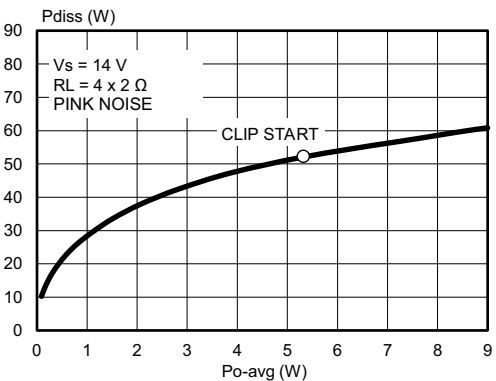

GAPGPS02078

Figure 20. ITU R-ARM frequency response, weighting filter for transient pop

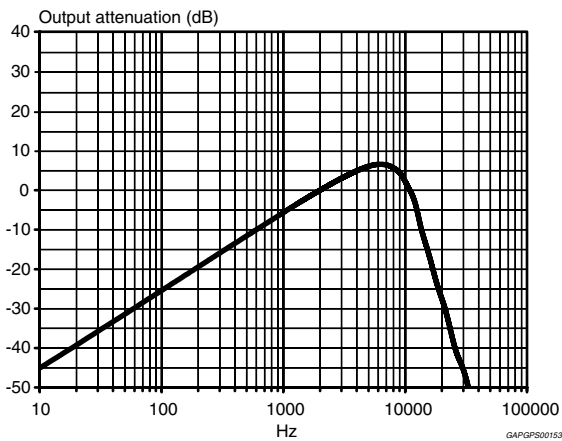

GAPGPS00153

## 5 General information

### 5.1 Operation

The STPA003's inputs are ground-compatible. If the standard value for the input capacitors ( $0.22\ \mu\text{F}$ ) is adopted, the low frequency cut-off will amount to 16 Hz. For optimum pop performances, the capacitor connected to AC-GND should be four times bigger than input capacitors (see [Figure 2](#)).


Standby and mute pins are 3.3 V and 5 V compatible.

RC cells at both mute and stand-by pins have always to be used in order to smooth the transitions for preventing any audible transient noise. A time constant slower than 2.5 V/ms is suggested for the stand-by pin and 0.5 V/ms for the mute pin.

In case the standby function is not used, it could steadily be connected to  $V_s$  through a 470 k $\Omega$  resistor.

The capacitance on SVR sets the start-up and shut-down times and helps to have pop-noise free transitions. Its minimum recommended value is 10  $\mu\text{F}$ . However, to have a fast start-up time, the internal resistor on SVR pin, used to set the time constant, is reduced from 100 k $\Omega$  to 3 k $\Omega$  till voltage on SVR reaches  $V_{CC}/4 - 2V_{BE}$  and then released. In this way the capacitor on SVR is charged very quickly to  $V_{CC}/4$ , as shown in the following figure.

Figure 21. SVR charge diagram

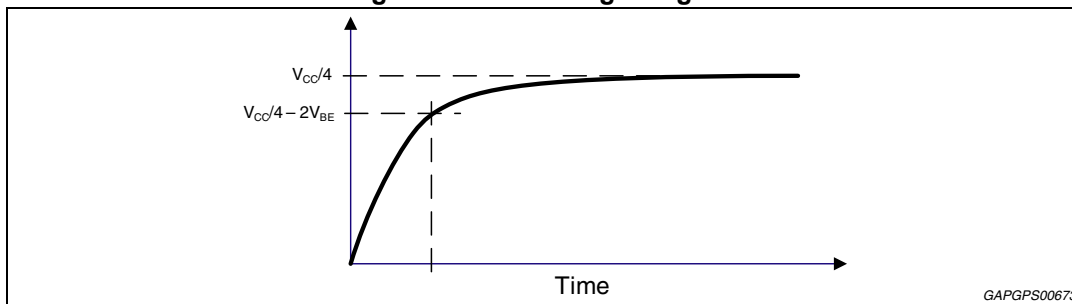

SVR pin accomplishes multiple functions:

- it is used as a reference voltage for input pins ( $V_{CC}/4$ )
- the capacitor connected to SVR helps the supply voltage ripple rejection
- it is used as a reference to generate the half supply voltage for the output

When the amplifier goes in stand-by mode or goes out from this condition, it is suggested to put the amplifier in mute to ensure the absence of audible noise. Then the standby pin can be set to the appropriate value (ground or  $> 2.2\ \text{V}$ ) and the capacitance on SVR pin is discharged or charged consequently.

## 5.2 Battery variations

### 5.2.1 Low voltage operation

Most recent OEM specifications require automatic stop for car engine at traffic lights, in order to reduce emissions of polluting substances. The STPA003, thanks to its innovating design, allows a continuous operation when battery falls down. At 6 V it is still fully operational, only the maximum output power is reduced according to the available voltage supply.


If the battery voltage drops below the minimum operating voltage of 6 V the amplifier is fast muted, the capacitor on SVR is discharged and the amplifier restarts when the battery voltage returns to the correct voltage.

### 5.2.2 Cranks

STPA003 can sustain worst case cranks from 16 V to 6 V, continuing to play and without producing any pop noise.

Examples of battery cranking curves are shown below, indicating the shape and duration of allowed battery transitions.


**Figure 22. Battery cranking curve example 1**

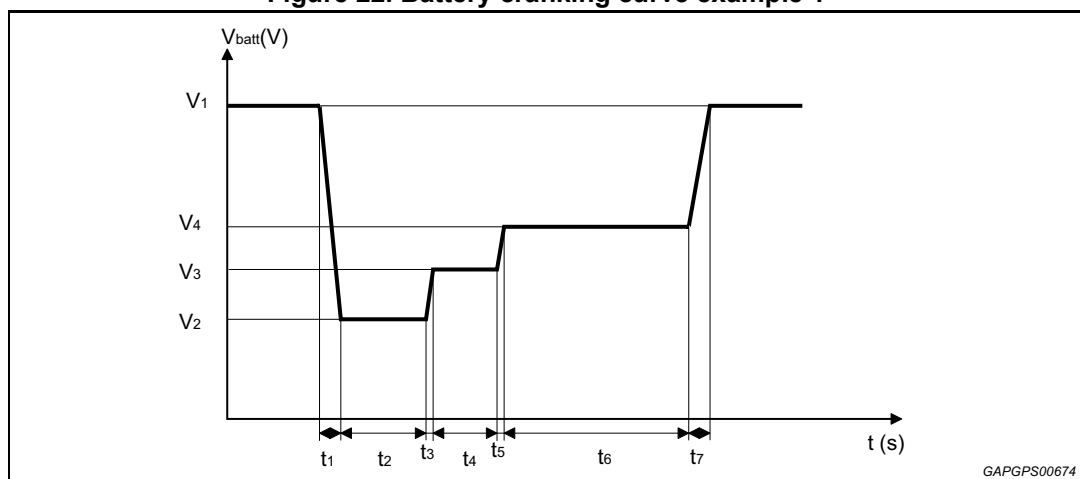

$V_1 = 16\text{ V}$ ;  $V_2 = 6\text{ V}$ ;  $V_3 = 7\text{ V}$ ;  $V_4 = 8\text{ V}$

$t_1 = 2\text{ ms}$ ;  $t_2 = 50\text{ ms}$ ;  $t_3 = 5\text{ ms}$ ;  $t_4 = 300\text{ ms}$ ;  $t_5 = 10\text{ ms}$ ;  $t_6 = 1\text{ s}$ ;  $t_7 = 2\text{ ms}$

Figure 23. Battery cranking curve example 2

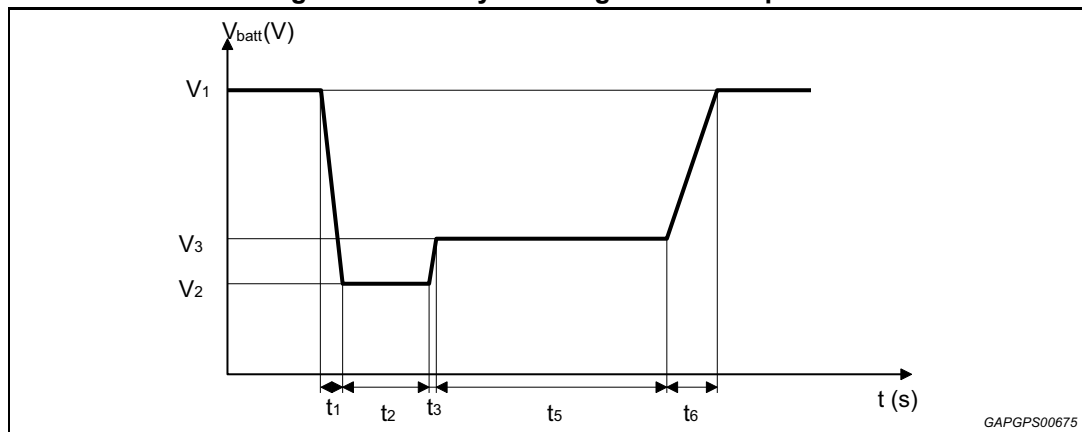


$V_1 = 16 \text{ V}$ ;  $V_2 = 6 \text{ V}$ ;  $V_3 = 7 \text{ V}$

$t_1 = 2 \text{ ms}$ ;  $t_2 = 5 \text{ ms}$ ;  $t_3 = 15 \text{ ms}$ ;  $t_5 = 1 \text{ s}$ ;  $t_6 = 50 \text{ ms}$

### 5.2.3 Advanced battery management (hybrid vehicles)

In addition to compatibility with low  $V_{batt}$ , the STPA003 is able to sustain upwards fast battery transitions without causing unwanted audible effects, like pop noise, and without any sound interruption thanks to the innovative circuit topology. In fact, in hybrid vehicles, the engine ignition causes a fast increase of battery voltage which can reach 16 V in less than 10 ms.

Figure 24. Upwards fast battery transitions diagram

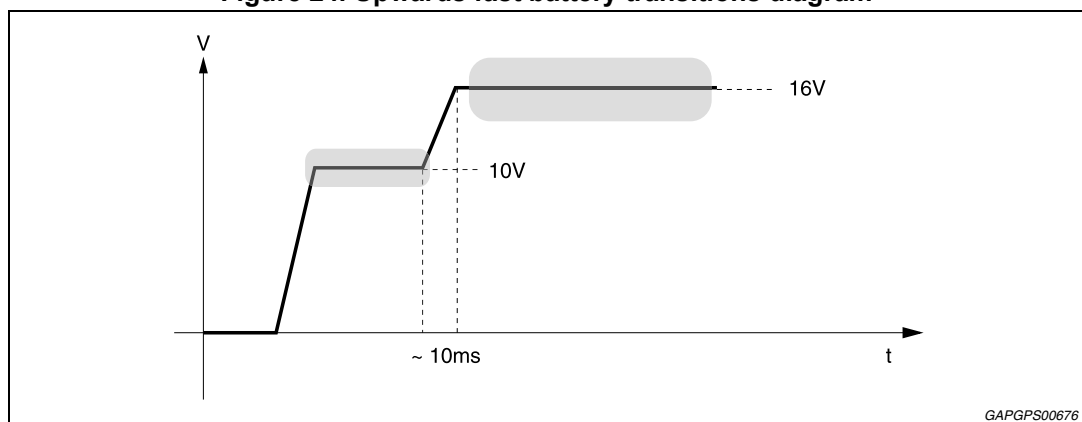

## 5.3 Protections

### 5.3.1 Short circuits and open circuit operation

When the IC detects a short circuit to ground, to  $V_{\text{supply}}$  or across the load, the output of the amplifier is put in three-state (high impedance condition). The power stage remains in this condition until the short is removed.

In case of short circuit to ground or  $V_{\text{cc}}$ , the amplifier exits from the three-state condition only when the output returns inside the limits imposed by an internal voltage comparator.

When a short across the load is present, the power stage sees an over-current and is brought in protection mode for 100  $\mu\text{s}$ . After this time, if the short circuit condition is removed the amplifier returns to play, otherwise the high impedance state is maintained and the check is repeated every 100  $\mu\text{s}$ .


Disconnection of load (open load condition) doesn't damage the amplifier, which continues to play.

### 5.3.2 Over-voltage and load dump protection

When the battery voltage is higher than 19 V, the amplifier is switched to a high impedance state. It stops playing till the supply voltage returns in the permitted range.

The amplifier is protected against load dump surges having amplitude as high as 50 V and a rising time lower than 5 ms (see [Figure 25](#)).


**Figure 25. Load dump protection diagram**

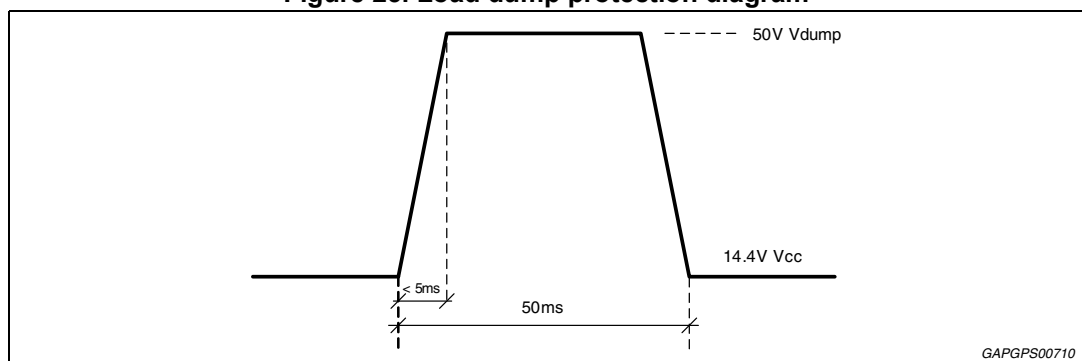

### 5.3.3 Thermal protection

If the junction temperature of the IC reaches  $T_j = 150\text{ }^{\circ}\text{C}$ , a smooth mute is applied to reduce output power and limit power dissipation. If this is not enough and the junction temperature continues to increase, the amplifier is switched off when reaches the maximum temperature of  $170\text{ }^{\circ}\text{C}$ .

**Figure 26. Thermal protection diagram**

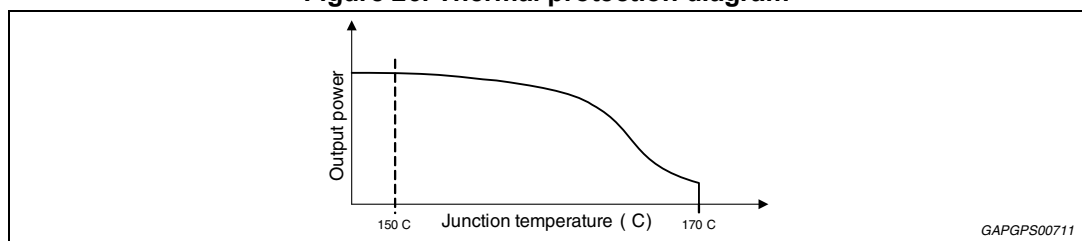

## 5.4 Warnings

### 5.4.1 DC offset detection (OD pin)

The STPA003 integrates a DC offset detector to avoid that an anomalous input DC offset is multiplied by the amplifier gain producing a dangerous large offset at the output. In fact an output offset may lead to speakers damage for overheating. To correctly detect a DC offset, the power amplifier has to be un-muted with no input signal.

When the differential output voltage is out of a window comparator with thresholds  $\pm 3$  V (typ), the OD pin is pulled down.


### 5.4.2 Clipping detection and diagnostics (CD-DIAG pin)

When clipping occurs, the output signal is distorted. If the signal distortion on one of the output channels exceeds 1 %, the CD-DIAG pin is pulled down. This information can be sent to an audio processor in order to reduce the input signal of the amplifier and reduce the clipping.

A short to ground and short to  $V_{CC}$  is signaled by CD-DIAG. This pin is pulled down to 0 V till these shorts are present to inform the user a protection occurred.

CD-DIAG acts also as thermal warning. In fact every time  $T_j$  exceeds 140 °C, it is pulled down to notify this occurrence.

Figure 27. Audio section waveforms

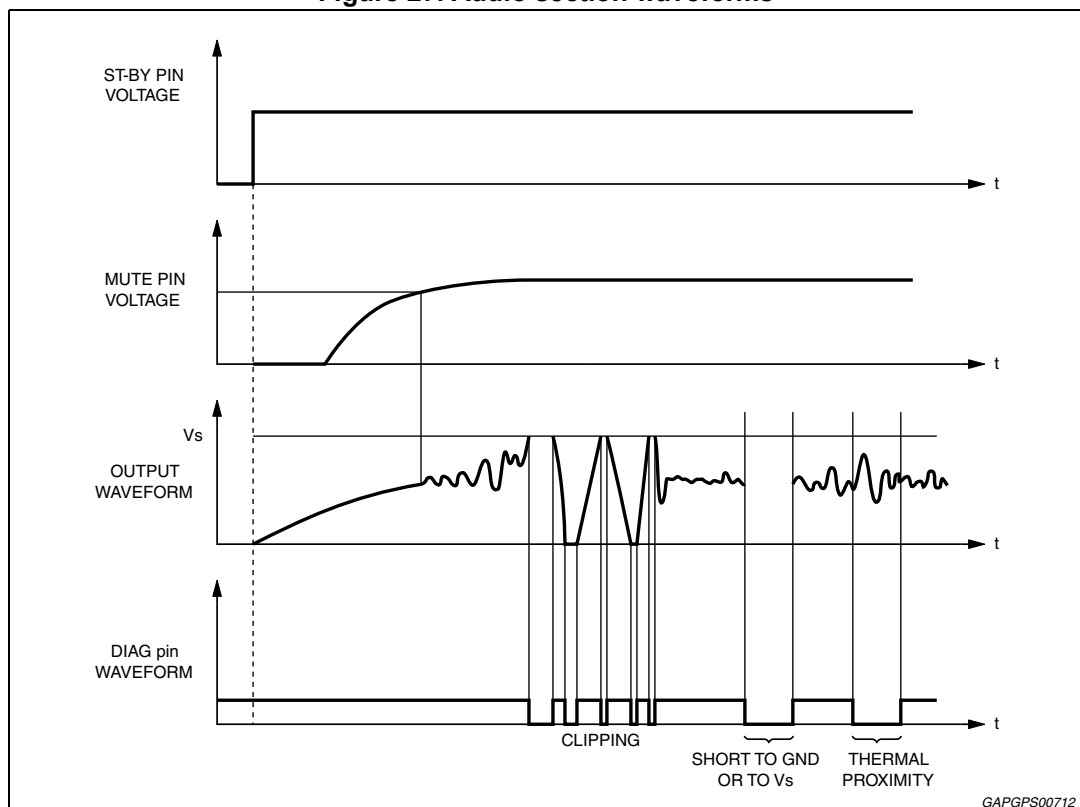

## 5.5 Heat sink definition

Assuming we have a maximum dissipated power of 26 W (e.g. in the worst case situation of frequent clipping occurrence), considering  $T_j$  max is 150 °C and assuming ambient temperature is 70 °C, the available temperature gap for a correct dissipation is 80 °C. This means the thermal resistance of the system  $R_{th}$  has to be  $80\text{ °C}/26\text{ W} = 3\text{ °C/W}$ .

The junction to case thermal resistance is 1 °C/W. So the heat sink thermal resistance should be approximately 2 °C/W. This would avoid any thermal shutdown occurrence even after long-term and full-volume operation.

## 6 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

**Figure 28. Flexiwatt25 (vertical) mechanical data and package dimensions**


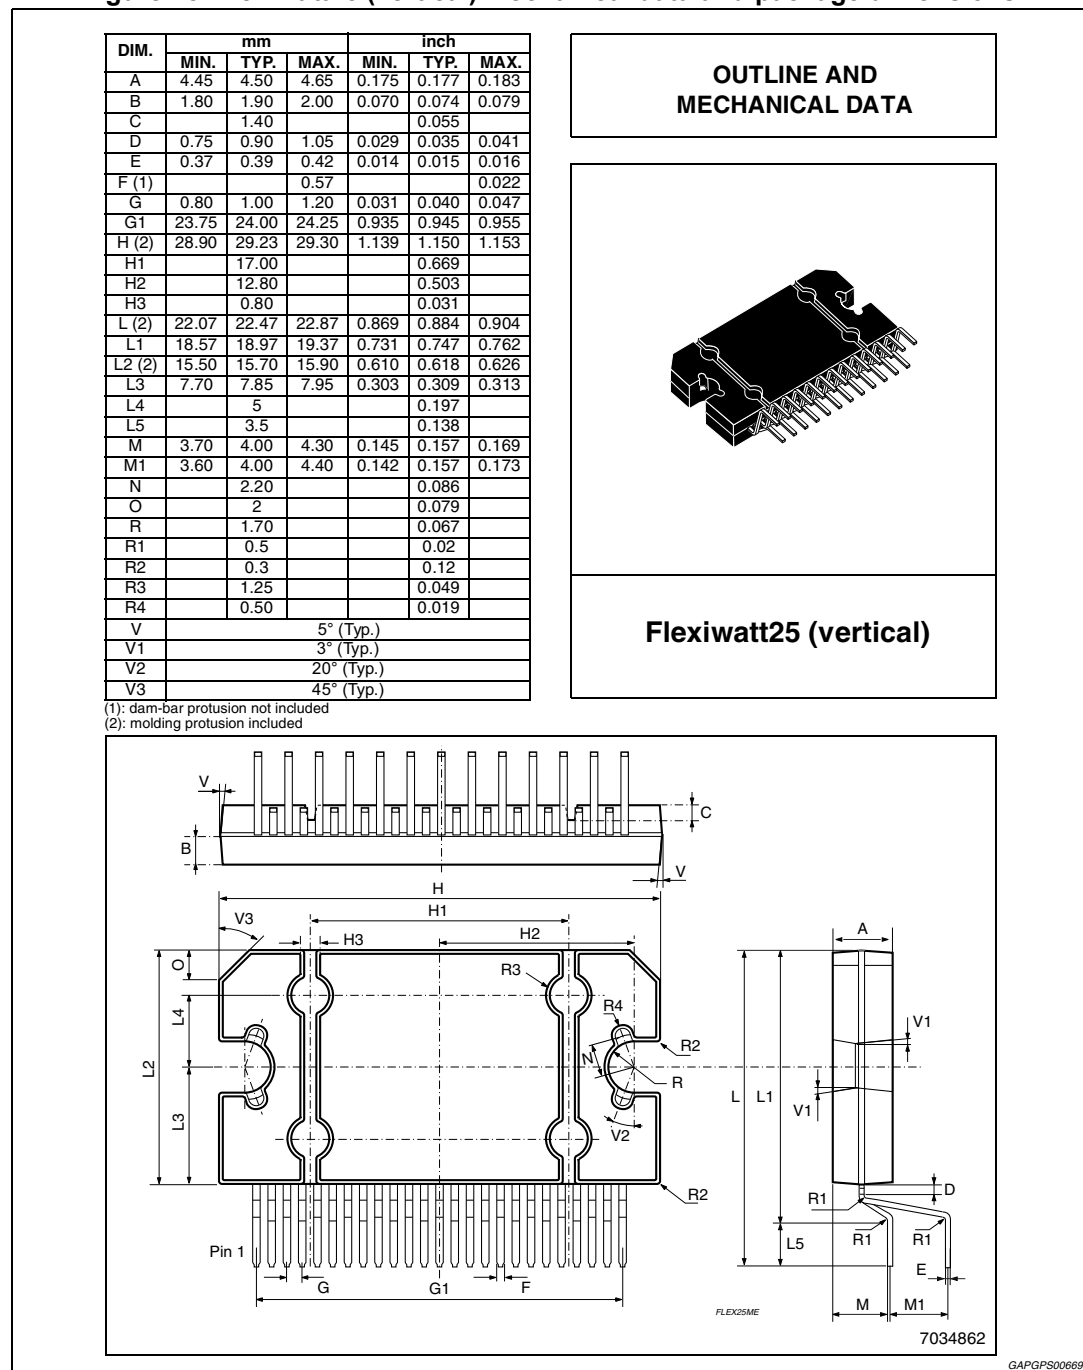


Figure 29. Flexiwatt27 (Vertical) mechanical data and package dimensions


| DIM.              | mm         |       |       | inch  |       |       |
|-------------------|------------|-------|-------|-------|-------|-------|
|                   | MIN.       | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| A                 | 4.45       | 4.50  | 4.65  | 0.175 | 0.177 | 0.183 |
| B                 | 1.80       | 1.90  | 2.00  | 0.070 | 0.074 | 0.079 |
| C                 |            | 1.40  |       |       | 0.055 |       |
| D                 | 0.75       | 0.90  | 1.05  | 0.029 | 0.035 | 0.041 |
| E                 | 0.37       | 0.39  | 0.42  | 0.014 | 0.015 | 0.016 |
| F <sup>(1)</sup>  |            |       | 0.57  |       |       | 0.022 |
| G                 | 0.80       | 1.00  | 1.20  | 0.031 | 0.040 | 0.047 |
| G1                | 25.75      | 26.00 | 26.25 | 1.014 | 1.023 | 1.033 |
| H <sup>(2)</sup>  | 28.90      | 29.23 | 29.30 | 1.139 | 1.150 | 1.153 |
| H1                |            | 17.00 |       |       | 0.669 |       |
| H2                |            | 12.80 |       |       | 0.503 |       |
| H3                |            | 0.80  |       |       | 0.031 |       |
| L <sup>(2)</sup>  | 22.07      | 22.47 | 22.87 | 0.869 | 0.884 | 0.904 |
| L1                | 18.57      | 18.97 | 19.37 | 0.731 | 0.747 | 0.762 |
| L2 <sup>(2)</sup> | 15.50      | 15.70 | 15.90 | 0.610 | 0.618 | 0.626 |
| L3                | 7.70       | 7.85  | 7.95  | 0.303 | 0.309 | 0.313 |
| L4                |            | 5     |       |       | 0.197 |       |
| L5                |            | 3.5   |       |       | 0.138 |       |
| M                 | 3.70       | 4.00  | 4.30  | 0.145 | 0.157 | 0.169 |
| M1                | 3.60       | 4.00  | 4.40  | 0.142 | 0.157 | 0.173 |
| N                 |            | 2.20  |       |       | 0.086 |       |
| O                 |            | 2     |       |       | 0.079 |       |
| R                 |            | 1.70  |       |       | 0.067 |       |
| R1                |            | 0.5   |       |       | 0.02  |       |
| R2                |            | 0.3   |       |       | 0.12  |       |
| R3                |            | 1.25  |       |       | 0.049 |       |
| R4                |            | 0.50  |       |       | 0.019 |       |
| V                 | 5° (Typ.)  |       |       |       |       |       |
| V1                | 3° (Typ.)  |       |       |       |       |       |
| V2                | 20° (Typ.) |       |       |       |       |       |
| V3                | 45° (Typ.) |       |       |       |       |       |

(1): dam-bar protusion not included; (2): molding protusion included.

### OUTLINE AND MECHANICAL DATA



### Flexiwatt27 (vertical)

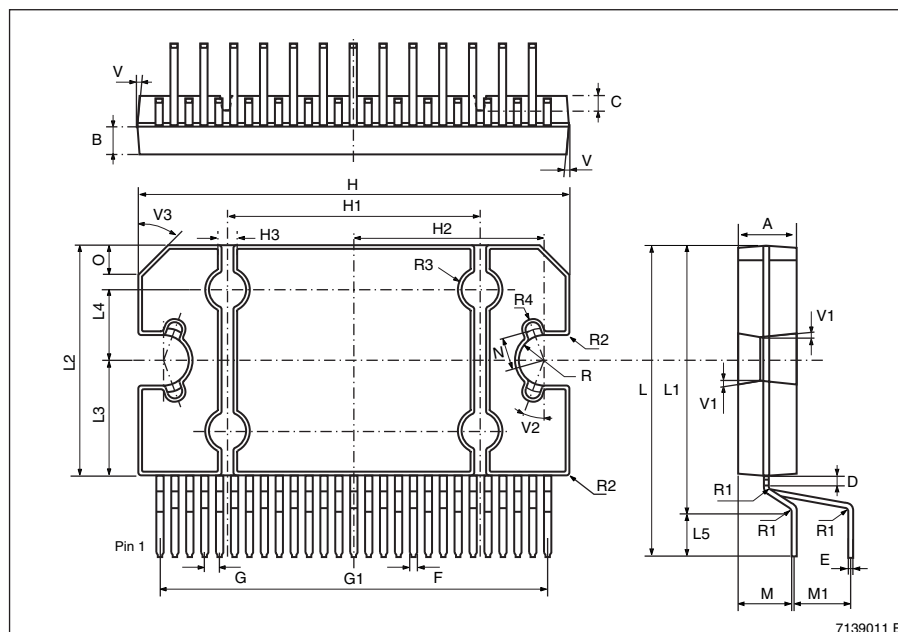

7139011 E GAPGPS00096

## 7 Revision history

**Table 6. Document revision history**

| Date        | Revision | Changes                                                                                      |
|-------------|----------|----------------------------------------------------------------------------------------------|
| 11-Jul-2014 | 1        | Initial release.                                                                             |
| 21-Jan-2020 | 2        | Updated <a href="#">Table 5: Electrical characteristics</a> (P <sub>o</sub> Test condition). |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

