

# LT1101

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage .....  $\pm 22\text{V}$   
 Differential Input Voltage .....  $\pm 36\text{V}$   
 Input Voltage ..... Equal to Positive Supply Voltage  
 ..... 10V Below Negative Supply Voltage  
 Output Short Circuit Duration ..... Indefinite

Operating Temperature Range

LT1101AM/LT1101M (**OBSOLETE**) ...  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$

LT1101AI/LT1101I .....  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

LT1101AC/LT1101C .....  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$

Storage Temperature Range .....  $-65^{\circ}\text{C}$  to  $150^{\circ}\text{C}$

Lead Temperature (Soldering, 10 sec) .....  $300^{\circ}\text{C}$

## PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>TOP VIEW<br/>OUTPUT<br/>GROUND (REF)<br/>REF G = 10<br/>-IN<br/>V- (CASE)<br/>V+<br/>+IN<br/>OUT G = 10<br/>H PACKAGE<br/>8-LEAD TO-5 METAL CAN<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 150^{\circ}\text{C/W}</math>, <math>\theta_{JC} = 45^{\circ}\text{C/W}</math></p> | <p>TOP VIEW<br/>GROUND (REF)<br/>REF G = 10<br/>-IN<br/>V-<br/>V+<br/>+IN<br/>OUT G = 10<br/>N PACKAGE 8-LEAD PDIP<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 130^{\circ}\text{C/W}</math><br/>J PACKAGE 8-LEAD CERDIP<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 100^{\circ}\text{C/W}</math></p> | <p>TOP VIEW<br/>NC<br/>GND (REF)<br/>NC<br/>REF G = 10<br/>-IN<br/>NC<br/>V-<br/>NC<br/>NC<br/>V+<br/>+IN<br/>OUT G = 10<br/>NC<br/>OUTPUT<br/>SW PACKAGE<br/>16-LEAD PLASTIC SO<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 100^{\circ}\text{C/W}</math></p> |
| ORDER PART NUMBER                                                                                                                                                                                                                                                                                         | ORDER PART NUMBER                                                                                                                                                                                                                                                                                                                                      | ORDER PART NUMBER                                                                                                                                                                                                                                                                      |
| LT1101AMH<br>LT1101MH<br>LT1101ACH<br>LT1101CH<br><b>OBSOLETE PACKAGES</b><br>Consider the N8 as an Alternate Source                                                                                                                                                                                      | LT1101AMJ8    LT1101AIN8<br>LT1101MJ8    LT1101IN8<br>LT1101ACJ8    LT1101ACN8<br>LT1101CJ8    LT1101CN8                                                                                                                                                                                                                                               | LT1101SW<br>LT1101ISW                                                                                                                                                                                                                                                                  |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS

$V_S = 5\text{V}$ ,  $0\text{V}$ ,  $V_{CM} = 0.1\text{V}$ ,  $V_{REF(PIN 1)} = 0.1\text{V}$ ,  $G = 10$  or  $100$ ,  $T_A = 25^{\circ}\text{C}$ , unless otherwise noted. (Note 4)

| SYMBOL   | PARAMETER            | CONDITIONS                                                            | LT1101AM/AI/AC |       |       | LT1101M/I/C |       |       | UNITS         |
|----------|----------------------|-----------------------------------------------------------------------|----------------|-------|-------|-------------|-------|-------|---------------|
|          |                      |                                                                       | MIN            | TYP   | MAX   | MIN         | TYP   | MAX   |               |
| $G_E$    | Gain Error           | $G = 100$ , $V_0 = 0.1\text{V}$ to $3.5\text{V}$ , $R_L = 50\text{k}$ |                | 0.010 | 0.050 |             | 0.011 | 0.075 | %             |
|          |                      | $G = 10$ , $V_0 = 0.1\text{V}$ to $3.5\text{V}$ , $R_L = 50\text{k}$  |                | 0009  | 0.040 |             | 0.010 | 0.060 | %             |
| $G_{NL}$ | Gain Nonlinearity    | $G = 100$ , $R_L = 50\text{k}$                                        |                | 20    | 60    |             | 20    | 75    | ppm           |
|          |                      | $G = 10$ , $R_L = 50\text{k}$ (Note 2)                                |                | 3     | 7     |             | 3     | 8     | ppm           |
| $V_{OS}$ | Input Offset Voltage | LT1101SW                                                              |                | 50    | 160   |             | 60    | 220   | $\mu\text{V}$ |
|          |                      |                                                                       |                |       |       |             | 250   | 600   | $\mu\text{V}$ |
| $I_{OS}$ | Input Offset Current |                                                                       |                | 0.13  | 0.60  |             | 0.15  | 0.90  | nA            |
| $I_B$    | Input Bias Current   |                                                                       |                | 6     | 8     |             | 6     | 10    | nA            |
| $I_S$    | Supply Current       |                                                                       |                | 75    | 105   |             | 78    | 120   | $\mu\text{A}$ |

1101fa

# ELECTRICAL CHARACTERISTICS

$V_S = 5V, 0V, V_{CM} = 0.1V, V_{REF(PIN\ 1)} = 0.1V, G = 10 \text{ or } 100, T_A = 25^\circ C$ , unless otherwise noted. (Note 4)

| SYMBOL | PARAMETER                    | CONDITIONS                                                                              | LT1101AM/AI/AC |      |     | LT1101M/I/C |      |     | UNITS      |
|--------|------------------------------|-----------------------------------------------------------------------------------------|----------------|------|-----|-------------|------|-----|------------|
|        |                              |                                                                                         | MIN            | TYP  | MAX | MIN         | TYP  | MAX |            |
| CMRR   | Common Mode Rejection Ratio  | 1k Source Imbalance                                                                     | 95             | 106  |     | 92          | 105  |     | dB         |
|        |                              | $G = 100, V_{CM} = 0.07V \text{ to } 3.4V$<br>$G = 10, V_{CM} = 0.07V \text{ to } 3.1V$ | 84             | 100  |     | 82          | 99   |     | dB         |
|        | Minimum Supply Voltage       | (Note 5)                                                                                |                | 1.8  | 2.3 |             | 1.8  | 2.3 | V          |
| $V_O$  | Maximum Output Voltage Swing | Output High, 50k to GND                                                                 | 4.1            | 4.3  |     | 4.1         | 4.3  |     | V          |
|        |                              | Output High, 2k to GND                                                                  | 3.5            | 3.9  |     | 3.5         | 3.9  |     | V          |
|        |                              | Output Low, $V_{REF} = 0$ , No Load                                                     |                | 3.3  | 6   |             | 3.3  | 6   | mV         |
|        |                              | Output Low, $V_{REF} = 0$ , 2k to GND                                                   |                | 0.5  | 1   |             | 0.5  | 1   | mV         |
|        |                              | Output Low, $V_{REF} = 0, I_{SINK} = 100\mu A$                                          |                | 90   | 130 |             | 90   | 130 | mV         |
| BW     | Bandwidth                    | $G = 100$ (Note 2)                                                                      | 2.0            | 3.0  |     | 2.0         | 3.0  |     | kHz        |
|        |                              | $G = 10$ (Note 2)                                                                       | 22             | 33   |     | 22          | 33   |     | kHz        |
| SR     | Slew Rate                    | (Note 2)                                                                                | 0.04           | 0.07 |     | 0.04        | 0.07 |     | V/ $\mu s$ |

$V_S = \pm 15V, V_{CM} = 0V, T_A = 25^\circ C$ , Gain = 10 or 100, unless otherwise noted.

| SYMBOL   | PARAMETER                                            | CONDITIONS                                            | LT1101AM/AI/AC |       |       | LT1101M/I/C |       |       | UNITS           |
|----------|------------------------------------------------------|-------------------------------------------------------|----------------|-------|-------|-------------|-------|-------|-----------------|
|          |                                                      |                                                       | MIN            | TYP   | MAX   | MIN         | TYP   | MAX   |                 |
| $G_E$    | Gain Error                                           | $G = 100, V_O = \pm 10V, R_L = 50k$                   |                | 0.008 | 0.040 |             | 0.009 | 0.060 | %               |
|          |                                                      | $G = 100, V_O = \pm 10V, R_L = 2k$                    |                | 0.011 | 0.055 |             | 0.012 | 0.070 | %               |
|          |                                                      | $G = 100, V_O = \pm 10V, R_L = 50k \text{ or } 2k$    |                | 0.008 | 0.040 |             | 0.009 | 0.060 | %               |
| $G_{NL}$ | Gain Nonlinearity                                    | $G = 100, R_L = 50k$                                  |                | 7     | 16    |             | 8     | 20    | ppm             |
|          |                                                      | $G = 100, R_L = 2k$                                   |                | 24    | 45    |             | 25    | 60    | ppm             |
|          |                                                      | $G = 10, R_L = 50k \text{ or } 2k$                    |                | 3     | 8     |             | 3     | 9     | ppm             |
| $V_{OS}$ | Input Offset Voltage                                 | LT1101SW                                              |                | 50    | 160   |             | 60    | 220   | $\mu V$         |
|          |                                                      |                                                       |                |       |       |             | 250   | 600   | $\mu V$         |
| $I_{OS}$ | Input Offset Current                                 |                                                       |                | 0.13  | 0.60  |             | 0.15  | 0.90  | nA              |
| $I_B$    | Input Bias Current                                   |                                                       |                | 6     | 8     |             | 6     | 10    | nA              |
|          | Input Resistance<br>Common Mode<br>Differential Mode | (Note 2)                                              | 4              | 7     |       | 3           | 7     |       | G $\Omega$      |
|          |                                                      | (Note 2)                                              | 7              | 12    |       | 5           | 12    |       | G $\Omega$      |
| $e_n$    | Input Noise Voltage                                  | 0.1Hz to 10Hz (Note 3)                                |                | 0.9   | 1.8   |             | 0.9   |       | $\mu V_{p-p}$   |
|          | Input Noise Voltage Density                          | $f_0 = 10Hz$ (Note 3)                                 |                | 45    | 64    |             | 45    |       | $nV/\sqrt{Hz}$  |
|          |                                                      | $f_0 = 1000Hz$ (Note 3)                               |                | 43    | 54    |             | 43    |       | $nV/\sqrt{Hz}$  |
| $i_n$    | Input Noise Current                                  | 0.1Hz to 10Hz (Note 3)                                |                | 2.3   | 4.0   |             | 2.3   |       | pA $_{p-p}$     |
|          | Input Noise Current Density                          | $f_0 = 10Hz$ (Note 3)                                 |                | 0.06  | 0.10  |             | 0.06  |       | pA $/\sqrt{Hz}$ |
|          |                                                      | $f_0 = 1000Hz$                                        |                | 0.02  |       |             | 0.02  |       | pA $/\sqrt{Hz}$ |
|          | Input Voltage Range                                  | $G = 100$                                             | 13.0           | 13.8  |       | 13.0        | 13.8  |       | V               |
|          |                                                      |                                                       | -14.4          | -14.7 |       | -14.4       | -14.7 |       | V               |
|          |                                                      | $G = 10$                                              | 11.5           | 12.5  |       | 11.5        | 12.5  |       | V               |
|          |                                                      |                                                       | -13.0          | -13.3 |       | -13.0       | -13.3 |       | V               |
| CMRR     | Common Mode Rejection Ratio                          | 1k Source Imbalance                                   | 100            | 112   |       | 98          | 112   |       | dB              |
|          |                                                      | $G = 100$ , Over CM Range<br>$G = 10$ , Over CM Range | 84             | 100   |       | 82          | 99    |       | dB              |
| PSRR     | Power Supply Rejection Ratio                         | $V_S = +2.2V, -0.1V \text{ to } \pm 18V$              | 102            | 114   |       | 100         | 114   |       | dB              |
| $I_S$    | Supply Current                                       |                                                       |                | 92    | 130   |             | 94    | 150   | $\mu A$         |

1101fa

## ELECTRICAL CHARACTERISTICS

$V_S = \pm 15V$ ,  $V_{CM} = 0V$ ,  $T_A = 25^\circ C$ , Gain = 10 or 100, unless otherwise noted.

| SYMBOL | PARAMETER                    | CONDITIONS                          | LT1101AM/AI  |              |     | LT1101M/I    |              |     | UNITS      |
|--------|------------------------------|-------------------------------------|--------------|--------------|-----|--------------|--------------|-----|------------|
|        |                              |                                     | MIN          | TYP          | MAX | MIN          | TYP          | MAX |            |
| $V_O$  | Maximum Output Voltage Swing | $R_L = 50k$<br>$R_L = 2k$           | 13.0<br>11.0 | 14.2<br>13.2 |     | 13.0<br>11.0 | 14.2<br>13.2 |     | V<br>V     |
| BW     | Bandwidth                    | G = 100 (Note 2)<br>G = 10 (Note 2) | 2.3<br>25    | 3.5<br>37    |     | 2.3<br>25    | 3.5<br>37    |     | kHz<br>kHz |
| SR     | Slew Rate                    |                                     | 0.06         | 0.10         |     | 0.06         | 0.10         |     | V/ $\mu s$ |

## ELECTRICAL CHARACTERISTICS

$V_S = \pm 15V$ ,  $V_{CM} = 0V$ , Gain = 10 or 100,  $-55^\circ C \leq T_A \leq 125^\circ C$  for AM/M grades,  $-40^\circ C \leq T_A \leq 85^\circ C$  for AI/I grades, unless otherwise noted.

| SYMBOL                   | PARAMETER                    | CONDITIONS                                    | LT1101AM/AI |       |       | LT1101M/I |       |       | UNITS            |
|--------------------------|------------------------------|-----------------------------------------------|-------------|-------|-------|-----------|-------|-------|------------------|
|                          |                              |                                               | MIN         | TYP   | MAX   | MIN       | TYP   | MAX   |                  |
| $G_E$                    | Gain Error                   | G = 100, $V_O = \pm 10V$ , $R_L = 50k$        |             | 0.024 | 0.070 |           | 0.026 | 0.100 | %                |
|                          |                              | G = 100, $V_O = \pm 10V$ , $R_L = 5k$         |             | 0.030 | 0.100 |           | 0.035 | 0.130 | %                |
|                          |                              | G = 10, $V_O = \pm 10V$ , $R_L = 50k$ or $5k$ |             | 0.015 | 0.070 |           | 0.018 | 0.100 | %                |
| $TCG_E$                  | Gain Error Drift (Note 2)    | G = 100, $R_L = 50k$                          |             | 2     | 4     |           | 2     | 5     | ppm/ $^\circ C$  |
|                          |                              | G = 100, $R_L = 5k$                           |             | 2     | 7     |           | 2     | 8     | ppm/ $^\circ C$  |
|                          |                              | G = 10, $R_L = 50k$ or $5k$                   |             | 1     | 4     |           | 1     | 5     | ppm/ $^\circ C$  |
| $G_{NL}$                 | Gain Nonlinearity            | G = 100, $R_L = 50k$                          |             | 24    | 70    |           | 26    | 90    | ppm              |
|                          |                              | G = 100, $R_L = 5k$                           |             | 70    | 300   |           | 75    | 500   | ppm              |
|                          |                              | G = 10, $R_L = 50k$                           |             | 4     | 13    |           | 5     | 15    | ppm              |
|                          |                              | G = 10, $R_L = 5k$                            |             | 10    | 40    |           | 12    | 60    | ppm              |
| $V_{OS}$                 | Input Offset Voltage         | LT1101ISW                                     |             | 90    | 350   |           | 110   | 500   | $\mu V$          |
|                          |                              |                                               |             |       |       |           | 110   | 950   | $\mu V$          |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift   | (Note 2)<br>LT1101ISW                         |             | 0.4   | 2.0   |           | 0.5   | 2.8   | $\mu V/^\circ C$ |
|                          |                              |                                               |             |       |       |           | 0.5   | 4.8   | mV/ $^\circ C$   |
| $I_{OS}$                 | Input Offset Current         |                                               |             | 0.16  | 0.80  |           | 0.19  | 1.30  | nA               |
| $\Delta I_{OS}/\Delta T$ | Input Offset Current Drift   | (Note 2)                                      |             | 0.5   | 4.0   |           | 0.8   | 7.0   | pA/ $^\circ C$   |
| $I_B$                    | Input Bias Current           |                                               |             | 7     | 10    |           | 7     | 12    | nA               |
| $\Delta I_B/\Delta T$    | Input Bias Current Drift     | (Note 2)                                      |             | 10    | 25    |           | 10    | 30    | pA/ $^\circ C$   |
| CMRR                     | Common Mode Rejection Ratio  | G = 100, $V_{CM} = -14.4V$ to $13V$           | 96          | 111   |       | 94        | 111   |       | dB               |
|                          |                              | G = 100, $V_{CM} = -13V$ to $11.5V$           | 80          | 99    |       | 78        | 98    |       | dB               |
| PSRR                     | Power Supply Rejection Ratio | $V_S = 3.0, -0.1V$ to $\pm 18V$               | 98          | 110   |       | 94        | 110   |       | dB               |
| $I_S$                    | Supply Current               |                                               |             | 105   | 165   |           | 108   | 190   | $\mu A$          |
| $V_O$                    | Maximum Output Voltage Swing | $R_L = 50k$                                   | 12.5        | 14.0  |       | 12.5      | 14.0  |       | V                |
|                          |                              | $R_L = 5k$                                    | 11.0        | 13.5  |       | 11.0      | 13.5  |       | V                |

**ELECTRICAL CHARACTERISTICS**

$V_S = \pm 15V$ ,  $V_{CM} = 0V$ , Gain = 10 or 100,  $0^\circ C \leq T_A \leq 70^\circ C$ , unless otherwise noted.

| SYMBOL                   | PARAMETER                    | CONDITIONS                                       | LT1101AC   |            |       | LT1101C/S  |            |       | UNITS            |
|--------------------------|------------------------------|--------------------------------------------------|------------|------------|-------|------------|------------|-------|------------------|
|                          |                              |                                                  | MIN        | TYP        | MAX   | MIN        | TYP        | MAX   |                  |
| $G_E$                    | Gain Error                   | $G = 100$ , $V_O = \pm 10V$ , $R_L = 50k$        |            | 0.012      | 0.055 |            | 0.014      | 0.080 | %                |
|                          |                              | $G = 100$ , $V_O = \pm 10V$ , $R_L = 2k$         |            | 0.018      | 0.085 |            | 0.020      | 0.100 | %                |
|                          |                              | $G = 10$ , $V_O = \pm 10V$ , $R_L = 50k$ or $2k$ |            | 0.009      | 0.055 |            | 0.010      | 0.080 | %                |
| $TCG_E$                  | Gain Error Drift<br>(Note 2) | $G = 100$ , $R_L = 50k$                          |            | 1          | 4     |            | 1          | 5     | ppm/ $^\circ C$  |
|                          |                              | $G = 100$ , $R_L = 2k$                           |            | 2          | 7     |            | 2          | 9     | ppm/ $^\circ C$  |
|                          |                              | $G = 10$ , $R_L = 50k$ or $5k$                   |            | 1          | 4     |            | 1          | 5     | ppm/ $^\circ C$  |
| $G_{NL}$                 | Gain Nonlinearity            | $G = 100$ , $R_L = 50k$                          |            | 9          | 25    |            | 10         | 35    | ppm              |
|                          |                              | $G = 100$ , $R_L = 2k$                           |            | 33         | 75    |            | 36         | 100   | ppm              |
|                          |                              | $G = 10$ , $R_L = 50k$ or $2k$                   |            | 4          | 10    |            | 4          | 11    | ppm              |
| $V_{OS}$                 | Input Offset Voltage         |                                                  |            | 70         | 250   |            | 85         | 350   | $\mu V$          |
|                          |                              | LT1101SW                                         |            |            |       |            | 300        | 800   | $\mu V$          |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift   | (Note 2)                                         |            | 0.4        | 2.0   |            | 0.5        | 2.8   | $\mu V/^\circ C$ |
|                          |                              | LT1101SW                                         |            |            |       |            | 1.2        | 4.5   | $\mu V/^\circ C$ |
| $I_{OS}$                 | Input Offset Current         |                                                  |            | 0.14       | 0.70  |            | 0.17       | 1.10  | nA               |
| $\Delta I_{OS}/\Delta T$ | Input Offset Current Drift   | (Note 2)                                         |            | 0.5        | 4.0   |            | 0.8        | 7.0   | pA/ $^\circ C$   |
| $I_B$                    | Input Bias Current           |                                                  |            | 6          | 9     |            | 6          | 11    | nA               |
| $\Delta I_B/\Delta T$    | Input Bias Current Drift     | (Note 2)                                         |            | 10         | 25    |            | 10         | 30    | pA/ $^\circ C$   |
| CMRR                     | Common Mode Rejection Ratio  | $G = 100$ , $V_{CM} = -14.4V$ to $13V$           | 98         | 112        |       | 96         | 112        |       | dB               |
|                          |                              | $G = 100$ , $V_{CM} = -13V$ to $11.5V$           | 82         | 100        |       | 80         | 99         |       | dB               |
| PSRR                     | Power Supply Rejection Ratio | $V_S = 2.5$ , $-0.1V$ to $\pm 18V$               | 100        | 112        |       | 97         | 112        |       | dB               |
| $I_S$                    | Supply Current               |                                                  |            | 98         | 148   |            | 100        | 170   | $\mu A$          |
| $V_O$                    | Maximum Output Voltage Swing | $R_L = 50k$                                      | $\pm 12.5$ | $\pm 14.1$ |       | $\pm 12.5$ | $\pm 14.1$ |       | V                |
|                          |                              | $R_L = 2k$                                       | $\pm 10.5$ | $\pm 13.0$ |       | $\pm 10.5$ | $\pm 13.0$ |       | V                |

# ELECTRICAL CHARACTERISTICS

$V_S = 5V, 0V, V_{CM} = 0.1V, V_{REF(PIN\ 1)} = 0.1V, \text{Gain} = 10 \text{ or } 100,$   
 $-40^\circ C \leq T_A \leq 85^\circ C$  for Al/I grades, unless otherwise noted (Note 4).

| SYMBOL                   | PARAMETER                    | CONDITIONS                                                                                             | LT1101AM/AI |       |       | LT1101M/I |       |       | UNITS            |
|--------------------------|------------------------------|--------------------------------------------------------------------------------------------------------|-------------|-------|-------|-----------|-------|-------|------------------|
|                          |                              |                                                                                                        | MIN         | TYP   | MAX   | MIN       | TYP   | MAX   |                  |
| $G_E$                    | Gain Error                   | $G = 100, V_O = 0.1V \text{ to } 3.5V, R_L = 50k$<br>$G = 10, V_{CM} = 0.15, R_L = 50k$                |             | 0.026 | 0.080 |           | 0.028 | 0.120 | %                |
|                          |                              |                                                                                                        |             | 0.011 | 0.070 |           | 0.014 | 0.100 | %                |
| $TCG_E$                  | Gain Error Drift             | $R_L = 50k$ (Note 2)                                                                                   |             | 1     | 4     |           | 1     | 5     | ppm/ $^\circ C$  |
| $G_{NL}$                 | Gain Nonlinearity            | $G = 100, R_L = 50k$<br>$G = 10, R_L = 50k$ (Note 2)                                                   |             | 45    | 110   |           | 48    | 140   | ppm              |
|                          |                              |                                                                                                        |             | 4     | 13    |           | 5     | 15    | ppm              |
| $V_{OS}$                 | Input Offset Voltage         | LT1101ISW                                                                                              |             | 90    | 350   |           | 110   | 500   | $\mu V$          |
|                          |                              |                                                                                                        |             |       |       |           | 110   | 950   | $\mu V$          |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift   | (Note 2)<br>LT1101ISW                                                                                  |             | 0.4   | 2.0   |           | 0.5   | 2.8   | $\mu V/^\circ C$ |
|                          |                              |                                                                                                        |             |       |       |           | 0.5   | 4.8   | $\mu V/^\circ C$ |
| $I_{OS}$                 | Input Offset Current         |                                                                                                        |             | 0.16  | 0.80  |           | 0.19  | 1.30  | nA               |
| $\Delta V_{OS}/\Delta T$ | Input Offset Current Drift   | (Note 2)                                                                                               |             | 0.5   | 4.0   |           | 0.8   | 7.0   | pA/ $^\circ C$   |
| $I_B$                    | Input Bias Current           |                                                                                                        |             | 7     | 10    |           | 7     | 12    | nA               |
| $\Delta I_B/\Delta T$    | Input Bias Current Drift     | (Note 2)                                                                                               |             | 10    | 25    |           | 10    | 30    | pA/ $^\circ C$   |
| CMRR                     | Common Mode Rejection Ratio  | $G = 100, V_{CM} = 0.1V \text{ to } 3.2V$<br>$G = 10, V_{CM} = 0.1V \text{ to } 2.9V, V_{REF} = 0.15V$ | 91          | 105   |       | 88        | 104   |       | dB               |
|                          |                              |                                                                                                        | 80          | 98    |       | 77        | 97    |       | dB               |
| $I_S$                    | Supply Current               |                                                                                                        |             | 88    | 135   |           | 92    | 160   | $\mu A$          |
| $V_O$                    | Maximum Output Voltage Swing | Output High, 50k to GND                                                                                | 3.8         | 4.1   |       | 3.8       | 4.1   |       | V                |
|                          |                              | Output High, 2k to GND                                                                                 | 3.0         | 3.7   |       | 3.0       | 3.7   |       | V                |
|                          |                              | Output Low, $V_{REF} = 0$ , No Load                                                                    |             | 4.5   | 8     |           | 4.5   | 8     | mV               |
|                          |                              | Output Low, $V_{REF} = 0$ , 2k to GND                                                                  |             | 0.7   | 1.5   |           | 0.7   | 1.5   | mV               |
|                          |                              | Output Low, $V_{REF} = 0, I_{SINK} = 100\mu A$                                                         |             | 125   | 170   |           | 125   | 170   | mV               |

**ELECTRICAL CHARACTERISTICS**

$V_S = 5V, 0V, V_{CM} = 0.1V, V_{REF(PIN\ 1)} = 0.1V, \text{Gain} = 10 \text{ or } 100,$   
 $0^\circ C \leq T_A \leq 70^\circ C,$  unless otherwise noted (Note 4).

| SYMBOL                   | PARAMETER                    | CONDITIONS                                                                                                                                                                             | LT1101AC   |                               |                         | LT1101C/S  |                               |                         | UNITS                                |
|--------------------------|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------|-------------------------|------------|-------------------------------|-------------------------|--------------------------------------|
|                          |                              |                                                                                                                                                                                        | MIN        | TYP                           | MAX                     | MIN        | TYP                           | MAX                     |                                      |
| $G_E$                    | Gain Error                   | $G = 100, V_O = 0.1V \text{ to } 3.5V, R_L = 50k$<br>$G = 10, V_{CM} = 0.15V, R_L = 50k$                                                                                               |            | 0.017<br>0.010                | 0.065<br>0.060          |            | 0.018<br>0.012                | 0.095<br>0.080          | %<br>%                               |
| $TCG_E$                  | Gain Error Drift             | $R_L = 50k$ (Note 2)                                                                                                                                                                   |            | 1                             | 4                       |            | 1                             | 5                       | ppm/ $^\circ C$                      |
| $G_{NL}$                 | Gain Nonlinearity            | $G = 100, R_L = 50k$<br>$G = 10, R_L = 50k$ (Note 2)                                                                                                                                   |            | 25<br>4                       | 80<br>10                |            | 25<br>4                       | 100<br>11               | ppm<br>ppm                           |
| $V_{OS}$                 | Input Offset Voltage         | LT1101SW                                                                                                                                                                               |            | 70                            | 250                     |            | 85<br>300                     | 350<br>800              | $\mu V$<br>$\mu V$                   |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift   | (Note 2)<br>LT1101SW                                                                                                                                                                   |            | 0.4                           | 2.0                     |            | 0.5<br>1.2                    | 2.8<br>4.5              | $\mu V/^\circ C$<br>$\mu V/^\circ C$ |
| $I_{OS}$                 | Input Offset Current         |                                                                                                                                                                                        |            | 0.14                          | 0.70                    |            | 0.17                          | 1.10                    | nA                                   |
| $\Delta I_{OS}/\Delta T$ | Input Offset Current Drift   | (Note 2)                                                                                                                                                                               |            | 0.5                           | 4.0                     |            | 0.8                           | 7                       | pA/ $^\circ C$                       |
| $I_B$                    | Input Bias Current           |                                                                                                                                                                                        |            | 6                             | 9                       |            | 6                             | 11                      | nA                                   |
| $\Delta I_B/\Delta T$    | Input Bias Current Drift     | (Note 2)                                                                                                                                                                               |            | 10                            | 25                      |            | 10                            | 30                      | pA/ $^\circ C$                       |
| CMRR                     | Common Mode Rejection Ratio  | $G = 100, V_{CM} = 0.07V \text{ to } 3.3V$<br>$G = 10, V_{CM} = 0.07V \text{ to } 3V, V_{REF} = 0.15V$                                                                                 | 93<br>82   | 105<br>99                     |                         | 90<br>80   | 104<br>98                     |                         | dB<br>dB                             |
| $I_S$                    | Supply Current               |                                                                                                                                                                                        |            | 80                            | 120                     |            | 85                            | 145                     | $\mu A$                              |
| $V_O$                    | Maximum Output Voltage Swing | Output High, 50k to GND<br>Output High, 2k to GND<br>Output Low, $V_{REF} = 0$ , No Load<br>Output Low, $V_{REF} = 0$ , 2k to GND<br>Output Low, $V_{REF} = 0$ , $I_{SINK} = 100\mu A$ | 4.0<br>3.3 | 4.2<br>3.8<br>4<br>0.6<br>100 | <br><br>7<br>1.2<br>150 | 4.0<br>3.3 | 4.2<br>3.8<br>4<br>0.6<br>100 | <br><br>7<br>1.2<br>150 | V<br>V<br>mV<br>mV<br>mV             |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** This parameter is not tested. It is guaranteed by design and by inference from other tests.


**Note 3:** This parameter is tested on a sample basis only.

**Note 4:** These test conditions are equivalent to  $V_S = 4.9V, -0.1V, V_{CM} = 0V, V_{REF(PIN1)} = 0V$ .


**Note 5:** Minimum supply voltage is guaranteed by the power supply rejection test. The LT1101 actually works at 1.8V supply with minimal degradation in performance.

# TYPICAL PERFORMANCE CHARACTERISTICS


**Gain = 100 Nonlinearity Distribution**

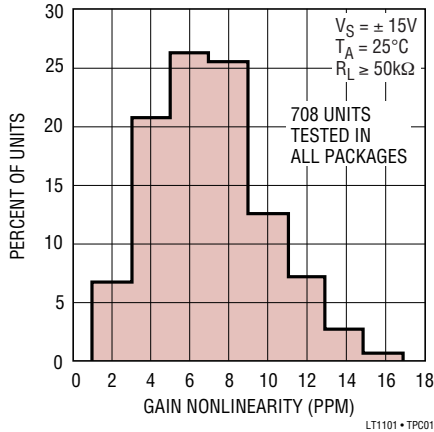


**Gain = 10 Nonlinearity Distribution**

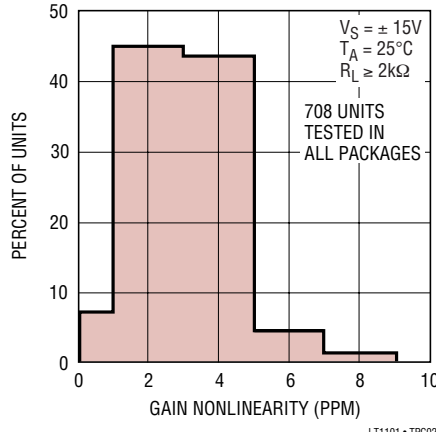


**Gain vs Frequency**

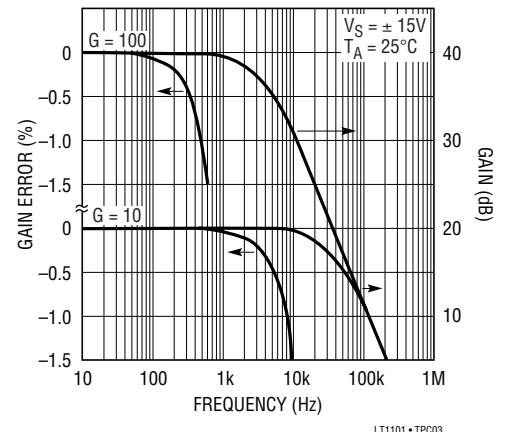


**Gain Error Over Temperature**

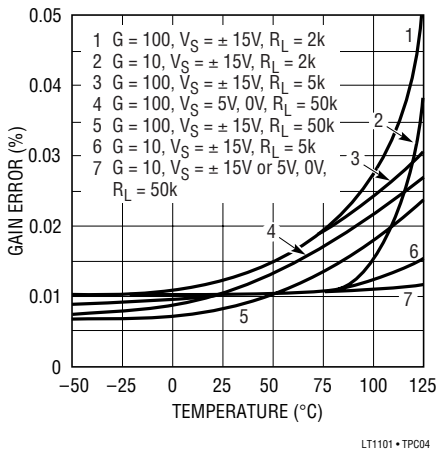


**Gain Nonlinearity Temperature**

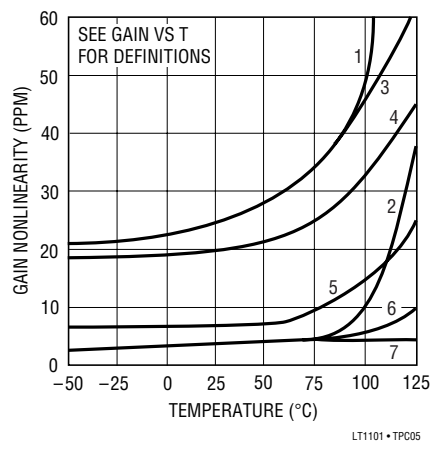


**Input Offset Voltage Distribution**

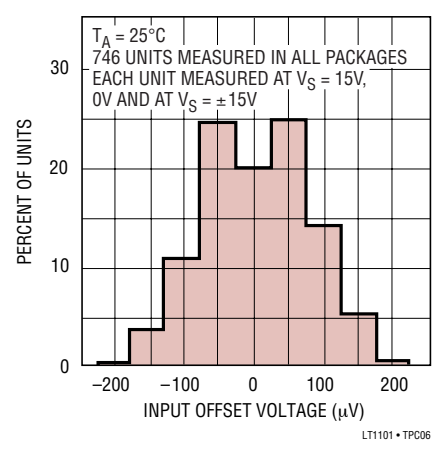


**Supply Current vs Temperature**

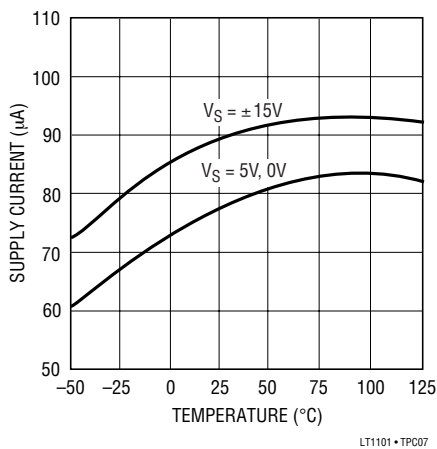

**Input Bias and Offset Currents vs Temperature**

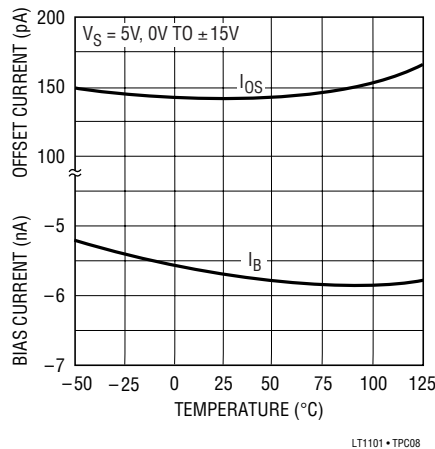


**Input Bias Current vs Common Mode Voltage**

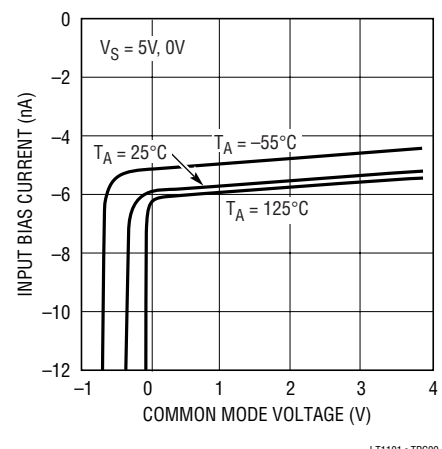


# TYPICAL PERFORMANCE CHARACTERISTICS

**Common Mode Rejection Ratio vs Frequency**

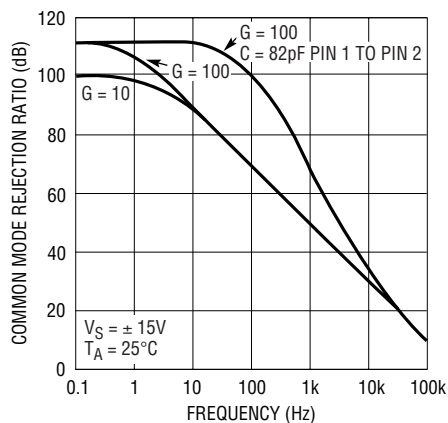


LT1101 • TPC10

**Common Mode Range vs Supply Voltage**

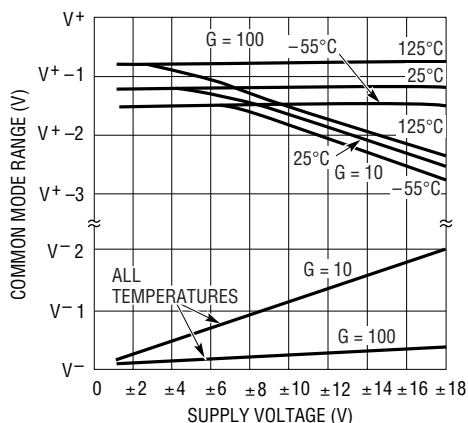


LT1101 • TPC11

**Power Supply Rejection Ratio vs Frequency**

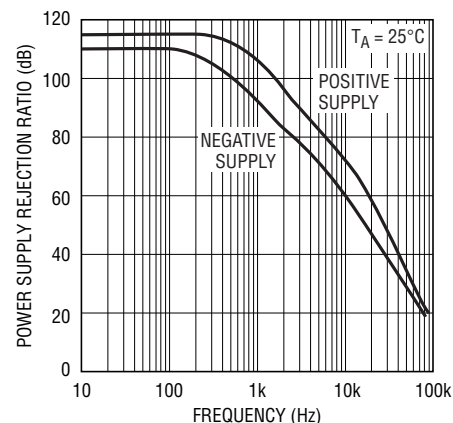


LT1101 • TPC12

**Output Saturation vs Temperature vs Sink Current**

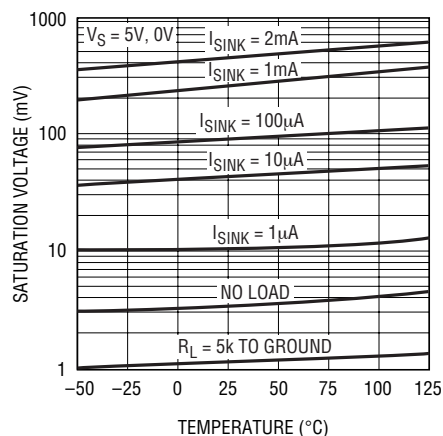


LT1101 • TPC13

**Output Voltage Swing vs Load Current**

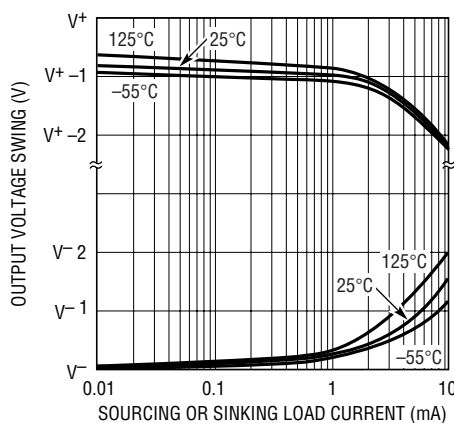


LT1101 • TPC14

**Short-Circuit Current vs Time**

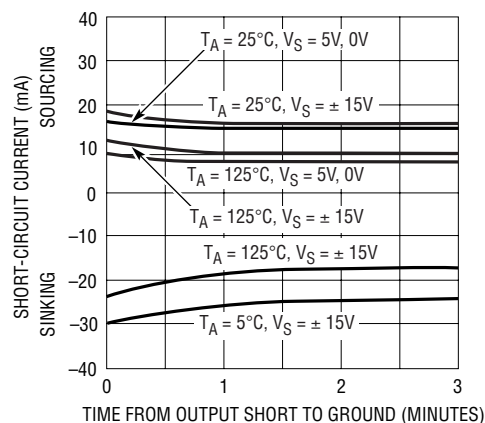


LT1101 • TPC15

**Capacitive Load Handling**

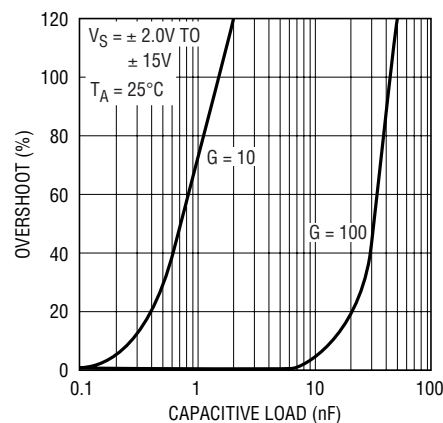


LT1101 • TPC16

**Undistorted Output Swing vs Frequency**

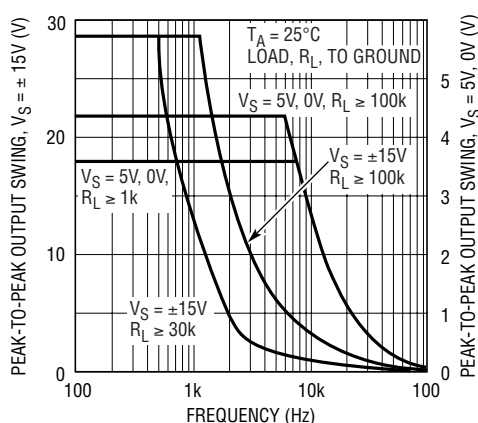

LT1101 • TPC17


**Output Impedance vs Frequency**

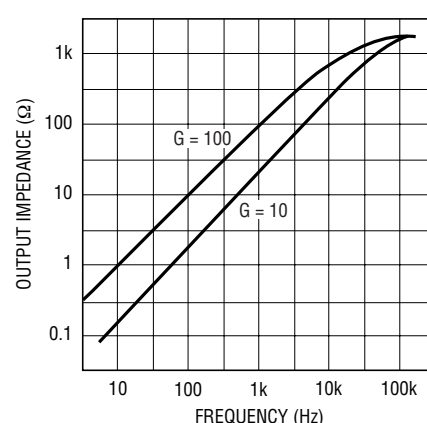

LT1101 • TPC18


# TYPICAL PERFORMANCE CHARACTERISTICS

Noise Spectrum

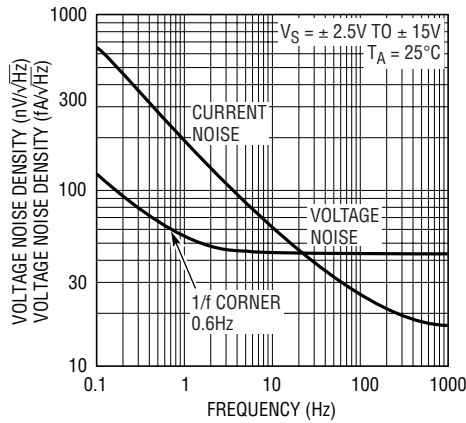


LT1101 • TPC19

Warm-Up Drift

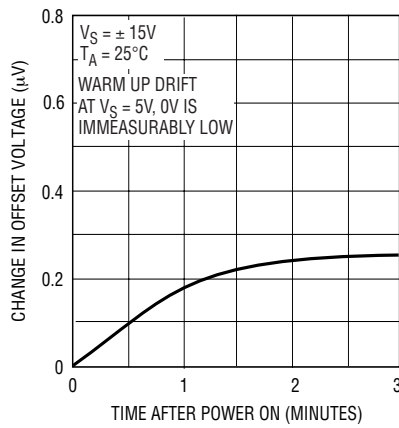


LT1101 • TPC20

Large Signal Transient Response  
 $G = 10, V_S = 5V, 0V$

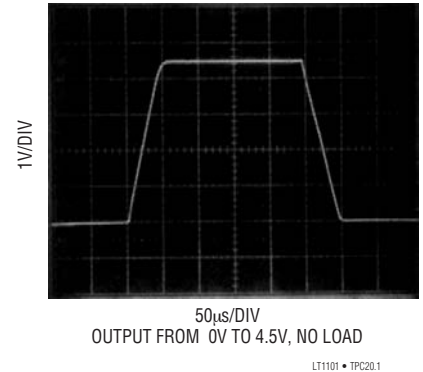


LT1101 • TPC20.1

Large Signal Transient Response  
 $G = 10, V_S = 15V$

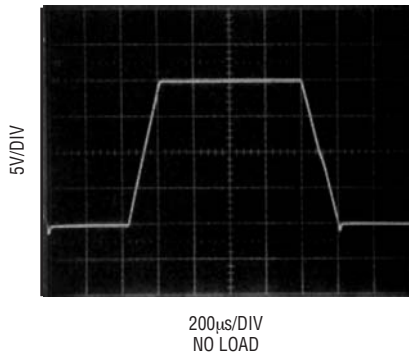


LT1101 • TPC20.2

Large Signal Transient Response  
 $G = 100, V_S = \pm 15V$

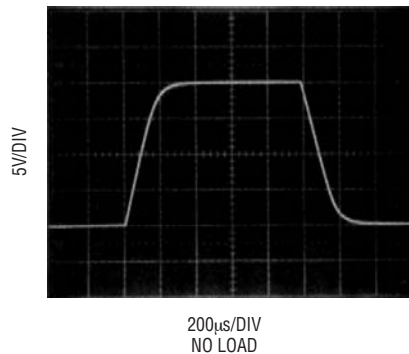


LT1101 • TPC20.3

Large Signal Transient Response  
 $G = 100, V_S = 5V, 0V$

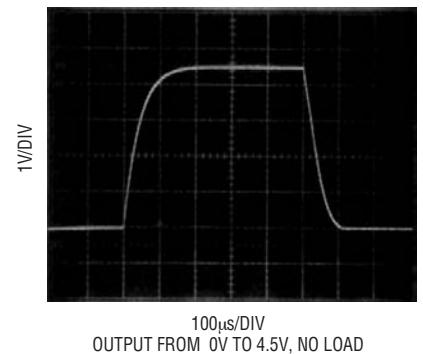


LT1101 • TPC20.4

Small Signal Transient Response  
 $G = 10, V_S = 5V, 0V$

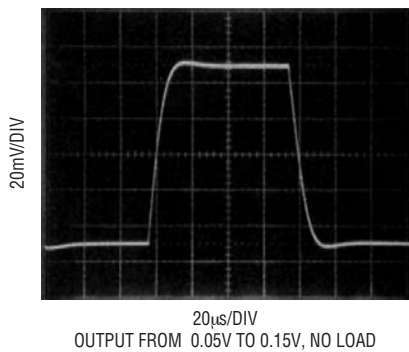


LT1101 • TPC20.5

Small Signal Transient Response  
 $G = 10, V_S = \pm 15V$

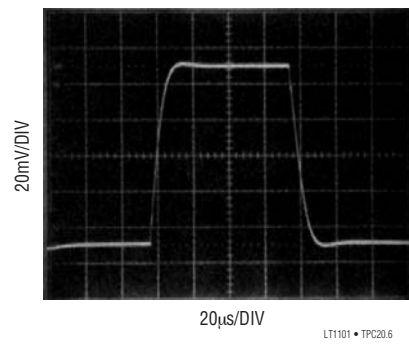

LT1101 • TPC20.6


Small Signal Transient Response  
 $G = 100, V_S = 5V, 0V$

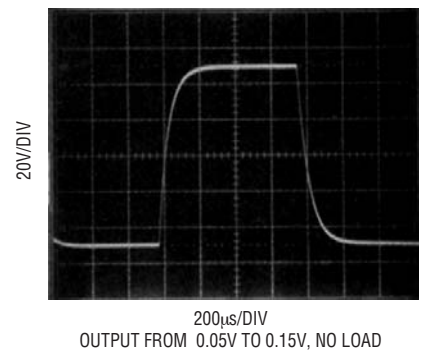

LT1101 • TPC20.7


## TYPICAL PERFORMANCE CHARACTERISTICS

**Single Supply: Minimum Common Mode Voltage vs Output Voltage**

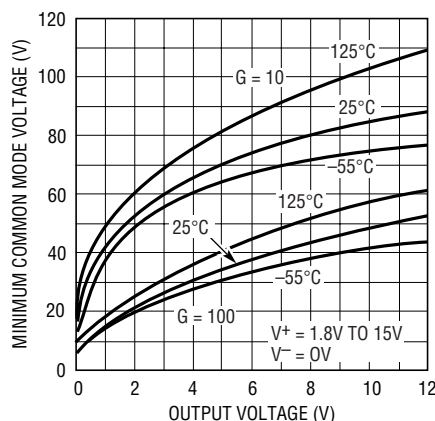


LT1101 • TPC21

**Single Supply: Minimum Output Voltage vs Common Mode Voltage**

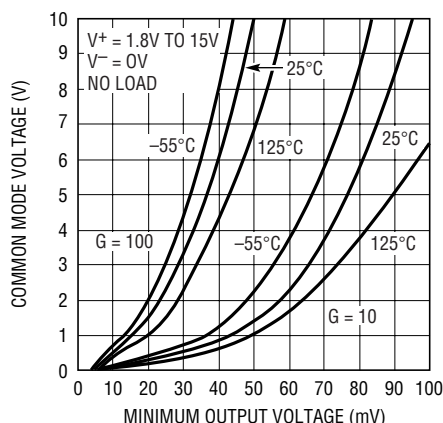

LT1101 • TPC22

**Minimum Supply Voltage vs Temperature**

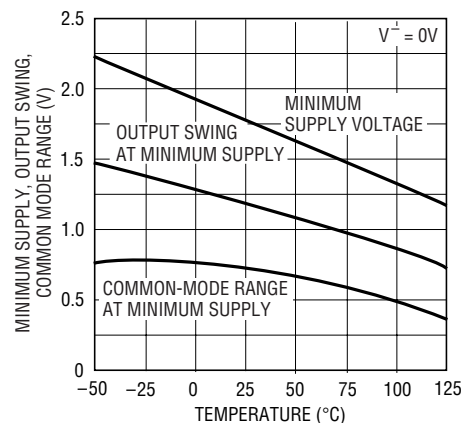

LT1101 • TPC23

## APPLICATIONS INFORMATION

### Single Supply Applications

The LT1101 is the first instrumentation amplifier which is fully specified for single supply operation, (i.e. when the negative supply is 0V). Both the input common mode range and the output swing are within a few millivolts of ground.

Probably the most common application for instrumentation amplifiers is amplifying a differential signal from a transducer or sensor resistance bridge. All competitive instrumentation amplifiers have a minimum required common mode voltage which is 3V to 5V above the negative supply. This means that the voltage across the bridge has to be 6V to 10V or dual supplies have to be used (i.e., micropower) single battery usage is not attainable on competitive devices.

The minimum output voltage obtainable on the LT1101 is a function of the input common mode voltage. When the common mode voltage is high and the output is low, current will flow from the output of amplifier A into the output of amplifier B. See the Minimum Output Voltage vs Common Mode Voltage plot.

Similarly, the Single Supply Minimum Common Mode Voltage vs Output Voltage plot specifies the expected common mode range.

When the output is high and input common mode is low, the output of amplifier A has to sink current coming from the output of amplifier B. Since amplifier A is effectively in unity gain, its input is limited by its output.

### Common Mode Rejection vs Frequency


The common mode rejection ratio (CMRR) of the LT1101 starts to roll off at a relatively low frequency. However, as shown on the Common Mode Rejection Ratio vs Frequency plot, CMRR can be enhanced significantly by connecting an 82pF capacitor between pins 1 and 2. This improvement is only available in the gain 100 configuration, and it is in excess of 30dB at 60Hz.

### Offset Nulling


The LT1101 is not equipped with dedicated offset null terminals. In many bridge transducer or sensor applications, calibrating the bridge simultaneously eliminates the instrumentation amplifier's offset as a source of error. For example, in the Micropower Remote Temperature Sensor Application shown, one adjustment removes the offset errors due to the temperature sensor, voltage reference and the LT1101.

## APPLICATIONS INFORMATION

A simple resistive offset adjust procedure is shown below. If  $R = 5\Omega$  for  $G = 10$ , and  $R = 50\Omega$  for  $G = 100$ , then the effect of  $R$  on gain error is approximately 0.006%. Unfortunately, about  $450\mu\text{A}$  has to flow through  $R$  to bias the reference terminal (Pin 1) and to null out the worst-case offset voltage. The total current through the resistor network can exceed 1mA, and the micropower advantage of the LT1101 is lost.

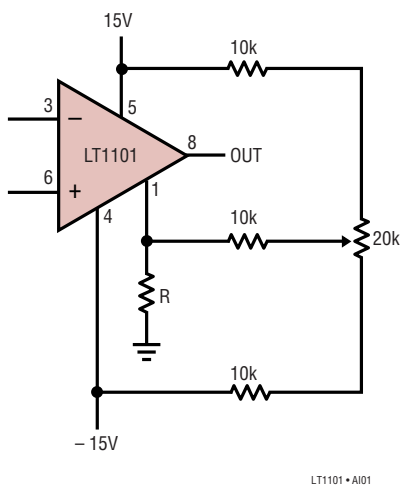

Another offset adjust scheme uses the LT1077 micropower op amp to drive the reference Pin 1. Gain error and common mode rejection are unaffected, the total current increase is  $45\mu\text{A}$ . The offset of the LT1077 is trimmed and amplified to match and cancel the offset voltage of the LT1101. Output offset null range is  $\pm 25\text{mV}$ .

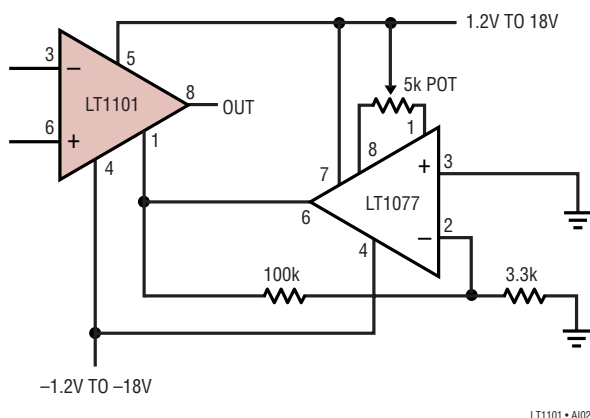

### Gains Between 10 and 100

Gains between 10 and 100 can be achieved by connecting two equal resistors ( $= R_x$ ) between Pins 1 and 2 and Pins 7 and 8.

$$\text{Gain} = 10 + \frac{R_x}{R + R_x/90}$$

The nominal value of  $R$  is  $9.2\text{k}\Omega$ . The usefulness of this method is limited by the fact that  $R$  is not controlled to better than  $\pm 10\%$  absolute accuracy in production. However, on any specific unit,  $90R$  can be measured between Pins 1 and 2.

### Input Protection


Instrumentation amplifiers are often used in harsh environments where overload conditions can occur. The LT1101 employs PNP input transistors, consequently the differential input voltage can be  $\pm 30\text{V}$  (with  $\pm 15\text{V}$  supplies,  $\pm 36\text{V}$  with  $\pm 18\text{V}$  supplies) without an increase in input bias current. Competitive instrumentation amplifiers have NPN inputs which are protected by back-to-back diodes. When the differential input voltage exceeds  $\pm 1.3\text{V}$  on these competitive devices, input current increases to the milliampere level; more than  $\pm 10\text{V}$  differential voltage can cause permanent damage.

When the LT1101's inputs are pulled above the positive supply, the inputs will clamp a diode voltage above the positive supply. No damage will occur if the input current is limited to  $20\text{mA}$ .

$500\Omega$  resistors in series with the inputs protect the LT1101 when the inputs are pulled as much as  $10\text{V}$  below the negative supply.

# APPLICATIONS INFORMATION


## Micropower, Battery Operated Remote Temperature Sensor

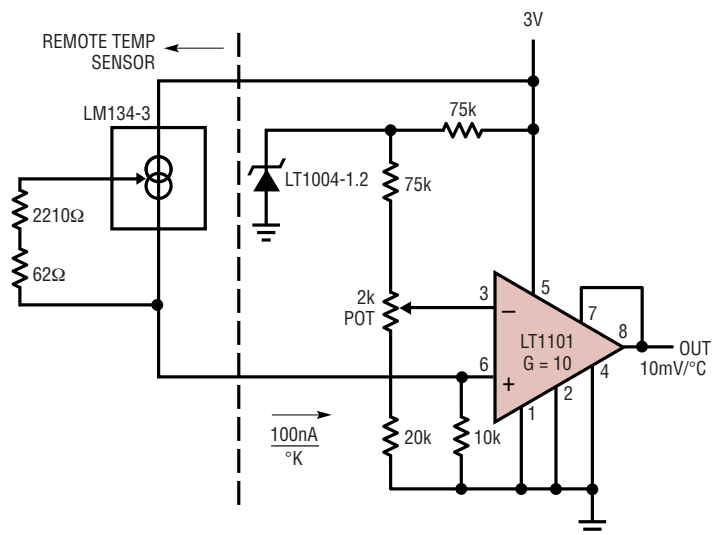

TRIM OUTPUT TO 250mV AT 25°C  
TEMPERATURE RANGE = 2.5°C TO 150°C  
ACCURACY = ±0.5°C

LT1101 • A103


## 4mA to 20mA Loop Receiver

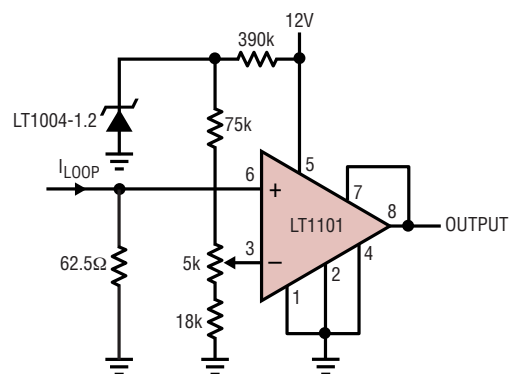

4mA TO 20mA IN – 0V TO 10V OUT  
TRIM OUTPUT TO 5V AT 12mA IN

LT1101 • A104


## Instrumentation Amplifier with ±150mA Output Current

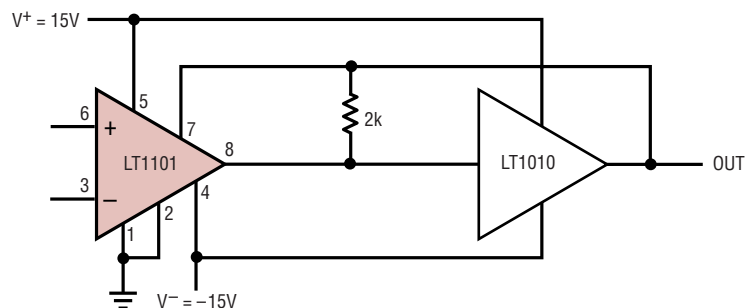

GAIN = 10, DEGRADED BY 0.01% DUE TO LT1010  
OUTPUT = ±10V INTO 75Ω (TO 1.5kHz)  
DRIVES ANY CAPACITIVE LOAD  
SINGLE SUPPLY APPLICATION (V<sup>+</sup> = 5V, V<sup>-</sup> = 0V):  
V<sub>OUT MIN</sub> = 120mV, V<sub>OUT MAX</sub> = 3.4V

LT1101 • A105

## Voltage Controlled Current Source




$$I_{OUT} = \frac{100V_{IN}}{R}$$

I<sub>OUT</sub> = 0mA TO 5mA  
VOLTAGE COMPLIANCE = 6.4V  
(R ≤ 200Ω)

LT1101 • A106


## APPLICATIONS INFORMATION

### Differential Voltage Amplification from a Resistance Bridge

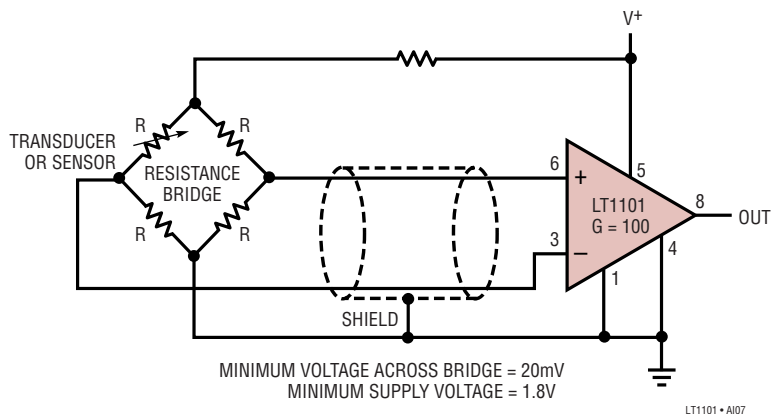


### Gain = 20, 110 or 200 Instrumentation Amplifier

#### Differential Output

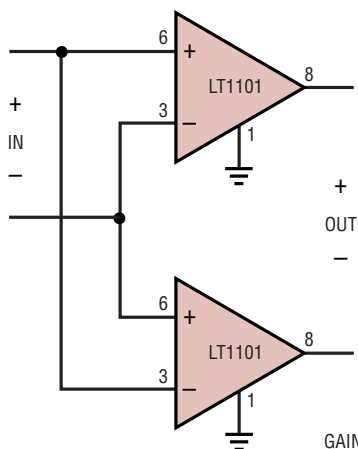

#### Single Ended Output

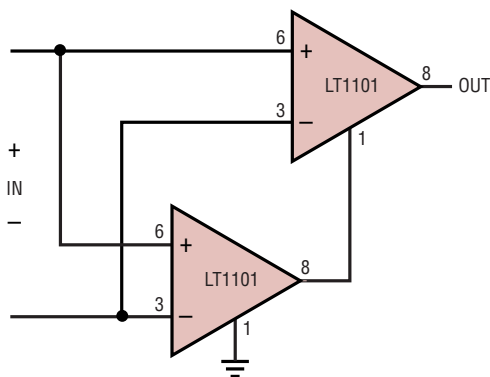


GAIN = 200, AS SHOWN  
GAIN = 20, SHORT PIN 1 TO PIN 2, PIN 7 TO PIN 8  
ON BOTH DEVICES  
GAIN = 110, SHORT PIN 1 TO PIN 2, PIN 7 TO PIN 8  
ON ONE DEVICE, NOT ON THE OTHER  
INPUT REFERRED NOISE IS REDUCED BY  $\sqrt{2}$  (G = 200 OR 20)

LT1101 • A108

## PACKAGE DESCRIPTION


### H Package 8-Lead TO-5 Metal Can (.200 Inch PCD) (Reference LTC DWG # 05-08-1320)

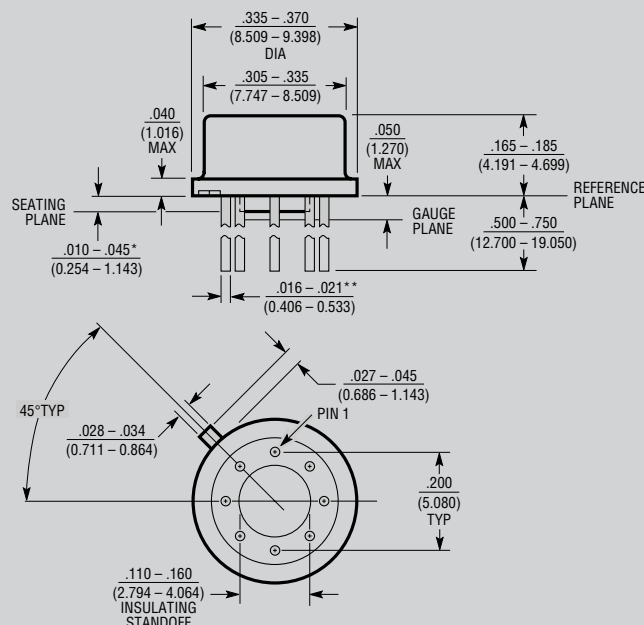

\*LEAD DIAMETER IS UNCONTROLLED BETWEEN THE REFERENCE PLANE AND THE SEATING PLANE

\*\*FOR SOLDER DIP LEAD FINISH, LEAD DIAMETER IS .016 - .024 (0.406 - 0.610) H8(TO-5) 0.200 PCD 0801


### J8 Package 8-Lead Cerdip (Narrow .300 Inch, Hermetic) (Reference LTC DWG # 05-08-1110)

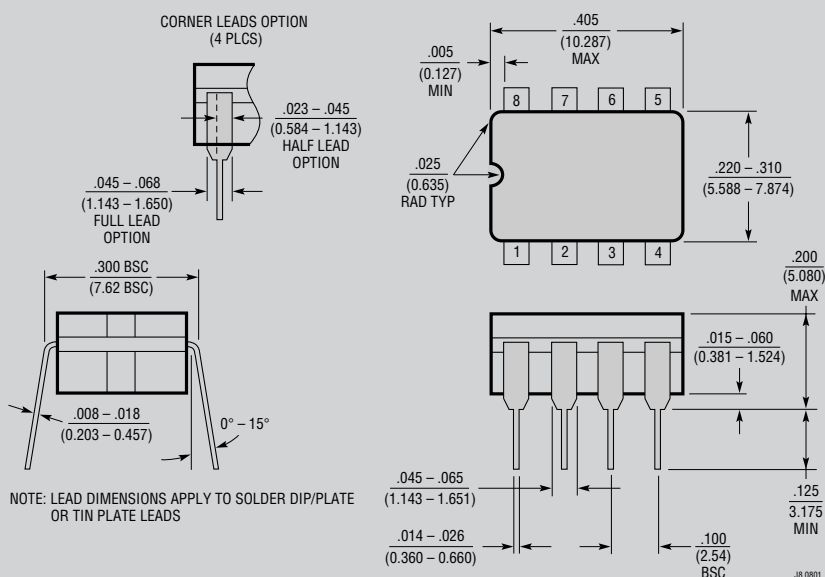

## OBSOLETE PACKAGES

# PACKAGE DESCRIPTION



## N8 Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

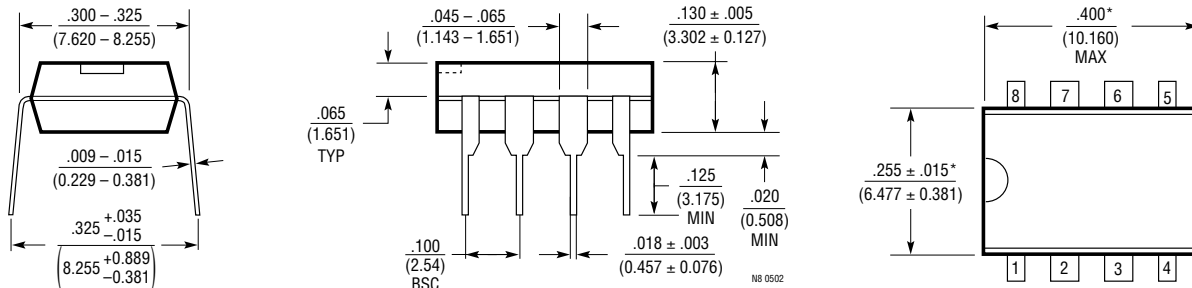

NOTE:

1. DIMENSIONS ARE  $\frac{\text{INCHES}}{\text{MILLIMETERS}}$ \*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

## SW Package 16-Lead Plastic Small Outline (Wide .300 Inch) (Reference LTC DWG # 05-08-1620)

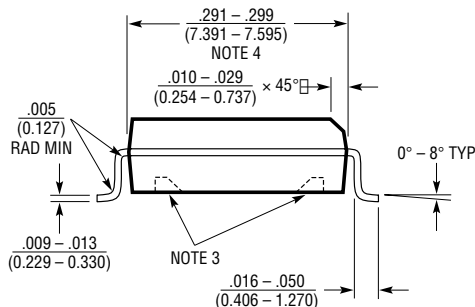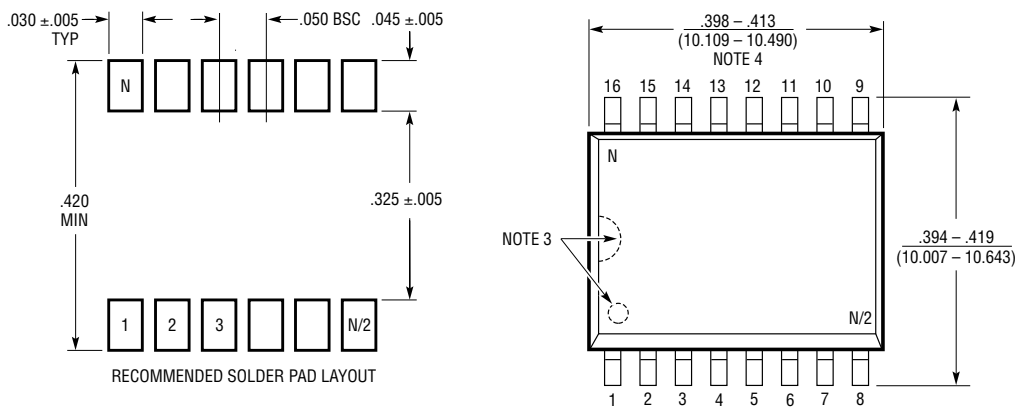

NOTE:

1. DIMENSIONS IN  $\frac{\text{INCHES}}{\text{MILLIMETERS}}$ 

2. DRAWING NOT TO SCALE

3. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS.

THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS

4. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.

MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S16 (WIDE) 0502