
Package Outline Dimensions

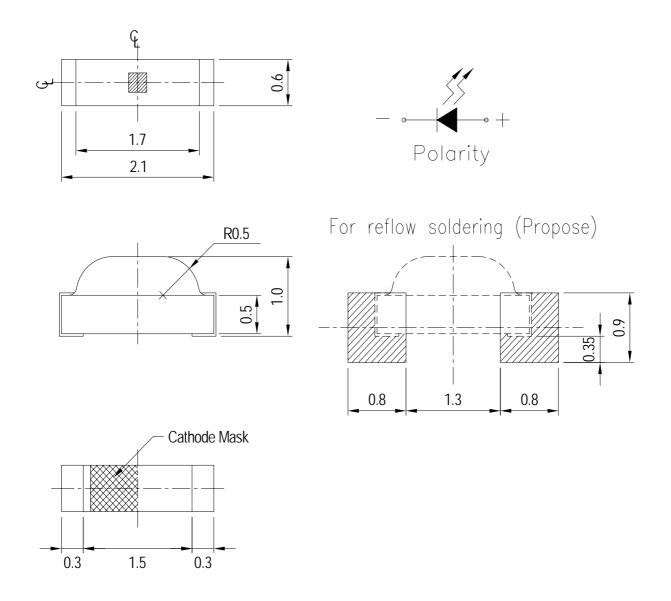

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-125EVERLIGHT ELECTRONICS CO.,LTD.

12-215SYGC/S530-E2/TR8

Nosolute Maximum Kating	(1 u=2 5 ())				
Parameter	Symbol	Rating	Unit		
Reverse Voltage	V _R	5	V		
Forward Current	$I_{\rm F}$	25	mA		
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA		
Power Dissipation	Pd	60	mW		
Electrostatic Discharge(HBM)	ESD	2000	V		
Operating Temperature	T _{opr}	-40 ~ +85	°C		
Storage Temperature	T _{stg}	-40 ~ +90	°C		
Soldering Temperature	T _{sol}	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.			

Absolute Maximum Ratings (Ta=25°C)

EVERLIGHT


Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	I_V	16.8	20.5		mcd	I _F =20	
Peak Wavelength	λp		575		nm		
Dominant Wavelength	λd		573		nm		
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm		
Viewing Angle	2 <i>θ</i> 1/2		130		deg		
Forward Voltage	V_{F}	1.7	2.0	2.4	V		
Reverse Current	I _R			10	μA	V _R =5V	


EVERLIGHT ELECTRONICS CO., LTD.

Electro-Optical Characteristics (Ta=25°C)

EVERLIGHT

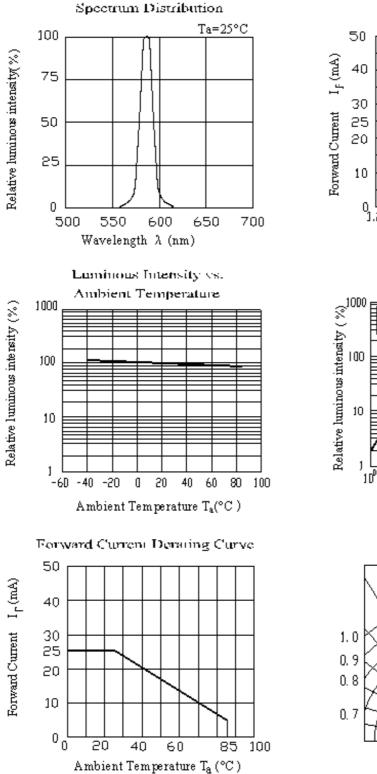

12-215SYGC/S530-E2/TR8

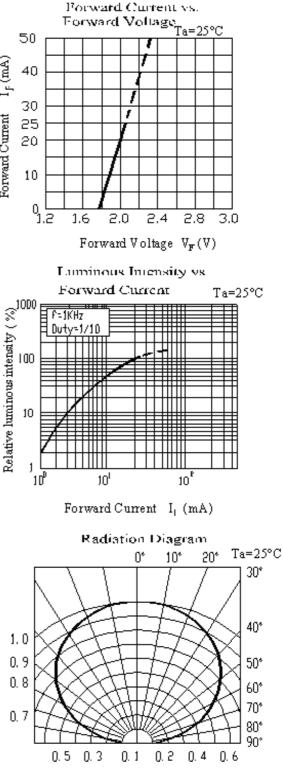

Everlight Electronics Co., Ltd. Device No:SZDSE-125http://www.everlight.com Prepared date: 6-Apr-2009 Rev 1 Page: 4 of 9 Prepared by: Huang yongxin

EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.

12-215SYGC/S530-E2/TR8

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

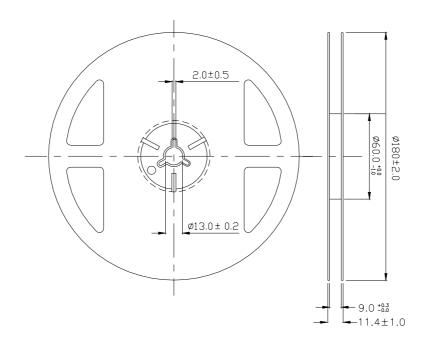

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm


Everlight Electronics Co., Ltd. Device No:SZDSE-125http://www.everlight.com Rev 1 Page: 5 of 9 Prepared date: 6-Apr-2009 Prepared by: Huang yongxin EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

12-215SYGC/S530-E2/TR8

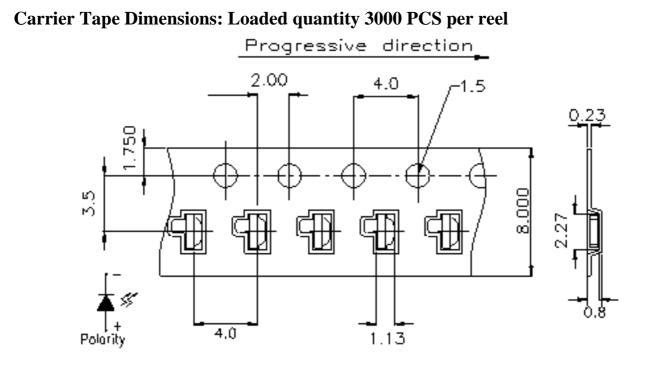

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

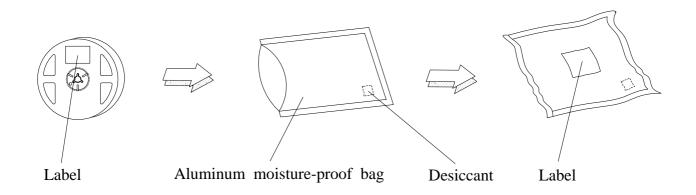

Everlight Electronics Co., Ltd. Device No:SZDSE-125http://www.everlight.com Rev 1 Page: 6 of 9 Prepared date: 6-Apr-2009 Prepared by: Huang yongxin

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90% LTPD : 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min $\int 5 \text{ min}$ L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90% RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

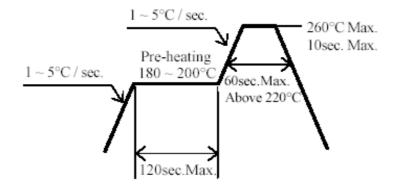


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

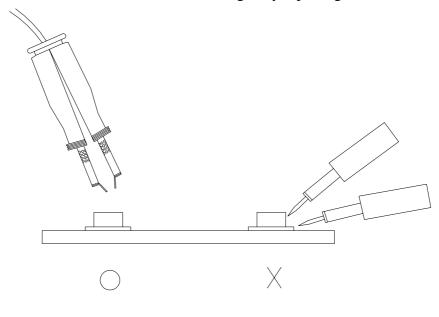

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No:SZDSE-125http://www.everlight.com Rev 1 Page: 9 of 9 Prepared date: 6-Apr-2009 Prepared by: Huang yongxin