

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Certifications

CB Test Report

Report: US/15348/UL

IEC 60950-1:2005 2nd Edition

UL General Safety

Report: E358085

UL 60950-1 2nd Edition

EN General Safety

Report: SPCLVD1109103



EN60950-1:2006 + A12:2011

Notes



Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Typical Characteristics



RE-xx05S

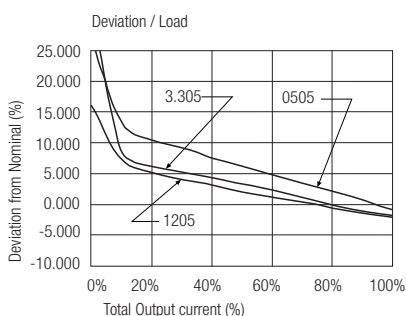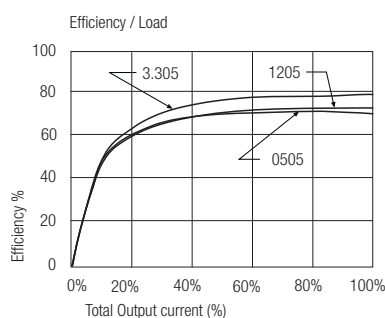

RE-xx12S

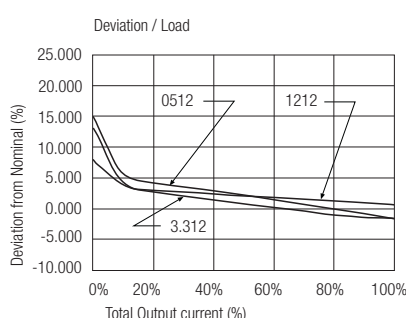
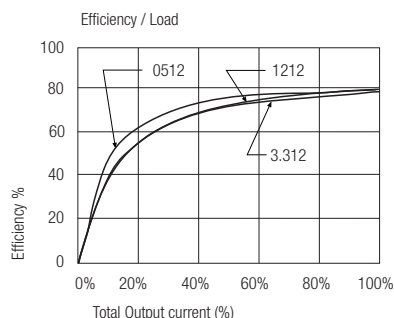


RE-xx15S

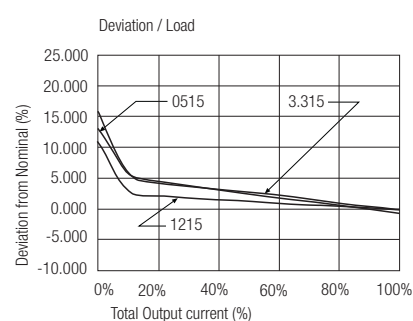
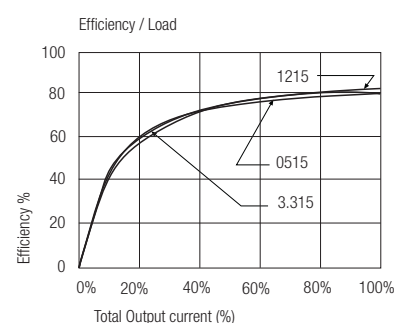


Package Style and Pinning (mm)

7 PIN SIP Package



Recommended Footprint Details



RE Pin Connections

Pin #	Single
1	+Vin
2	-Vin
4	-Vout
6	+Vout
XX.X	$\pm 0.5 \text{ mm}$
XX.XX	$\pm 0.25 \text{ mm}$