

Distinctive Characteristics

Special bracket for right angle mounting provides added design variations.

Higher operating force type provides more pronounced operating feel.

Rubber seal construction prevents contact contamination and allows automated soldering and cleaning.


Choice of dimensions from PCB to top of cap allows design flexibility.

Dome contact gives crisp tactile feedback to positively indicate circuit transfer and assures high reliability and long life of up to 5,000,000 operations.

Slanted terminals provide a spring type action which ensures secure mounting and prevents dislodging during wave soldering.

Molded-in terminals are part of the sealed construction which allows automated soldering and washing.

Terminal spacing conforms to standard .100" (2.54mm) PCB grid.

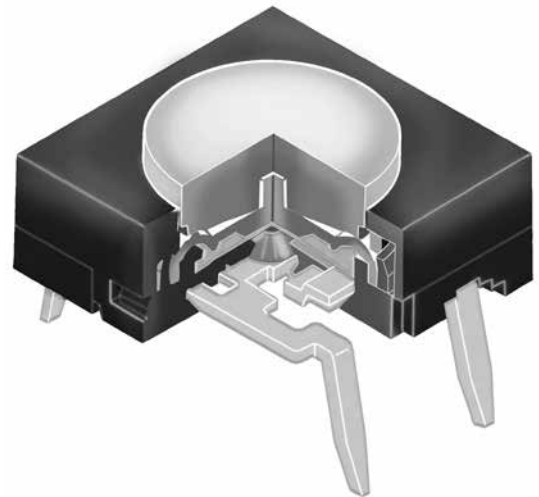


Actual Size



Common Bus Matrix

These single pole, single throw switches can be used in a key-board matrix and, using strapped terminals, achieve a common bus electrical configuration on a single-sided PC board.

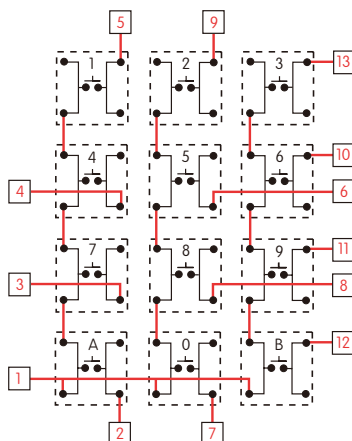


PC Terminations		1	2	3	4	5	6	7	8	9	10	11	12	13
Keys (Switches)	1	●												
	2		●											
	3			●										
	4				●									
	5					●								
	6						●							
	7							●						
	8								●					
	9									●				
	10										●			
	11											●		
	12												●	
	13													●

Red = PCB Trace Black = Switch Circuit


X-Y Matrix

These single pole, single throw switches can be arranged on a single-sided PC board matrix with strapped terminals to achieve an X-Y type electrical interconnection.

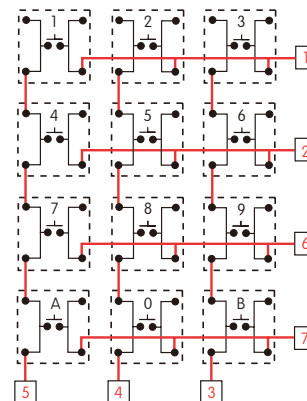


PC Terminations		1	2	3	4	5	6	7
Keys (Switches)	1							
	2							
	3							
	4							
	5							
	6							
	7							
	8							
	9							
	0							
	A							
	B							
				= ON				


TYPICAL SWITCH ORDERING EXAMPLE

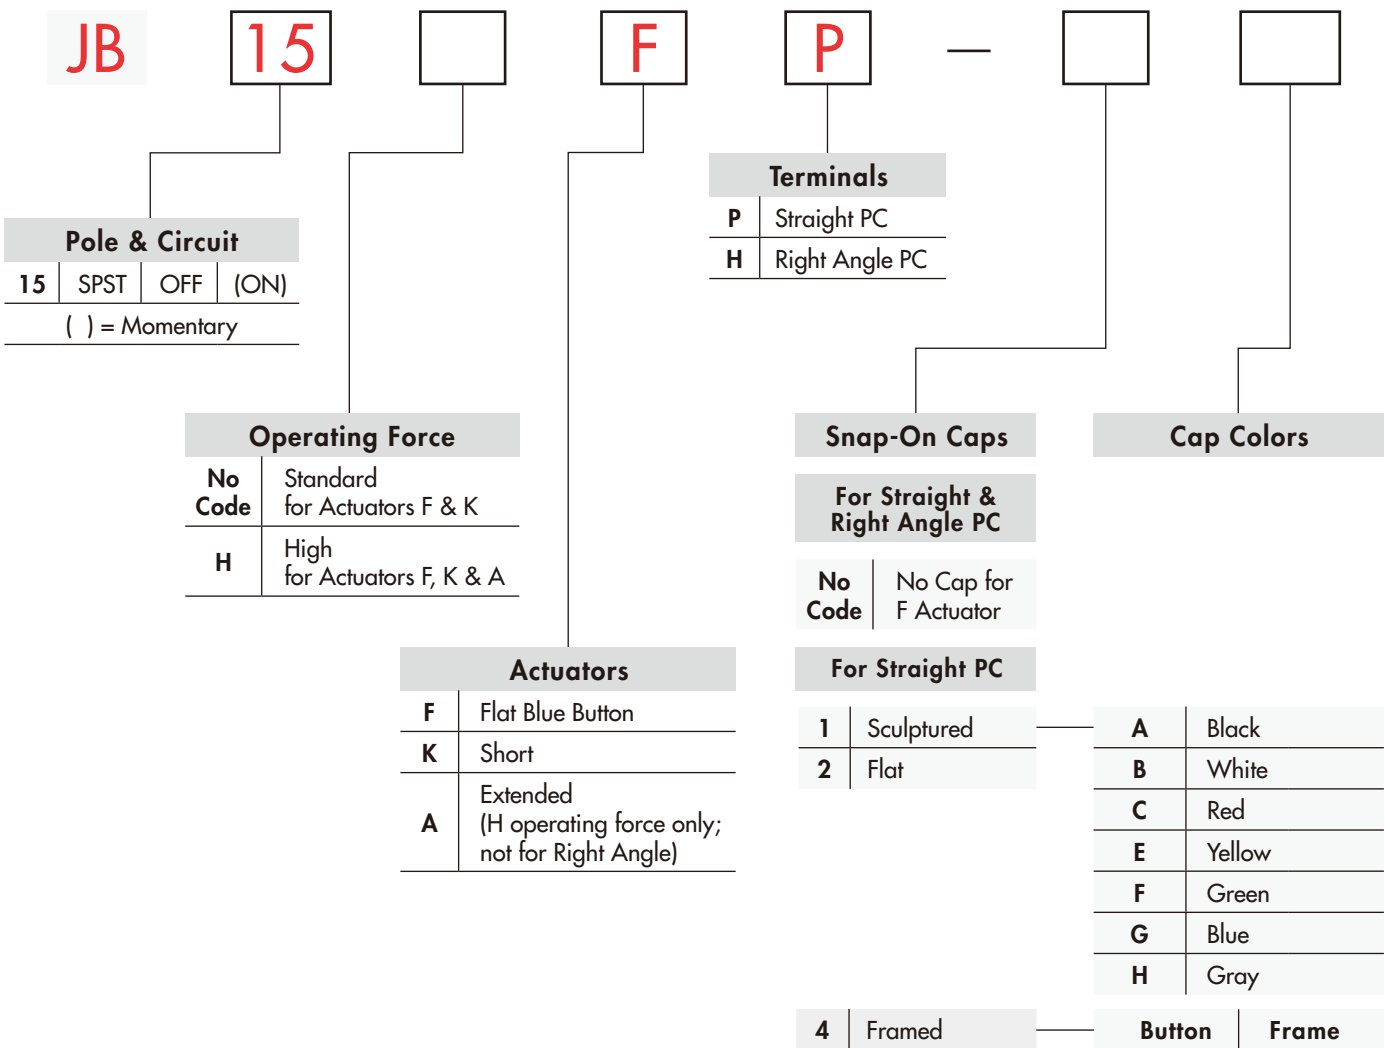

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

JB15FP

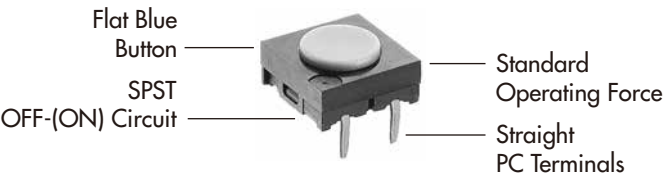

POLE & CIRCUIT					
		Actuator Position () = Momentary		Switch Throw & Schematic	
Pole	Model	Normal	Down	SPST 	Note: Terminal numbers are shown on the switch.
SP	JB15	OFF 	(ON) 		

OPERATING FORCE



Standard Operating Force
1.76N
For F & K Actuators




High Operating Force
2.65N
For F, K & A Actuators



ACTUATORS



Flat Blue Button

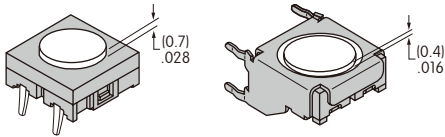




Flat button is an integral part of the switch and cannot be ordered separately.

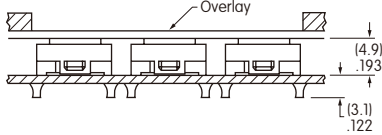

Custom keyboards can be designed with flat buttons beneath an overlay.
Not applicable for right angle mounting.




Short Actuator

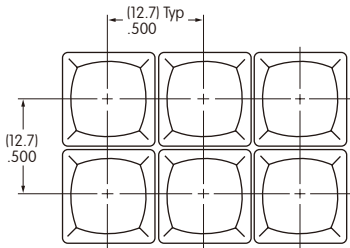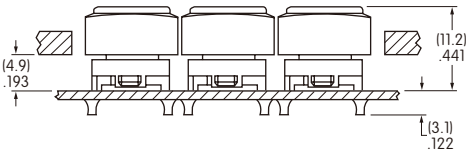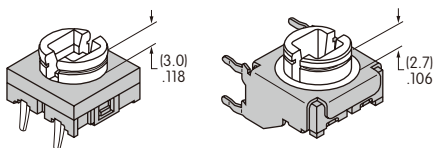



Custom keyboards can be designed with caps installed through a panel cutout (illustration with framed cap AT4078 and button AT4077). Not applicable for right angle mounting.



Extended Actuator



Combines with high operating force only; not for right angle.

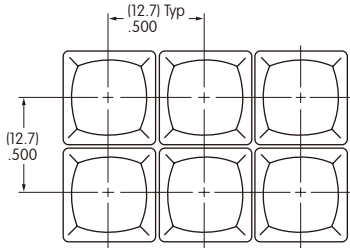
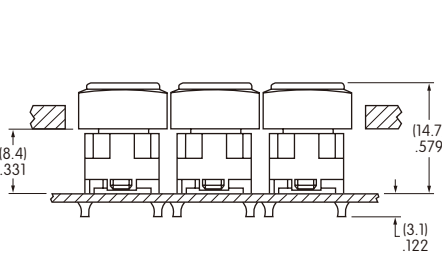


Custom keyboards can be designed with caps installed through a panel cutout (illustration with framed cap AT4078 and button AT4077).

TERMINALS



P

Straight PC



H

Right Angle PC




Further details shown in Typical Switch Dimensions

SNAP-ON CAPS

1

AT4058 Sculptured for Straight PC


Material: Polyamide
Finish: Matte
Colors: A B C E F G H



2

AT4059 Flat for Straight PC


Material: Polycarbonate
Finish: Glossy
Colors: A B C E F G H



4

Framed: AT4077 Button & AT4078 Frame for Straight PC


Material: Polycarbonate
Finish: Matte
Colors: B C E F G H



6

AT4139 Flat for Right Angle PC

Material: Polycarbonate
Finish: Glossy
Colors: A B C H




5

AT4140 Cap with AT547 Mounter for Straight PC

Cap
Material: Polycarbonate
Finish: Glossy
Colors: A B C H


Mounter
Material: Polyamide
Finish: Matte
Color: A

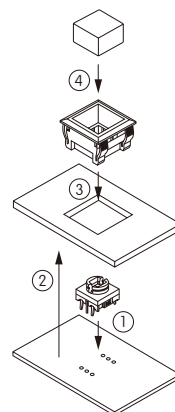

Assembly Procedure



1. Solder switch to PCB.
2. Install PCB in equipment.
3. Snap mounter into panel. Dimension from top of panel to top of PCB is .386" (9.8mm).
4. Snap cap onto plunger.

Panel Cutout & Footprint



Panel Mounting Dimensions

Panel Thickness:
.039" ~ .079"
(1.0mm ~ 2.0mm)



Cap Colors Available:

A Black

B White

C Red

E Yellow




F Green

G Blue

H Gray

TYPICAL SWITCH DIMENSIONS




Flat Blue Button • Straight PC



Spring action terminals conform to .100" (2.54mm) PCB spacing

JB15FP

Flat Blue Button • Right Angle PC







JB15FH

Short Actuator

Extended Actuator

Sculptured Snap-on Cap • Straight PC







Spring action terminals conform to .100" (2.54mm) PCB spacing

JB15KP-1C

Short Actuator

Extended Actuator

Flat Snap-on Cap • Straight PC







Spring action terminals conform to .100" (2.54mm) PCB spacing

JB15KP-2C

Short Actuator

Extended Actuator

Framed Snap-on Cap • Straight PC



Spring action terminals conform to .100" (2.54mm) PCB spacing




JB15FHAP-4BC

TYPICAL SWITCH DIMENSIONS

Flat Snap-on Cap • Right Angle PC



JB15KH-6C



LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Shaded Areas are Printable Areas

AT4058








AT4059 & AT4140



AT4077 Button



AT4139



Recommended Print Method: Screen Print or Pad Print. Epoxy based ink is recommended.

