

L78L00 SERIES

Table 1: Absolute Maximum Ratings

| Symbol    | Parameter                            |                                     | Value                  | Unit |
|-----------|--------------------------------------|-------------------------------------|------------------------|------|
| $V_I$     | DC Input Voltage                     | $V_O = 3.3 \text{ to } 9 \text{ V}$ | 30                     | V    |
|           |                                      | $V_O = 12 \text{ to } 15 \text{ V}$ | 35                     |      |
|           |                                      | $V_O = 18 \text{ to } 24 \text{ V}$ | 40                     |      |
| $I_O$     | Output Current                       |                                     | 100                    | mA   |
| $P_{tot}$ | Power Dissipation                    |                                     | Internally Limited (*) |      |
| $T_{stg}$ | Storage Temperature Range            |                                     | -40 to 150             | °C   |
| $T_{op}$  | Operating Junction Temperature Range | for L78L00C, L78L00AC               | 0 to 125               | °C   |
|           |                                      | for L78L00AB                        | -40 to 125             |      |

(\*) Our SO-8 package used for Voltage Regulators is modified internally to have pins 2, 3, 6 and 7 electrically communed to the die attach flag. This particular frame decreases the total thermal resistance of the package and increases its ability to dissipate power when an appropriate area of copper on the printed circuit board is available for heat-sinking. The external dimensions are the same as for the standard SO-8.

Table 2: Thermal Data

| Symbol         | Parameter                           |     | SO-8   | TO-92 | SOT-89 | Unit |
|----------------|-------------------------------------|-----|--------|-------|--------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case    | Max | 20     |       | 15     | °C/W |
| $R_{thj-amb}$  | Thermal Resistance Junction-ambient | Max | 55 (*) | 200   |        | °C/W |

(\*) Considering 6 cm<sup>2</sup> of copper Board heat-sink

Figure 2: Test Circuits

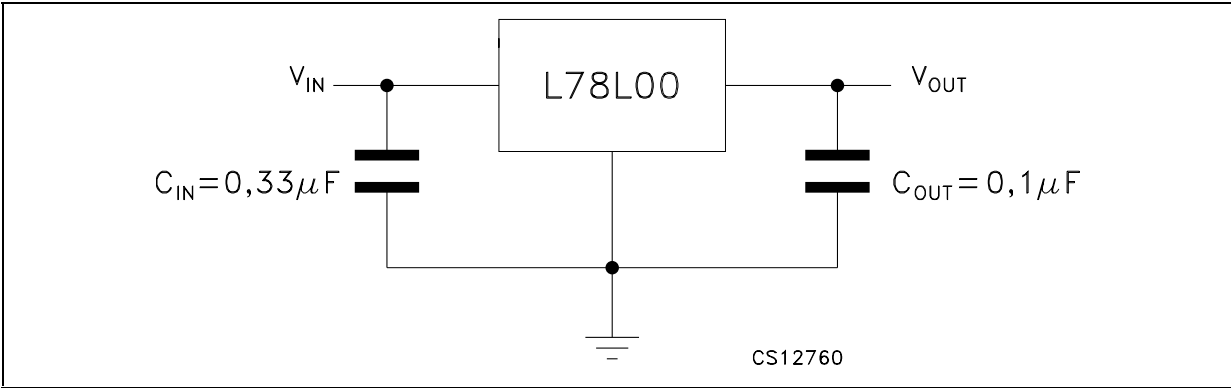


Figure 3: Pin Connection (top view, bottom view for TO-92)

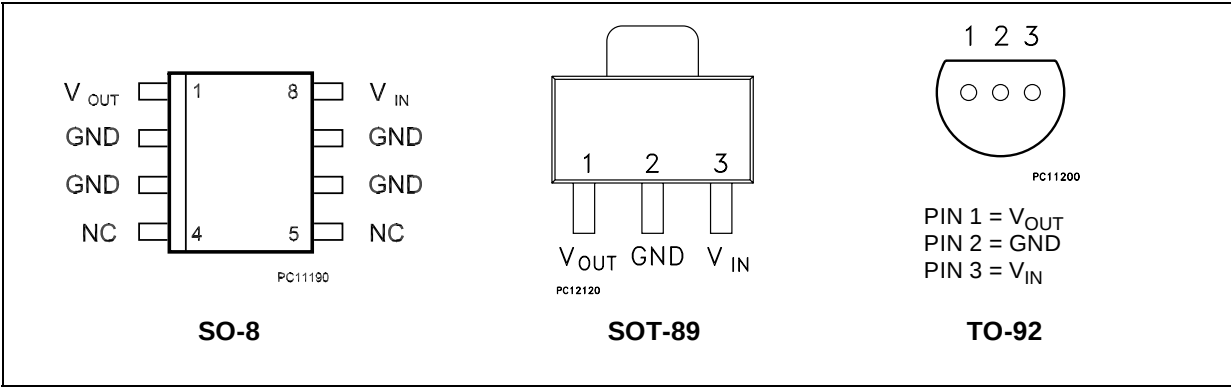


Table 3: Order Codes

| TYPE     | SO-8 (TUBE)* | TO-92 (BAG)** | SOT-89 (T&R) | OUTPUT VOLTAGE |
|----------|--------------|---------------|--------------|----------------|
| L78L33C  | L78L33CD     | L78L33CZ      |              | 3.3 V          |
| L78L33AC | L78L33ACD    | L78L33ACZ     | L78L33ACUTR  | 3.3 V          |
| L78L33AB | L78L33ABD    | L78L33ABZ     | L78L33ABUTR  | 3.3 V          |
| L78L05C  | L78L05CD     | L78L05CZ      |              | 5 V            |
| L78L05AC | L78L05ACD    | L78L05ACZ     | L78L05ACUTR  | 5 V            |
| L78L05AB | L78L05ABD    | L78L05ABZ     | L78L05ABUTR  | 5 V            |
| L78L06C  | L78L06CD     | L78L06CZ      |              | 6 V            |
| L78L06AC | L78L06ACD    | L78L06ACZ     | L78L06ACUTR  | 6 V            |
| L78L06AB | L78L06ABD    | L78L06ABZ     | L78L06ABUTR  | 6 V            |
| L78L08C  | L78L08CD     | L78L08CZ      |              | 8 V            |
| L78L08AC | L78L08ACD    | L78L08ACZ     | L78L08ACUTR  | 8 V            |
| L78L08AB | L78L08ABD    | L78L08ABZ     | L78L08ABUTR  | 8 V            |
| L78L09C  | L78L09CD     | L78L09CZ      |              | 9 V            |
| L78L09AC | L78L09ACD    | L78L09ACZ     | L78L09ACUTR  | 9 V            |
| L78L09AB | L78L09ABD    | L78L09ABZ     | L78L09ABUTR  | 9 V            |
| L78L10C  | L78L10CD     | L78L10CZ      |              | 10 V           |
| L78L10AC | L78L10ACD    | L78L10ACZ     | L78L10ACUTR  | 10 V           |
| L78L10AB | L78L10ABD    | L78L10ABZ     | L78L10ABUTR  | 10 V           |
| L78L12C  | L78L12CD     | L78L12CZ      |              | 12 V           |
| L78L12AC | L78L12ACD    | L78L12ACZ     | L78L12ACUTR  | 12 V           |
| L78L12AB | L78L12ABD    | L78L12ABZ     | L78L12ABUTR  | 12 V           |
| L78L15C  | L78L15CD     | L78L15CZ      |              | 15 V           |
| L78L15AC | L78L15ACD    | L78L15ACZ     | L78L15ACUTR  | 15 V           |
| L78L15AB | L78L15ABD    | L78L15ABZ     | L78L15ABUTR  | 15 V           |
| L78L18C  | L78L18CD     | L78L18CZ      |              | 18 V           |
| L78L18AC | L78L18ACD    | L78L18ACZ     | L78L18ACUTR  | 18 V           |
| L78L18AB | L78L18ABD    | L78L18ABZ     | L78L18ABUTR  | 18 V           |
| L78L20C  | L78L20CD     | L78L20CZ      |              | 20 V           |
| L78L20AC | L78L20ACD    | L78L20ACZ     | L78L20ACUTR  | 20 V           |
| L78L20AB | L78L20ABD    | L78L20ABZ     | L78L20ABUTR  | 20 V           |
| L78L24C  | L78L24CD     | L78L24CZ      |              | 24 V           |
| L78L24AC | L78L24ACD    | L78L24ACZ     | L78L24ACUTR  | 24 V           |
| L78L24AB | L78L24ABD    | L78L24ABZ     | L78L24ABUTR  | 24 V           |

(\*) Available in Tape & Reel with the suffix "13TR".

(\*\*) Available in Ammopak with the suffix "-AP" or in Tape & Reel with the suffix "TR". Please note that in these cases pins are shaped according to Tape & Reel specifications.

## L78L00 SERIES

**Table 4: Electrical Characteristics Of L78L33C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 8.3\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                    | Min.  | Typ. | Max.  | Unit          |
|--------------|--------------------------|----------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                           | 3.036 | 3.3  | 3.564 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 5.3$ to $20\text{ V}$                                           | 2.97  |      | 3.63  | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 8.3\text{ V}$                                                   | 2.97  |      | 3.63  |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 5.3$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                              |       |      | 150   | mV            |
|              |                          | $V_I = 6.3$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                              |       |      | 100   |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                              |       |      | 60    | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                               |       |      | 30    |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                           |       |      | 6     | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                          |       |      | 5.5   | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                        |       |      | 0.2   | mA            |
|              |                          | $V_I = 6.3$ to $20\text{ V}$                                                                       |       |      | 1.5   |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                      |       | 40   |       | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 6.3$ to $16.3\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 41    | 49   |       | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                    |       | 1.7  |       | V             |

**Table 5: Electrical Characteristics Of L78L05C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 10\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                       | 4.6  | 5    | 5.4  | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 7$ to $20\text{ V}$                                         | 4.5  |      | 5.5  | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 10\text{ V}$                                                | 4.5  |      | 5.5  |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 8.5$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 200  | mV            |
|              |                          | $V_I = 9$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 150  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                          |      |      | 60   | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 30   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                       |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                      |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                    |      |      | 0.2  | mA            |
|              |                          | $V_I = 8$ to $20\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                  |      | 40   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 9$ to $20\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 40   | 49   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                |      | 1.7  |      | V             |

**Table 6: Electrical Characteristics Of L78L06C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 12\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                       | 5.52 | 6    | 6.48 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 8.5$ to $20\text{ V}$                                       | 5.4  |      | 6.6  | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 12\text{ V}$                                                | 5.4  |      | 6.6  |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 8.5$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 200  | mV            |
|              |                          | $V_I = 9$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 150  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                          |      |      | 60   | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 30   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                       |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                      |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                    |      |      | 0.2  | mA            |
|              |                          | $V_I = 8$ to $20\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                  |      | 50   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 9$ to $20\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 38   | 46   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                |      | 1.7  |      | V             |

**Table 7: Electrical Characteristics Of L78L08C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 14\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                 | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                        | 7.36 | 8    | 8.64 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 10.5$ to $23\text{ V}$                                       | 7.2  |      | 8.8  | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 14\text{ V}$                                                 | 7.2  |      | 8.8  |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 10.5$ to $23\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 200  | mV            |
|              |                          | $V_I = 11$ to $23\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 150  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 80   | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 40   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                        |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                       |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                     |      |      | 0.2  | mA            |
|              |                          | $V_I = 11$ to $23\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                   |      | 60   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 12$ to $23\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 36   | 45   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                 |      | 1.7  |      | V             |

## L78L00 SERIES

**Table 8: Electrical Characteristics Of L78L09C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 15\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                 | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                        | 8.28 | 9    | 9.72 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 11.5$ to $23\text{ V}$                                       | 8.1  |      | 9.9  | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 15\text{ V}$                                                 | 8.1  |      | 9.9  |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 11.5$ to $23\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 250  | mV            |
|              |                          | $V_I = 12$ to $23\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 200  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 80   | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 40   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                        |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                       |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                     |      |      | 0.2  | mA            |
|              |                          | $V_I = 12$ to $23\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                   |      | 70   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 12$ to $23\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 36   | 44   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                 |      | 1.7  |      | V             |

**Table 9: Electrical Characteristics Of L78L10C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 16\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                 | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                        | 9.2  | 10   | 10.8 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 12.5$ to $23\text{ V}$                                       | 9    |      | 11   | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 16\text{ V}$                                                 | 9    |      | 11   |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 12.5$ to $23\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 230  | mV            |
|              |                          | $V_I = 13$ to $23\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 170  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 80   | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 40   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                        |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                       |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 13$ to $23\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                   |      | 60   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 14$ to $23\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 37   | 45   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                 |      | 1.7  |      | V             |

**Table 10: Electrical Characteristics Of L78L12C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 19\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                 | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                        | 11.1 | 12   | 12.9 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 14.5$ to $27\text{ V}$                                       | 10.8 |      | 13.2 | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 19\text{ V}$                                                 | 10.8 |      | 13.2 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 14.5$ to $27\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 250  | mV            |
|              |                          | $V_I = 16$ to $27\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 200  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 100  | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 50   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                        |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                       |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                     |      |      | 0.2  | mA            |
|              |                          | $V_I = 16$ to $27\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                   |      | 80   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 15$ to $25\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 36   | 42   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                 |      | 1.7  |      | V             |

**Table 11: Electrical Characteristics Of L78L15C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 23\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                     | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-----------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                            | 13.8 | 15   | 16.2 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 17.5$ to $30\text{ V}$                                           | 13.5 |      | 16.5 | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 23\text{ V}$                                                     | 13.5 |      | 16.5 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 17.5$ to $30\text{ V}$ $T_J = 25^\circ\text{C}$                                              |      |      | 300  | mV            |
|              |                          | $V_I = 20$ to $30\text{ V}$ $T_J = 25^\circ\text{C}$                                                |      |      | 250  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                               |      |      | 150  | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                                |      |      | 75   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                            |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                           |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                         |      |      | 0.2  | mA            |
|              |                          | $V_I = 20$ to $30\text{ V}$                                                                         |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                       |      | 90   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 18.5$ to $28.5\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 33   | 39   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                     |      | 1.7  |      | V             |

## L78L00 SERIES

**Table 12: Electrical Characteristics Of L78L18C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 27\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                 | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                        | 16.6 | 18   | 19.4 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 22$ to $33\text{ V}$                                         | 16.2 |      | 19.8 | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 27\text{ V}$                                                 | 16.2 |      | 19.8 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 22$ to $33\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 320  | mV            |
|              |                          | $V_I = 22$ to $33\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 270  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 170  | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 85   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                        |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                       |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                     |      |      | 0.2  | mA            |
|              |                          | $V_I = 23$ to $33\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                   |      | 120  |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 23$ to $33\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 32   | 38   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                 |      | 1.7  |      | V             |

**Table 13: Electrical Characteristics Of L78L20C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 29\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                 | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                        | 18.4 | 20   | 21.6 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 24$ to $33\text{ V}$                                         | 18   |      | 22   | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 29\text{ V}$                                                 | 18   |      | 22   |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 22.5$ to $34\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 330  | mV            |
|              |                          | $V_I = 24$ to $34\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 280  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 180  | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 90   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                        |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                       |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                     |      |      | 0.2  | mA            |
|              |                          | $V_I = 25$ to $33\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                   |      | 120  |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 25$ to $35\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 31   | 38   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                 |      | 1.7  |      | V             |

**Table 14: Electrical Characteristics Of L78L24C** (refer to the test circuits,  $T_J = 0$  to  $125^\circ\text{C}$ ,  $V_I = 33\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$  unless otherwise specified).

| Symbol       | Parameter                | Test Conditions                                                                                 | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                        | 22.1 | 24   | 25.9 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 27$ to $38\text{ V}$                                         | 21.6 |      | 26.4 | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 33\text{ V}$                                                 | 21.6 |      | 26.4 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 27$ to $38\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 350  | mV            |
|              |                          | $V_I = 28$ to $38\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 300  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 200  | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 100  |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                        |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                       |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                     |      |      | 0.2  | mA            |
|              |                          | $V_I = 28$ to $38\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                   |      | 200  |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 29$ to $35\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 30   | 37   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                 |      | 1.7  |      | V             |

**Table 15: Electrical Characteristics Of L78L33AB And L78L33AC**

(refer to the test circuits,  $V_I = 8.3\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ ,  $T_J = 0$  to  $125^\circ\text{C}$  for L78L33AC,  $T_J = -40$  to  $125^\circ\text{C}$  for L78L33AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                    | Min.  | Typ. | Max.  | Unit          |
|--------------|--------------------------|----------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                           | 3.168 | 3.3  | 3.432 | V             |
| $V_O$        | Output Voltage           | $I_O = 1$ to $40\text{ mA}$ $V_I = 5.3$ to $20\text{ V}$                                           | 3.135 |      | 3.465 | V             |
|              |                          | $I_O = 1$ to $70\text{ mA}$ $V_I = 8.3\text{ V}$                                                   | 3.135 |      | 3.465 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 5.3$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                              |       |      | 150   | mV            |
|              |                          | $V_I = 6.3$ to $20\text{ V}$ $T_J = 25^\circ\text{C}$                                              |       |      | 100   |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1$ to $100\text{ mA}$ $T_J = 25^\circ\text{C}$                                              |       |      | 60    | mV            |
|              |                          | $I_O = 1$ to $40\text{ mA}$ $T_J = 25^\circ\text{C}$                                               |       |      | 30    |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                           |       |      | 6     | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                          |       |      | 5.5   | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1$ to $40\text{ mA}$                                                                        |       |      | 0.1   | mA            |
|              |                          | $V_I = 6.3$ to $20\text{ V}$                                                                       |       |      | 1.5   |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz}$ to $100\text{KHz}$ $T_J = 25^\circ\text{C}$                                      |       | 40   |       | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 6.3$ to $16.3\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 41    | 49   |       | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                    |       | 1.7  |       | V             |

## L78L00 SERIES

**Table 16: Electrical Characteristics Of L78L05AB And L78L05AC**

(refer to the test circuits,  $V_I = 10V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ ,

$T_J = 0\text{ to }125^\circ\text{C}$  for L78L05AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L05AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                     | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-----------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                            | 4.8  | 5    | 5.2  | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 7\text{ to }20\text{ V}$                                    | 4.75 |      | 5.25 | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 10\text{ V}$                                                | 4.75 |      | 5.25 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 7\text{ to }20\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 150  | mV            |
|              |                          | $V_I = 8\text{ to }20\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 100  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                          |      |      | 60   | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 30   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                            |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                           |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                    |      |      | 0.1  | mA            |
|              |                          | $V_I = 8\text{ to }20\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                         |      | 40   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 8\text{ to }18\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 41   | 49   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                     |      | 1.7  |      | V             |

**Table 17: Electrical Characteristics Of L78L06AB And L78L06AC**

(refer to the test circuits,  $V_I = 12V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ ,

$T_J = 0\text{ to }125^\circ\text{C}$  for L78L06AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L06AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                     | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|-----------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                            | 5.76 | 6    | 6.24 | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 8.5\text{ to }20\text{ V}$                                  | 5.7  |      | 6.3  | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 12\text{ V}$                                                | 5.7  |      | 6.3  |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 8.5\text{ to }20\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 150  | mV            |
|              |                          | $V_I = 9\text{ to }20\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 100  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                          |      |      | 60   | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 30   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                            |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                           |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                    |      |      | 0.1  | mA            |
|              |                          | $V_I = 9\text{ to }20\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                         |      | 50   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 9\text{ to }20\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 39   | 46   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                     |      | 1.7  |      | V             |

**Table 18: Electrical Characteristics Of L78L08AB And L78L08AC**(refer to the test circuits,  $V_I = 14\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ , $T_J = 0\text{ to }125^\circ\text{C}$  for L78L08AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L08AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                             | 7.68 | 8    | 8.32 | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 10.5\text{ to }23\text{ V}$                                  | 7.6  |      | 8.4  | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 14\text{ V}$                                                 | 7.6  |      | 8.4  |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 10.5\text{ to }23\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 175  | mV            |
|              |                          | $V_I = 11\text{ to }23\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 125  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 80   | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 40   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                             |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                            |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 11\text{ to }23\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                          |      | 60   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 12\text{ to }23\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 37   | 45   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                      |      | 1.7  |      | V             |

**Table 19: Electrical Characteristics Of L78L09AB And L78L09AC**(refer to the test circuits,  $V_I = 15\text{V}$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ , $T_J = 0\text{ to }125^\circ\text{C}$  for L78L09AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L09AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                             | 8.64 | 9    | 9.36 | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 11.5\text{ to }23\text{ V}$                                  | 8.55 |      | 9.45 | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 15\text{ V}$                                                 | 8.55 |      | 9.45 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 11.5\text{ to }23\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 225  | mV            |
|              |                          | $V_I = 12\text{ to }23\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 150  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 80   | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 40   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                             |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                            |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 12\text{ to }23\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                          |      | 70   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 12\text{ to }23\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 37   | 44   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                      |      | 1.7  |      | V             |

## L78L00 SERIES

**Table 20: Electrical Characteristics Of L78L10AB And L78L10AC**

(refer to the test circuits,  $V_I = 16V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ ,

$T_J = 0\text{ to }125^\circ\text{C}$  for L78L10AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L10AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                             | 9.6  | 10   | 10.4 | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 12.5\text{ to }23\text{ V}$                                  | 9.5  |      | 10.5 | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 16\text{ V}$                                                 | 9.5  |      | 10.5 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 12.5\text{ to }23\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 230  | mV            |
|              |                          | $V_I = 13\text{ to }23\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 170  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 80   | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 40   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                             |      |      | 6    | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                            |      |      | 5.5  | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 13\text{ to }23\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                          |      | 60   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 14\text{ to }23\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 37   | 45   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                      |      | 1.7  |      | V             |

**Table 21: Electrical Characteristics Of L78L12AB And L78L12AC**

(refer to the test circuits,  $V_I = 19V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ ,

$T_J = 0\text{ to }125^\circ\text{C}$  for L78L12AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L12AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                             | 11.5 | 12   | 12.5 | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 14.5\text{ to }27\text{ V}$                                  | 11.4 |      | 12.6 | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 19\text{ V}$                                                 | 11.4 |      | 12.6 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 14.5\text{ to }27\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 250  | mV            |
|              |                          | $V_I = 16\text{ to }27\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 200  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 100  | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 50   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                             |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                            |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 16\text{ to }27\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                          |      | 80   |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 15\text{ to }25\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 37   | 42   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                      |      | 1.7  |      | V             |

**Table 22: Electrical Characteristics Of L78L15AB And L78L15AC**(refer to the test circuits,  $V_I = 19V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ , $T_J = 0\text{ to }125^\circ\text{C}$  for L78L15AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L15AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                          | Min.  | Typ. | Max.  | Unit          |
|--------------|--------------------------|----------------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                                 | 14.4  | 15   | 15.6  | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 17.5\text{ to }30\text{ V}$                                      | 14.25 |      | 15.75 | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 23\text{ V}$                                                     | 14.25 |      | 15.75 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 17.5\text{ to }30\text{ V}$ $T_J = 25^\circ\text{C}$                                              |       |      | 300   | mV            |
|              |                          | $V_I = 20\text{ to }30\text{ V}$ $T_J = 25^\circ\text{C}$                                                |       |      | 250   |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                               |       |      | 150   | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                                |       |      | 75    |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                                 |       |      | 6.5   | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                                |       |      | 6     | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                         |       |      | 0.1   | mA            |
|              |                          | $V_I = 20\text{ to }30\text{ V}$                                                                         |       |      | 1.5   |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                              |       | 90   |       | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 18.5\text{ to }28.5\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 34    | 39   |       | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                          |       | 1.7  |       | V             |

**Table 23: Electrical Characteristics Of L78L18AB And L78L18AC**(refer to the test circuits,  $V_I = 27V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ , $T_J = 0\text{ to }125^\circ\text{C}$  for L78L18AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L18AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                             | 17.3 | 18   | 18.7 | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 22\text{ to }33\text{ V}$                                    | 17.1 |      | 18.9 | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 27\text{ V}$                                                 | 17.1 |      | 18.9 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 22\text{ to }33\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 320  | mV            |
|              |                          | $V_I = 22\text{ to }33\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 270  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 170  | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 85   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                             |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                            |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 23\text{ to }33\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                          |      | 120  |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 23\text{ to }33\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 33   | 38   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                      |      | 1.7  |      | V             |

## L78L00 SERIES

**Table 24: Electrical Characteristics Of L78L20AB And L78L20AC**

(refer to the test circuits,  $V_I = 29V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ ,

$T_J = 0\text{ to }125^\circ\text{C}$  for L78L20AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L20AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                             | 19.2 | 20   | 20.8 | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 24\text{ to }33\text{ V}$                                    | 19   |      | 21   | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 29\text{ V}$                                                 | 19   |      | 21   |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 22.5\text{ to }34\text{ V}$ $T_J = 25^\circ\text{C}$                                          |      |      | 330  | mV            |
|              |                          | $V_I = 24\text{ to }34\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 280  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 180  | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 90   |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                             |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                            |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 25\text{ to }33\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                          |      | 120  |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 25\text{ to }35\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 32   | 38   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                      |      | 1.7  |      | V             |

**Table 25: Electrical Characteristics Of L78L24AB And L78L24AC**

(refer to the test circuits,  $V_I = 27V$ ,  $I_O = 40\text{ mA}$ ,  $C_I = 0.33\text{ }\mu\text{F}$ ,  $C_O = 0.1\text{ }\mu\text{F}$ ,

$T_J = 0\text{ to }125^\circ\text{C}$  for L78L24AC,  $T_J = -40\text{ to }125^\circ\text{C}$  for L78L24AB, unless otherwise specified)

| Symbol       | Parameter                | Test Conditions                                                                                      | Min. | Typ. | Max. | Unit          |
|--------------|--------------------------|------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$        | Output Voltage           | $T_J = 25^\circ\text{C}$                                                                             | 23   | 24   | 25   | V             |
| $V_O$        | Output Voltage           | $I_O = 1\text{ to }40\text{ mA}$ $V_I = 27\text{ to }38\text{ V}$                                    | 22.8 |      | 25.2 | V             |
|              |                          | $I_O = 1\text{ to }70\text{ mA}$ $V_I = 33\text{ V}$                                                 | 22.8 |      | 25.2 |               |
| $\Delta V_O$ | Line Regulation          | $V_I = 27\text{ to }38\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 350  | mV            |
|              |                          | $V_I = 28\text{ to }38\text{ V}$ $T_J = 25^\circ\text{C}$                                            |      |      | 300  |               |
| $\Delta V_O$ | Load Regulation          | $I_O = 1\text{ to }100\text{ mA}$ $T_J = 25^\circ\text{C}$                                           |      |      | 200  | mV            |
|              |                          | $I_O = 1\text{ to }40\text{ mA}$ $T_J = 25^\circ\text{C}$                                            |      |      | 100  |               |
| $I_d$        | Quiescent Current        | $T_J = 25^\circ\text{C}$                                                                             |      |      | 6.5  | mA            |
|              |                          | $T_J = 125^\circ\text{C}$                                                                            |      |      | 6    | mA            |
| $\Delta I_d$ | Quiescent Current Change | $I_O = 1\text{ to }40\text{ mA}$                                                                     |      |      | 0.1  | mA            |
|              |                          | $V_I = 28\text{ to }38\text{ V}$                                                                     |      |      | 1.5  |               |
| eN           | Output Noise Voltage     | $B = 10\text{Hz to }100\text{KHz}$ $T_J = 25^\circ\text{C}$                                          |      | 200  |      | $\mu\text{V}$ |
| SVR          | Supply Voltage Rejection | $V_I = 23\text{ to }33\text{ V}$ $f = 120\text{Hz}$<br>$I_O = 40\text{ mA}$ $T_J = 25^\circ\text{C}$ | 31   | 37   |      | dB            |
| $V_d$        | Dropout Voltage          |                                                                                                      |      | 1.7  |      | V             |

Figure 4: L78L05/12 Output Voltage vs Ambient Temperature

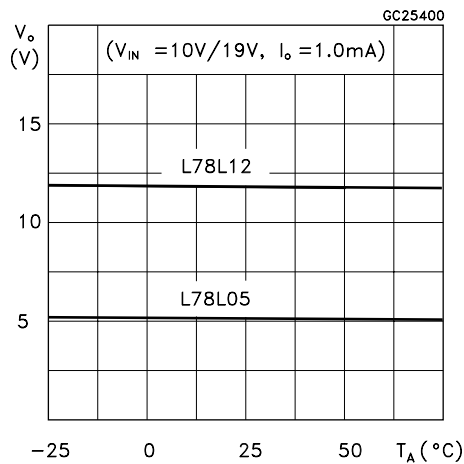


Figure 7: L78L05/12 Quiescent Current vs Output Current

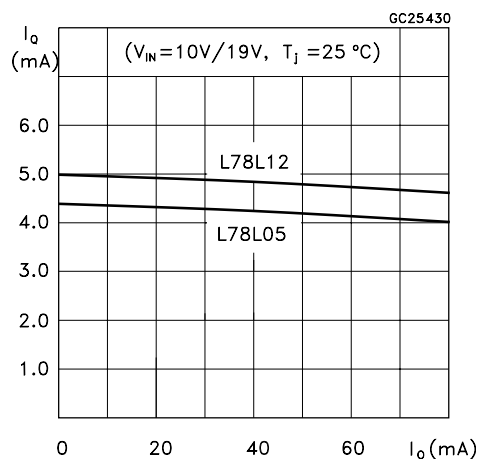


Figure 5: L78L05/12/24 Load Characteristics

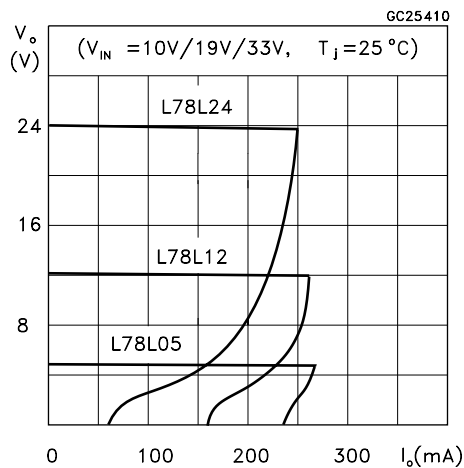


Figure 8: L78L05 Quiescent Current vs Input Voltage

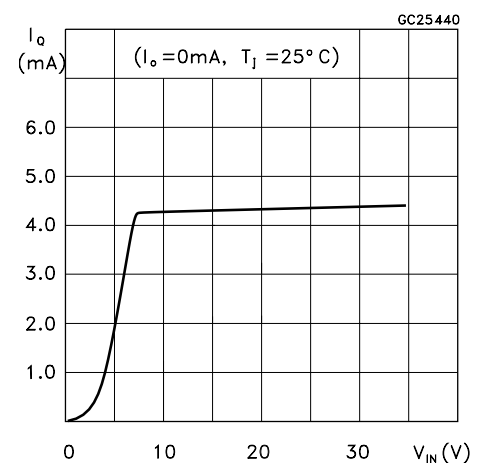


Figure 6: L78L05/12/24 Thermal Shutdown

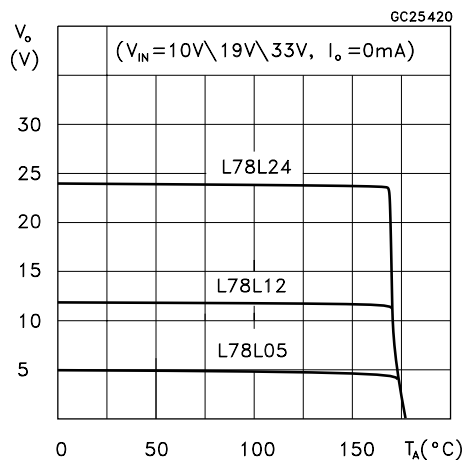


Figure 9: L78L05/12/24 Output Characteristics

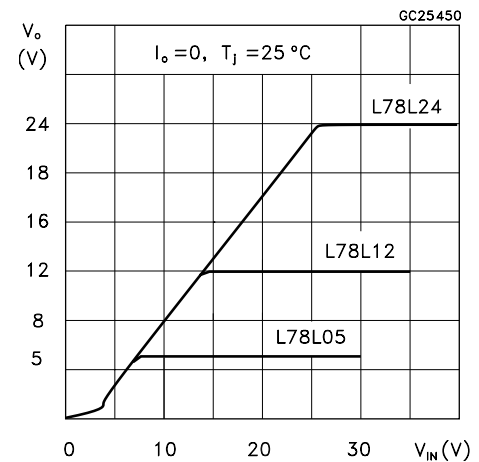


Figure 10: L78L05/12/24 Ripple Rejection

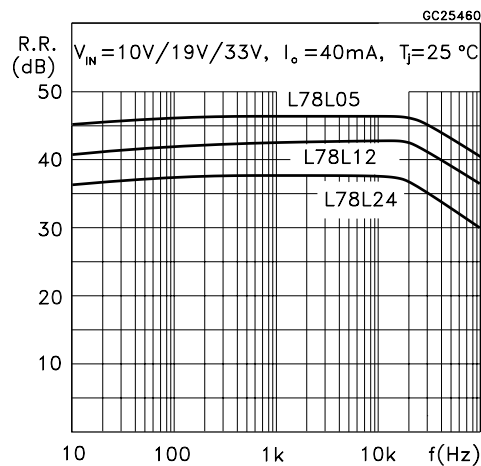


Figure 12: L78L00 Series Short Circuit Output Current


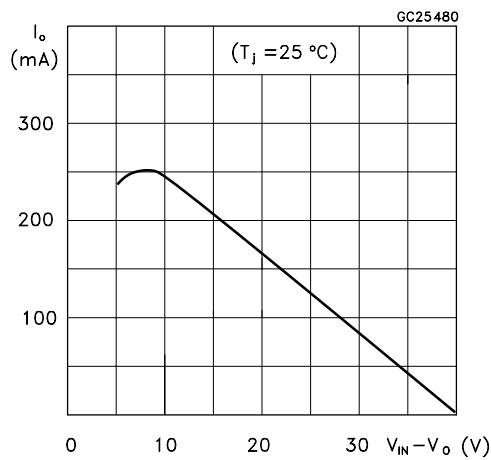


Figure 11: L78L05 Dropout Characteristics

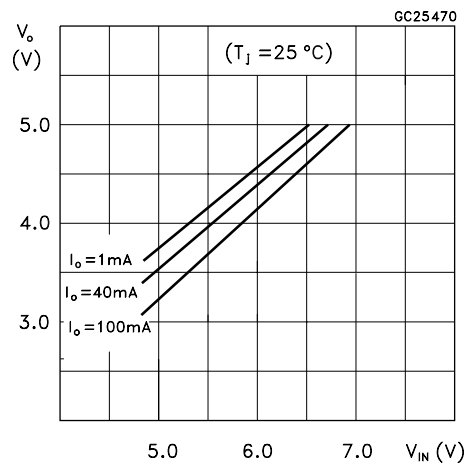

## TYPICAL APPLICATIONS

Figure 13: High Output Current Short Circuit Protected

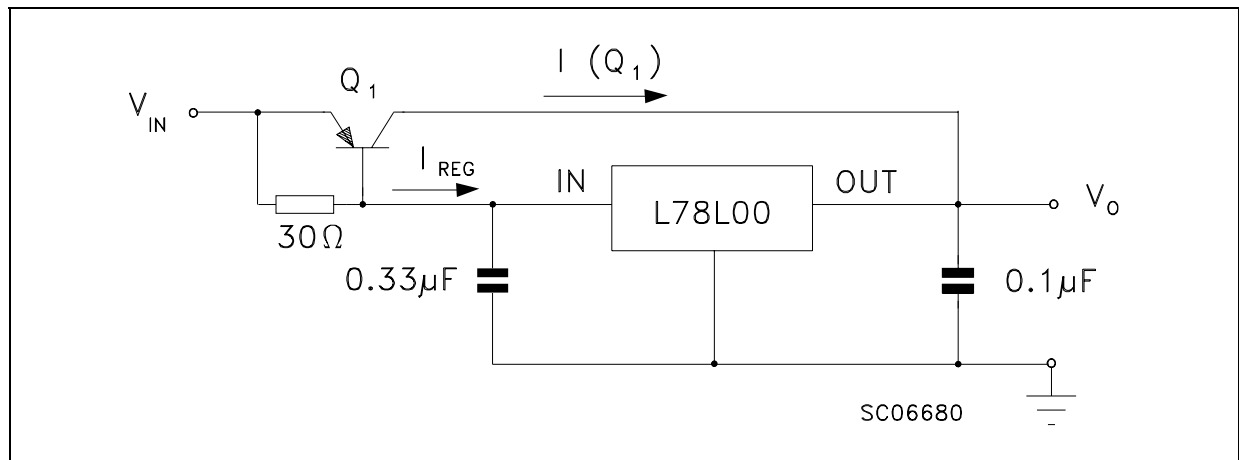


Figure 14: Edit Boost Circuit

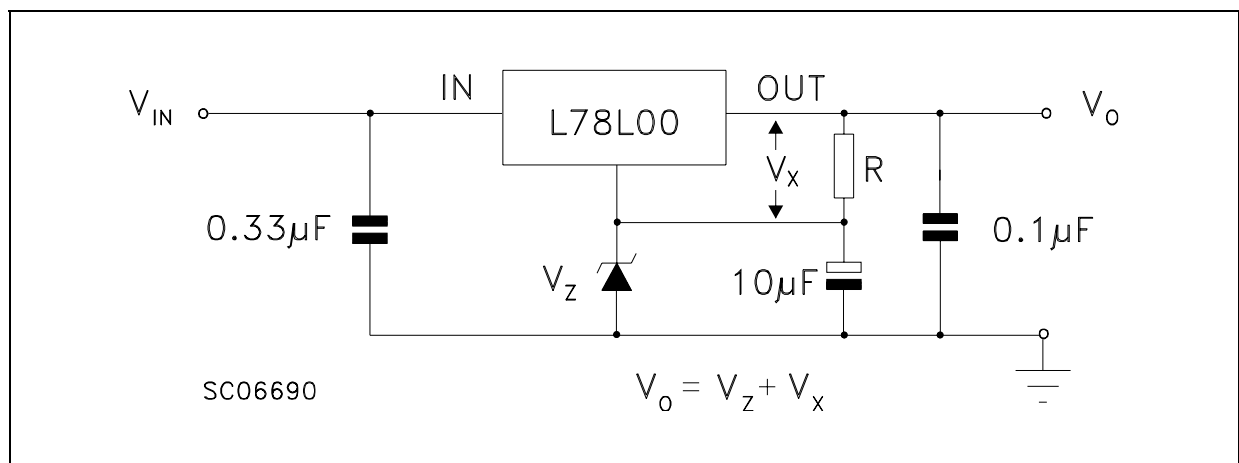


Figure 15: Current Regulator






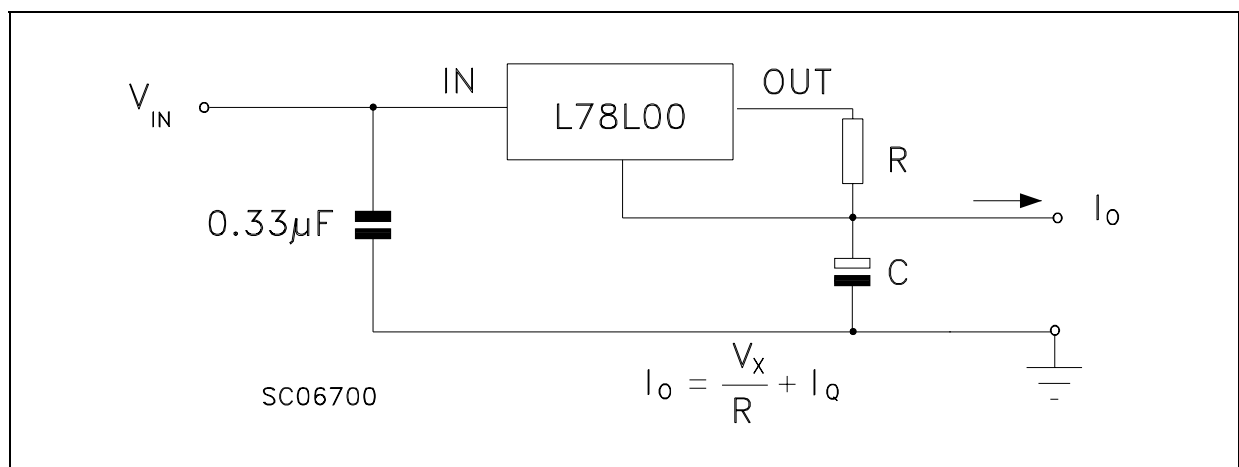


Figure 16: Adjustable Output Regulator

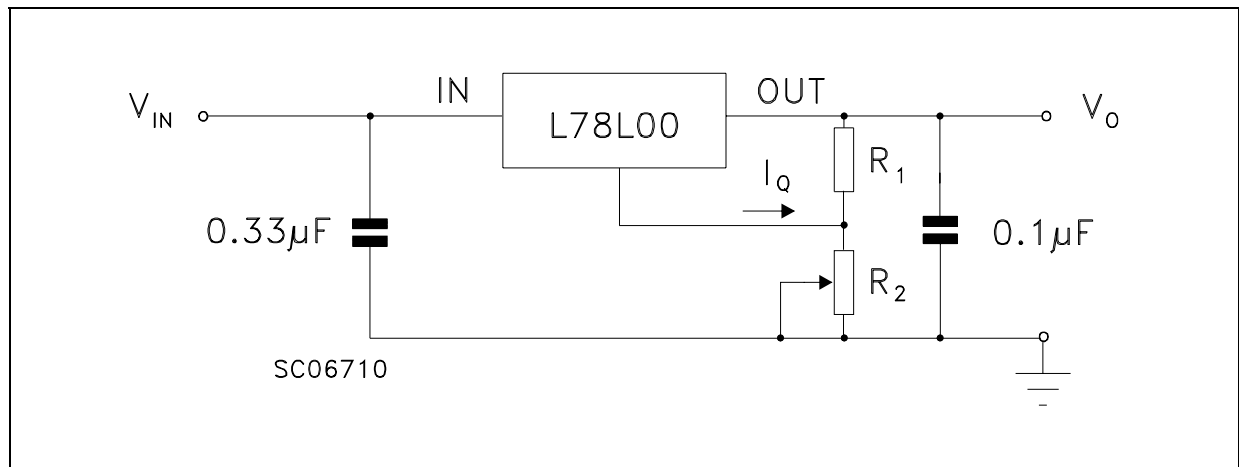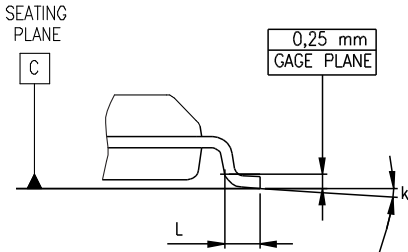

SO-8 MECHANICAL DATA


| DIM. | mm.       |      |      | inch  |       |       |
|------|-----------|------|------|-------|-------|-------|
|      | MIN.      | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 1.35      |      | 1.75 | 0.053 |       | 0.069 |
| A1   | 0.10      |      | 0.25 | 0.04  |       | 0.010 |
| A2   | 1.10      |      | 1.65 | 0.043 |       | 0.065 |
| B    | 0.33      |      | 0.51 | 0.013 |       | 0.020 |
| C    | 0.19      |      | 0.25 | 0.007 |       | 0.010 |
| D    | 4.80      |      | 5.00 | 0.189 |       | 0.197 |
| E    | 3.80      |      | 4.00 | 0.150 |       | 0.157 |
| e    |           | 1.27 |      |       | 0.050 |       |
| H    | 5.80      |      | 6.20 | 0.228 |       | 0.244 |
| h    | 0.25      |      | 0.50 | 0.010 |       | 0.020 |
| L    | 0.40      |      | 1.27 | 0.016 |       | 0.050 |
| k    | 8° (max.) |      |      |       |       |       |
| ddd  |           |      | 0.1  |       |       | 0.04  |

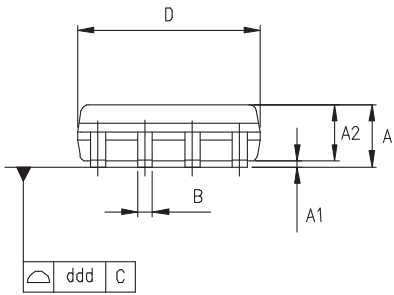

0016023/C


## SOT-89 MECHANICAL DATA

| DIM. | mm.  |     |      | mils  |      |       |
|------|------|-----|------|-------|------|-------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.  |
| A    | 1.4  |     | 1.6  | 55.1  |      | 63.0  |
| B    | 0.44 |     | 0.56 | 17.3  |      | 22.0  |
| B1   | 0.36 |     | 0.48 | 14.2  |      | 18.9  |
| C    | 0.35 |     | 0.44 | 13.8  |      | 17.3  |
| C1   | 0.35 |     | 0.44 | 13.8  |      | 17.3  |
| D    | 4.4  |     | 4.6  | 173.2 |      | 181.1 |
| D1   | 1.62 |     | 1.83 | 63.8  |      | 72.0  |
| E    | 2.29 |     | 2.6  | 90.2  |      | 102.4 |
| e    | 1.42 |     | 1.57 | 55.9  |      | 61.8  |
| e1   | 2.92 |     | 3.07 | 115.0 |      | 120.9 |
| H    | 3.94 |     | 4.25 | 155.1 |      | 167.3 |
| L    | 0.89 |     | 1.2  | 35.0  |      | 47.2  |

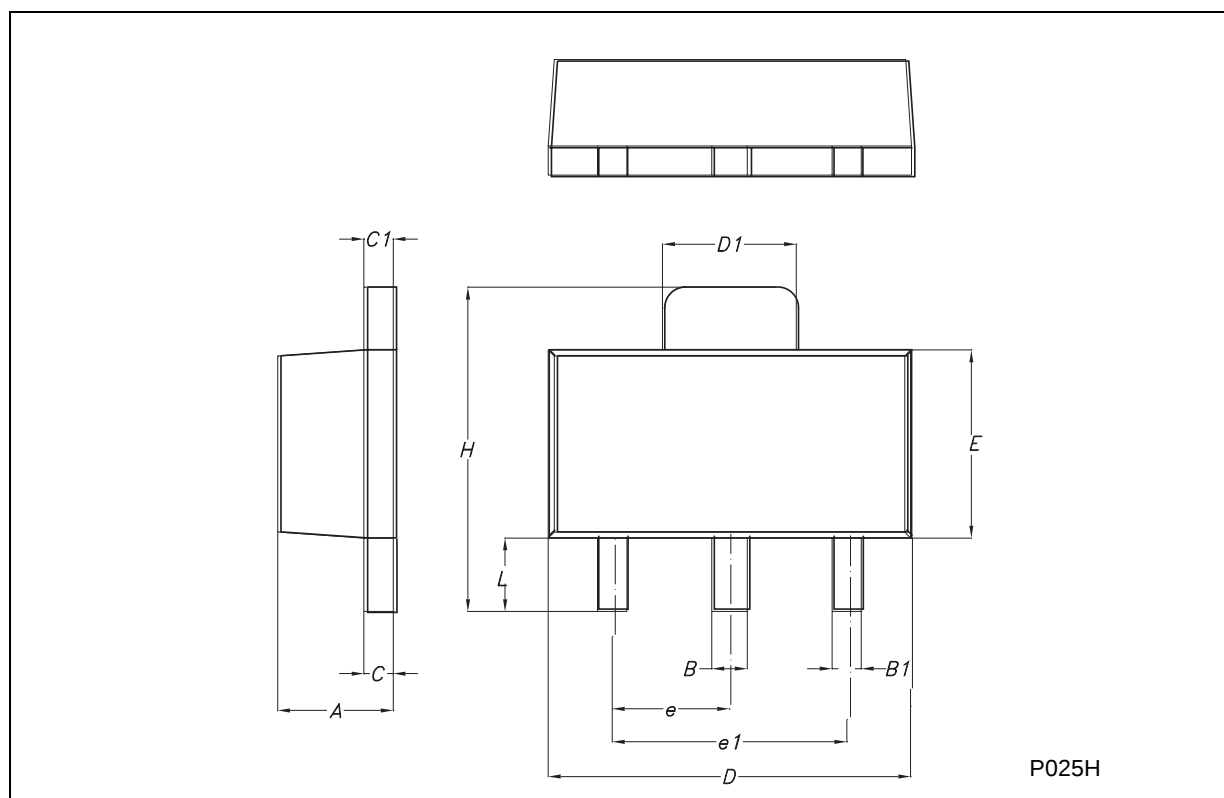


TO-92 MECHANICAL DATA

| DIM.     | mm.  |     |       | mils  |      |       |
|----------|------|-----|-------|-------|------|-------|
|          | MIN. | TYP | MAX.  | MIN.  | TYP. | MAX.  |
| A        | 4.32 |     | 4.95  | 170.1 |      | 194.9 |
| b        | 0.36 |     | 0.51  | 14.2  |      | 20.1  |
| D        | 4.45 |     | 4.95  | 175.2 |      | 194.9 |
| E        | 3.30 |     | 3.94  | 129.9 |      | 155.1 |
| e        | 2.41 |     | 2.67  | 94.9  |      | 105.1 |
| e1       | 1.14 |     | 1.40  | 44.9  |      | 55.1  |
| L        | 12.7 |     | 15.49 | 500.0 |      | 609.8 |
| R        | 2.16 |     | 2.41  | 85.0  |      | 94.9  |
| S1       | 0.92 |     | 1.52  | 36.2  |      | 59.8  |
| W        | 0.41 |     | 0.56  | 16.1  |      | 22.0  |
| $\alpha$ |      | 5°  |       |       | 5°   |       |

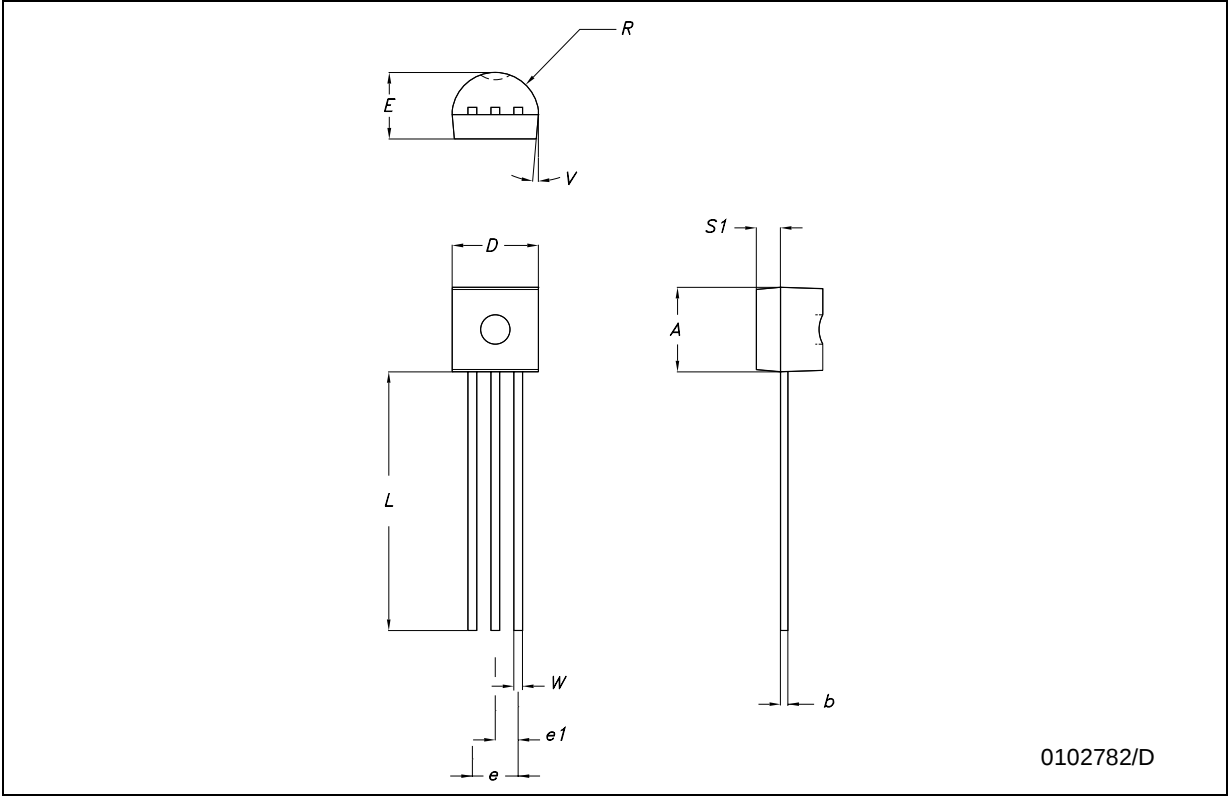


## Tape &amp; Reel SO-8 MECHANICAL DATA

| DIM. | mm.  |     |      | inch  |      |        |
|------|------|-----|------|-------|------|--------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.   |
| A    |      |     | 330  |       |      | 12.992 |
| C    | 12.8 |     | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |     |      | 0.795 |      |        |
| N    | 60   |     |      | 2.362 |      |        |
| T    |      |     | 22.4 |       |      | 0.882  |
| Ao   | 8.1  |     | 8.5  | 0.319 |      | 0.335  |
| Bo   | 5.5  |     | 5.9  | 0.216 |      | 0.232  |
| Ko   | 2.1  |     | 2.3  | 0.082 |      | 0.090  |
| Po   | 3.9  |     | 4.1  | 0.153 |      | 0.161  |
| P    | 7.9  |     | 8.1  | 0.311 |      | 0.319  |

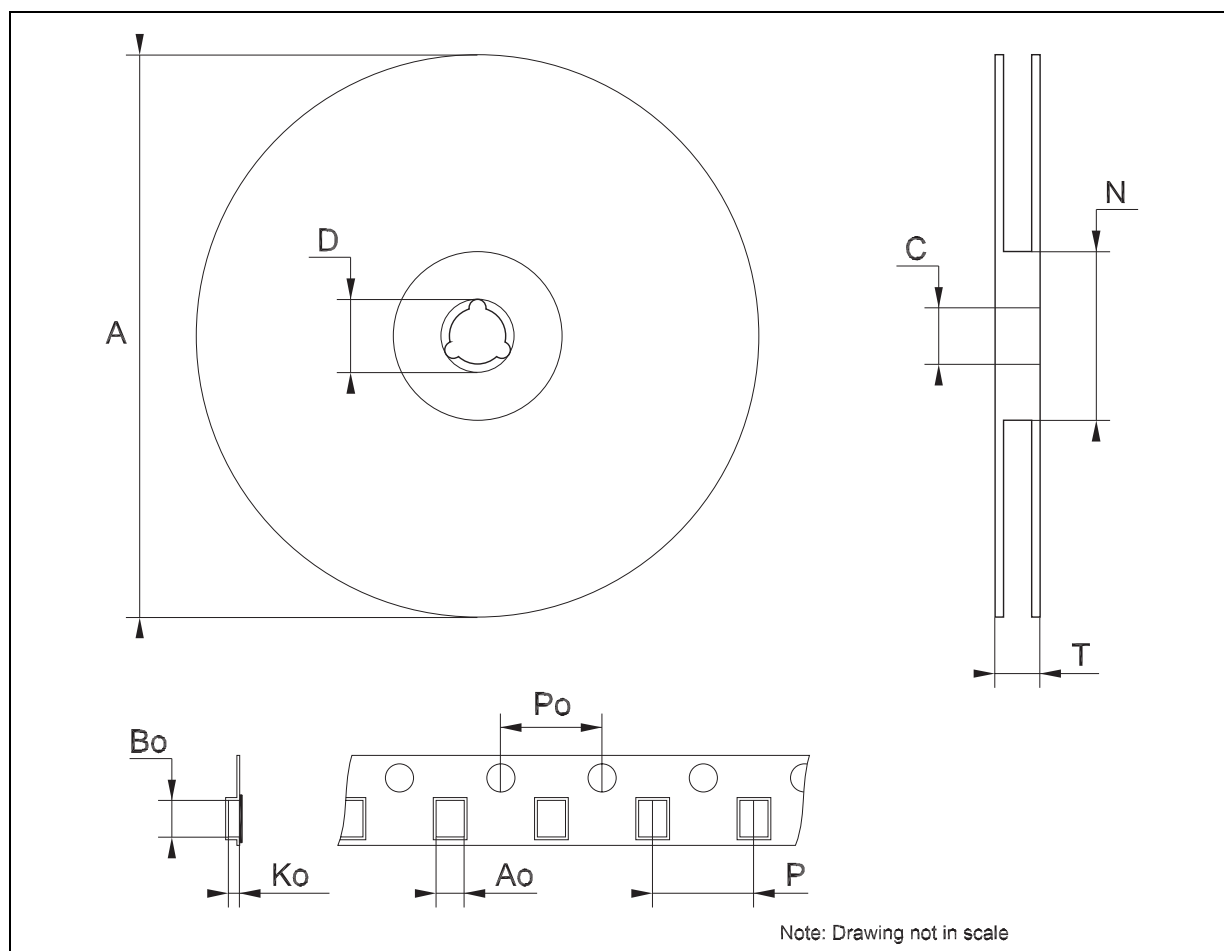


Tape & Reel SOT89 MECHANICAL DATA

| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |      |      | 180  |       |       | 7.086 |
| C    | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 60   |      |      | 2.362 |       |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   | 4.70 | 4.80 | 4.90 | 0.185 | 0.189 | 0.193 |
| Bo   | 4.30 | 4.40 | 4.50 | 0.169 | 0.173 | 0.177 |
| Ko   | 1.70 | 1.80 | 1.90 | 0.067 | 0.071 | 0.075 |
| Po   | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |
| P    | 7.9  | 8.0  | 8.1  | 0.311 | 0.315 | 0.319 |

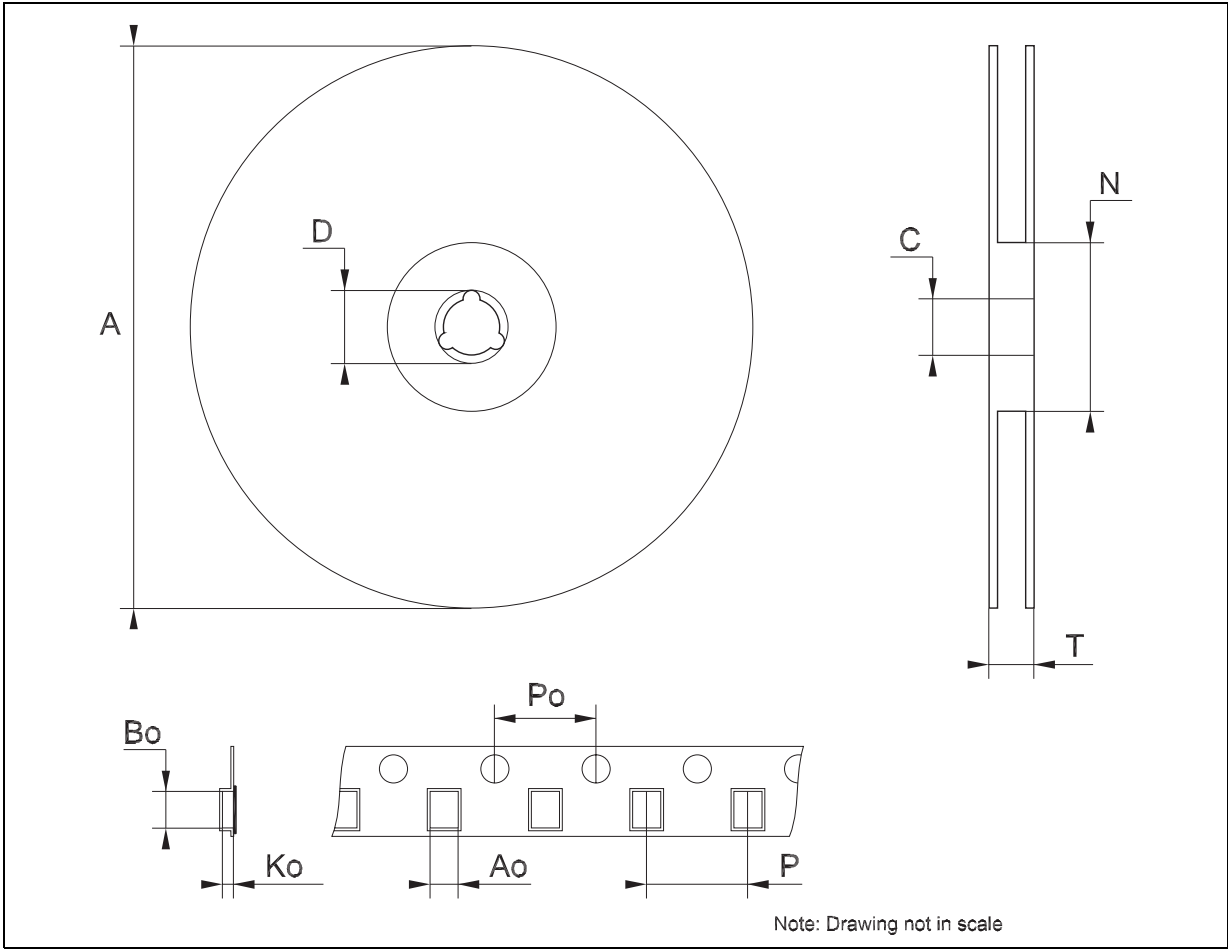

## Tape &amp; Reel for TO-92 MECHANICAL DATA

| DIM.    | mm.   |       |       | inch  |        |       |
|---------|-------|-------|-------|-------|--------|-------|
|         | MIN.  | TYP   | MAX.  | MIN.  | TYP.   | MAX.  |
| A1      |       | 4.80  |       |       | 0.189  |       |
| T       |       | 3.80  |       |       | 0.150  |       |
| T1      |       | 1.60  |       |       | 0.063  |       |
| T2      |       | 2.30  |       |       | 0.091  |       |
| d       |       | 0.48  |       |       | 0.019  |       |
| P0      | 12.5  |       | 12.9  | 0.492 |        | 0.508 |
| P2      | 5.65  |       | 7.05  | 0.222 |        | 0.278 |
| F1, F2  | 2.44  | 2.54  | 2.94  | 0.096 | 0.100  | 0.116 |
| delta H |       | ±2    |       |       | 0.079  |       |
| W       | 17.5  | 18.00 | 19.0  | 0.689 | 0.709  | 0.748 |
| W0      | 5.7   |       | 6.3   | 0.224 |        | 0.248 |
| W1      | 8.5   |       | 9.25  | 0.335 |        | 0.364 |
| W2      |       | 0.50  |       |       | 0.20   |       |
| H       |       | 18.50 | 18.70 |       | 0.728  | 0.726 |
| H0      | 15.50 |       | 16.50 | 0.610 |        | 0.650 |
| H1      |       | 25.00 |       |       | 0.984  |       |
| D0      | 3.8   |       | 4.2   | 0.150 |        | 0.165 |
| t       |       | 0.90  |       |       | 0.035  |       |
| L1      |       | 3     |       |       | 0.118  |       |
| delta P |       | ±1    |       |       | 0.039  |       |
| u       |       | 50    |       |       | 1.968  |       |
| Φ1      |       | 360   |       |       | 14.173 |       |
| Φ2      |       | 30    |       |       | 1.181  |       |

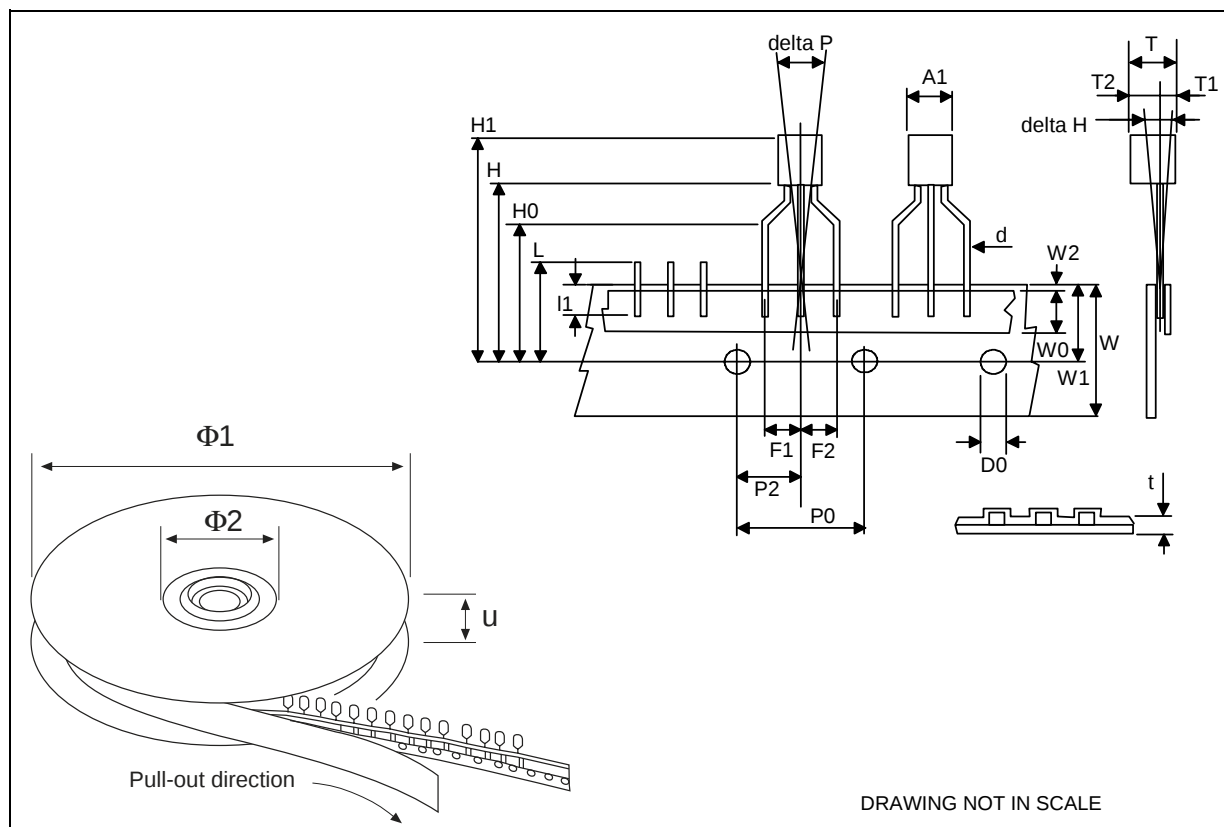

**Table 26: Revision History**

| <b>Date</b> | <b>Revision</b> | <b>Description of Changes</b>        |
|-------------|-----------------|--------------------------------------|
| 14-Mar-2005 | 9               | Add Tape & Reel for TO-92.           |
| 15-Mar-2005 | 10              | Add note on Table 3.                 |
| 23-Dec-2005 | 11              | Mistake on Ordering Table in Header. |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)