


PACKAGE/ORDERING INFORMATION

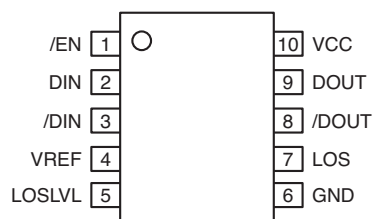

10-Pin MSOP (K10-1)

Ordering Information⁽¹⁾

| Part Number | Package Type | Operating Range | Package Marking | Lead Finish |
|-----------------------------|--------------|-----------------|--------------------------------------|----------------|
| SY88903VKC | K10-1 | Commercial | 903V with Pb-free bar-line indicator | Sn-Pb |
| SY88903VKCTR ⁽²⁾ | K10-1 | Commercial | 903V with Pb-free bar-line indicator | Sn-Pb |
| SY88903VKG | K10-1 | Industrial | 903V with Pb-free bar-line indicator | NiPdAu Pb-Free |
| SY88903VKGTR ⁽²⁾ | K10-1 | Industrial | 903V with Pb-free bar-line indicator | NiPdAu Pb-Free |

Notes:

1. Contact factory for die availability. Die is guaranteed at $T_A = 25^\circ\text{C}$, DC electricals only.
2. Tape and Reel.

PIN DESCRIPTION

| Pin Number | Pin Name | Type | Pin Function |
|------------|----------|-----------------------------|--|
| 1 | EN | TTL Input | Output Enable (Active Low). |
| 2 | DIN | Data Input | Data Input. |
| 3 | /DIN | Data Input | Inverting Data Input. |
| 4 | VREF | Output | Reference Voltage Output for LOS Level Set (see Figure 3). |
| 5 | LOSLVL | Input | LOS Limit Set. |
| 6 | GND | Ground | Ground |
| 7 | LOS | TTL Output (Open Collector) | Loss-of-Signal Indicator (Active Low). |
| 8 | /DOUT | PECL Output | Inverting Data Output. |
| 9 | DOUT | PECL Output | Data Output. |
| 10 | VCC | Power Supply | Positive Power Supply. |

Absolute Maximum Ratings⁽¹⁾

Supply Voltage (V_{CC}) 0V to +7.0V
 Input Voltage (D_{IN} , $/D_{IN}$, $/EN$, LOS_{LVL}) 0V to V_{CC}
 Output Voltage
 (D_{OUT} , $/D_{OUT}$) with 50 Ω Load ... $V_{CC} - 2.5V$ to $V_{CC} + 0.3V$
 (V_{REF}) $V_{CC} - 2.0V$ to V_{CC}
 Lead Temperature (soldering, 20 sec.) 260°C
 Maximum Operating Junction Temperature (T_J) +125°C
 Storage Temperature (T_S) -55°C to +125°C

Operating Ratings⁽²⁾

Supply Voltage (V_{IN}) +2.97V to +5.5V
 Ambient Temperature (T_A) -40°C to +85°C
 Package Thermal Resistance
 MSOP (θ_{JA}) Still-air 113°C/W

DC ELECTRICAL CHARACTERISTICS

$V_{CC} = +5V \pm 10\%$ or $+3.3V \pm 10\%$; $R_{LOAD} = 50\Omega$ to $V_{CC} - 2V$; $T_A = -40^\circ C$ to $+85^\circ C$; unless noted.

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|--------------|------------------------------|--------------------------------------|-----------------|-----------------|-----------------|---------|
| I_{CC} | Power Supply Current | No output load | | 30 | 42 | mA |
| I_{IL} | $/EN$ Input LOW Current | $V_{IN} = 0.5V$ | -0.3 | | | mA |
| I_{IH} | $/EN$ Input HIGH Current | $V_{IN} = 2.7V$ $V_{IN} = V_{CC}$ | | | 20 100 | μA |
| V_{CMR} | Common Mode Range | | GND +2.0 | | V_{CC} | V |
| V_{OFFSET} | Differential Output Offset | | | | ± 160 | mV |
| LOS_{LVL} | LOS_{LVL} Level | | V_{REF} | | V_{CC} | V |
| V_{OL} | LOS Output Low Level | $I_{OL} = +2mA$ | | | 0.5 | V |
| I_{OH} | LOS Output Leakage | $V_{OH} = 5.5V$ | | | 250 | μA |
| V_{OH} | DOUT and $/DOUT$ HIGH Output | | $V_{CC} - 1085$ | $V_{CC} - 955$ | $V_{CC} - 880$ | mV |
| V_{OL} | DOUT and $/DOUT$ LOW Output | | $V_{CC} - 1830$ | $V_{CC} - 1705$ | $V_{CC} - 1620$ | mV |
| V_{REF} | Reference Supply | | $V_{CC} - 1.38$ | $V_{CC} - 1.32$ | $V_{CC} - 1.26$ | V |
| I_{REF} | V_{REF} Output Current | | -0.8 | | 0.5 | mA |
| V_{IH} | $/EN$ Input HIGH Voltage | | 2.0 | | | V |
| V_{IL} | $/EN$ Input LOW Voltage | | | | 0.8 | V |

Notes:

1. Permanent device damage may occur if absolute maximum ratings are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.
2. The data sheet limits are not guaranteed if the device is operated beyond the operating ratings.

AC ELECTRICAL CHARACTERISTICS



$V_{CC} = +5V \pm 10\%$ or $+3.3V \pm 10\%$; $R_{LOAD} = 50\Omega$ to $V_{CC} - 2V$; $T_A = -40^\circ C$ to $+85^\circ C$; unless noted.

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|------------|---|--|-----|--------------------|------|------------------|
| PSRR | Power Supply ⁽³⁾ Rejection Ratio | Input referred, 55MHz | | 35 | | dB |
| V_{ID} | Input Voltage Range | | 5 | | 1800 | mV _{pp} |
| t_r, t_f | Output Rise/Fall Time | $V_{ID} > 100mV_{pp}$ $V_{ID} < 100mV_{pp}$ | | t_{rin}, t_{fin} | 260 | ps |
| V_{OD} | Differential Output Voltage Swing ⁽⁴⁾ | $V_{ID} = 15mV_{pp}$ $V_{ID} = 5mV_{pp}$ | | 600 200 | | mV mV |
| t_{OFFL} | LOS Release Time ⁽⁵⁾ Minimum Input | | | 0.1 | 0.5 | μs |
| t_{OFFH} | LOS Release Time ⁽⁶⁾ Maximum Input | | | 0.1 | 0.5 | μs |
| t_{ONL} | LOS Assert Time ⁽⁵⁾ | | | 0.2 | 0.5 | μs |
| VSR | LOS Sensitivity Range | $2^{23}-1$ pattern | 5 | | 50 | mV _{pp} |
| HYS | LOS Hysteresis | $2^{23}-1$ pattern | 2 | 4.6 | 8 | dB |

Notes:

- Input referred noise = RMS output noise/low frequency gain.
- Input is a 622MHz square wave.
- Input is a 200MHz square wave, $t_r < 300ps$, $8mV_{pp}$.
- Input is a 200MHz square wave, $t_r < 300ps$, $1.8V_{pp}$.

TYPICAL CHARACTERISTICS

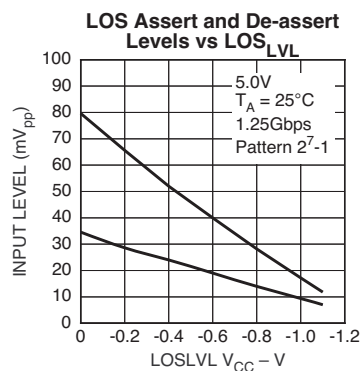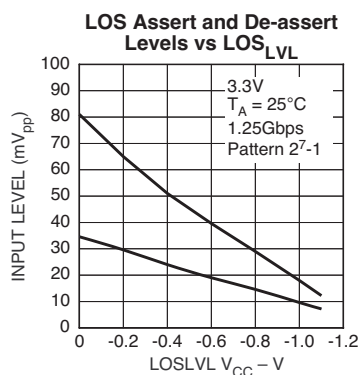

DESIGN PROCEDURE

Output Termination

The SY88903V outputs must be terminated with a 50Ω load to $V_{CC} - 2V$ (or Thevenin equivalent).

Layout and PCB Design

Since the SY88903V is a high-frequency component, performance can largely be determined by board layout and design. A common problem with high-gain amplifiers is feedback from the large swing outputs to the input via the power supply.


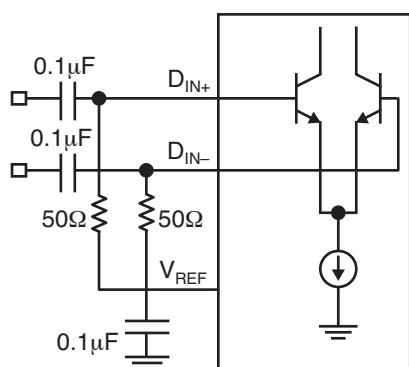


Figure 2. Differential Input Configuration

The SY88903V ground pin should be connected to the circuit board ground. Use multiple PCB vias close to the part to connect to ground. Avoid long, inductive runs which can degrade performance.

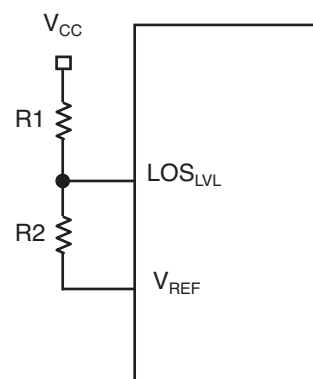


Notes:

$$LOSLVL = V_{CC} - 1.32V \times \frac{R1}{R1 + R2}$$

$$R1 + R2 \geq 2.6k\Omega$$

Figure 3. LOSLVL Circuit

10-PIN MSOP (K10-1)

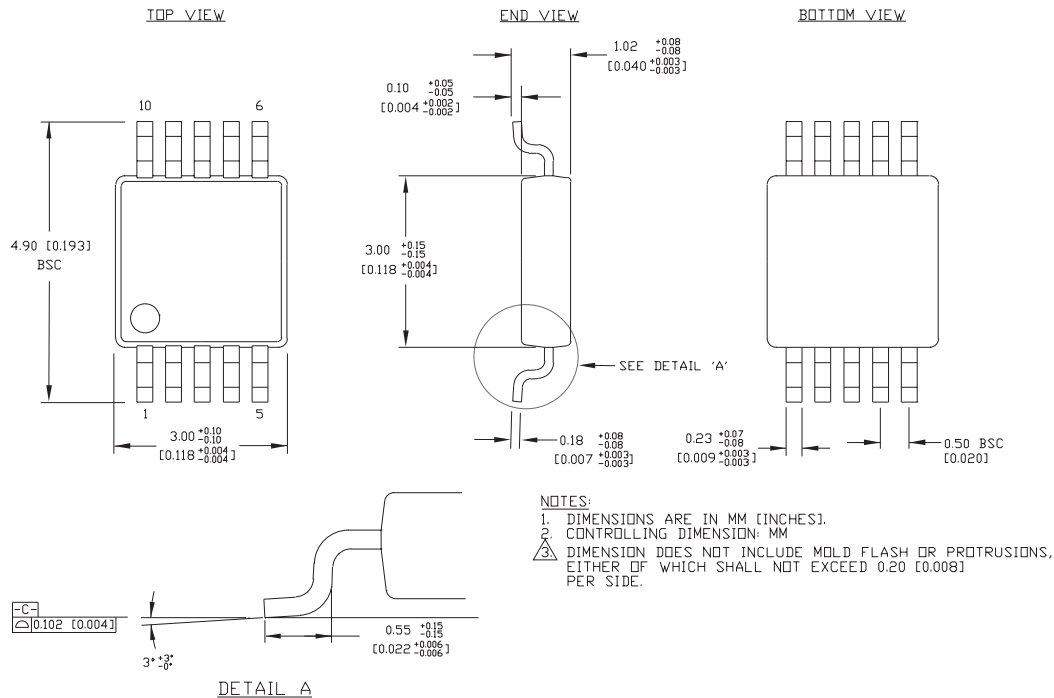

Rev. 00

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.