

FEATURES AND BENEFITS (continued)

- Chopper stabilization results in extremely stable quiescent output voltage
- Nearly zero magnetic hysteresis
- Ratiometric output from supply voltage

DESCRIPTION (continued)

The ACS723 is provided in a small, low-profile surface-mount SOIC8 package. The leadframe is plated with 100% matte tin, which is compatible with standard lead (Pb) free printed circuit board assembly processes. Internally, the device is Pb-free, except for flip-chip high-temperature Pb-based solder balls, currently exempt from RoHS. The device is fully calibrated prior to shipment from the factory.

SELECTION GUIDE

Part Number	I _{PR} (A)	Sens(Typ) at V _{CC} = 5 V (mV/A)	T _A (°C)	Packing [1]
ACS723LLCTR-05AB-T [2]	±5	400	−40 to 150	Tape and Reel, 3000 pieces per reel
ACS723LLCTR-10AU-T [2]	10			
ACS723LLCTR-10AB-T [2]	±10	200		
ACS723LLCTR-20AU-T [2]	20			
ACS723LLCTR-20AB-T [2]	±20	100		
ACS723LLCTR-40AU-T [2]	40			
ACS723LLCTR-40AB-T [2]	±40			
ACS723LLCTR-50AB-T [2]	±50	40		

[1] Contact Allegro for additional packing options.

[2] Variant not intended for automotive applications.

SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Notes	Rating	Units
Supply Voltage	V_{CC}		6	V
Reverse Supply Voltage	V_{RCC}		-0.1	V
Output Voltage	V_{IOUT}		25	V
Reverse Output Voltage	V_{RIOUT}		-0.1	V
Maximum Continuous Current	I_{CMAX}	$T_A = 25^{\circ}\text{C}$	65	A
Operating Ambient Temperature	T_A	Range L	-40 to 150	$^{\circ}\text{C}$
Junction Temperature	$T_{J(max)}$		165	$^{\circ}\text{C}$
Storage Temperature	T_{stg}		-65 to 165	$^{\circ}\text{C}$


ISOLATION CHARACTERISTICS

Characteristic	Symbol	Notes	Rating	Unit
Dielectric Strength Test Voltage	V_{ISO}	Agency type-tested for 60 seconds per UL 60950-1 (edition. 2). Production tested at VISO for 1 second, in accordance with UL 60950-1 (edition. 2).	2400	V_{RMS}
Working Voltage for Basic Isolation	V_{WVBI}	Maximum approved working voltage for basic (single) isolation according UL 60950-1 (edition 2).	420	V_{PK} or VDC
			297	V_{RMS}
Clearance	D_{cl}	Minimum distance through air from IP leads to signal leads.	3.9	mm
Creepage	D_{cr}	Minimum distance along package body from IP leads to signal leads.	3.9	mm

THERMAL CHARACTERISTICS


Characteristic	Symbol	Test Conditions*	Value	Units
Package Thermal Resistance (Junction to Ambient)	$R_{\theta JA}$	Mounted on the Allegro 85-0593 evaluation board with 400 mm ² of 4 oz. copper on each side, connected to pins 1 and 2, and to pins 3 and 4, with thermal vias connecting the layers. Performance values include the power consumed by the PCB.	23	$^{\circ}\text{C/W}$
Package Thermal Resistance (Junction to Lead)	$R_{\theta JL}$	Mounted on the Allegro ASEK723 evaluation board.	5	$^{\circ}\text{C/W}$

*Additional thermal information available on the Allegro website.

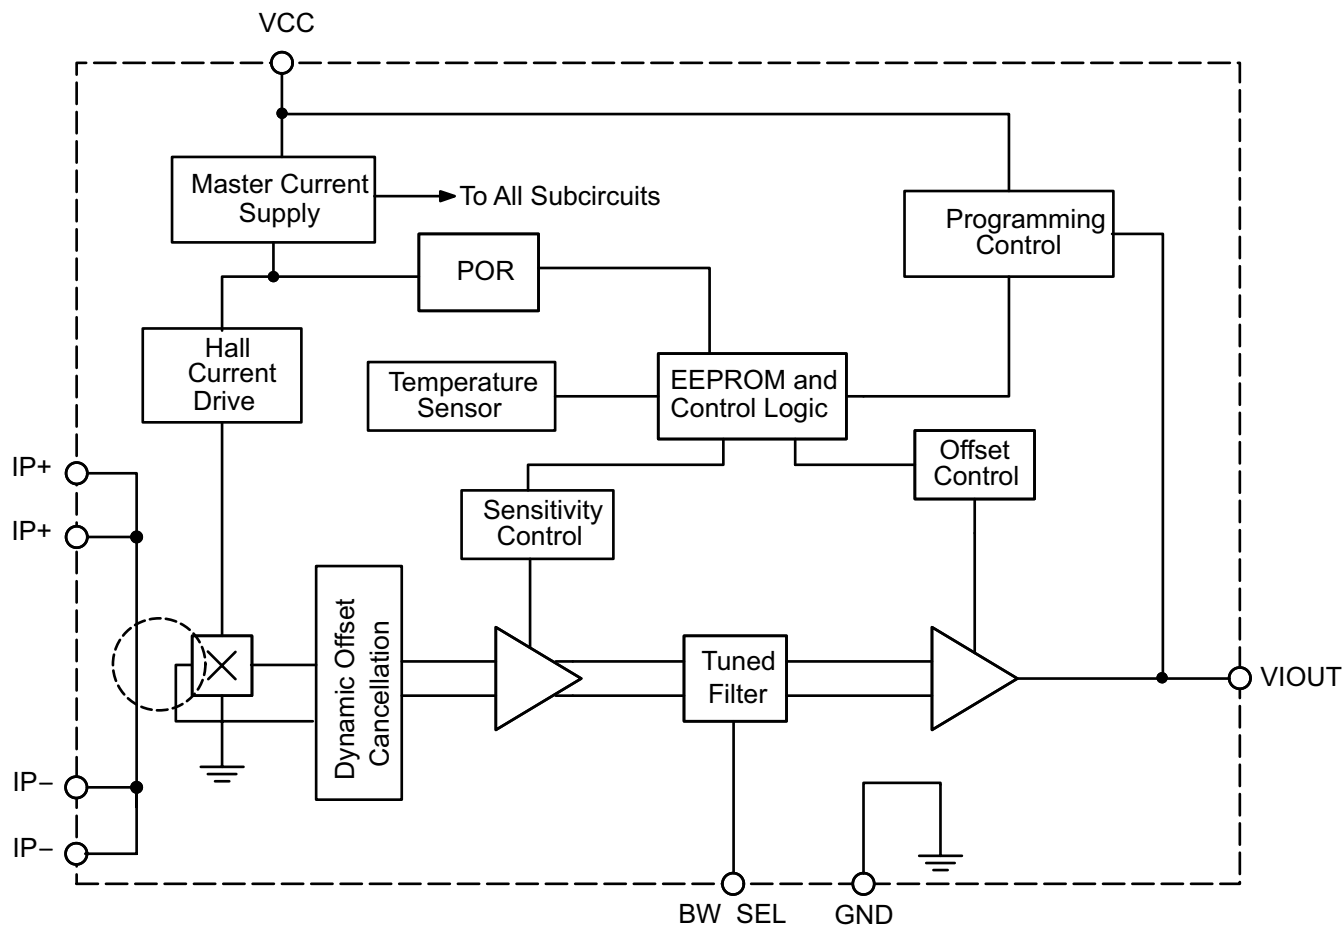

Functional Block Diagram

PINOUT DIAGRAM AND TERMINAL LIST

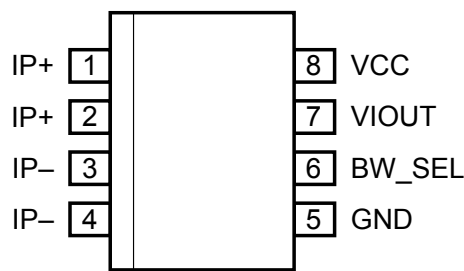

Pinout Diagram

Terminal List Table

Number	Name	Description
1, 2	IP+	Terminals for current being sensed; fused internally
3, 4	IP–	Terminals for current being sensed; fused internally
5	GND	Signal ground terminal
6	BW_SEL	Terminal for selecting 20 kHz or 80 kHz bandwidth
7	VIOOUT	Analog output signal
8	VCC	Device power supply terminal

COMMON ELECTRICAL CHARACTERISTICS ^[1]: Valid through the full range of $T_A = -40^{\circ}\text{C}$ to 150°C , and at $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Supply Voltage	V_{CC}		4.5	5	5.5	V
Supply Current	I_{CC}	V_{CC} within $V_{CC}(\text{min})$ and $V_{CC}(\text{max})$	—	9	14	mA
Output Capacitance Load	C_L	VIOOUT to GND	—	—	10	nF
Output Resistive Load	R_L	VIOOUT to GND	4.7	—	—	k Ω
Primary Conductor Resistance	R_{IP}	$T_A = 25^{\circ}\text{C}$	—	0.65	—	m Ω
Magnetic Coupling Factor	C_F		—	10	—	G/A
Rise Time	t_r	$I_P = I_P(\text{max})$, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$, BW_SEL tied to GND	—	4	—	μs
		$I_P = I_P(\text{max})$, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$, BW_SEL tied to VCC	—	17.5	—	μs
Propagation Delay	t_{pd}	$I_P = I_P(\text{max})$, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$, BW_SEL tied to GND	—	1	—	μs
		$I_P = I_P(\text{max})$, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$, BW_SEL tied to VCC	—	5	—	μs
Response Time	t_{RESPONSE}	$I_P = I_P(\text{max})$, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$, BW_SEL tied to GND	—	5	—	μs
		$I_P = I_P(\text{max})$, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$, BW_SEL tied to VCC	—	22.5	—	μs
Internal Bandwidth	BW _i	Small signal -3 dB ; $C_L = 1\text{ nF}$, BW_SEL tied to GND	—	80	—	kHz
		Small signal -3 dB ; $C_L = 1\text{ nF}$, BW_SEL tied to VCC	—	20	—	kHz
Noise Density	I_{ND}	Input referenced noise density; $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$	—	110	—	$\mu\text{A}_{(\text{rms})}/\sqrt{\text{Hz}}$
Noise	I_N	Input referenced noise; BW _i = 80 kHz, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$	—	30	—	$\text{mA}_{(\text{rms})}$
		Input referenced noise; BW _i = 20 kHz, $T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$	—	15	—	$\text{mA}_{(\text{rms})}$
Nonlinearity	E_{LIN}	Through full range of I_{PR}	—	± 1	—	%
Saturation Voltage ^[2]	V_{OH}	$R_L = 4.7\text{ k}\Omega$, $T_A = 25^{\circ}\text{C}$	$V_{CC} - 0.5$	—	—	V
	V_{OL}	$R_L = 4.7\text{ k}\Omega$, $T_A = 25^{\circ}\text{C}$	—	—	0.5	V
Power-On Time	t_{PO}	Output reaches 90% of steady-state level, $T_A = 25^{\circ}\text{C}$, $I_P = I_{PR}(\text{max})$ applied	—	64	—	μs

^[1] Device may be operated at higher primary current levels, I_P , ambient temperatures, T_A , and internal leadframe temperatures, provided the Maximum Junction Temperature, $T_J(\text{max})$, is not exceeded.

^[2] The sensor IC will continue to respond to current beyond the range of I_P until the high or low saturation voltage; however, the nonlinearity in this region will be worse than through the rest of the measurement range.

xLLCTR-5AB PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
NOMINAL PERFORMANCE						
Current Sensing Range	I _{PR}		−5	−	5	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	−	400	−	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Bidirectional; I _P = 0 A	−	V _{CC} × 0.5	−	V
ACCURACY PERFORMANCE						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	−2	−	2	%
		T _A = −40°C to 25°C; measured at I _P = I _{PR} (max)	−	±2.5	−	%
Offset Voltage [1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	−15	−	15	mV
		I _P = 0 A; T _A = −40°C to 25°C	−	±20	−	mV
Total Output Error [2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	−2.5	−	2.5	%
		I _P = I _{PR} (max), T _A = −40°C to 25°C	−	±3	−	%
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E _{sens_drift}		−	±2	−	%
Total Output Error Lifetime Drift	E _{tot_drift}		−	±2	−	%

[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.

[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

xLLCTR-10AU PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
NOMINAL PERFORMANCE						
Current Sensing Range	I _{PR}		0	–	10	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	–	400	–	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Unidirectional; I _P = 0 A	–	V _{CC} × 0.1	–	V
ACCURACY PERFORMANCE						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	–2	–	2	%
		T _A = –40°C to 25°C; measured at I _P = I _{PR} (max)	–	±2.5	–	%
Offset Voltage [1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	–15	–	15	mV
		I _P = 0 A; T _A = –40°C to 25°C	–	±20	–	mV
Total Output Error [2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	–2.5	–	2.5	%
		I _P = I _{PR} (max), T _A = –40°C to 25°C	–	±3	–	%
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E _{sens_drift}		–	±2	–	%
Total Output Error Lifetime Drift	E _{tot_drift}		–	±2	–	%

[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.

[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

xLLCTR-10AB PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
NOMINAL PERFORMANCE						
Current Sensing Range	I _{PR}		−10	−	10	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	−	200	−	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Bidirectional; I _P = 0 A	−	V _{CC} × 0.5	−	V
ACCURACY PERFORMANCE						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	−1.5	−	1.5	%
		T _A = −40°C to 25°C; measured at I _P = I _{PR} (max)	−	±2	−	%
Offset Voltage [1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	−10	−	10	mV
		I _P = 0 A; T _A = −40°C to 25°C	−	±15	−	mV
Total Output Error [2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	−2	−	2	%
		I _P = I _{PR} (max), T _A = −40°C to 25°C	−	±3	−	%
Lifetime Drift Characteristics						
Sensitivity Error Lifetime Drift	E _{sens_drift}		−	±2	−	%
Total Output Error Lifetime Drift	E _{tot_drift}		−	±2	−	%

[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.

[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

xLLCTR-20AU PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
NOMINAL PERFORMANCE						
Current Sensing Range	I _{PR}		0	–	20	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	–	200	–	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Unidirectional; I _P = 0 A	–	V _{CC} × 0.1	–	V
ACCURACY PERFORMANCE						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	–1.5	–	1.5	%
		T _A = –40°C to 25°C; measured at I _P = I _{PR} (max)	–	±2	–	%
Offset Voltage [1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	–10	–	10	mV
		I _P = 0 A; T _A = –40°C to 25°C	–	±15	–	mV
Total Output Error [2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	–2	–	2	%
		I _P = I _{PR} (max), T _A = –40°C to 25°C	–	±3	–	%
LIFETIME DRIFT CHARACTERISTICS						
Sensitivity Error Lifetime Drift	E _{sens_drift}		–	±2	–	%
Total Output Error Lifetime Drift	E _{tot_drift}		–	±2	–	%

[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.

[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

xLLCTR-20AB PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
NOMINAL PERFORMANCE						
Current Sensing Range	I _{PR}		–20	–	20	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	–	100	–	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Bidirectional; I _P = 0 A	–	V _{CC} × 0.5	–	V
ACCURACY PERFORMANCE						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	–1.5	–	1.5	%
		T _A = –40°C to 25°C; measured at I _P = I _{PR} (max)	–	±2	–	%
Offset Voltage [1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	–10	–	10	mV
		I _P = 0 A; T _A = –40°C to 25°C	–	±15	–	mV
Total Output Error [2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	–2	–	2	%
		I _P = I _{PR} (max), T _A = –40°C to 25°C	–	±3	–	%
Lifetime Drift Characteristics						
Sensitivity Error Lifetime Drift	E _{sens_drift}		–	±2	–	%
Total Output Error Lifetime Drift	E _{tot_drift}		–	±2	–	%

[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.

[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

xLLCTR-40AU PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Nominal Performance						
Current Sensing Range	I _{PR}		0	–	40	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	–	100	–	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Unidirectional; I _P = 0 A	–	V _{CC} × 0.1	–	V
Accuracy Performance						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	–1.5	–	1.5	%
		T _A = –40°C to 25°C; measured at I _P = I _{PR} (max)	–	±2	–	%
Offset Voltage ^[1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	–10	–	10	mV
		I _P = 0 A; T _A = –40°C to 25°C	–	±15	–	mV
Total Output Error ^[2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	–2	–	2	%
		I _P = I _{PR} (max), T _A = –40°C to 25°C	–	±3	–	%
Lifetime Drift Characteristics						
Sensitivity Error Lifetime Drift	E _{sens_drift}		–	±2	–	%
Total Output Error Lifetime Drift	E _{tot_drift}		–	±2	–	%

^[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.

^[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

xLLCTR-40AB PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
NOMINAL PERFORMANCE						
Current Sensing Range	I _{PR}		−40	–	40	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	–	50	–	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Bidirectional; I _P = 0 A	–	V _{CC} × 0.5	–	V
ACCURACY PERFORMANCE						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	−1.5	–	1.5	%
		T _A = −40°C to 25°C; measured at I _P = I _{PR} (max)	–	±2	–	%
Offset Voltage [1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	−10	–	10	mV
		I _P = 0 A; T _A = −40°C to 25°C	–	±15	–	mV
Total Output Error [2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	−2	–	2	%
		I _P = I _{PR} (max), T _A = −40°C to 25°C	–	±3	–	%
Lifetime Drift Characteristics						
Sensitivity Error Lifetime Drift	E _{sens_drift}		–	±2	–	%
Total Output Error Lifetime Drift	E _{tot_drift}		–	±2	–	%

^[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.

^[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

xLLCTR-50AB PERFORMANCE CHARACTERISTICS: T_A Range L, valid at $T_A = -40^\circ\text{C}$ to 150°C , $V_{CC} = 5\text{ V}$,
unless otherwise specified


Characteristic	Symbol	Test Conditions	Min.	Typ.	Max.	Units
NOMINAL PERFORMANCE						
Current Sensing Range	I _{PR}		−50	−	50	A
Sensitivity	Sens	I _{PR} (min) < I _P < I _{PR} (max)	−	40	−	mV/A
Zero Current Output Voltage	V _{IOUT(Q)}	Bidirectional; I _P = 0 A	−	V _{CC} × 0.5	−	V
ACCURACY PERFORMANCE						
Sensitivity Error	E _{sens}	T _A = 25°C to 150°C; measured at I _P = I _{PR} (max)	−1.5	−	1.5	%
		T _A = −40°C to 25°C; measured at I _P = I _{PR} (max)	−	±2	−	%
Offset Voltage [1]	V _{OE}	I _P = 0 A; T _A = 25°C to 150°C	−10	−	10	mV
		I _P = 0 A; T _A = −40°C to 25°C	−	±15	−	mV
Total Output Error [2]	E _{TOT}	I _P = I _{PR} (max), T _A = 25°C to 150°C	−2	−	2	%
		I _P = I _{PR} (max), T _A = −40°C to 25°C	−	±3	−	%
Lifetime Drift Characteristics						
Sensitivity Error Lifetime Drift	E _{sens_drift}		−	±2	−	%
Total Output Error Lifetime Drift	E _{tot_drift}		−	±2	−	%

[1] Offset Voltage does not incorporate any error due to external magnetic fields. See section: Impact of External Magnetic Fields.


[2] Percentage of I_P , with $I_P = I_{PR}(\text{max})$.

CHARACTERISTIC PERFORMANCE


xLLCTR-5AB Key Parameters

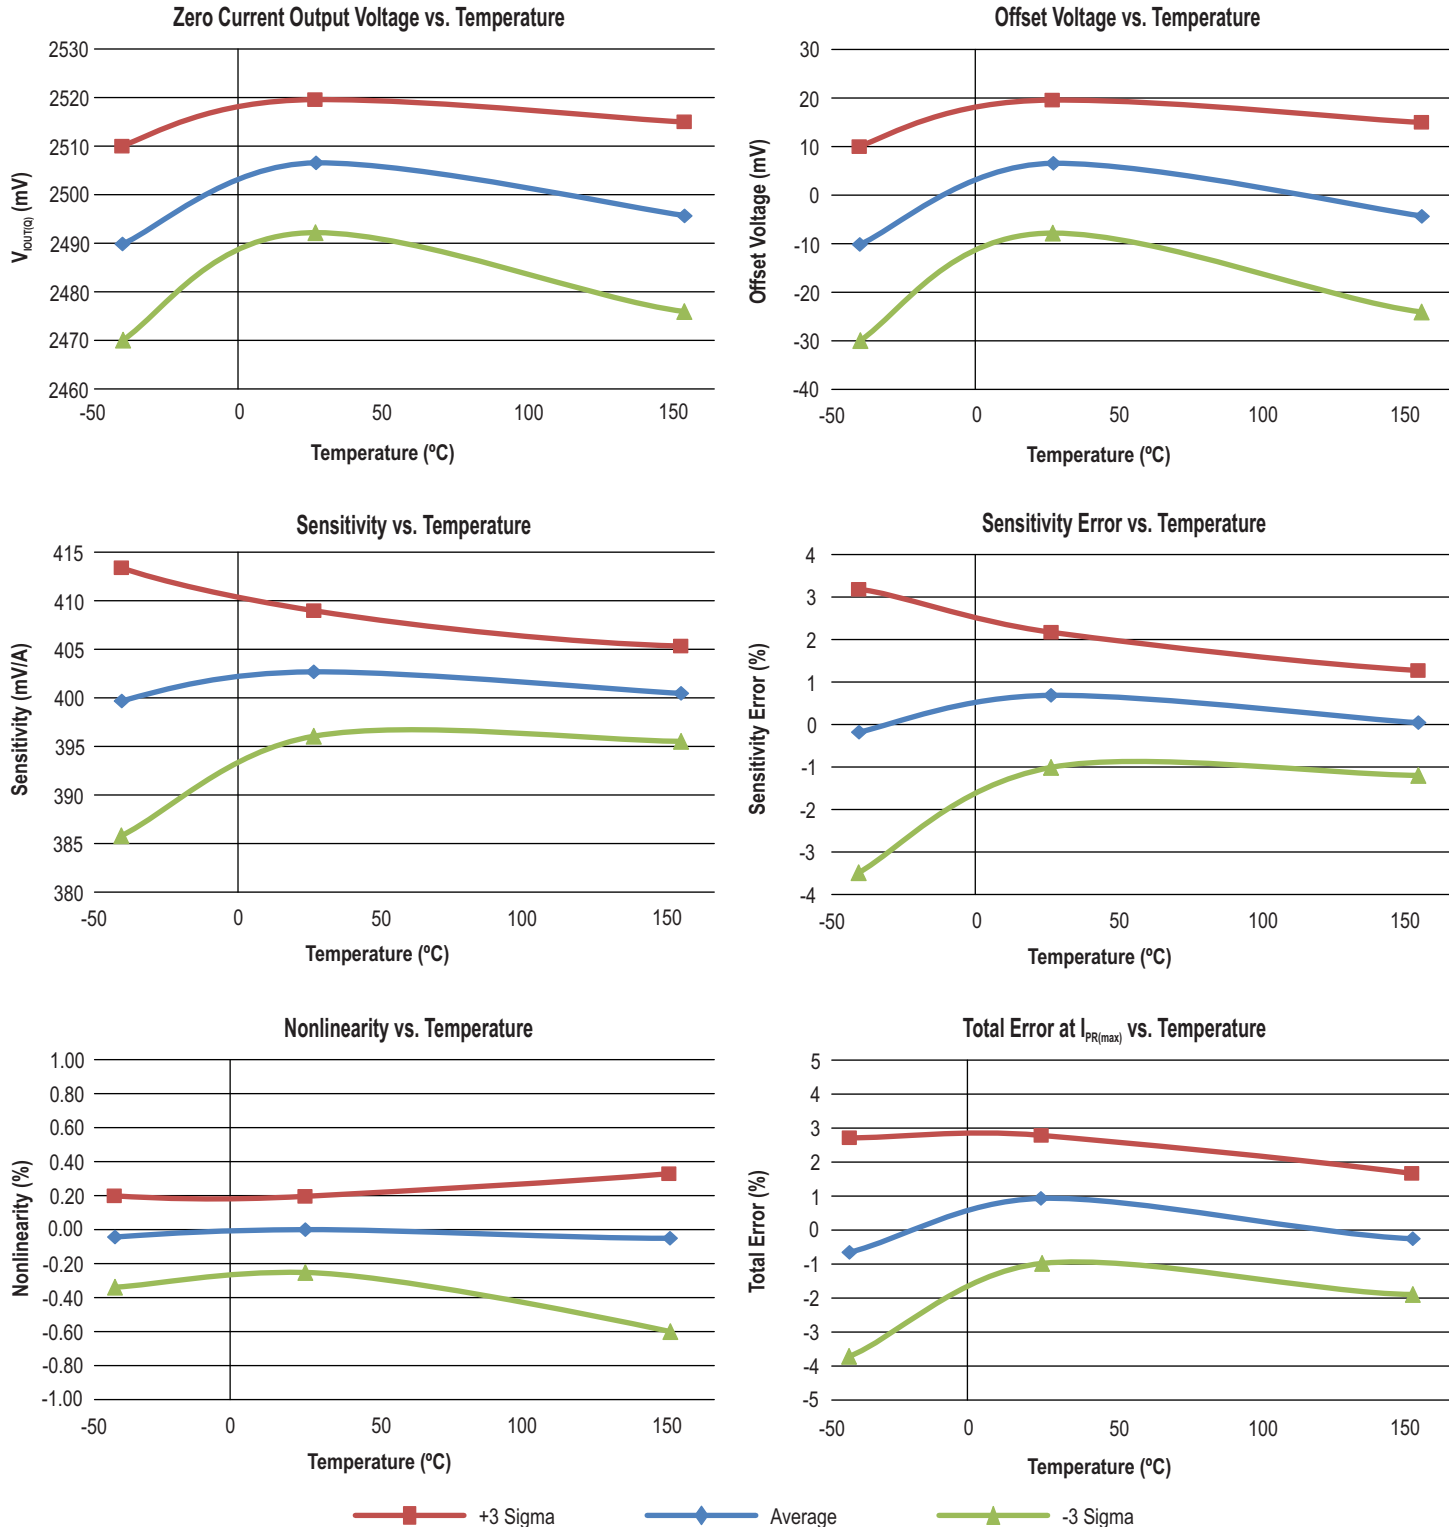


xLLCTR-10AB Key Parameters

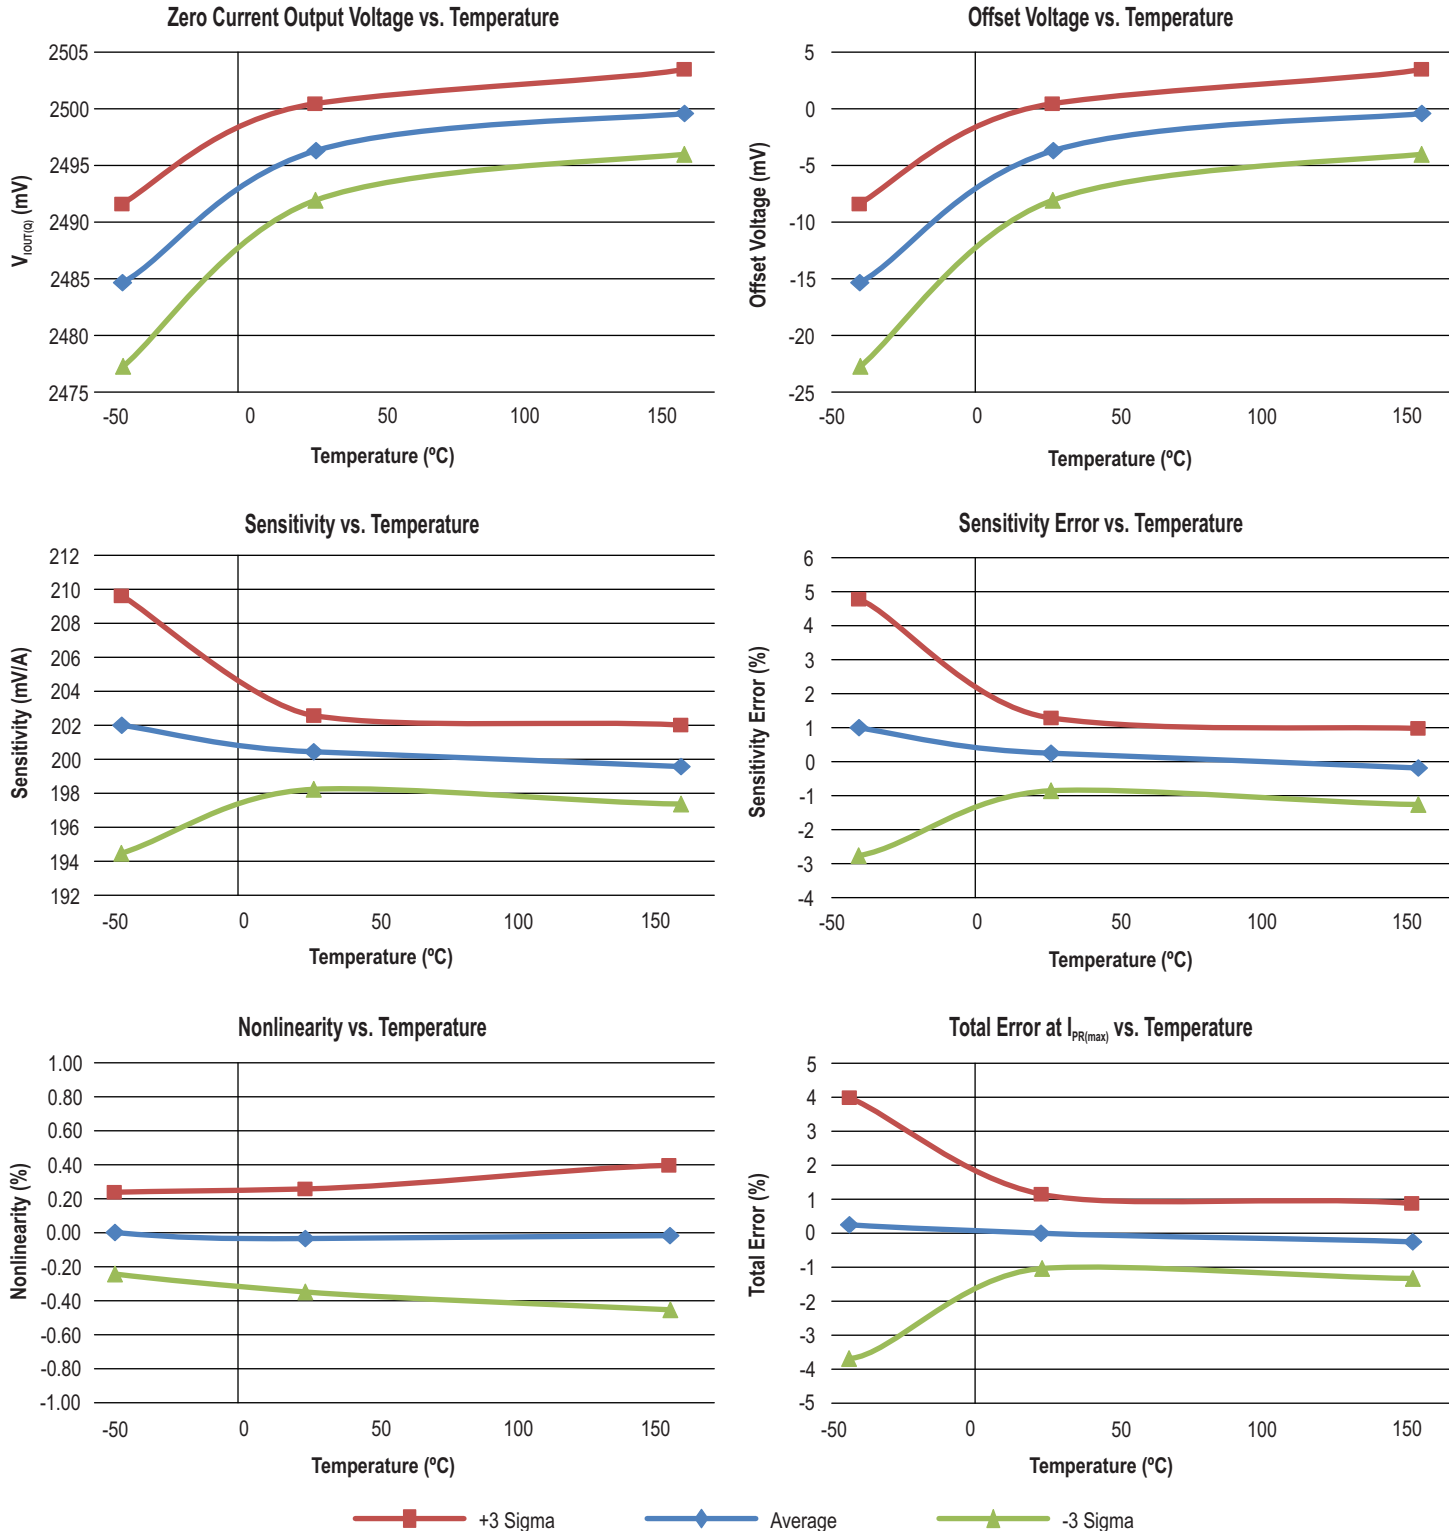


xLLCTR-10AU Key Parameters

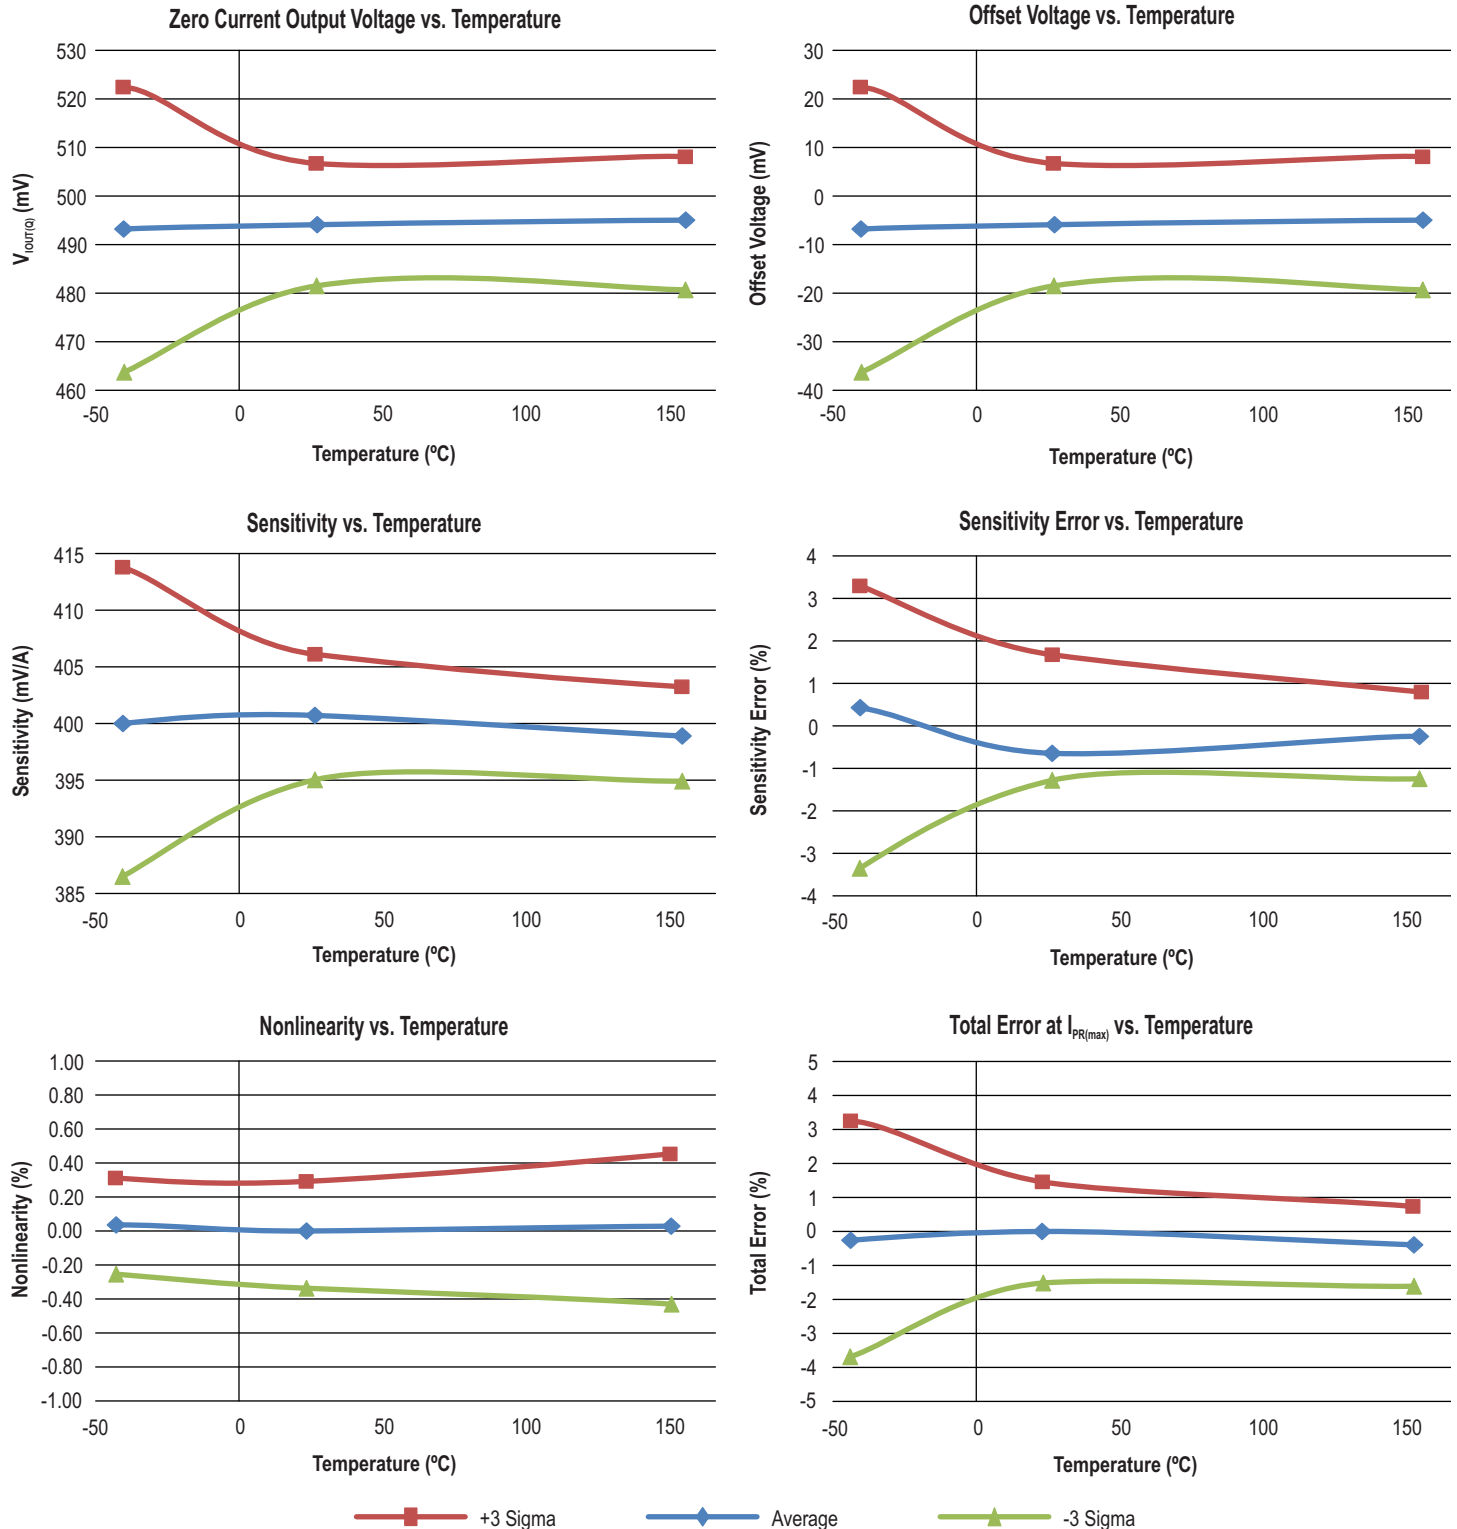


xLLCTR-20AB Key Parameters

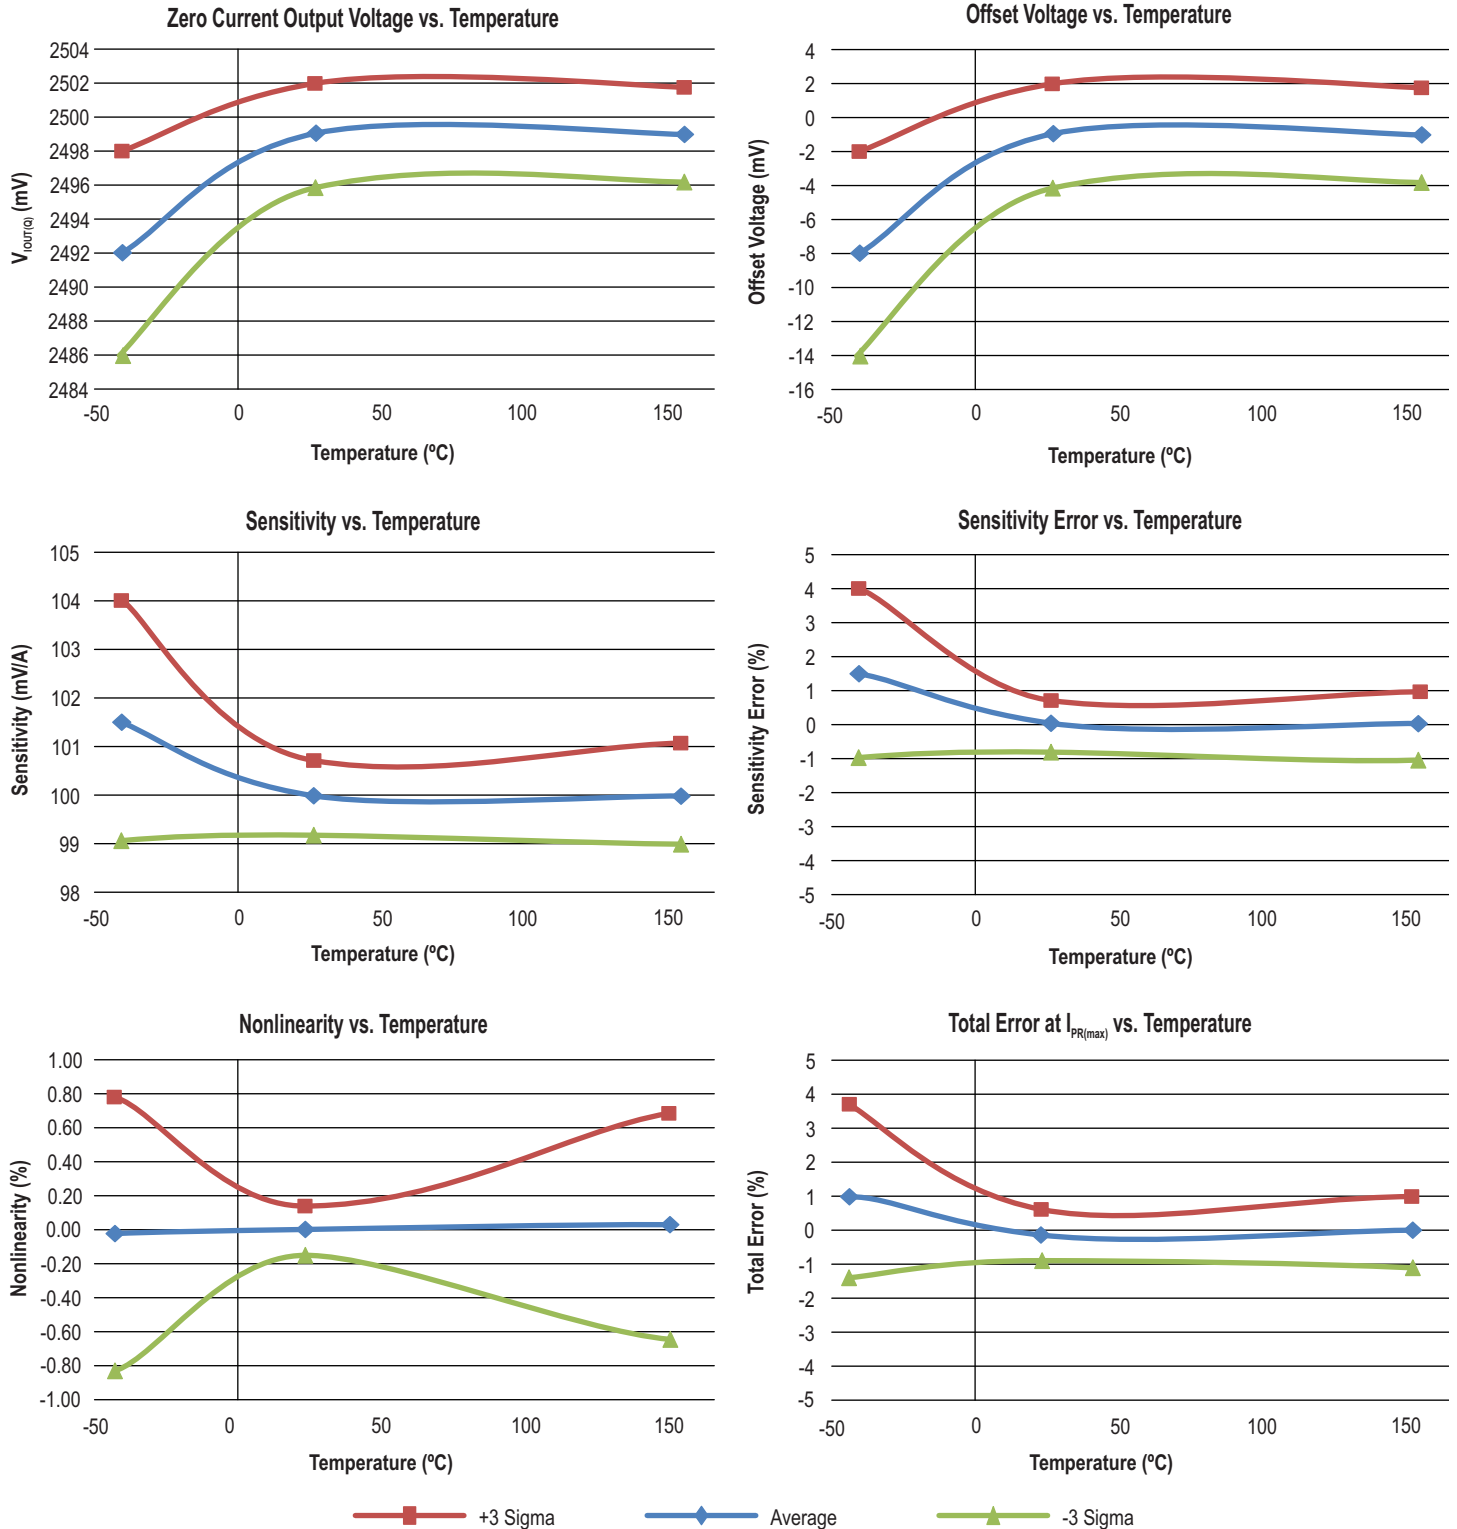


xLLCTR-20AU Key Parameters

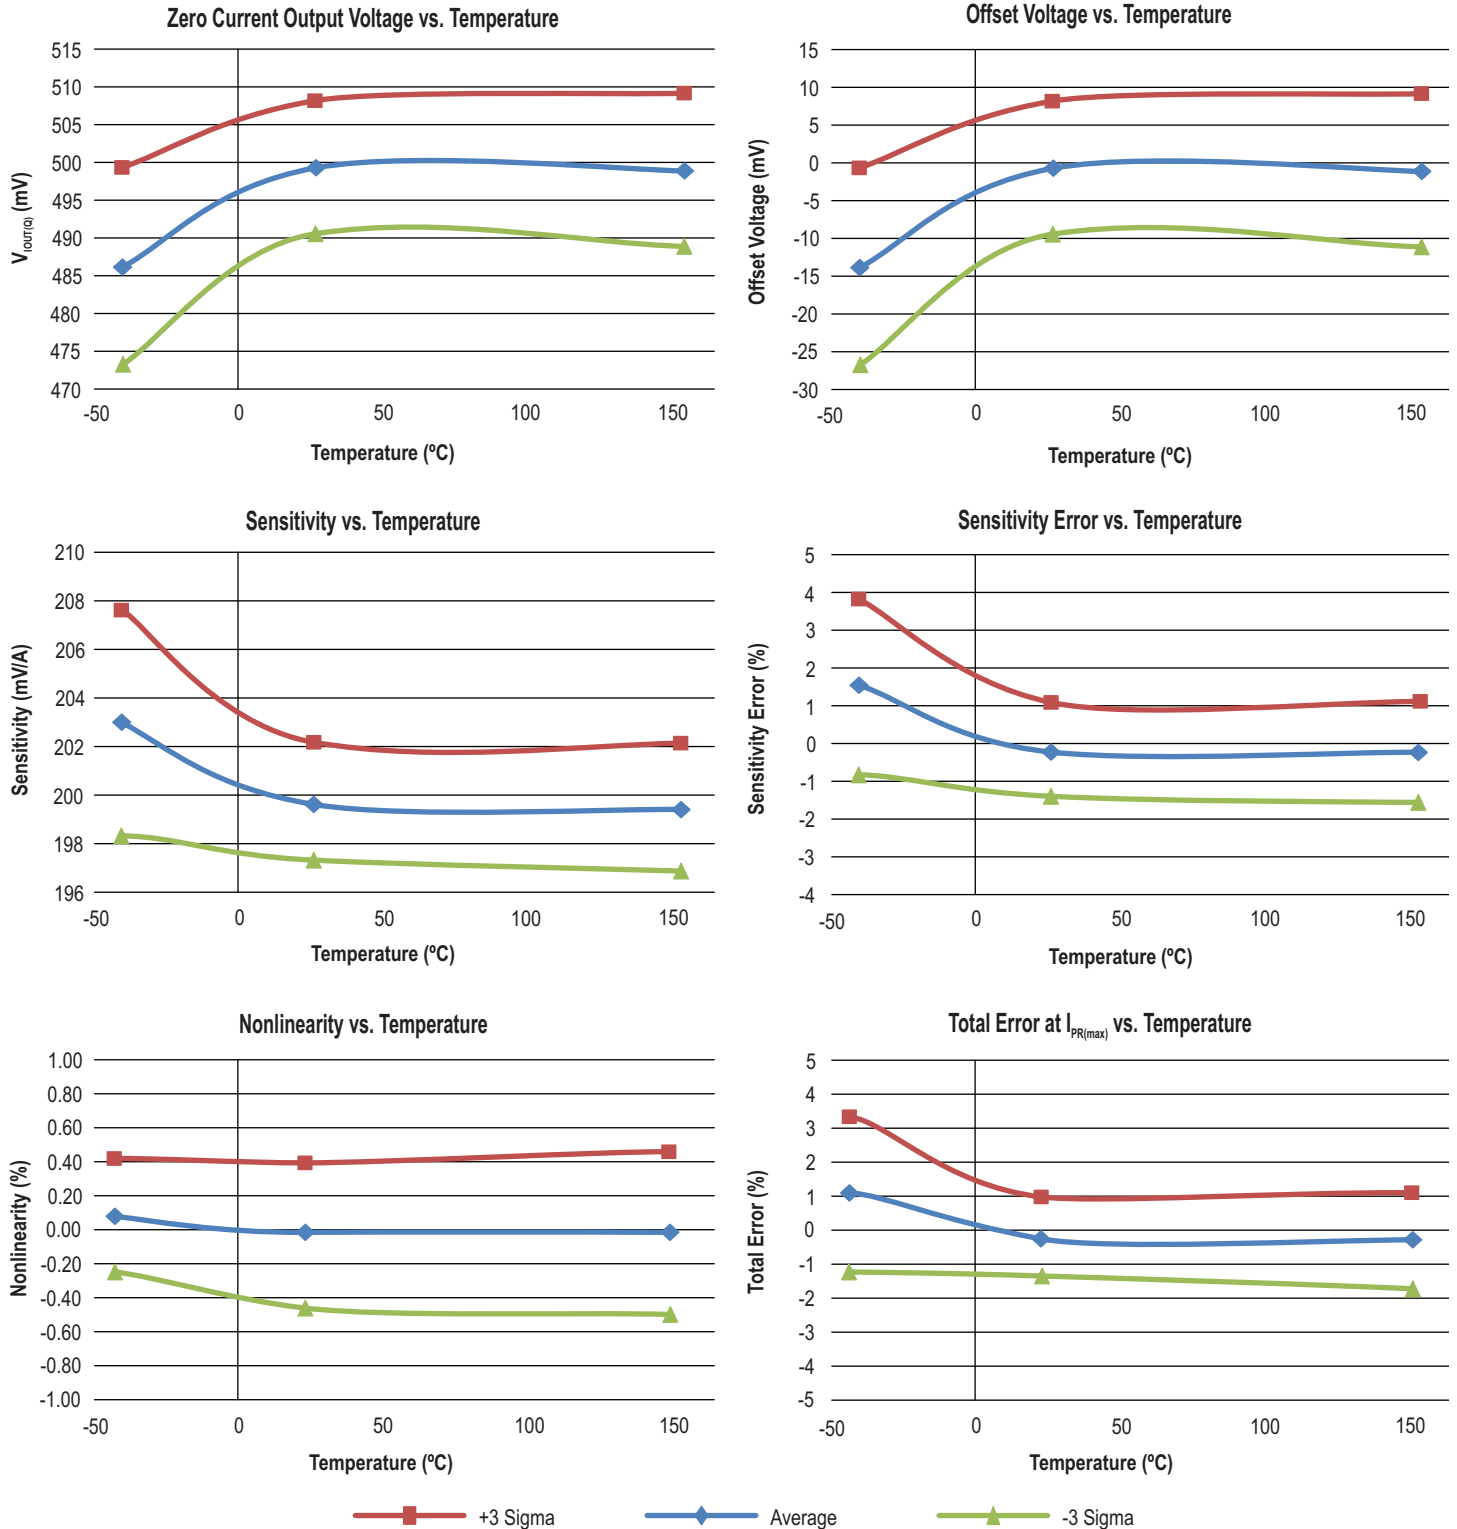

xLLCTR-40AB Key Parameters

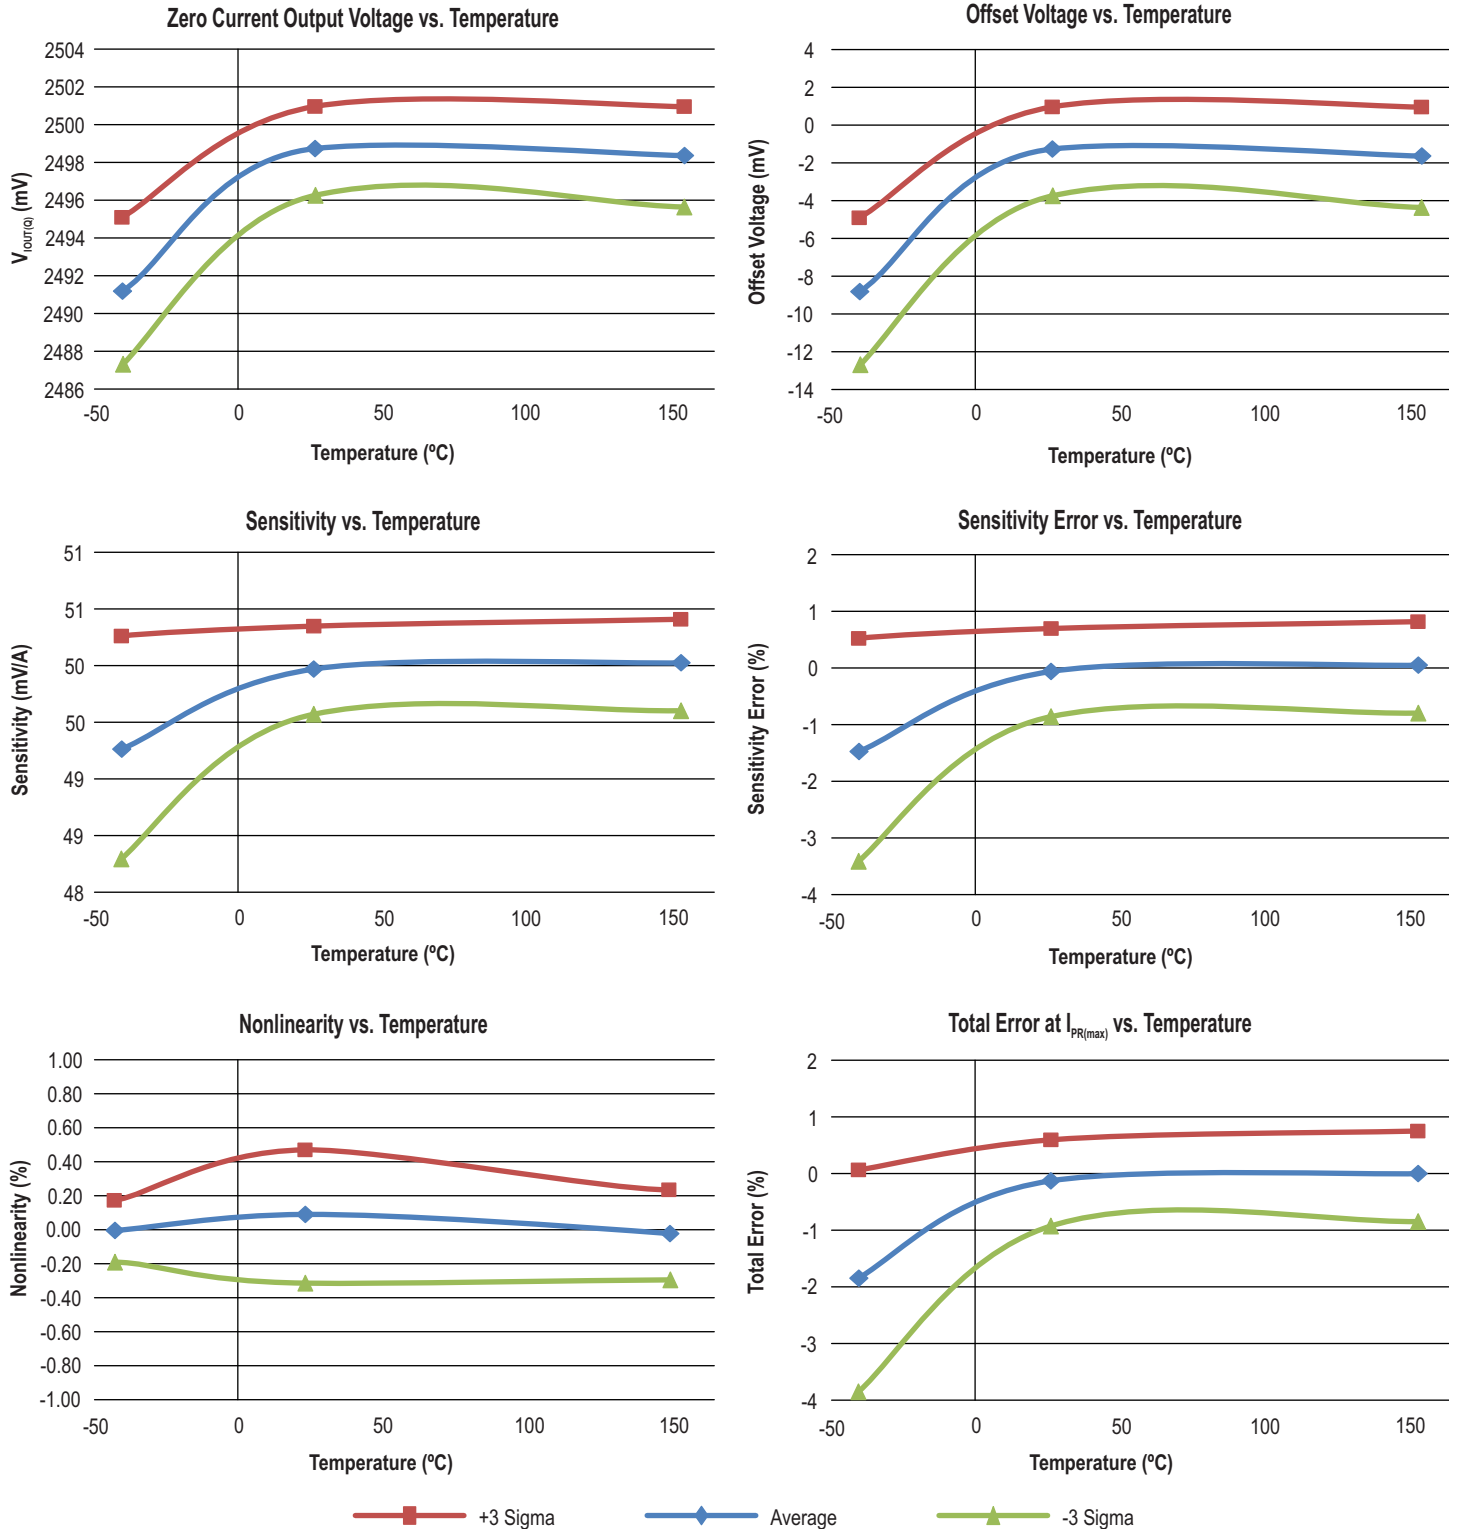

xLLCTR-40AU Key Parameters

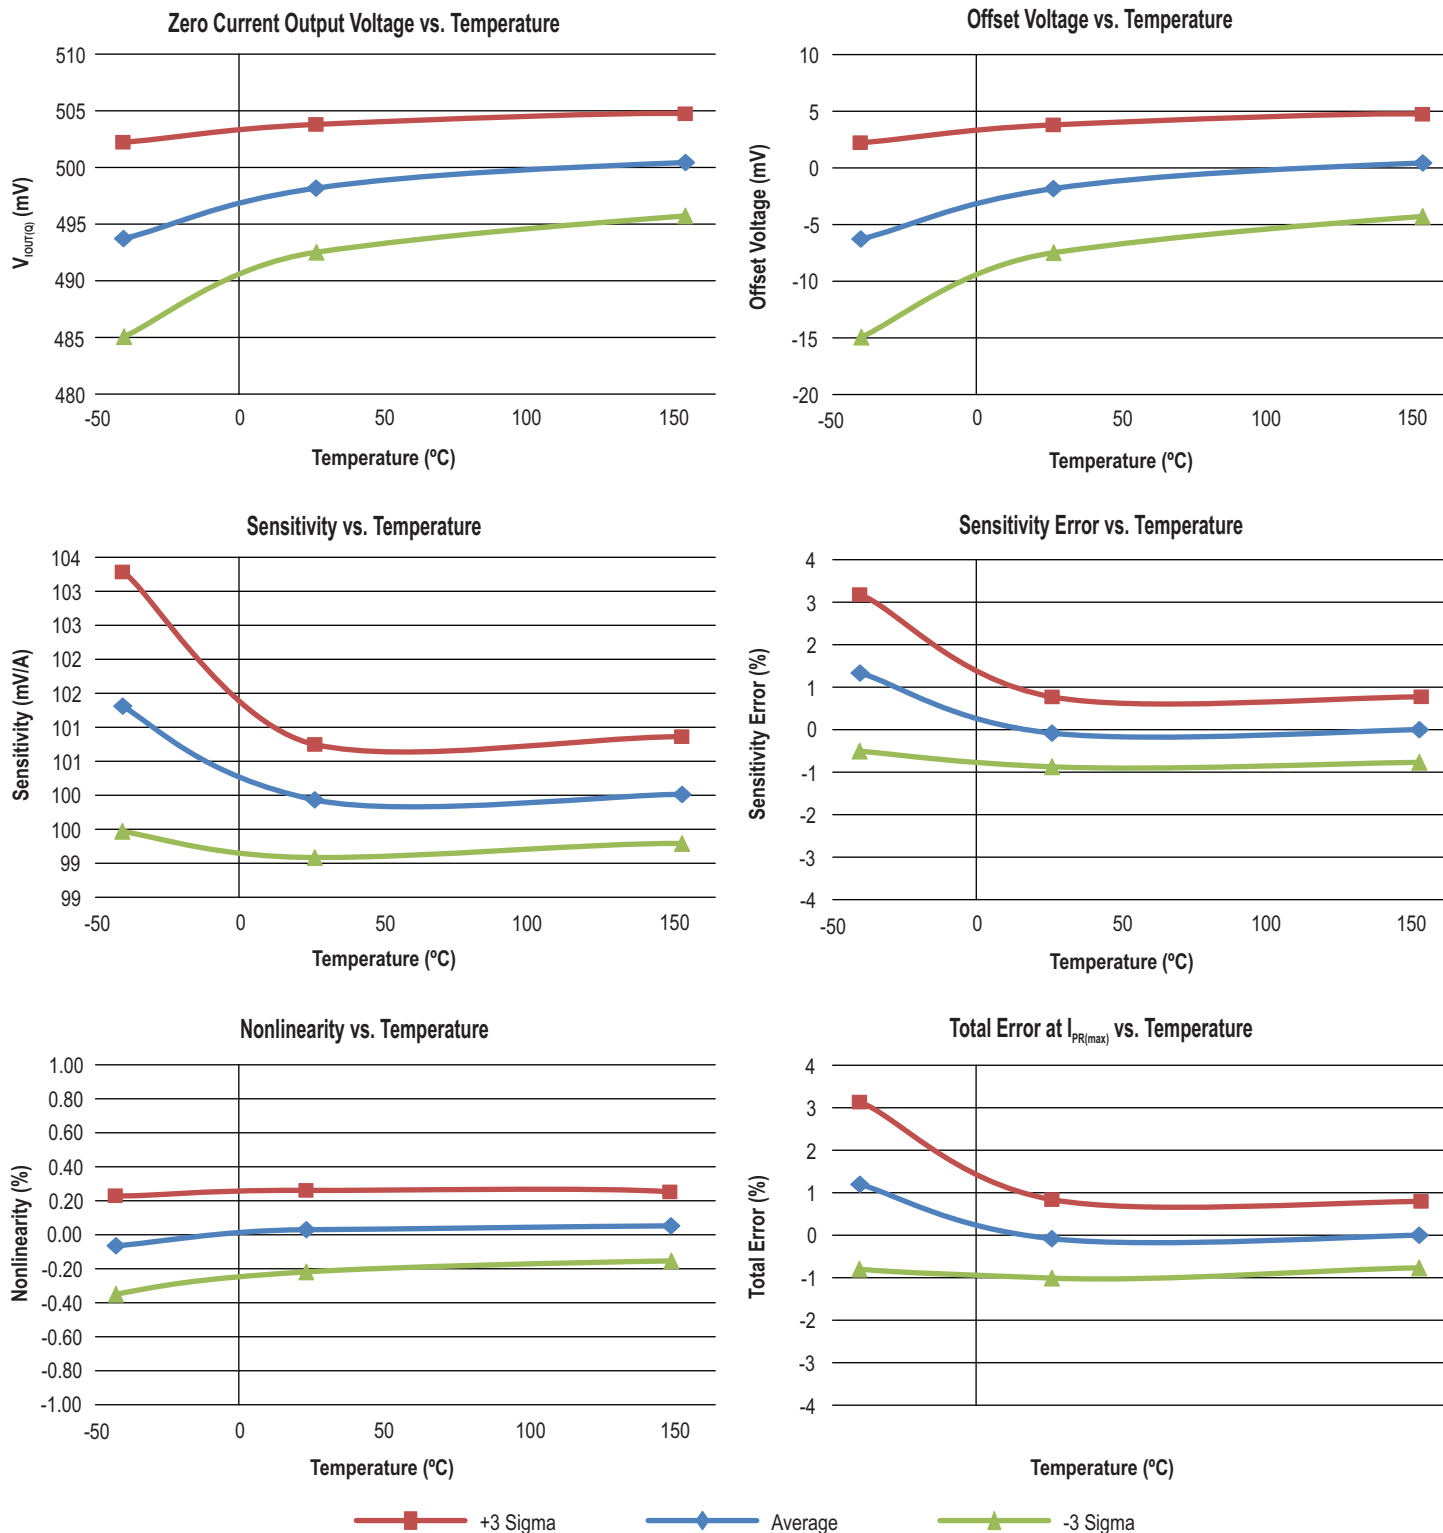

DEFINITIONS OF ACCURACY CHARACTERISTICS

Sensitivity (Sens)

The change in sensor IC output in response to a 1 A change through the primary conductor. The sensitivity is the product of the magnetic circuit sensitivity (G/A) (1 G = 0.1 mT) and the linear IC amplifier gain (mV/G). The linear IC amplifier gain is programmed at the factory to optimize the sensitivity (mV/A) for the full-scale current of the device.

Nonlinearity (E_{LIN})

The nonlinearity is a measure of how linear the output of the sensor IC is over the full current measurement range. The nonlinearity is calculated as:

$$E_{LIN} = \left\{ 1 - \left[\frac{V_{IOUT}(I_{PR(max)}) - V_{IOUT(Q)}}{2 \times V_{IOUT}(I_{PR(max)/2}) - V_{IOUT(Q)}} \right] \right\} \times 100 (\%)$$

where $V_{IOUT}(I_{PR(max)})$ is the output of the sensor IC with the maximum measurement current flowing through it and $V_{IOUT}(I_{PR(max)/2})$ is the output of the sensor IC with half of the maximum measurement current flowing through it.

Zero Current Output Voltage ($V_{IOUT(Q)}$)

The output of the sensor when the primary current is zero. For a unipolar supply voltage, it nominally remains at $0.5 \times V_{CC}$ for a bidirectional device and $0.1 \times V_{CC}$ for a unidirectional device. For example, in the case of a bidirectional output device, $V_{CC} = 5$ V translates into $V_{IOUT(Q)} = 2.5$ V. Variation in $V_{IOUT(Q)}$ can be attributed to the resolution of the Allegro linear IC quiescent voltage trim and thermal drift.

Offset Voltage (V_{OE})

The deviation of the device output from its ideal quiescent value of $0.5 \times V_{CC}$ (bidirectional) or $0.1 \times V_{CC}$ (unidirectional) due to nonmagnetic causes. To convert this voltage to amperes, divide by the device sensitivity, Sens.

Total Output Error (E_{TOT})

The difference between the current measurement from the sensor IC and the actual current (I_P), relative to the actual current. This is equivalent to the difference between the ideal output voltage and the actual output voltage, divided by the ideal sensitivity, relative to the current flowing through the primary conduction path:

$$E_{TOT}(I_P) = \frac{V_{IOUT_ideal}(I_P) - V_{IOUT}(I_P)}{Sens_{ideal}(I_P) \times I_P} \times 100 (\%)$$

The Total Output Error incorporates all sources of error and is a function of I_P . At relatively high currents, E_{TOT} will be mostly

due to sensitivity error, and at relatively low currents, E_{TOT} will be mostly due to Offset Voltage (V_{OE}). In fact, at $I_P = 0$, E_{TOT} approaches infinity due to the offset. This is illustrated in Figures 1 and 2. Figure 1 shows a distribution of output voltages versus I_P at 25°C and across temperature. Figure 2 shows the corresponding E_{TOT} versus I_P .

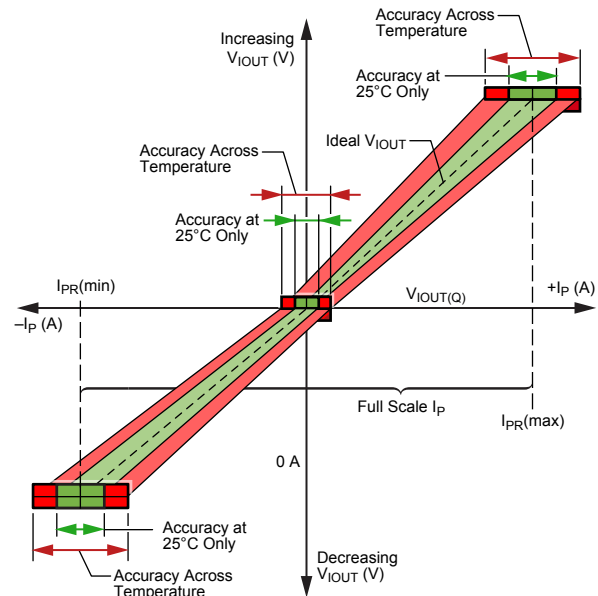


Figure 1: Output voltage versus sensed current

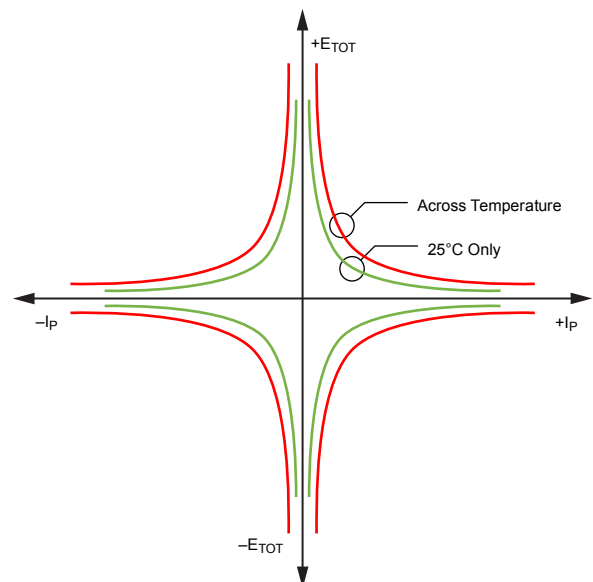


Figure 2: Total Output Error versus sensed current

APPLICATION INFORMATION

Impact of External Magnetic Fields

The ACS723 works by sensing the magnetic field created by the current flowing through the package. However, the sensor cannot differentiate between fields created by the current flow and external magnetic fields. This means that external magnetic fields can cause errors in the output of the sensor. Magnetic fields which are perpendicular to the surface of the package affect the output of the sensor, as it only senses fields in that one plane. The error in Amperes can be quantified as:

$$Error(B) = \frac{B}{C_F}$$

where B is the strength of the external field perpendicular to the

surface of the package in Gauss, and C_F is the coupling factor in G/A. Then, multiplying by the sensitivity of the part, Sens, gives the error in mV.

For example, an external field of 1 Gauss will result in around 0.1 A of error. If the ACS723LLCTR-10AB is being used—which has a nominal sensitivity of 200 mV/A—that equates to 20 mV of error on the output of the sensor.

External Field (Gauss)	Error (A)	Error (mV)			
		5AB	10AB	20AB	40AB
0.5	0.05	20	10	5	2.5
1	0.1	40	20	10	5
2	0.2	80	40	20	10

Thermal Rise vs. Primary Current

Self-heating due to the flow of current should be considered during the design of any current sensing system. The sensor, printed circuit board (PCB), and contacts to the PCB will generate heat as current moves through the system.

The thermal response is highly dependent on PCB layout, copper thickness, cooling techniques, and the profile of the injected current. The current profile includes peak current, current “on-time”, and duty cycle. While the data presented in this section was collected with direct current (DC), these numbers may be used to approximate thermal response for both AC signals and current pulses.

The plot in Figure 3 shows the measured rise in steady-state die temperature of the ACS723 versus continuous current at an ambient temperature, T_A , of 25 °C. The thermal offset curves may be directly applied to other values of T_A . Conversely, Figure 4 shows the maximum continuous current at a given T_A . Surges beyond the maximum current listed in Figure 4 are allowed given the maximum junction temperature, $T_{J(MAX)}$ (165°C), is not exceeded.

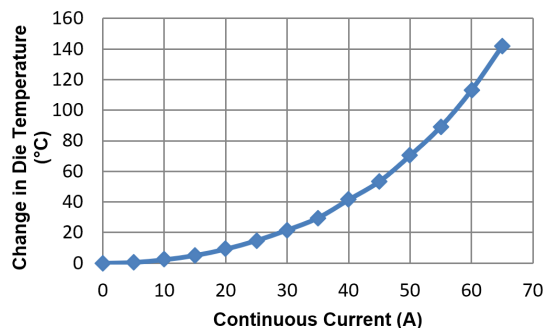


Figure 3: Self-Heating in the LC2 Package Due to Current Flow

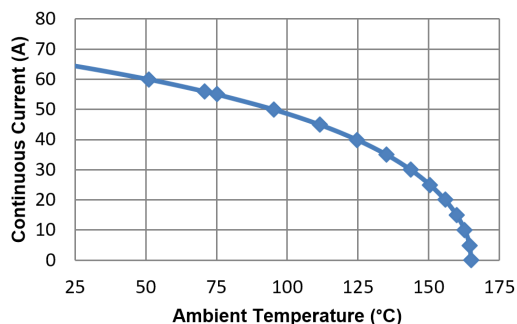


Figure 4: Maximum Continuous Current at a Given T_A

The thermal capacity of the ACS723 should be verified by the end user in the application’s specific conditions. The maximum junction temperature, $T_{J(MAX)}$ (165°C), should not be exceeded. Further information on this application testing is available in the [DC and Transient Current Capability application note](#) on the Allegro website.

ASEK723 Evaluation Board Layout

Thermal data shown in Figure 3 was collected using the ASEK723 Evaluation Board (TED-85-0702-002). This board includes 1388 mm² of 4 oz. copper (0.1388) connected to pins 1 and 2, and to pins 3 and 4, with thermal vias connecting the layers. Top and bottom layers of the PCB are shown below in Figure 5.

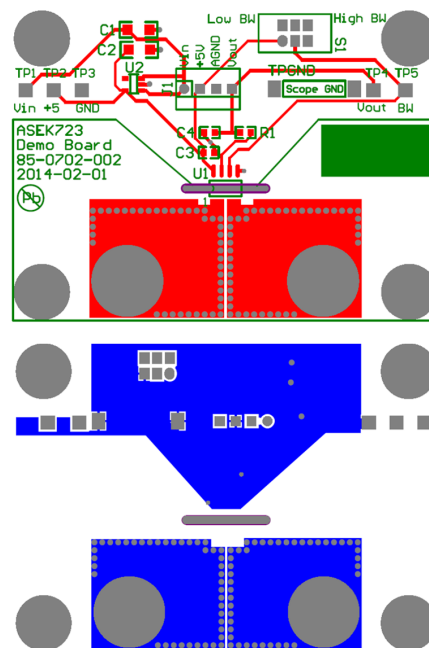


Figure 5: Top and Bottom Layers for ASEK723 Evaluation Board

Gerber files for the ASEK723 evaluation board are available for download from the Allegro website. See the technical documents section of the [ACS723 device webpage](#).

DEFINITIONS OF DYNAMIC RESPONSE CHARACTERISTICS

Power-On Time (t_{PO})

When the supply is ramped to its operating voltage, the device requires a finite time to power its internal components before responding to an input magnetic field.

Power-On Time, t_{PO} , is defined as the time it takes for the output voltage to settle within $\pm 10\%$ of its steady-state value under an applied magnetic field, after the power supply has reached its minimum specified operating voltage, $V_{CC}(\min)$, as shown in the chart at right.

Rise Time (t_r)




The time interval between a) when the sensor IC reaches 10% of its full-scale value, and b) when it reaches 90% of its full-scale value. The rise time to a step response is used to derive the bandwidth of the current sensor IC, in which $f(-3 \text{ dB}) = 0.35/t_r$. Both t_r and t_{RESPONSE} are detrimentally affected by eddy current losses observed in the conductive IC ground plane.

Propagation Delay (t_{pd})

The propagation delay is measured as the time interval a) when the primary current signal reaches 20% of its final value, and b) when the device reaches 20% of its output corresponding to the applied current.

Response Time (t_{RESPONSE})

The time interval between a) when the primary current signal reaches 90% of its final value, and b) when the device reaches 90% of its output corresponding to the applied current.

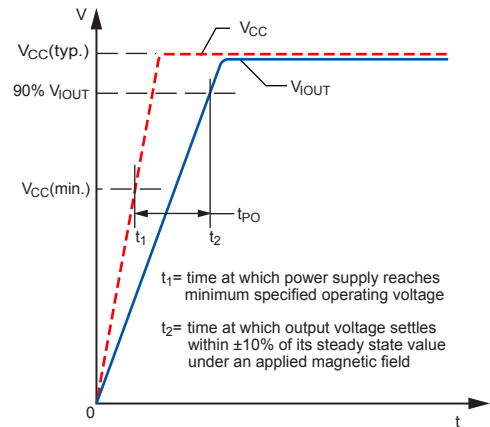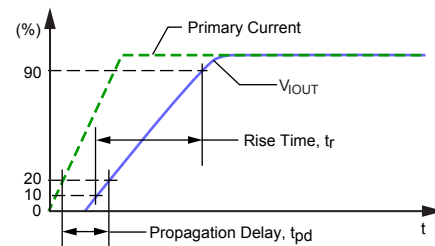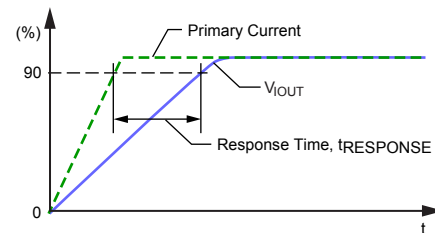Figure 6: Power-On Time (t_{PO})Figure 7: Rise Time (t_r) and Propagation Delay (t_{pd})Figure 8: Response Time (t_{RESPONSE})

PACKAGE OUTLINE DRAWING

For Reference Only – Not for Tooling Use

(Reference Allegro DWG-0000385, Rev. 2 or JEDEC MS-012AA)

Dimensions in millimeters – NOT TO SCALE

Dimensions exclusive of mold flash, gate burrs, and dambar protrusions
Exact case and lead configuration at supplier discretion within limits shown

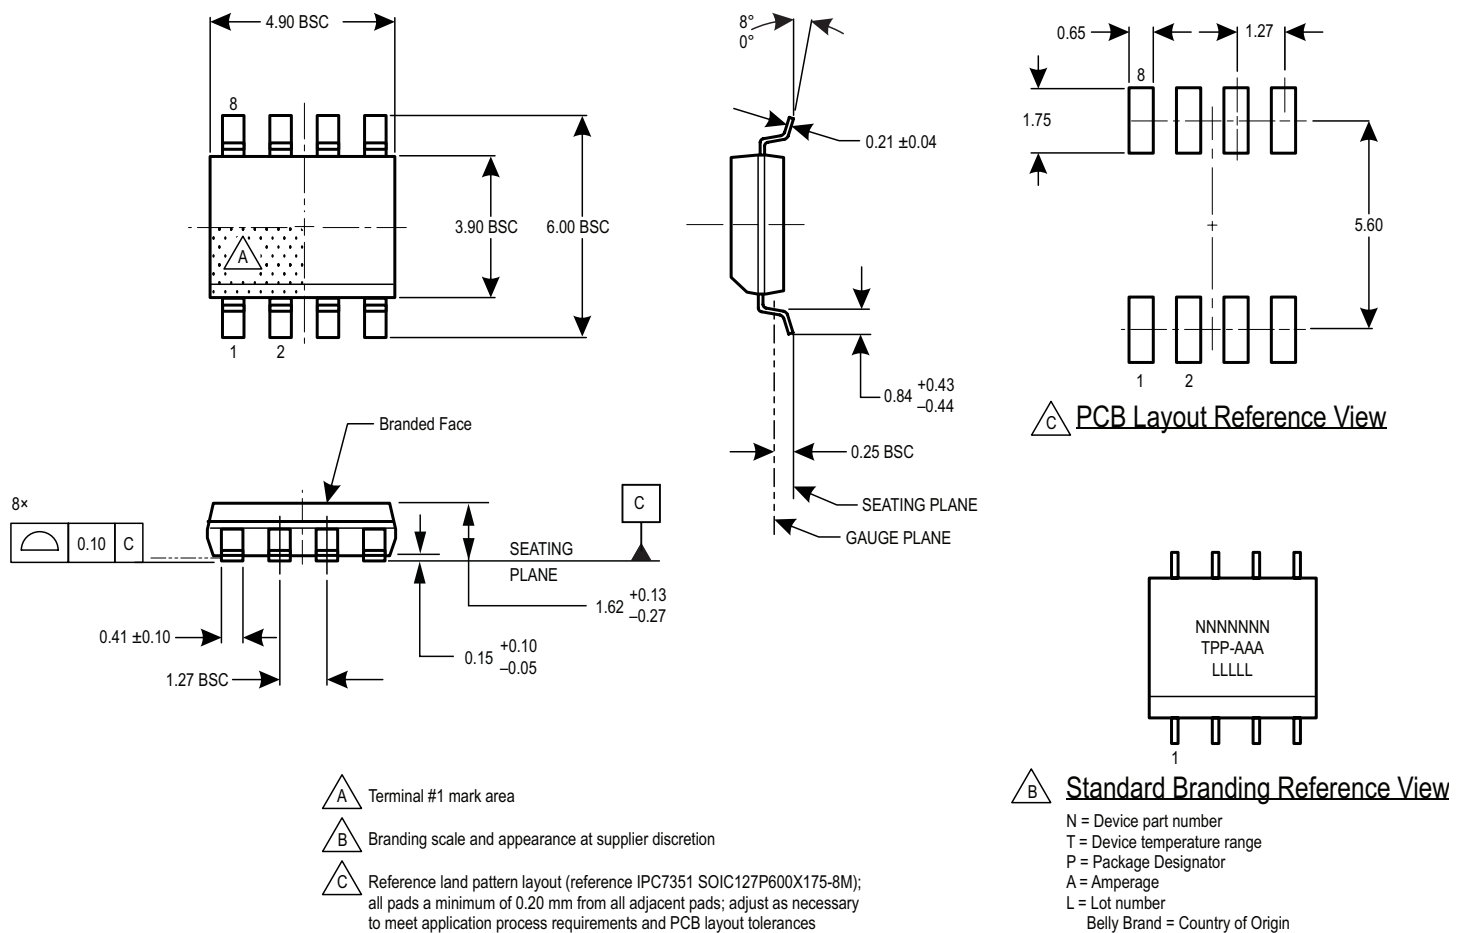


Figure 9: Package LC, 8-pin SOICN

Revision History

Number	Date	Description
–	June 10, 2014	Initial release.
1	October 29, 2014	Added Magnetic Coupling Factor characteristic and Error Due to External Magnetic Fields section
2	April 30, 2015	Added Characteristic Performance graphs
3	December 16, 2015	Added ACS723LLCTR-50AB-T variant
4	December 13, 2018	Added TUV/UL certificates
5	June 3, 2019	Updated TUV certificate mark
6	September 3, 2019	Added Maximum Continuous Current to Absolute Maximum Ratings table (page 3) and thermal data section (page 21)
7	September 9, 2021	Updated package drawing (page 23)

Copyright 2021, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.

For the latest version of this document, visit our website:

www.allegromicro.com