# High Operating Temperature MS920T / MS621T (Under development)



## FEATURES

- ◆ Operating temperature range: -30°C to +85°C
- Temperature Characteristics: Virtually no reduction in capacity at 85°C temperature environment.
- High Temperature Storage Characteristics: Higher capacity retention ratio after 85°C long term storage.
- \* Please confirm the operating conditions, etc. with your contact at Seiko Instruments Inc. We would like to provide the detail characteristics of MS920T.

Designed with SII's unique sealing technology, "MS920T" offers a wider operating temperature range than conventional models, while maintaining the features of current MS-series. The conventional MS rechargeable batteries have an operating temperature range up to 60°C. The new MS920T can operate at an even higher temperature of up to 85°C. It is a great fit for devices that operate under high temperature environment, and for apparatuses that have high internal temperature.

#### APPLICATIONS


Backup power for Real Time Clock or Memory Super small size power supply.


<Examples of apparatus> In-Vehicle equipments, Camera, Meter, etc.

## SPECIFICATIONS

-		Nominal			Si	ze		
	Туре	Voltage	Nominal Capacity	Internal impedance	Diameter	Height	Weight	
	<b>MS920T</b> 3V		6.5mAh	60Ω	9.5mm	2.0mm	0.45g	
	MS621T (Under development)	3V	3.0mAh	80Ω	6.8mm	2.1mm	0.23g	

#### **MS920T**







**FEATURES** 

#### **1. Superior leakage resistance**

Even a slight leakage from a battery may interfere with the connections made by the battery terminals, resulting in unstable device operation. Seiko Instruments Inc. offers micro batteries that are highly leak-resistant due to special sealing materials and processing technologies.

#### 2. Large capacity

In order to extend the operating time of devices with limited battery space, the market demands high volumetric efficiency. We offer large-capacity microbatteries developed with proprietary technology utilizing high-purity materials.

#### 3. Stable operating voltage

Carefully compounded ingredients allow each of our micro batteries to have a stable operating voltage over both a wide temperature range and depth of discharge.

#### 4. High reliability

Our micro batteries are manufactured under an integrated system featuring strict quality control, which starts with component manufacturing, through assembly and on to rigorous out-going inspection. A few decades ago, we commercialized a highly reliable silver oxide battery to meet the requirement of quartz watch development. Since then, we have expanded our microbattery offering and technology to support the increased diversity in electronic products available today.

This brochure introduces manganese silicon lithium rechargeable batteries, titanium silicon lithium rechargeable batteries, and reflowable capacitors.

We plan to continuously develop higher performance microbatteries and widen our products lineup to keep up with our emerging technologies.

Please feel free to contact us with any questions you may have.

#### CONTENTS

MS920T/ MS621T	2
Microbattery and Capacitor Lineup	4
MS Lithium Rechargeable Battery	6
TS Lithium Rechargeable Battery	10
Chip type Electric Double Layer Capacitor	12
XH Capacitor	14
Charging Circuit	17
CPX3225A	18
Selection Check Sheet	19
Environmental Activities	20
Precautions for Your Safety	21


# Microbattery and Capacitor Lineup

# MICROBATTERY AND CAPACITOR FEATURES

Chip type electric double layer capacitor XH capacitor	<ul> <li>Small and thin size chip type Electric Double Layer Capacitor.</li> <li>Pb-free reflowable capacitor made possible by a heat-resistant design. High capacity and long cycle characteristics are offered.</li> </ul>
MS lithium rechargeable battery	: 3V type. Large capacity and high cycle life characteristics in a compact body with excellent overdischarge characteristics featured.
TS lithium rechargeable battery	: 1.5V type. Charge voltage range from 1.5V to 3.0V is supported while high reliability is achieved.

#### Rechargeable battery and capacitor sizes

\*The rectangle and circles in the table show actual battery and capacitor sizes.

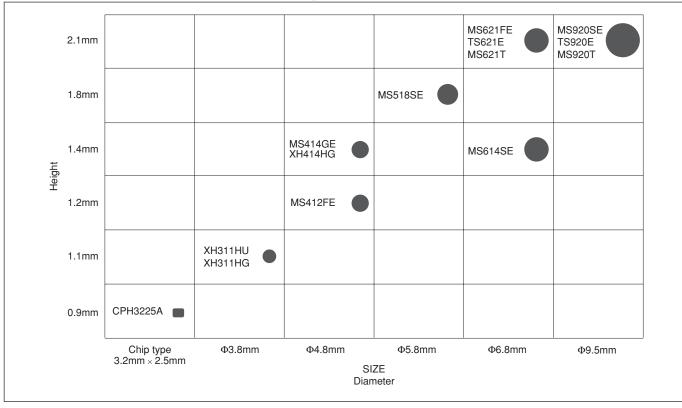



Applications



Micro Battery 2014-2015

## Microbattery and Capacitor Lineup

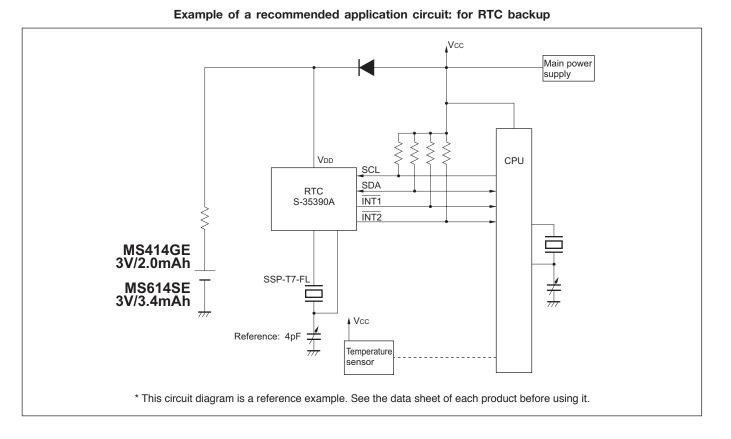

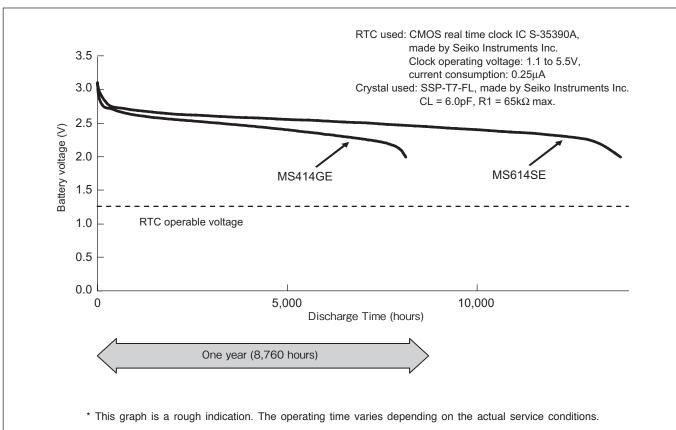

#### Example of RTC backup time, using MS414GE/MS614SE


Downloa

ded from Arrow.com.


# MS Lithium Rechargeable Battery

#### 3V Type

# MS414GE/MS412FE/MS518SE/MS614SE/MS621FE/MS920SE

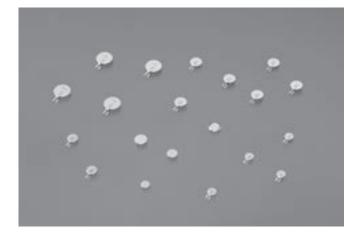

MS (Manganese Silicon) lithium rechargeable batteries, developed by Seiko Instruments Inc., use silicon oxide as the anode and a lithium manganese composite oxide as the cathode. As a result, they offer long cycle life and highly stable overdischarge characteristics.



## SPECIFICATIONS

# FEATURES

- Large discharge capacity : For high operational voltage range of 3.3V to 2.0V.
- Long cycle life :
- Cycle life of over 100 cycles (over 50 cycles for MS414GE) under charge/discharge conditions of 3.1V to 2.0V (D.O.D.100%).
- Excellent overdischarge characteristics : Continued stable capacity characteristics even after the battery is overdischarged down to 0.0V.
- Operation over a wide temperature range: Operating temperature range : -20°C to +60°C Consult us for using the battery at a temperature beyond the above temperature range.
- RoHS Compliant
- Approved by UL (Underwriters Laboratories Inc.) UL File No. MH15628

## APPLICATIONS

- Backup power supply for memory or clock function in various types of electronic equipment for mobile communication, office automation, audio-visual equipment, mobile information equipment, etc. (smartphone, tablet, cellphone, PHS, cordless phone, fax machine, PC, video camera, digital camera, tuner, handy terminal, etc.)
- · Main power supply for small and slim portable equipment.

		Charge Voltage			Standard	Maximum	Cycle Life	e (Time) <sup>*4</sup>	Size	(mm)	
Туре	Nominal Voltage (V)	(Standard Charge Voltage) <sup>*6</sup> (V)	Nominal Capacity (mAh) <sup>*1</sup>	Internal Impedance (Ω) <sup>*2</sup>	Charge/ Discharge Current (mA)	Discharge Current (Continuous) (mA) <sup>*3</sup>		20% <sup>*5</sup> D.O.D. (Depth of Discharge)	Diameter	Height	Weight (g)
MS414GE	3	2.8 to 3.3 (3.1)	2.0	100	0.010	0.05	50	500	4.8	1.4	0.08
MS412FE	3	2.8 to 3.3 (3.1)	1.0	100	0.010	0.10	100	1000	4.8	1.2	0.07
MS518SE	3	2.8 to 3.3 (3.1)	3.4	60	0.010	0.15	100	1000	5.8	1.8	0.13
MS614SE	3	2.8 to 3.3 (3.1)	3.4	80	0.015	0.25	100	1000	6.8	1.4	0.17
MS621FE	3	2.8 to 3.3 (3.1)	5.5	80	0.015	0.25	100	1000	6.8	2.1	0.23
MS920SE	3	2.8 to 3.3 (3.1)	11.0	35	0.050	0.80	100	1000	9.5	2.1	0.47

\*1. Nominal capacity: Typical value of discharge capacity between 3.1V and 2.0V

\*2. Internal impedance is measured using an AC (Alternating Current) method at the fully charged state.

\*3. Maximum discharge current indicates the value of a current for approximately 50% of the nominal capacity.

\*4. Cycle Life indicates the times charge/discharge is repeated for approximately 50% of the capacity values in the specification sheet.

\*5. 100% and 20% are based on nominal capacity.

\*6. A constant voltage charge is recommended, but due to a limit in charge current, it is necessary to insert a resistor to regulate the charge current.

Please see Page 17 for resister value. Contact us for further details.

If a constant current charge is required, contact us for more information.


MS Lithium Rechargeable Batteries are not reflowable. Please mount them on PCB by hand soldering.


ded from Arrow.com


Downloa

# 3V Type


## DISCHARGE CHARACTERISTICS (CHARGE VOLTAGE DEPENDENCE)






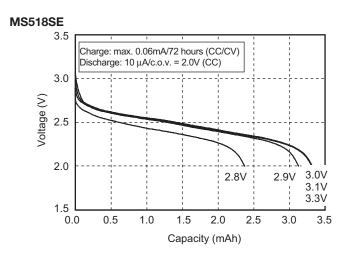





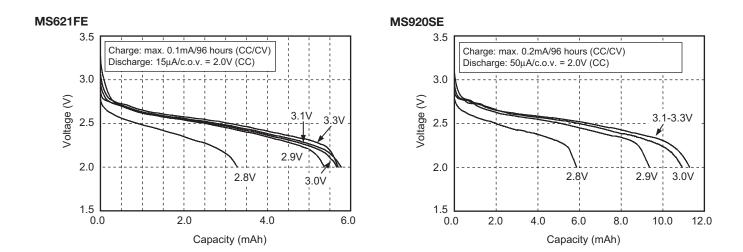

\* c.o.v. : Cut off Voltage


Micro Battery 2014-2015

# MS Lithium Rechargeable Battery


#### 3V Type


# CHARACTERISTICS


#### MS614SE





Discharge Characteristics at Various Discharge Current















Floating Characteristics (60°C, applied voltage 3.1V)



# DIMENSIONS OF STANDARD TERMINALS OF MS LITHIUM RECHARGEABLE BATTERIES










- Units: mm

Downloaded from Arrow.com.

- The hatched parts are tin plated (Sn: 100%).







# TS Lithium Rechargeable Battery <For Solar Watches>

#### 1.5V Type

# TS920E / TS621E (Under Development)



TS lithium rechargeable batteries are high capacity 1.5V type non-reflowable rechargeable batteries that provide sufficient discharge capacity with a charge voltage of less than 2.0V.

## FEATURES

- Low-voltage rechargeable
- High capacity
- · Long cycle life: at least 1000 cycles (20% D.O.D.)
- RoHS Compliant

# SPECIFICATIONS

Туре	Nominal Voltage (V)	Charge Voltage <sup>*3</sup> (V)	Nominal Capacity (Voltage Range V) (mAh)		Standard Charge/ Discharge Current (mA)		Diameter (mm)	Height (mm)	Weight (g)
TS920E	1.5	1.6 to 3.0	5.5 (2.3 to 1.0)	20	0.05	*4 1000 (20% D.O.D.) 100 (100% D.O.D.)	9.5	2.0	0.46
TS621E (Under development)	1.5	1.6 to 3.0	2.5 (2.3 to 1.0)				6.8	2.1	

\*1. Value measured using an AC (Alternating Current) method in the fully charged state.

\*2. Counts of charge and discharge repetition that maintains about 50% of the minimum guaranteed capacity

\*3. A constant voltage charge is recommended, but due to a limit in the charge current, it is necessary to insert a resistor to regulate the charge current.

Please contact us for further details.


If a constant current charge is required, please contact us for more information.

\*4. D.O.D. : Depth of Discharge

TS Lithium Rechargeable Batteries are not reflowable. Please mount them on PCB by hand soldering.

# CHARACTERISTICS Charge/discharge characteristics

#### Charge/discharge characteristi




\* c.o.v. : Cut off Voltage


ded from Arrow.com

Downloa

#### 

**TS920E** 







80

100

120

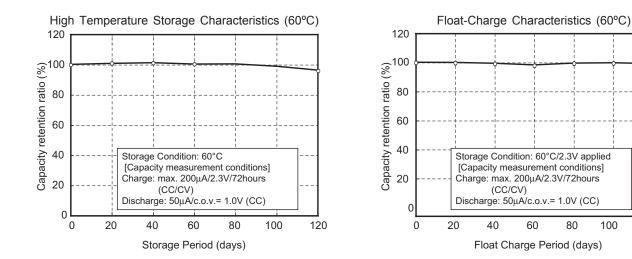

## STANDARD TERMINALS



#### - Units: mm

- The hatched parts are tin plated (Sn: 100%).

Downloaded from Arrow.com.


Seiko Instruments Inc.

## 1.5V Type

# Chip type Electric Double Layer Capacitor

Pb-free reflowable

# **CPH3225A**



CPH3225A is thinnest and smallest chip-type electric double layer capacitor.

The unique ceramic packaging with superior air-tightness is used. As the result, it offers leakage resistance and humidity resistance. Also, by optimizing its materials, a 1 minute rapid charge stores approximately 85% of full capacity.

Its heat-resistant design allows for Pb-free reflowable SMT board attachment.

## **FEATURES**

- Small and thin size
- · Excellent leakage resistance and humidity resistance
- Pb-free reflowable:
- Superior heat resistance (260°C peak) allows reflow soldering by Pr-free solder
- · Long cycle Life:
- At least 10,000 times of charge/discharge
- · Simple Charging circuit (constant voltage charging)
- Wide operating temperature range: Operating temperature range: -20°C to +60°C
   For use the battery at a temperature out of the above temperature range, please consult us.
- RoHS Compliant

#### APPLICATIONS

Backup Power for various devices.

Super small size power supply.

Smartphone, Tablet, Cellphone, Personal computer, IC card, Game machine, Handy terminal, Video camera, various kinds of small appliance, etc.

Туре	Maximum Use Voltage (V)	(Voltage Bange)		$\begin{array}{c} \text{Size}(\text{L}\times\text{W}\times\text{H})\\ (\text{mm}) \end{array}$	Weight (g)
CPH3225A	3.3	4.6μAh (3.3V-1.8V) 0.011F	160	$3.2 \times 2.5 \times 0.9$	0.025

\*. Value measured using AC (Alternating Current) method at the discharged state.

#### <APPLICATION NOTES>


- Prohibition ripple charging A ripple (high frequency fluctuation of voltage) in the charge voltage extremely lowers the capacitor performance. Be sure to charge capacitors with a stable voltage.
- Charge voltage

The age deterioration of the capacitor depends on the charge voltage. The age deterioration is accelerated as charge voltage goes higher.

#### • Usage environment

Aging degradation of the capacitor varies depending on the usage environment (temperature and humidity). Contact us for further details.

CHARACTERISTICS Charge/discharge characteristics




ded from Arrow.com.


Downloa

Seiko Instruments Inc.


#### Pb-free reflowable

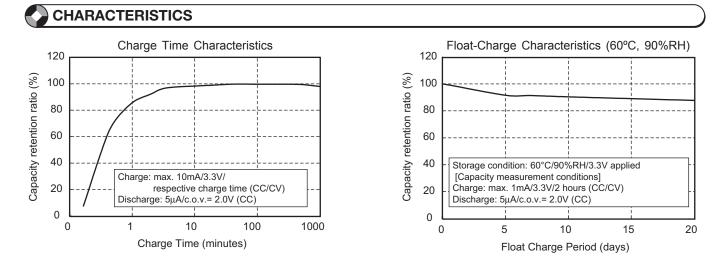

#### REFLOW SOLDERING CONDITIONS




The times of repeated reflow soldering must be two times or less. The Temperature must be measured at top of the cell.



Max. 260°C (within 5 seconds)

#### DIMENSIONS



- Units: mm

# XH Capacitor

# XH311HG/XH311HU/XH414HG



The XH series capacitor has a better discharge characteristic above 3V. It is an environmentally friendly product that is reflow mounted by Pb-free soldering. It features high capacity, and long-term reliability, as well as a wide operating voltage range. It is thus suitable for backup power supply of clock and memory functions on mobile and information devices.

# **FEATURES**

- · Pb-free reflowable: Superior heat resistance (260°C peak) allows reflow soldering by Pb-free solder
- Wide operating voltage range from 0V to 3.3V
- · High capacity: 0.08F with "414" size
- · Long Cycle Life:
- At least 10,000 times of charge/discharge
- · Simple charging circuit (constant voltage charging)
- Wide operating temperature range: Operating temperature range: -20°C to +60°C For using the battery at a temperature out of the above temperature range, please consult us.
- RoHS Compliant

# **APPLICATIONS**

Backup power supply for memory and clock functions of smartphone, tablet, cellphone, PHS, cordless phone, digital still camera, game machine, and printer, etc.

# SPECIFICATIONS

	Electrical Sp	ecifications (Normal Te	Si				
Туре	Maximum Use Voltage (V) Capacitance (F) Ir		Internal Impedance <sup>*2</sup> (Ω)	Diameter (mm)	Height (mm)	Weight (g)	
XH311HG	3.3	0.02	300	3.8	1.1	0.04	
XH311HU	3.3	0.035	150	3.8	1.1	0.04	
XH414HG	3.3	0.08	100	4.8	1.4	0.06	

The age deterioration of the capacitor

The age deterioration is accelerated as

depends on the charge voltage.

charge voltage goes higher.

\*1. Normal temperature: 23°C ± 3°C. Electrical characteristics and aging degradation of the products depend on temperature.

Charge voltage

\*2. Value measured using AC (Alternating Current) method at the discharged state.

#### <APPLICATION NOTES>

• Prohibition ripple charging A ripple (high frequency fluctuation of voltage) in the charge voltage extremely lowers the capacitor performance. Be sure to charge capacitors with a stable voltage.

## **CHARACTERISTICS**

#### Charge/discharge characteristics

#### XH311HG

3.0

2.5


2.0

1.0

0.0


Voltage

5

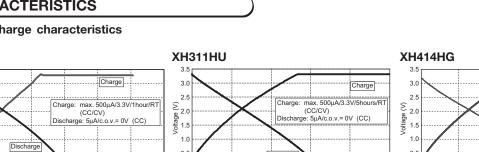

#### • Usage environment

Aging degradation of the capacitor varies depending on the usage environment (temperature and humidity). Contact us for further details.

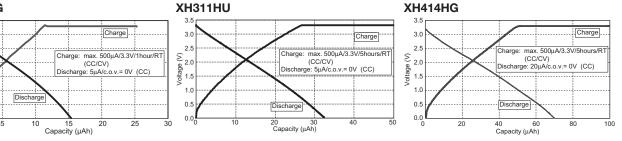


ded from Arrow.com.


Downloa

# CHARACTERISTICS

#### XH414HG

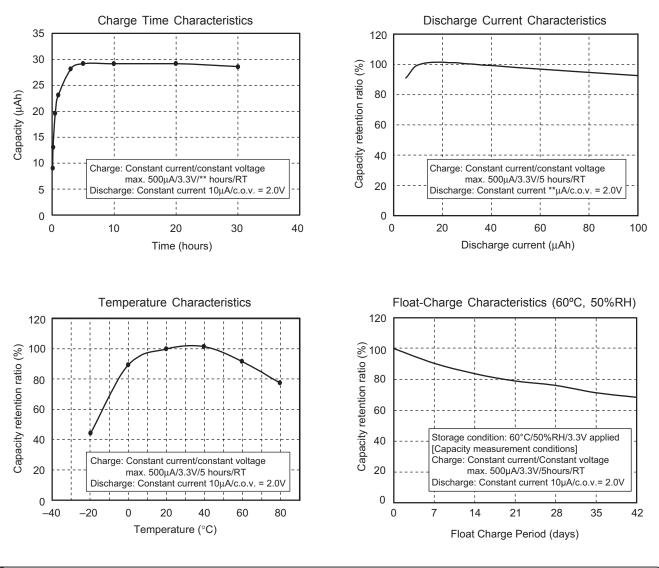


## REFLOW SOLDERING CONDITIONS



The times of repeated reflow soldering must be two times or less. The Temperature must be measured at top of the cell.

Recommended Reflow Condition




Downloaded from Arrow.com.


#### Pb-free reflowable





# STANDARD TERMINALS

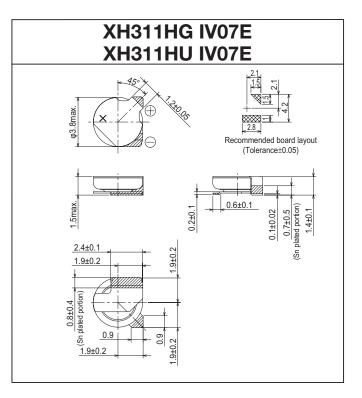

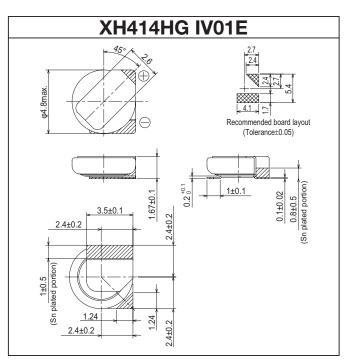


- Units: mm

- The hatched parts are tin plated (Sn: 100%).

# Charging Circuit

## 1. Charging circuit for MS Lithium Rechargeable Battery

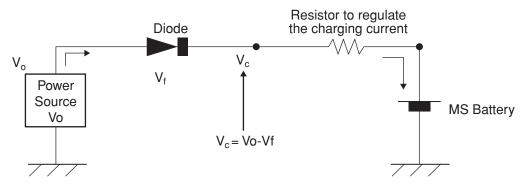

A resistor must be inserted to regulate the charging current, because our rechargeable batteries have a limit for charging current.

Please see the below table for recommended resister values. Those values are minimum for each battery type and "Vc" in the charging circuit.

The "Vc" is the actual charging voltage.

Vc value is calculated by Vo-Vf, deducting Vf (forward voltage drop of the diode) from Vo (the power source voltage).

For example, MS614SE and Vc 3.3V, the resister value should be 620 ohm or more.

Regarding charging voltage, the actual charging voltage "Vc" must Not be higher than 3.3V.


#### Table of minimum resistor values.

	MS414GE	MS412FE	MS518SE	MS614SE	MS621FE MS621T	MS920SE MS920T
Vc	Resistor	Resistor	Resistor	Resistor	Resistor	Resistor
(V)	(ohm)	(ohm)	(ohm)	(ohm)	(ohm)	(ohm)
3.3	2,000	2,000	1,500	620	620	620
3.2	1,600	1,600	1,000	430	430	430
3.1	1,600	1,600	820	330	330	330
3.0	1,500	1,500	750	300	300	300
2.9	1,500	1,500	750	300	300	300
2.8	1,500	1,500	750	300	300	300

Discharge capacity depends on charging voltage (Please see Page 7) Lower than 3V charging may cause lower discharge capacity.

For TS Lithium Rechargeable Battery or other batteries, please contact us.

#### 2. Charging circuit for XH capacitor and CPH capacitor

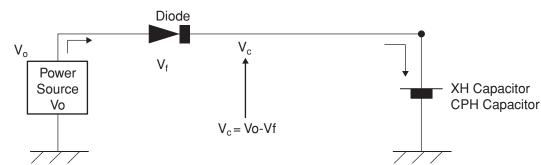

You do not need to insert a resister to regulate charging current.

Our XH capacitor or CPH capacitor do not have a limit for charging current.

Please keep the limit of Maximum charging voltage, 3.3V.

The "Vc" is the actual charging voltage.

Vc value is calculated by Vo-Vf, deducting Vf (forward voltage drop of the diode) from Vo (the power source voltage). The actual charging voltage "Vc" must not be higher than 3.3V.

This guidance is for XH capacitors and CPH capacitors. For CPX capacitor or other capacitors, please contact us.


Micro Battery 2014-2015

Downloa

led from Arrow.com

Seiko Instruments Inc.

# Low ESR, Low leak current Chip-type EDLC CPX3225A series

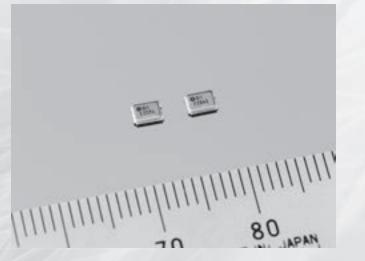

## FEATURES

 Large discharge current and super rapid charging achieved by low internal resistance

Reduced internal resistance to 25 ohms, one-third that of the conventional EDLCs, allows discharge current of up to several tens of mAs and rapid charging within a few seconds.

Chargeable by slight power, thanks to low leak current

Reduced leak current to about 10 nA level, approximately one-tenth that of the conventional EDLCs, allows sufficient charging with several micro Watts from a slight energy harvesting power source.

# APPLICATIONS

- · Electric storage device for energy harvesting
- Power source or Electric storage for Wireless Sensor Network, RFID tag, RF remote control for digital home electrical appliance
- Power source or Electric storage for Contactless IC card, multi-functional IC card
- Instant back-up for CPU or DRAM and power source for saving data on flash memory

#### **SPECIFICATIONS**

Part number	Maximum use voltage	Capacitance	Internal impedance	Size(L × W × H)	Weight
CPX3225A752D	2.6V	7.5mF	25Ω	3.2 x 2.5 x 0.9mm	0.024g
CPX3225A252D (under development)	CPX3225A252D (under development) 2.6V		25Ω	3.2 x 2.5 x 0.9mm	0.024g

ded from Arrow.com.

Downloa

# Microbattery and Capacitor Selection Check Sheet

# **CHECK SHEET**

If you are considering the purchase of one or more of our microbatteries or capacitors, please complete this check sheet and send it to us. We will let you know which products will be optimum for you to use.

# **Fax Sheet**

Micro-Energy Division Sales Sec. +81-43-211-8034 **Battery Sales Person** 1. Your company name 2. Which application do you use? 3. Your expected backup period hour / day / month 4. Your requested delivery date mm / yy 5. Operation voltage of the device for backup V to V 6. Consumption current at backup time mA • μΑ 7. Setting value of charging voltage V 8. Presence of reverse current protection diode Yes • No 9. Vf characteristics of the reverse current protection diode (at  $10\mu A$ ) V 10. Resistance value of charging protection resistance Ω 11. Limit of charging time 12. Required cycle life times 13. Other requests

14. Expected life (e.g., xx years or backup for xx hours)

15. Ambient temperature and humidity

Your contact information									
Name									
Section									
Phone									
Fax									
E-mail									

Micro Battery 2014-2015

Downlo

d from Arrow.com

# Environmental Activities

#### Environmental Activities at Micro-Energy Division **Environment & Quality Policy** Seiko Instruments Inc., Micro-Energy Division is located in Ayashi, a city with beautiful nature, in Miyagi Prefecture. Our aim is to provide customer satisfaction and harmony with the environment through all our products, from Micro battery to other electronic products, and sales activities. 1. We adhere firmly to laws, regulations and customers' specified requirements. 2. We aim to prevent pollution, to reduce CO<sub>2</sub>, and to conserve biodiversity. 3. We set goals, take actions, conduct regular reviews, and improve the system and performance continuously. 4. We contribute to the society by supporting green procurement, developing green products, and promoting green life activity. We adhere to regulations and recommodations regarding Chemical substance content in our products and will promote reduction and replacement. 6. We vigorously educate ourselves and try to engage voluntarily in green life activity. Based on the above policy, the following six environmental approaches are now being implemented throughout Micro-Energy Division. 1. Enrich the line up of Eco-Products • We introduced the SII Green Product Label System which is equivalent to the ISO 14021 Type II environmental label. At the end of FY2006, 100% of our products are certified as SII Green Products. In addition, 38 products are certified as SII "High Grade" Green Products. 2. Reduction of Greenhouse Gas • We practice various CO<sub>2</sub> reduction measures like using Eco-machinery. Since 1997, we have successfully reduced a total of 54,100 tons of CO2. We believe our efforts contribute to the prevention of global warming ton CO2 70,000 Reduction amount of CO2 60,000 (accumulated since 1997) 50,00 40,000 30,000 20,000 10,000 0 08 05 06 07 09 10 11 12 13 targe 3. 3R Promotion Activity • We have promoted the "reduce and reuse" activities and also promoted recycling at the end of the production process. With these activities, we achieved "Zero-emission" in 2004. We have reduced the non-recyclable wastes to less than 1 ton - less than 1% of our 1997 results. 80 70 Final amount of waste 60 50 40 30 20 10 07 11 12 04 05 06 09 10 13 4. Biodiversity Conservation We endeavor to deepen our understanding on the relevancy between biodiversity and our business activities, and to contribute to the conservation of biodiversity by participating local community activities. 5. Green Purchasing

• We adhere to a green purchasing campaign through the purchase of ingredients, manufacturing materials, and other necessary products, whenever appropriate.

#### 6. Green Life

• With the participation of all of Micro-Energy Division members, we deploy a clean-up and beautification campaign in all areas surrounding our factory once a year. In addition, we participate in the clean up activity at Hirose River once a year.

#### 7. Conflict Minerals

• Recognizing the international importance of conflict minerals issue, we prohibit the use of such minerals.

# Precautions for Your Safety

Micro-Energy Division Lithium rechargeable batteries (MS, TS) contain flammable organic solvents. For your safety, please follow the following precautions.

# 🔥 WARNING!

• Do not charge by higher current or higher voltage than specified.

Doing so may generate gas inside the battery, resulting swelling, fire, heat generation or bursting.

- Do not heat, disassemble nor dispose of in fire Doing so damages the insulation materials and may cause fire, heat generation, leakage or bursting.
- **Do not solder directly to the battery** If soldering is performed directly to the battery, the battery is heated up, consequently causing leakage, explosion or fire due to overheating from internal short-circuit.
- Do not short.

If the (+) and (-) come into contact with metal materials, short-circuit occurs. As a result, fire, heat generation, leakage or bursting may occur.

Keep batteries out of children's reach.
 It is dangerous that children swallow the battery.
 When you design mechanical hardware around the battery, please fix the battery firmly in order to prevent children from removing it.

When you store the batteries, please keep the batteries out of children's reach.

If a battery is swallowed, consult a physician immediately. • Do not reverse placement of (+) and (-)

- If the (+) and(-) side of the battery is reverse inserted, it may cause a short-circuit or over discharge of the battery on some equipment and it may induce overheating, explosion or fire.
- If leaked liquid gets in the eyes, wash them with clean water and consult a physician immediately.
- Do not use new and used batteries together. Do not use different types of batteries together. It may cause fire, heat generation, leakage or bursting.
- If you connect two or more batteries in series or parallel, please consult us in advance. It may cause bursting or fire due to unbalanced load or voltage.
- Do not use nor leave the batteries in direct sunlight nor in high-temperature areas. It may cause fire, heat generation, leakage or bursting.

Do not weld terminals to the battery

The heat by welding may cause fire, heat generation, leakage or bursting.

We weld standard terminals under strictly controlled conditions.


If you need to weld terminals to the battery, please consult us in advance.

Do not discharge by force

If the battery is discharged by direct connection to an external power supply etc., voltage of the battery will decline lower than 0 volts (electrical reversal) and will cause the battery case to expand, overheat, leak, explode or burn.

- In case of leakage or a strange smell, keep away from fire to prevent ignition of any leaked electrolyte.
- In case of disposal, insulate between (+) and (-) of battery by an insulating material. Jumbling batteries or with other metal materials cause short-circuit. As a result, fire, heat generation, leakage or

bursting may occur.



# 

- Do not apply strong pressure to the batteries nor handle roughly.
- It may cause fire, heat generation, leakage or bursting. • Avoid contact with water.
- It may cause heat generation.
- Keep batteries away from direct sunlight, high temperature and humidity.

It may cause heat generation or performance deterioration.

#### For prevention of performance deterioration of battery

 Pay attention to mat or sheet for ESD Battery with tabs or battery on PCB may short-circuit on the mat for ESD. As a result the voltage of the cell is reduced.

• Pay attention to soldering by tips Do no touch the battery by solder chips, when soldering another components after equipping battery.

- Keep any high temperature process away from battery.
- Use non-conductive material of jig for pick and place of batteries, for short-circuit protect. If short-circuit of battery occurs, the voltage of battery drops down quickly but raises gradually. • Pay attention to washing and drying Some detergent or high temperature drying may cause deteriorate of bat-

tery. If you need to wash batteries, consult us.

· Pay attention to material of jig for pick and place

#### International Transportation and Disposal

#### International Air/Marine/Ground Transportation

Regarding the transport of Lithium battery, organizations like IATA, ICAO, IMO, DOT have determined transport regulations, based on the United Nations Regulations. The SII Lithium rechargeable batteries can be transported being not

subject to the provisions of dangerous goods, if they meet the following requirements. (a) **<Caution Label>** Lithium battery handling label (IATA Dangerous

(a) **Countern Labers** Limit in battery handing laber (ATA Dangerous Goods Regulations Figure 7.4.1) must be put on each package. (b) **<Not Restricted Declarations** Each shipment must be accompanied with a document indicating that the packages contain Lithium

panied with a document indicating that the packages contain Lithium batteries, that the packages must be handled with care, and that special procedures should be followed in the event the package is damaged, and a telephone number for additional information. (c) <Weight Limit> Except in the case of packed with equipment, package may not exceed 2.5 kg gross mass.
 (d) <Strong Packaging> Batteries are separated so as to prevent short-circuit and are packed in strong packaging.
 (e) <Package Drop Test> Each packages is capable of withstanding a

(e) <**Package Drop Test>** Each packages is capable of withstanding a 1.2m drop test in any orientation without damage to batteries contained. **For further information, please consult with us.** 

#### **Disposal**

Recent environment protection concerns have increased globally and waste and recycling are regulated in the world. The current regulations differ in each country, state and local municipality. Please consult local regulations and authorities for recommended disposal of batteries. If you are in question of application or safety of our batteries, please consult your local authorities.

Micro Battery 2014-2015

or It may tion.

# Precautions for Your Safety

Micro-Energy Division capacitors (XH, CPH, CPX) contain flammable organic solvents. For your safety, please follow the following precautions.

# 

 Do not charge by higher current or higher voltage than specified.

Doing so may generate gas inside the capacitor, resulting in swelling, fire, heat generation or bursting.

- Do not reverse placement of (+) and (-) SII capacitors have polarity. If the (+) and (-) side of the capacitor is reverse inserted, it may cause short-circuit or over discharge of the capacitor on some equipment and it may induce overheating, explosion or fire.
- Do not solder directly to the capacitor (for XH only) If soldering is performed directly to the capacitor, the capacitor will over heat and, consequently cause leakage, explosion or fire due to overheating from internal short-circuit.
- Keep capacitors out of children's reach. It is dangerous that children swallow the capacitor.

When you design mechanical hardware around the capacitor, please fix the capacitor firmly in order to prevent children from removing it.

When you store the capacitors, please keep the capacitors out of children's reach. If a capacitor is swallowed, consult a physician immediately.

• Do not heat, disassemble nor dispose of in fire

Doing so damages the insulation materials and may cause fire, heat generation, leakage or bursting.

- Do not discharge by force If the capacitor is discharged by direct connection to an external power supply etc., voltage of the capacitor will decline lower than 0 volts (electrical reversal) and will cause the capacitor case to expand, overheat, leak, explode or burn.
- In case of leakage or a strange smell, keep away from fire to prevent ignition of any leaked electrolyte.



- If leaked liquid gets in the eyes, wash them with clean water and consult a physician immediately.
- Do not use nor leave the capacitors in direct sunlight nor in high-temperature areas.
- It may cause fire, heat generation, leakage or bursting.
  Do not make the capacitor airtight by sealing it with adhesive agent or coating agent.

It may cause short-circuit because of generated and accumulated electrolyte gas.

- Do not use new and used capacitors together. Do not use different types of capacitors together. It may cause fire, heat generation, leakage or bursting.
- If you connect two or more capacitors in series or parallel, please consult us in advance.
- It may cause bursting or fire due to unbalanced load or voltage. • Keep capacitors away from direct sunlight, high temperature and humidity.
- It may cause heat generation or performance deterioration.

All data, dimensions, characteristics and values shown in this catalogue are for reference only. Please contact your local Seiko Instruments Representative for current detailed specifications.

#### IMPORTANT

- 1. The information herein is subject to change without notice.
- 2. Neither reproduction, duplication nor unauthorized use of this catalog in whole or part is allowed without the prior written approval of Seiko Instruments Inc.
- The colors of the products reproduced herein ("Products") may be different from the actual colors. Check colors on actual products before using the Products.
- 4. Circuits and respective application methods described herein are for reference only. Seiko Instruments Inc. shall not be liable for any damages or losses resulting from any claim by third parties that any Products or application methods described herein infringe any right intellectual property right. All intellectual property rights with respect to the Products belong exclusively to

Seiko Instruments Inc.

Seiko Instruments Inc. does not grant users of the Products any right or license to the Products hereunder.

- When Products include Strategic Products (or Services) stipulated in the Foreign Exchange and Trade Control Law, they shall not be exported without permission of governmental authorities.
- 6. The Products are designed for consumer equipment and cannot be used as part of any device or equipment which influences the human body or requires a significantly high reliability, such as physical exercise equipment, medical equipment, disaster prevention equipment, gas related equipment, vehicles, aircraft and equipment mounted on vehicles without our prior express written consent.

led from Arrow.com

Downlo

# Silver Oxide Battery: SEIZAIKEN

# **SEIZAIKEN** is our trademark for silver oxide battery globally acknowledged in the quartz watch market.

#### · Low Drain Battery

Мо	del	Cł	naracteristics (F	RT)	Dimer	nsions		C.C.V. 2*	
JIS code	IEC code	Nominal Voltage (V)	Standard <sup>1*</sup> Capacity (mAh)	Standard Discharge Current (µA)	Diameter (mm)	Height (mm)	Weight (g)	at 24°C (V)	at –10°C (V)
SR416SW	337	1.55	7.5	10	4.8	1.65	0.11	1.35	1.10
SR421SW	348	1.55	12	20	4.8	2.15	0.14	1.35	1.10
SR512SW	335	1.55	5.5	5	5.8	1.25	0.15	1.45	1.10
SR516SW	317	1.55	12.5	20	5.8	1.65	0.18	1.45	1.10
SR521SW	379	1.55	13 16	20 30	5.8	2.15	0.23	1.45	1.10
SR527SW	319	1.55	22	40	5.8	2.70	0.29	1.45	1.10
SR616SW	321	1.55	16	20	6.8	1.65	0.25	1.45	1.10
SR621SW	364	1.55	21 23	30 40	6.8	2.15	0.32	1.45	1.20
SR626SW	377	1.55	24 28 30	30 40 40	6.8	2.60	0.39	1.45	1.20
SR712SW	346	1.55	10	10	7.9	1.25	0.26	1.45	1.20
SR716SW	315	1.55	21	30	7.9	1.65	0.33	1.45	1.20
SR721SW	362	1.55	23 28	40 40	7.9	2.10	0.42	1.45	1.20
SR726SW	397	1.55	34	40	7.9	2.60	0.52	1.45	1.20
SR731SW	329	1.55	36	50	7.9	3.10	0.56	1.45	1.20
SR41SW	384	1.55	45	50	7.9	3.60	0.67	1.45	1.20
SR916SW	373	1.55	27	50	9.5	1.65	0.51	1.45	1.20
SR920SW	371	1.55	46 35	60 50	9.5	2.05	0.60	1.45	1.20
SR927SW	395	1.55	53 60	80 100	9.5	2.70	0.75	1.45	1.20
SR936SW	394	1.55	85	140	9.5	3.60	1.10	1.45	1.20
SR1120SW	381	1.55	53	80	11.6	2.05	0.93	1.45	1.20
SR1130SW	390	1.55	80	100	11.6	3.05	1.29	1.45	1.20
SR43SW	301	1.55	120	150	11.6	4.20	1.75	1.45	1.20
SR44SW	303	1.55	160	180	11.6	5.40	2.20	1.45	1.20

1\* The standard capacity is calculated by the measurement result of discharging time with the standard discharge current to the voltage 1.2V.

 $2^*$  C.C.V.: Closed Circuit Voltage / Low Drain  $2k\Omega$  7.8msec Pulse

#### High Drain Battery

Model		Characteristics (RT)			Dimensions			C.C.V. <sup>3*</sup>	
JIS code	IEC code	Nominal Voltage (V)	Standard <sup>1*</sup> Capacity (mAh)	Standard Discharge Current (µA)	Diameter (mm)	Height (mm)	Weight (g)	at 24°C (V)	at −10°C (V)
SR626W	376	1.55	28	50	6.8	2.60	0.39	1.35	0.95
SR721W	361	1.55	26	50	7.9	2.10	0.41	1.35	1.05
SR726W	396	1.55	34	50	7.9	2.60	0.52	1.35	1.05
SR41W	392	1.55	45	80	7.9	3.60	0.67	1.35	1.05
SR920W	370	1.55	42	80	9.5	2.05	0.60	1.40	1.00
SR927W	399	1.55	53 60	90 110	9.5	2.70	0.75	1.40	1.05
SR1120W	391	1.55	53	90	11.6	2.05	0.93	1.40	1.20
SR1130W	389	1.55	80	130	11.6	3.05	1.29	1.40	1.20
SR43W	386	1.55	120	220	11.6	4.20	1.75	1.40	1.20
SR44W	357	1.55	160	250	11.6	5.40	2.20	1.40	1.20

1\* The standard capacity is calculated by the measurement result of discharging time with the standard discharge current to the voltage 1.2V.

 $3^{\star}$  C.C.V.: Closed Circuit Voltage / High Drain 200 $\Omega$   $\,$  5sec DC  $\,$ 



Micro-Energy Division who manufactures the products described in this catalog holds the ISO 9001 quality management system certificate, and the ISO 14001 environmental management systems certificate.



#### Seiko Instruments Inc.

Micro-Energy Division 1-8, Nakase, Mihamaku, Chiba-shi, Chiba 261-8507, Japan Telephone:+81-43-211-1735 Facsimile:+81-43-211-8034

## www.sii-me.com

#### Seiko Instruments (H.K.) Ltd.

4-5/F, Wyler Centre 2, 200 Tai Lin Pai Rd., Kwai Chung, N.T., Kowloon, Hong Kong Telephone: +852-2494-5111 Facsimile: +852-2480-5479 Email:sales@sih.com.hk http://www.sih.com.hk

#### Seiko Instruments (Shanghai) Inc.

Room 2701-2703, 27th Floor, Shanghai Plaza, 138 Mid Huaihai Rd., Shanghai 200021, China Telephone: +86-21-6375-6611 Facsimile: +86-21-6375-6727

#### Europe

#### Seiko Instruments GmbH

Siemensstrasse 9 D-63263 Neu Isenburg, Germany Telephone: +49-6102-297-0 Facsimile: +49-6102-297-50100 Email:info@seiko-instruments.de http://www.seiko-instruments.de

#### Asia

#### Seiko Instruments Taiwan Inc.

12F, No.101, Sec.2, Nanking E. Rd., Taipei 104, Taiwan, R.O.C. Telephone: +886-2-2563-5001 Facsimile: +886-2-2563-5580 Email:public@sii.co.jp http://www.sii.com.tw

Seiko Instruments Korea Inc. #507, 508, Korea City Air Terminal Bldg., 159-6, Samsung-dong, Gangnam-gu, Seoul, 135-728 Korea Telephone: +82-2-565-8006 Facsimile: +82-2-565-8306 http://www.sii.co.kr

#### North/Central/South America

#### Seiko Instruments U.S.A., Inc.

21221 S. Western Ave., Suite 250, Torrance, CA 90501, U.S.A. Telephone: +1-310-517-7802 Facsimile: +1-310-517-7792 Email:info@seikoinstruments.com http://www.sii-me.com

Contact us



Downloaded from Arrow.com.

(Specifications are subject to change without notice.)

#### Released in September 2014

Copyright@2014 Seiko Instruments Inc. All Right Reserved.

No.BAC3011EJ-01C1409