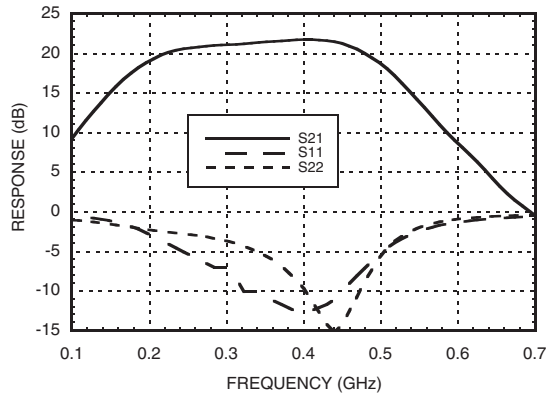
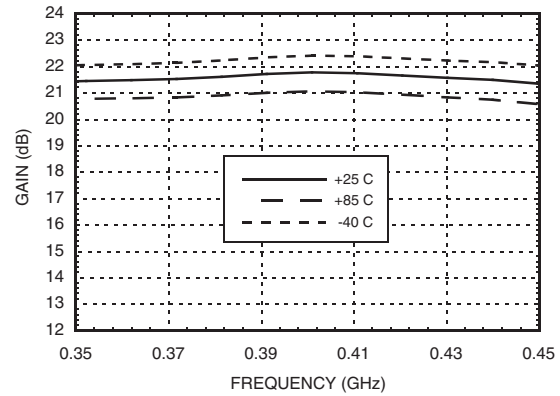
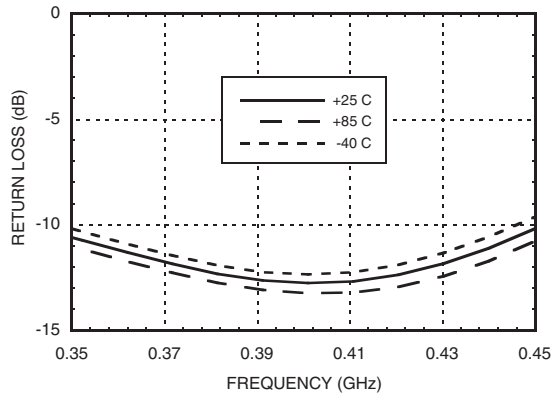
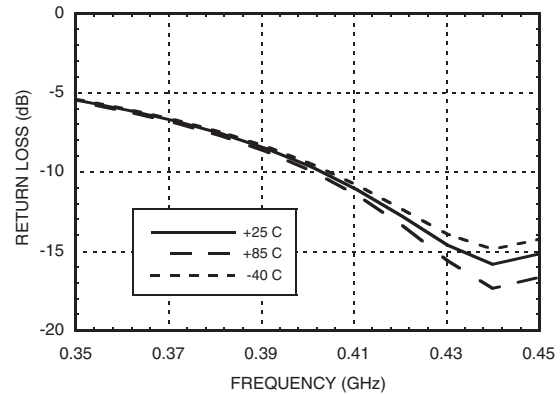
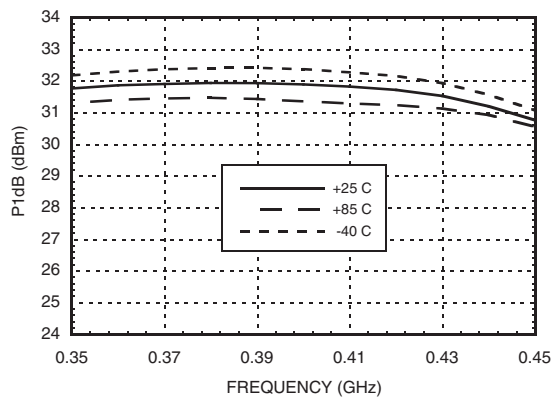
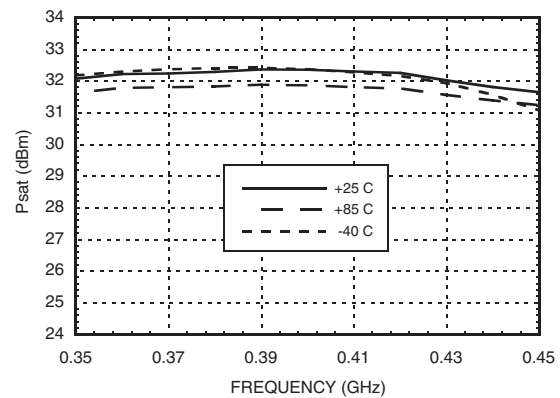
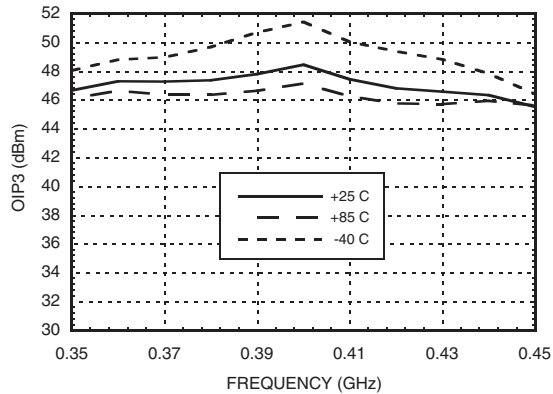
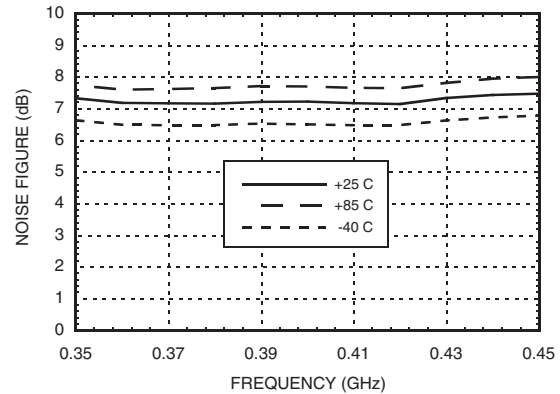
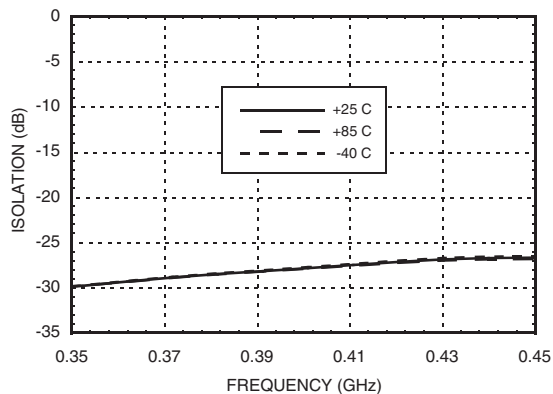
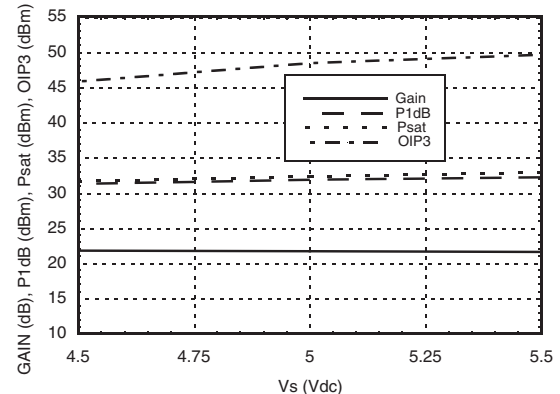
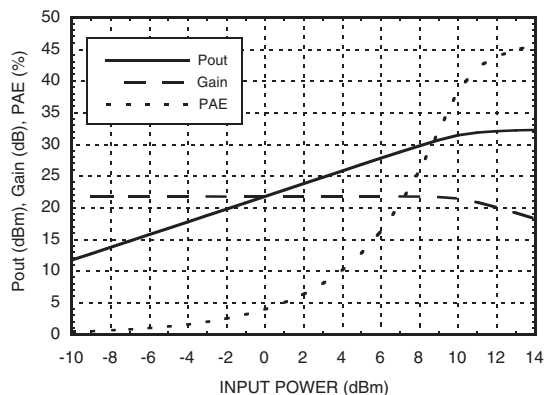
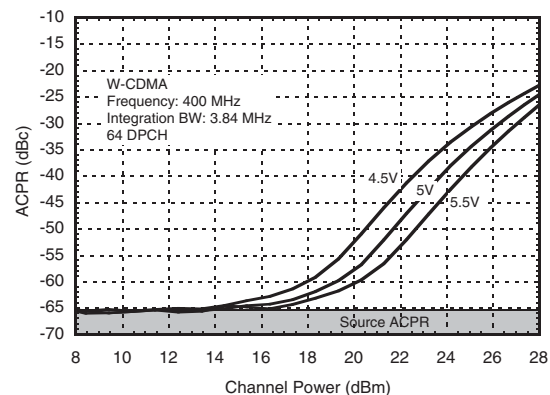




**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**
**Broadband Gain
& Return Loss @ 400 MHz**

Gain vs. Temperature @ 400 MHz

**Input Return Loss
vs. Temperature @ 400 MHz**

**Output Return Loss
vs. Temperature @ 400 MHz**

P_{1dB} vs. Temperature @ 400 MHz

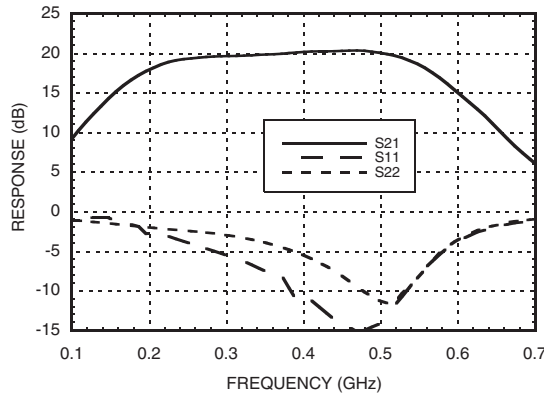P_{sat} vs. Temperature @ 400 MHz



**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**
Output IP3 vs. Temperature @ 400 MHz

**Noise Figure
vs. Temperature @ 400 MHz**

**Reverse Isolation
vs. Temperature @ 400 MHz**

**Gain, Power & IP3
vs. Supply Voltage @ 400 MHz**

Power Compression @ 400 MHz

**ACPR vs. Supply Voltage @ 400 MHz
W-CDMA, 64 DPCH**


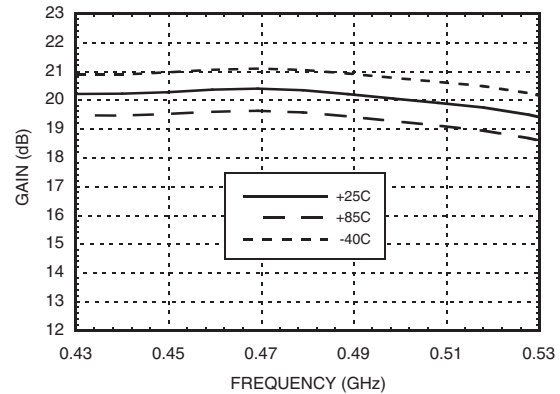


InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz


Broadband Gain & Return Loss @ 470 MHz




Gain vs. Temperature @ 470 MHz




Input Return Loss vs. Temperature @ 40 MHz

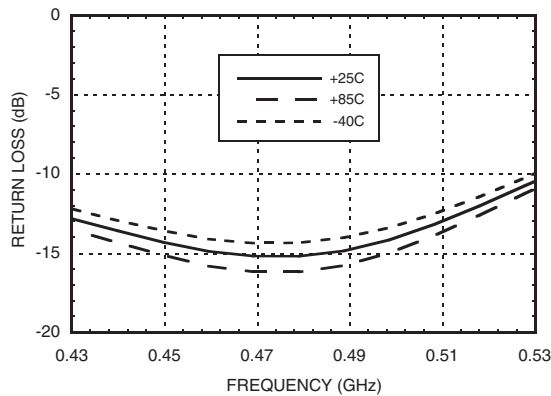


Output Return Loss vs. Temperature @ 470 MHz






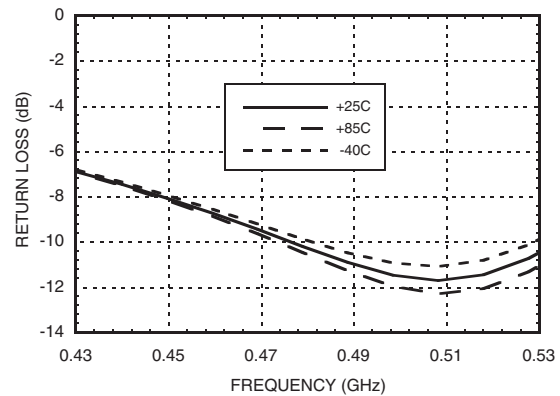


P1dB vs. Temperature @ 470 MHz

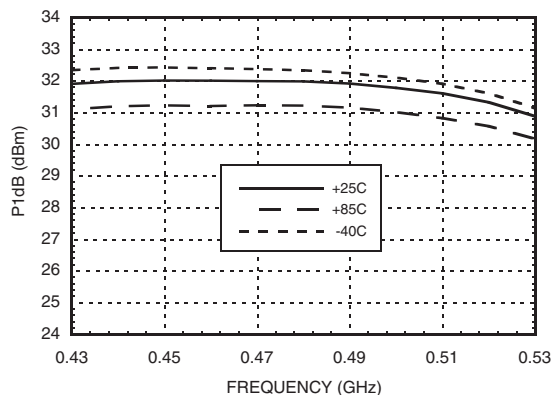

Psat vs. Temperature @ 470 MHz

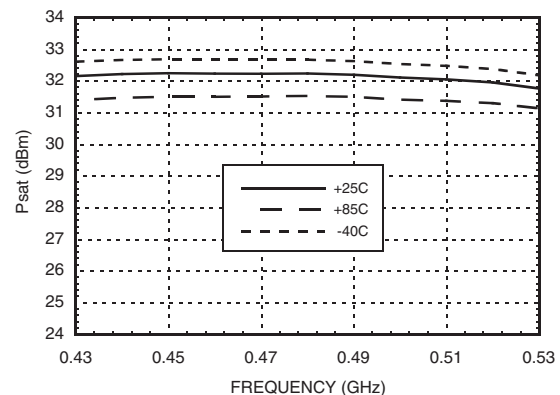


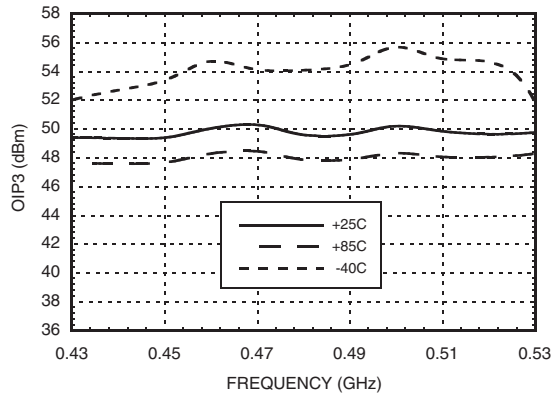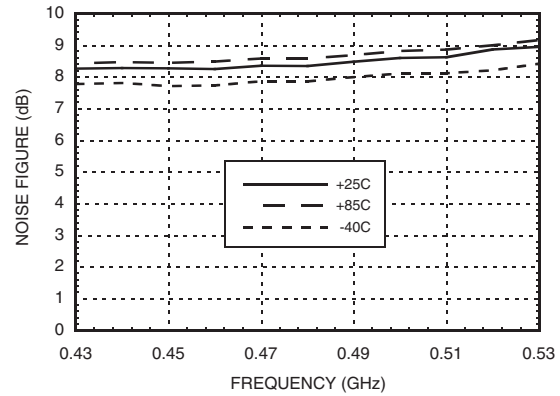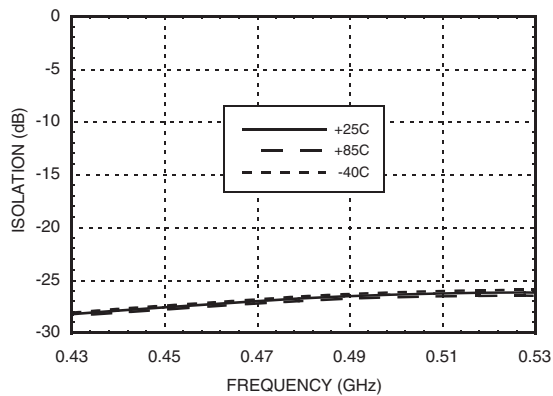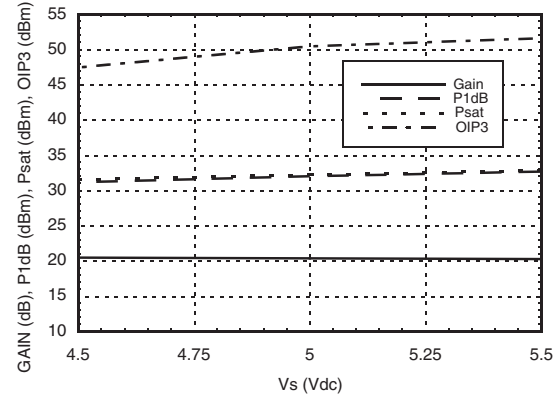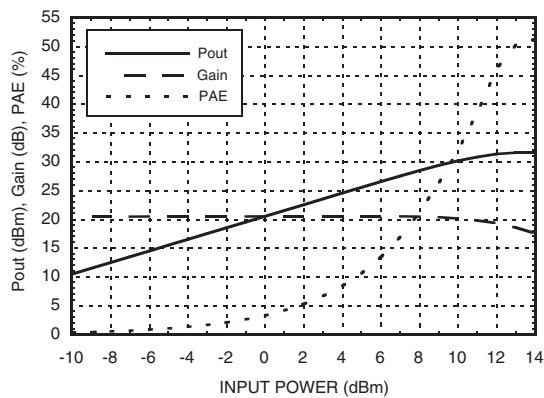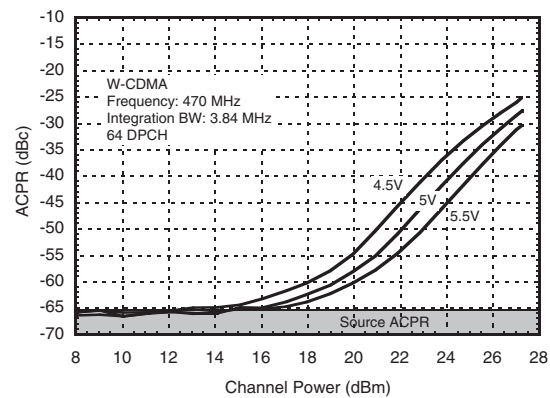
**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**
Output IP3 vs. Temperature @ 470 MHz

**Noise Figure
vs. Temperature @ 470 MHz**

**Reverse Isolation
vs. Temperature @ 470 MHz**

**Gain, Power & IP3
vs. Supply Voltage @ 470 MHz**

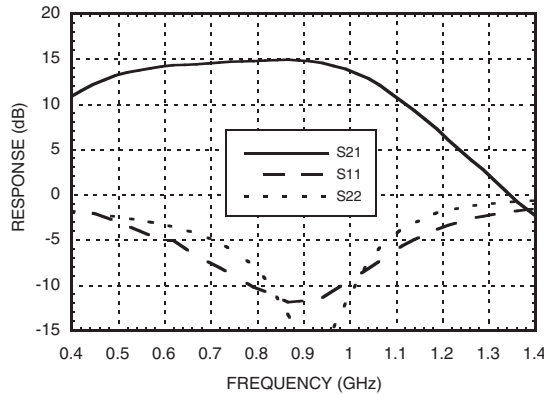Power Compression @ 470 MHz

**ACPR vs. Supply Voltage @ 470 MHz
W-CDMA, 64 DPCH**


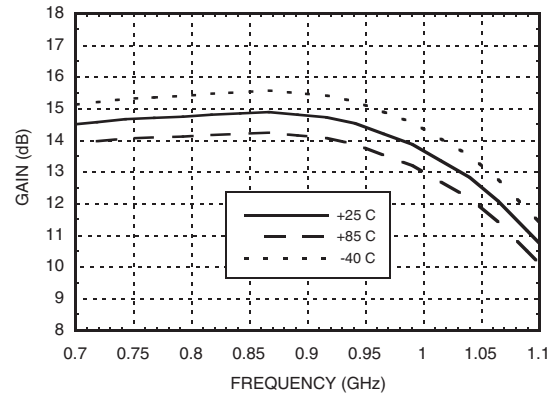


**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**


**Broadband Gain
& Return Loss @ 900 MHz**




Gain vs. Temperature @ 900 MHz




**Input Return Loss
vs. Temperature @ 900 MHz**

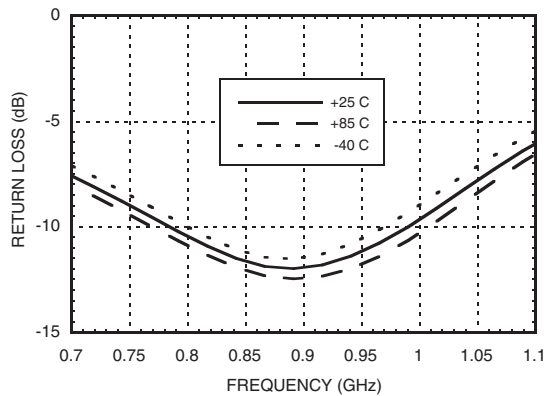


**Output Return Loss
vs. Temperature @ 900 MHz**

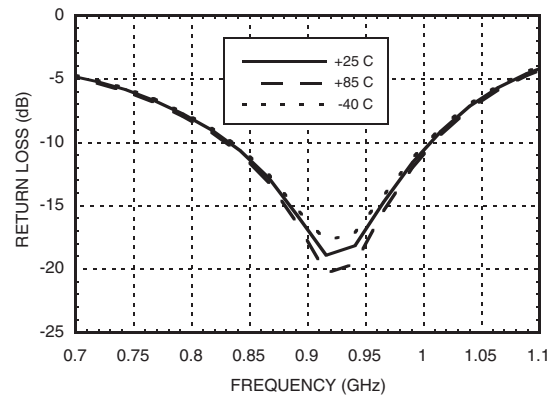

P1dB vs. Temperature @ 900 MHz






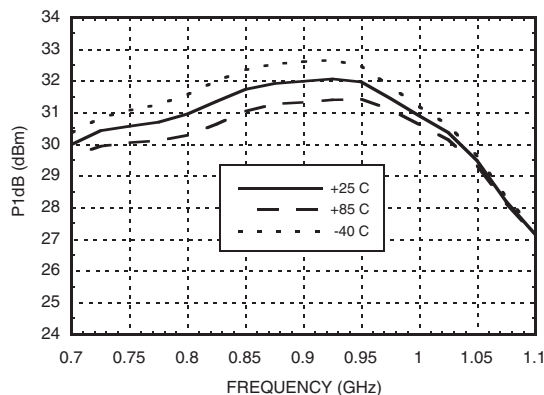


Psat vs. Temperature @ 900 MHz

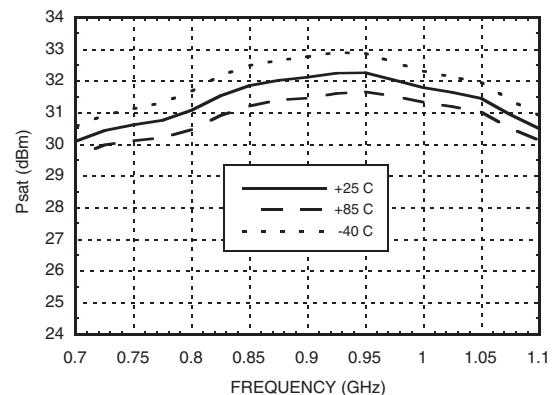



InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz

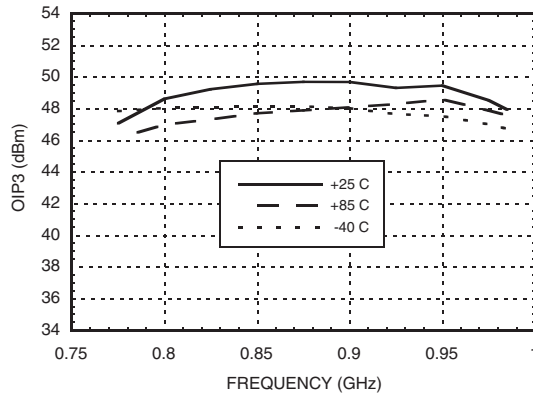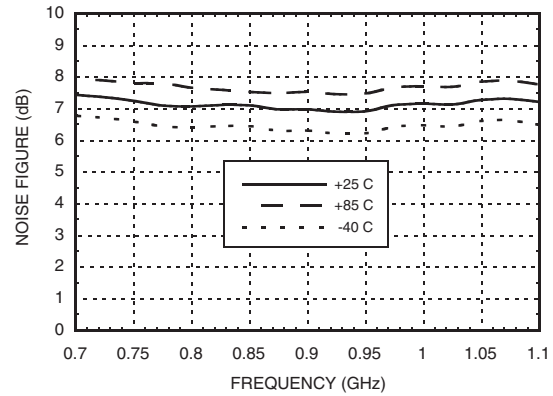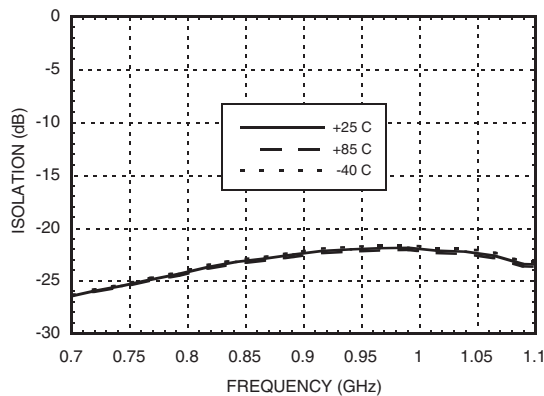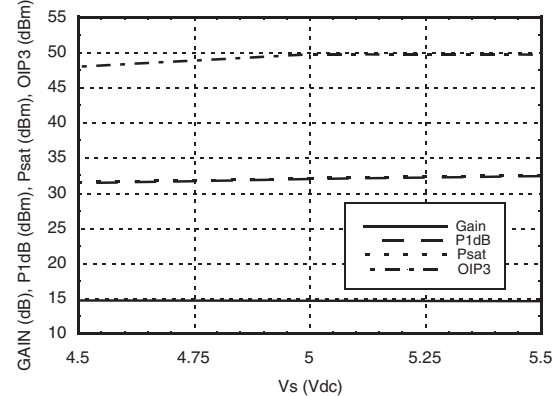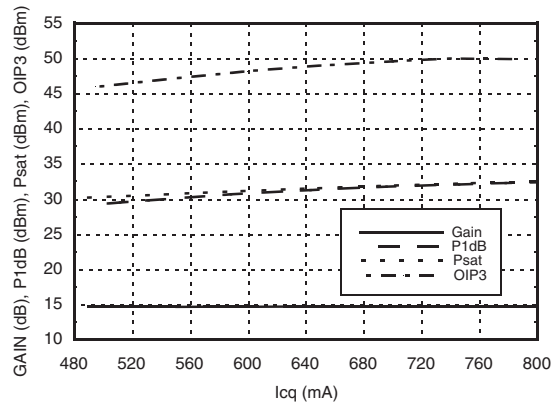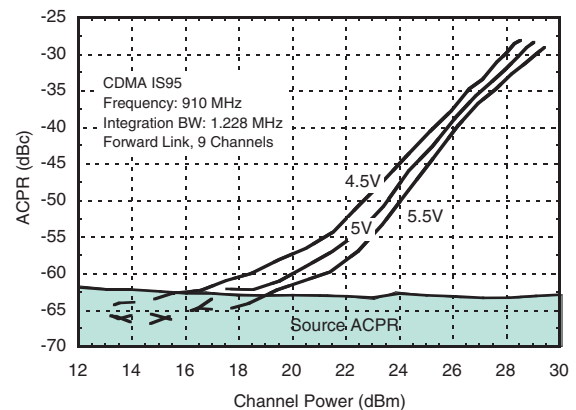Output IP3 vs. Temperature @ 900 MHz

Noise Figure vs. Temperature @ 900 MHz

**Reverse Isolation
vs. Temperature @ 900 MHz**

**Gain, Power & IP3
vs. Supply Voltage @ 900 MHz**

**Gain, Power & IP3
vs. Supply Current @ 900 MHz***

**ACPR vs. Supply Voltage @ 910 MHz
CDMA IS95, 9 Channels Forward**


* Icq is controlled by varying VPD.


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**


**Broadband Gain
& Return Loss @ 1900 MHz**

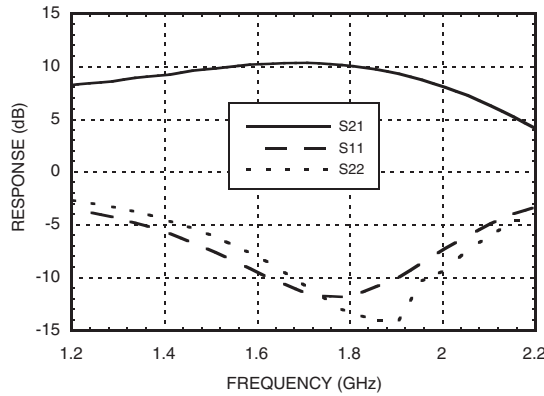


Gain vs. Temperature @ 1900 MHz

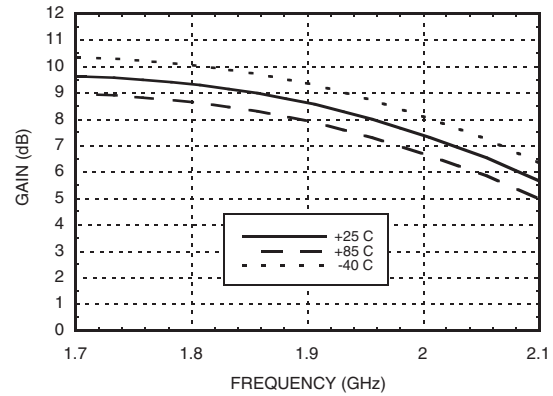


**Input Return Loss
vs. Temperature @ 1900 MHz**

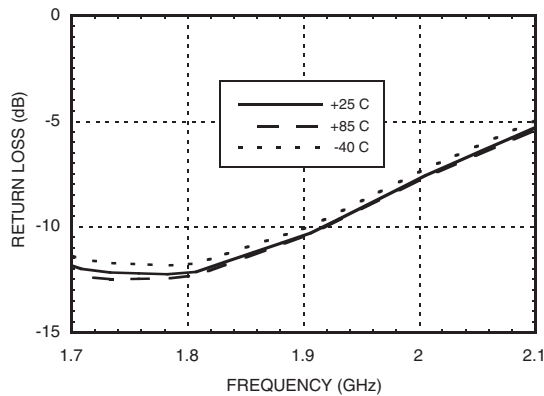


**Output Return Loss
vs. Temperature @ 1900 MHz**

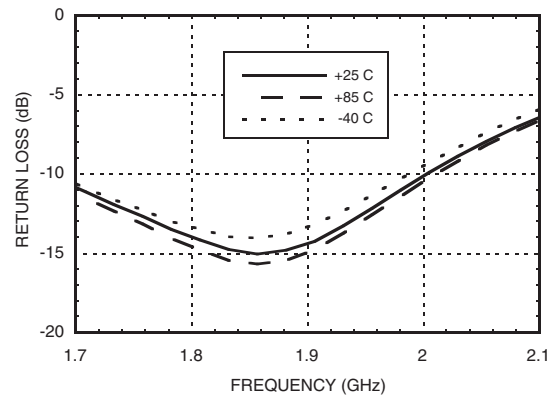

P1dB vs. Temperature @ 1900 MHz

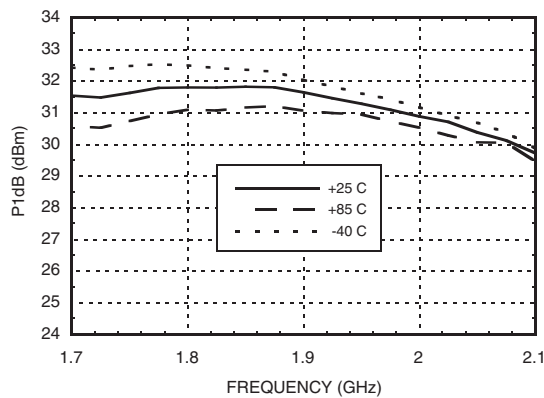


Psat vs. Temperature @ 1900 MHz

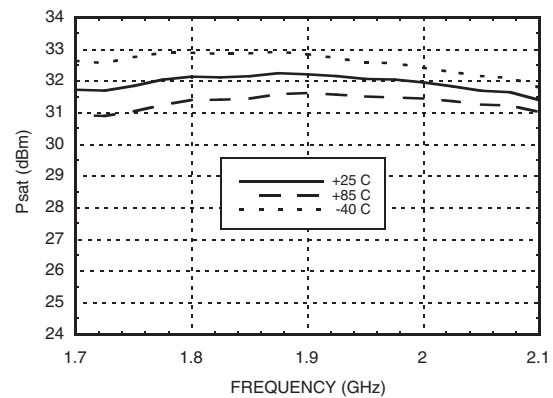




**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**


Output IP3 vs. Temperature @ 1900 MHz

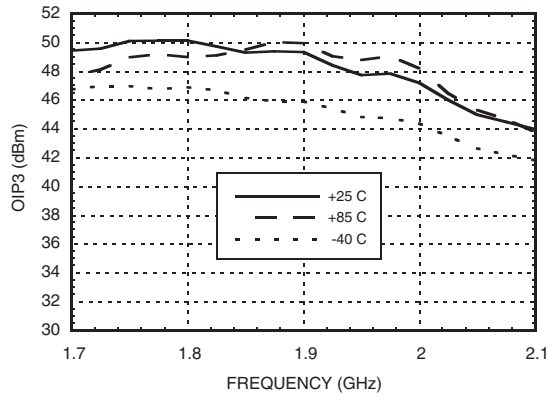


**Noise Figure
vs. Temperature @ 1900 MHz**

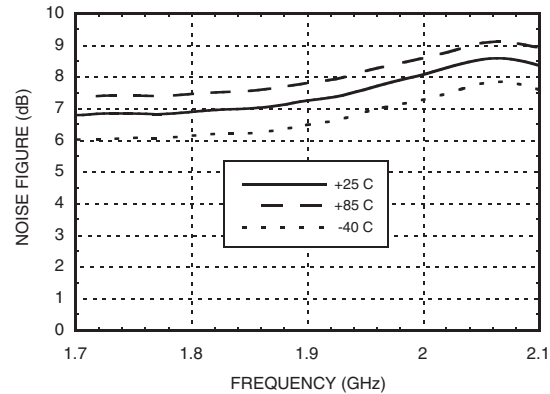


**Reverse Isolation
vs. Temperature @ 1900 MHz**

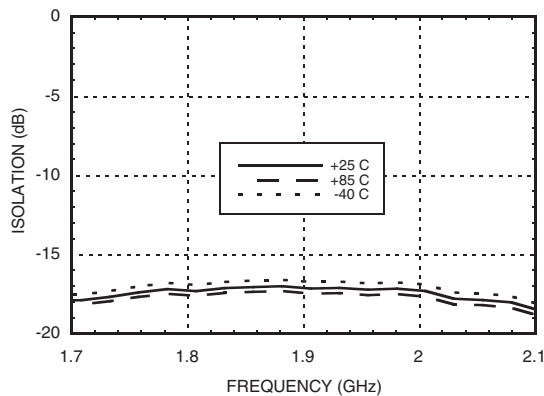


**Gain, Power & IP3
vs. Supply Voltage @ 1900 MHz**

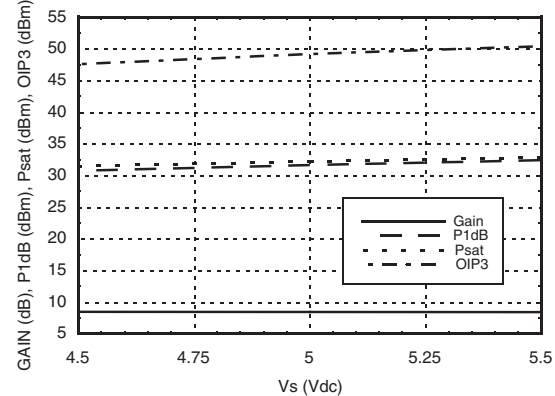

**Gain, Power & IP3
vs. Supply Current @ 1900 MHz***

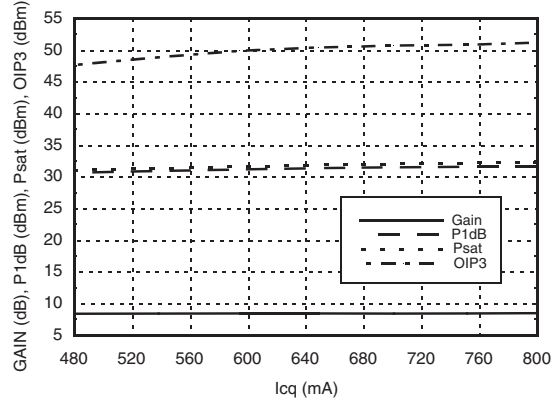

**ACPR vs. Supply Voltage @ 1960 MHz
CDMA 2000, 9 Channels Forward**

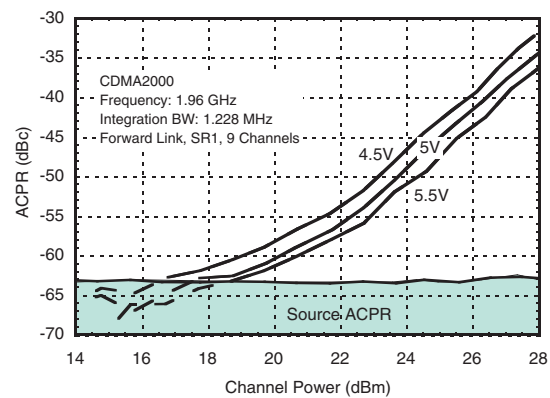

* Icq is controlled by varying VPD.


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**


**Broadband Gain
& Return Loss @ 2100 MHz**

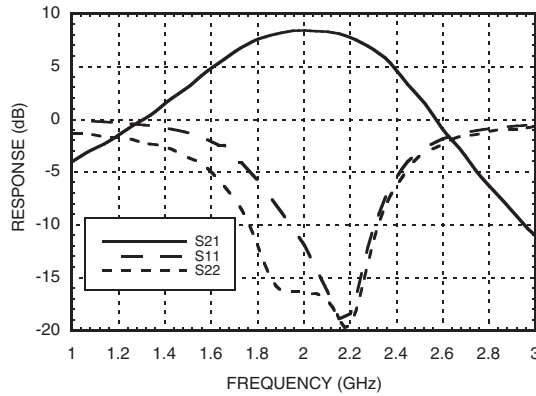


Gain vs. Temperature @ 2100 MHz

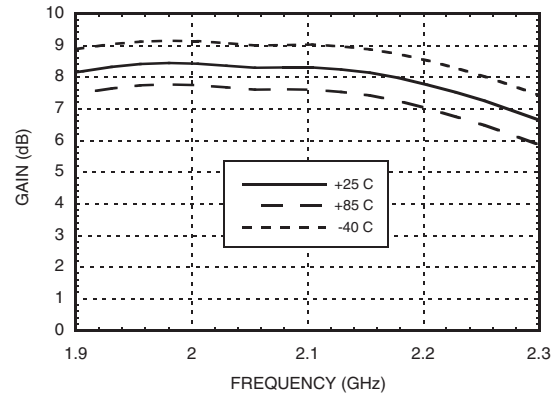


**Input Return Loss
vs. Temperature @ 2100 MHz**

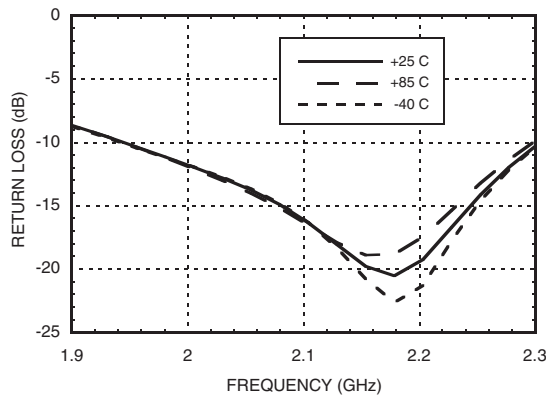


**Output Return Loss
vs. Temperature @ 2100 MHz**

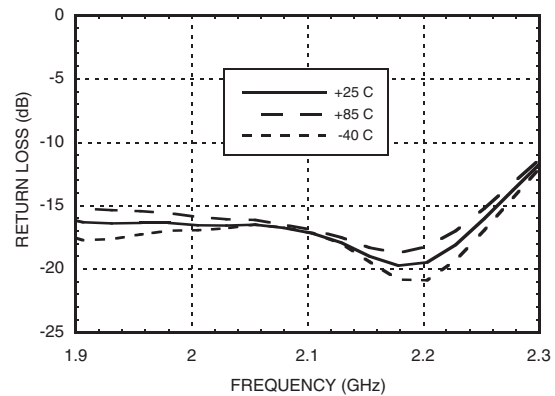

P1dB vs. Temperature @ 2100 MHz






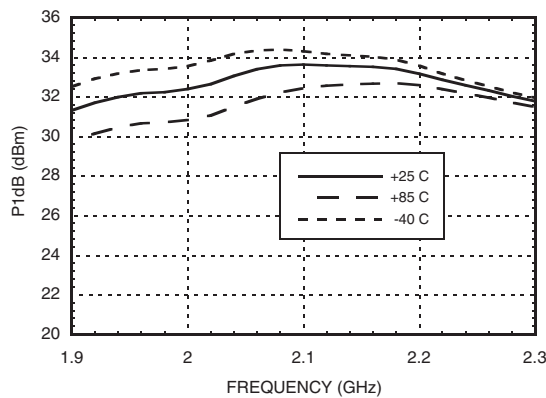


Psat vs. Temperature @ 2100 MHz

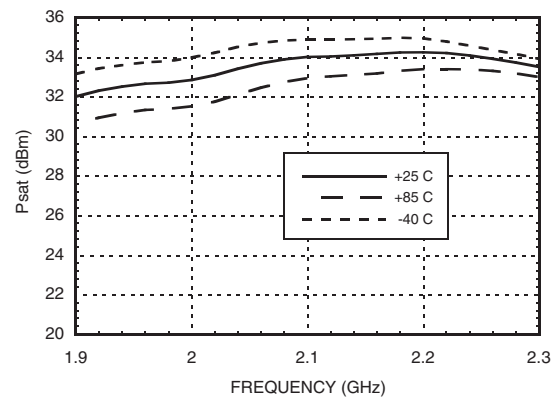




InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz

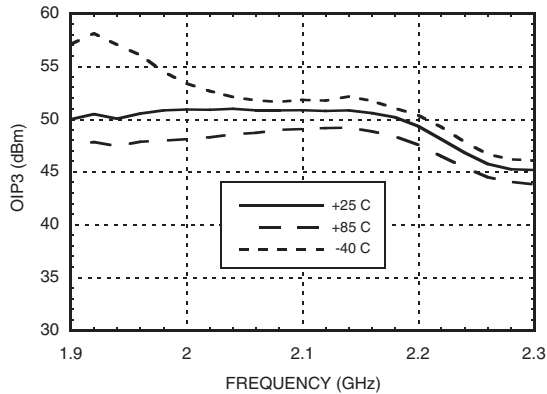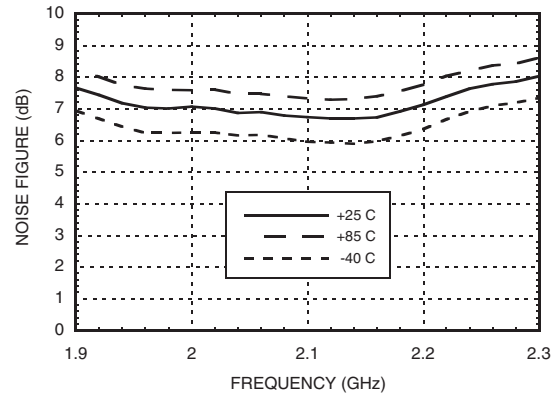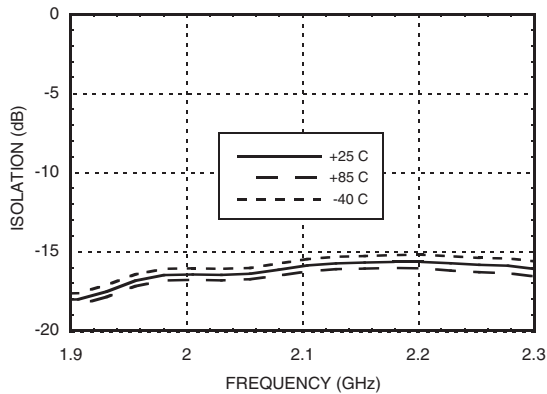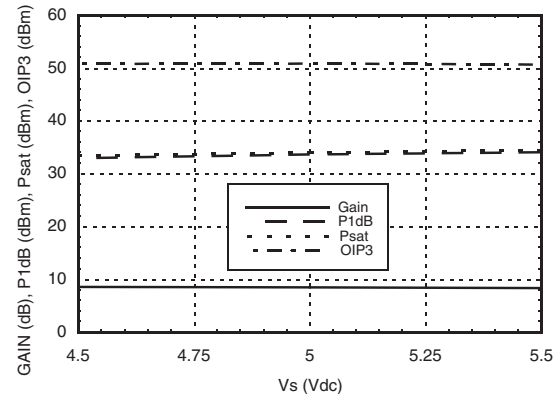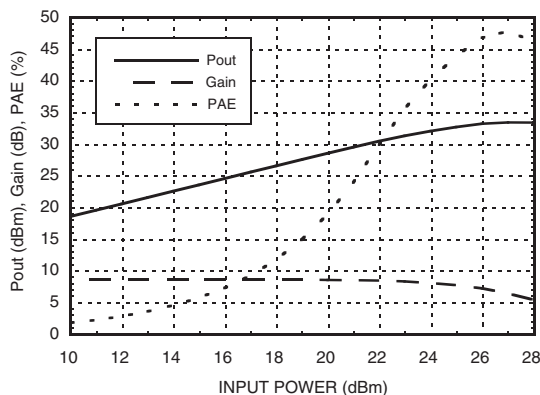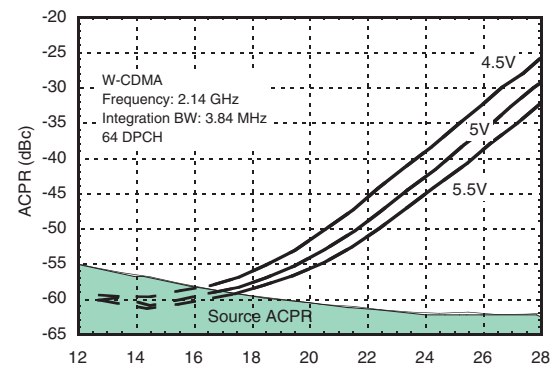Output IP3 vs. Temperature @ 2100 MHz

**Noise Figure
vs. Temperature @ 2100 MHz**

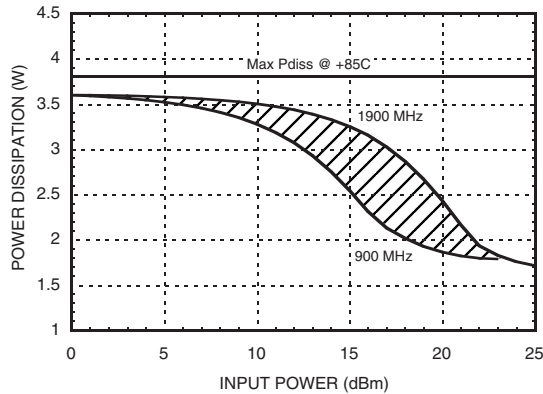**Reverse Isolation
vs. Temperature @ 2100 MHz**

**Gain, Power & IP3
vs. Supply Voltage @ 2100 MHz**

Power Compression @ 2100 MHz

**ACPR vs. Supply Voltage @ 2140 MHz
W-CDMA, 64 DPCH**


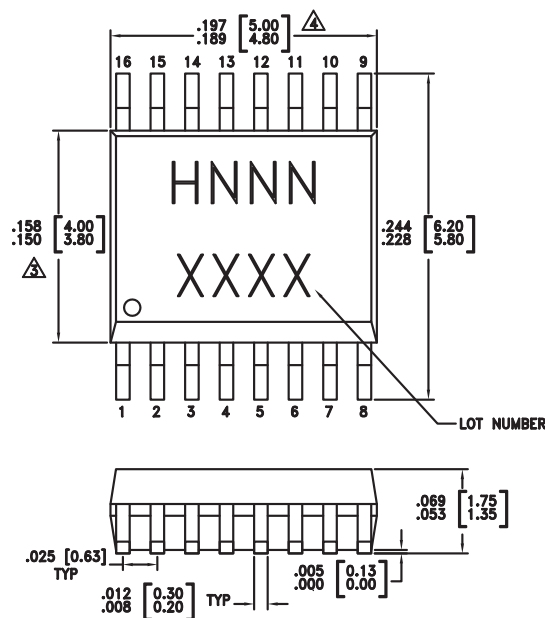
**InGaP HBT 1.6 WATT POWER
AMPLIFIER, 0.4 - 2.2 GHz**

Power Dissipation

Absolute Maximum Ratings

| | |
|---|----------------|
| Collector Bias Voltage (V _{cc}) | +6.0 Vdc |
| Control Voltage (V _{pd}) | +5.4 Vdc |
| RF Input Power (RFIN)(V _s = V _{pd} = +5Vdc) | +32 dBm |
| Junction Temperature | 150 °C |
| Continuous P _{diss} (T = 85 °C) (derate 58.5 mW/°C above 85 °C) | 3.8 W |
| Thermal Resistance (junction to ground paddle) | 17.1 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

Outline Drawing

NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[3] |
|--------------|--|---------------|---------------------|--------------------------------|
| HMC453QS16G | Low Stress Injection Molded Plastic | Sn/Pb Solder | MSL1 ^[1] | H453 XXXX |
| HMC453QS16GE | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | H453 XXXX |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C




[3] 4-Digit lot number XXXX

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|-------------------------|----------|---|---|
| 1, 2, 4, 5, 7-10, 13-16 | GND | These pins & package bottom must be connected to RF/DC ground. |  |
| 3 | VPD | Power control pin. For maximum power, this pin should be connected to 5V. A higher voltage is not recommended. For lower idle current, this voltage can be reduced. |  |
| 6 | RFIN | This pin is DC coupled. Off chip matching components are required. See Application Circuit herein. |  |
| 11, 12 | RFOUT | RF output and DC Bias input for the output amplifier stage. Off chip matching components are required. See Application Circuit herein. | |

400 MHz Application Circuit

This circuit was used to specify the performance for 400-410 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

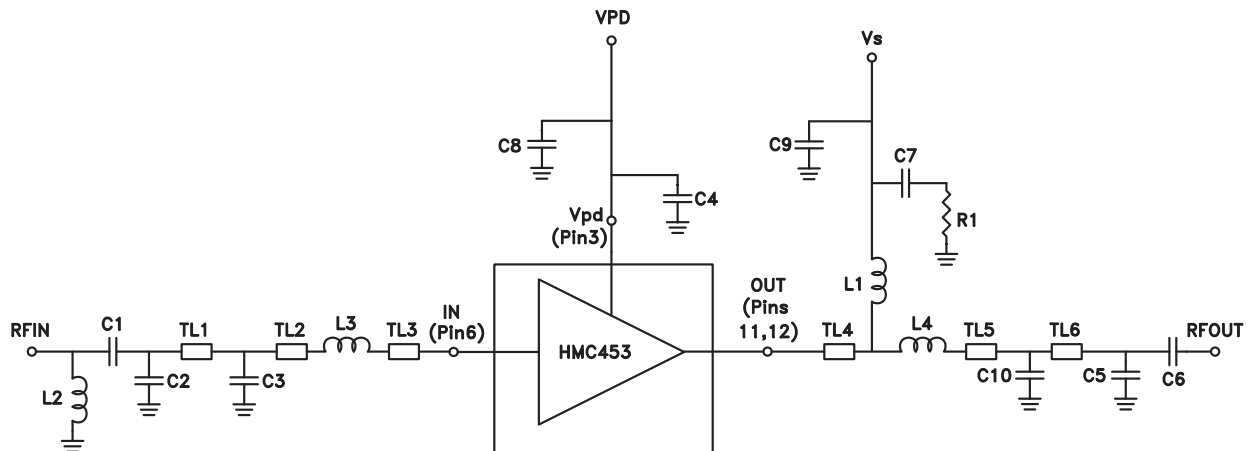


Recommended Component Values

| | |
|---------|---------|
| C1, C5 | 12 pF |
| C2, C10 | 8.2 pF |
| C3 | 6.8 pF |
| C4, C7 | 100 pF |
| C6 | 39 pF |
| C8, C9 | 2.2 μF |
| L1 | 47 nH |
| L2 | 40 nH |
| L3, L4 | 4.3 nH |
| R1 | 5.1 Ohm |

| | TL1 | TL2 | TL3 | TL4 | TL5 | TL6 |
|---|--------|--------|--------|--------|--------|--------|
| Impedance | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm |
| Physical Length | 0.22" | 0.04" | 0.04" | 0.16" | 0.04" | 0.05" |
| Electrical Length | 5° | 1° | 1° | 4° | 1° | 1° |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 | | | | | | |

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D

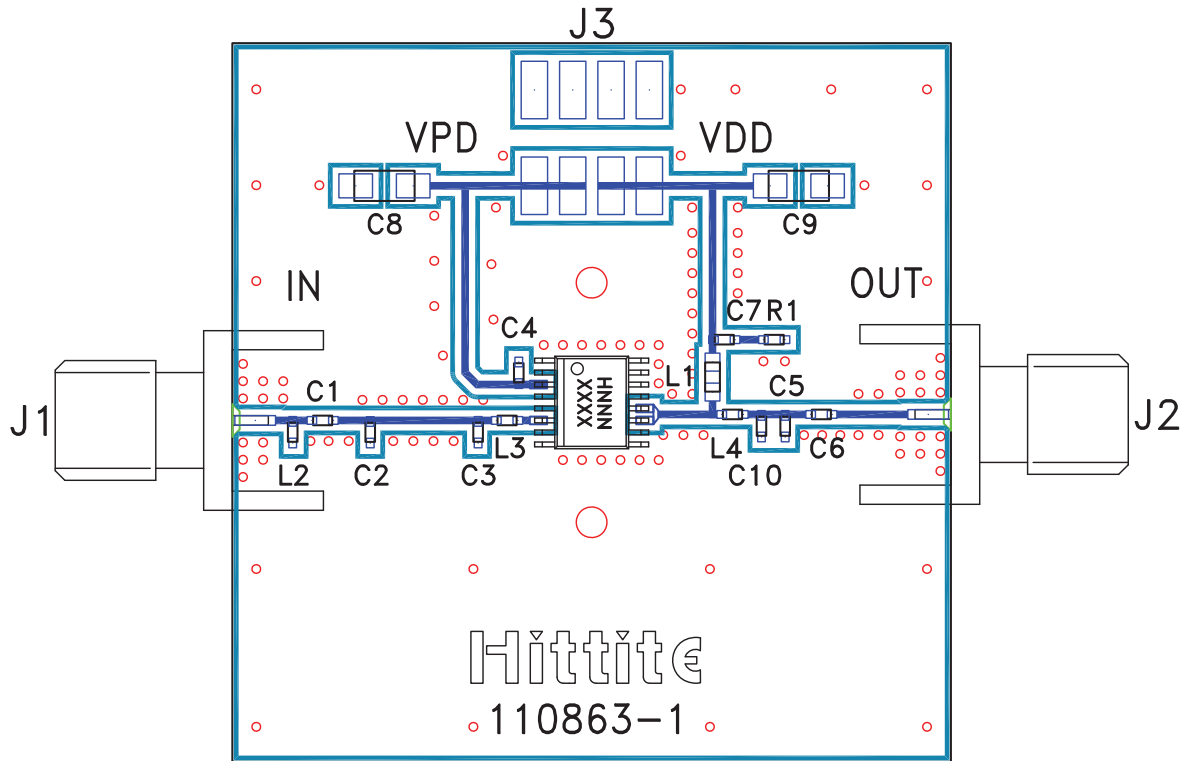
400 MHz Evaluation PCB

List of Materials for Evaluation PCB 110865-400 ^[1]

| Item | Description |
|--------------------|---------------------------------------|
| J1 - J2 | PCB Mount SMA Connector |
| J3 | 2 mm DC Header |
| C1, C5 | 12 pF Capacitor, 0402 Pkg. |
| C2, C10 | 8.2 pF Capacitor, 0402 Pkg. |
| C3 | 6.8 pF Capacitor, 0402 Pkg. |
| C4, C7 | 100 pF Capacitor, 0402 Pkg. |
| C6 | 39 pF Capacitor, 0402 Pkg. |
| C8, C9 | 2.2 μF Capacitor, Tantalum |
| L1 | 47 nH Inductor, 0603 Pkg. |
| L2 | 40 nH Inductor, 0402 Pkg. |
| L3, L4 | 4.3 nH Inductor, 0402 Pkg. |
| R1 | 5.1 Ohm Resistor, 0402 Pkg. |
| U1 | HMC453QS16G / HMC453QS16GE Linear Amp |
| PCB ^[2] | 110863 Evaluation PCB, 10 mils |

[1] Reference this number when ordering complete evaluation PCB


[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of VIA holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



470 MHz Application Circuit

This circuit was used to specify the performance for 450-496 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

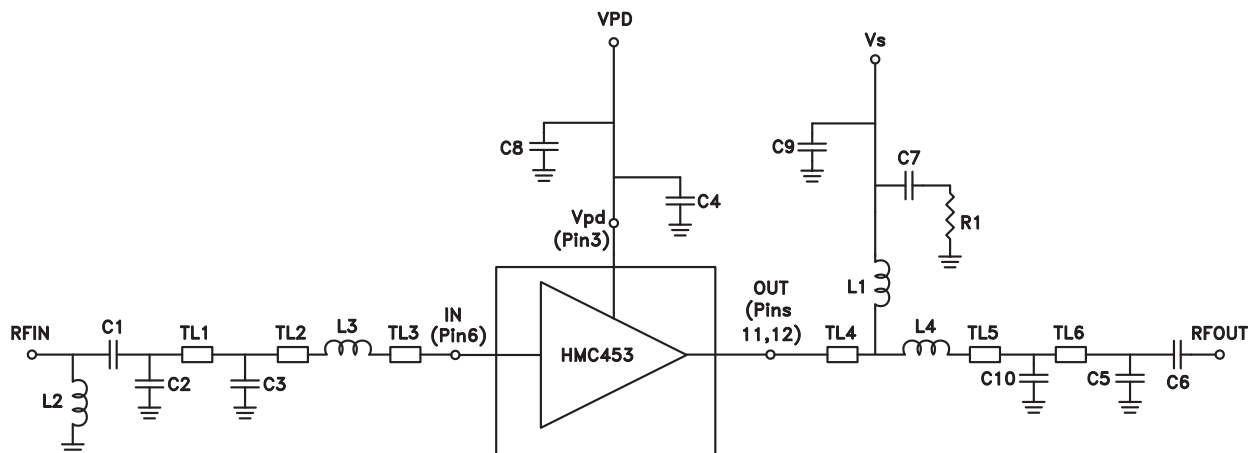


| Recommended Component Values | |
|------------------------------|-------------|
| C1 | 12 pF |
| C2 | 8.2 pF |
| C3 | 6.8 pF |
| C4, C7 | 100 pF |
| C5 | 10 pF |
| C6 | 39 pF |
| C8, C9 | 2.2 μ F |
| C10 | 5.6 pF |
| L1 | 47 nH |
| L2 | 40 nH |
| L3, L4 | 4.3 nH |
| R1 | 5.1 Ohm |

| | TL1 | TL2 | TL3 | TL4 | TL5 | TL6 |
|---|--------|--------|--------|--------|--------|--------|
| Impedance | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm |
| Physical Length | 0.22" | 0.04" | 0.04" | 0.16" | 0.04" | 0.05" |
| Electrical Length | 6° | 1° | 1° | 4° | 1° | 1° |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 | | | | | | |



470 MHz Evaluation PCB

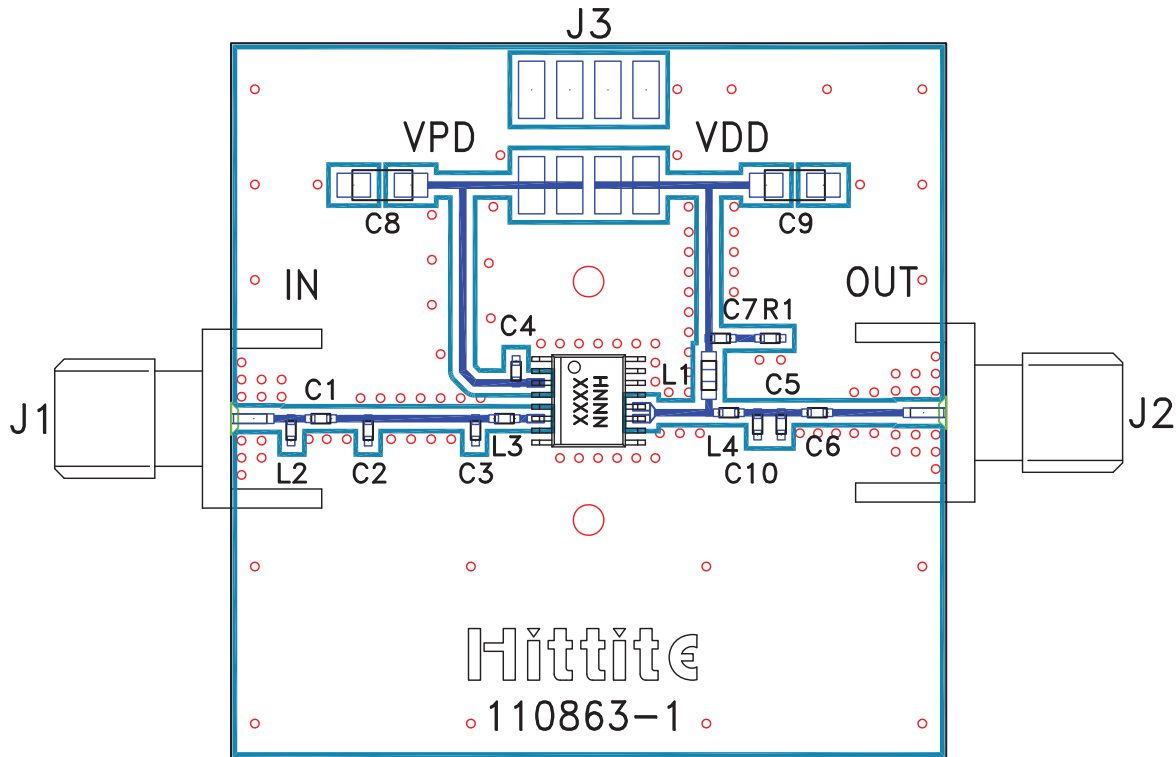

List of Materials for Evaluation PCB 110976-470 [1]

| Item | Description |
|---------|---------------------------------------|
| J1 - J2 | PCB Mount SMA Connector |
| J3 | 2 mm DC Header |
| C1 | 12 pF Capacitor, 0402 Pkg. |
| C2 | 8.2 pF Capacitor, 0402 Pkg. |
| C3 | 6.8 pF Capacitor, 0402 Pkg. |
| C4, C7 | 100 pF Capacitor, 0402 Pkg. |
| C5 | 10 pF Capacitor, 0402 Pkg. |
| C6 | 39 pF Capacitor, 0402 Pkg. |
| C8, C9 | 2.2 μ F Capacitor, Tantalum |
| C10 | 5.6 pF Capacitor, 0402 Pkg. |
| L1 | 47 nH Inductor, 0603 Pkg. |
| L2 | 40 nH Inductor, 0402 Pkg. |
| L3, L4 | 4.3 nH Inductor, 0402 Pkg. |
| R1 | 5.1 Ohm Resistor, 0402 Pkg. |
| U1 | HMC453QS16G / HMC453QS16GE Linear Amp |
| PCB [2] | 110863 Evaluation PCB, 10 mils |

[1] Reference this number when ordering complete evaluation PCB


[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



900 MHz Application Circuit

This circuit was used to specify the performance for 810-960 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

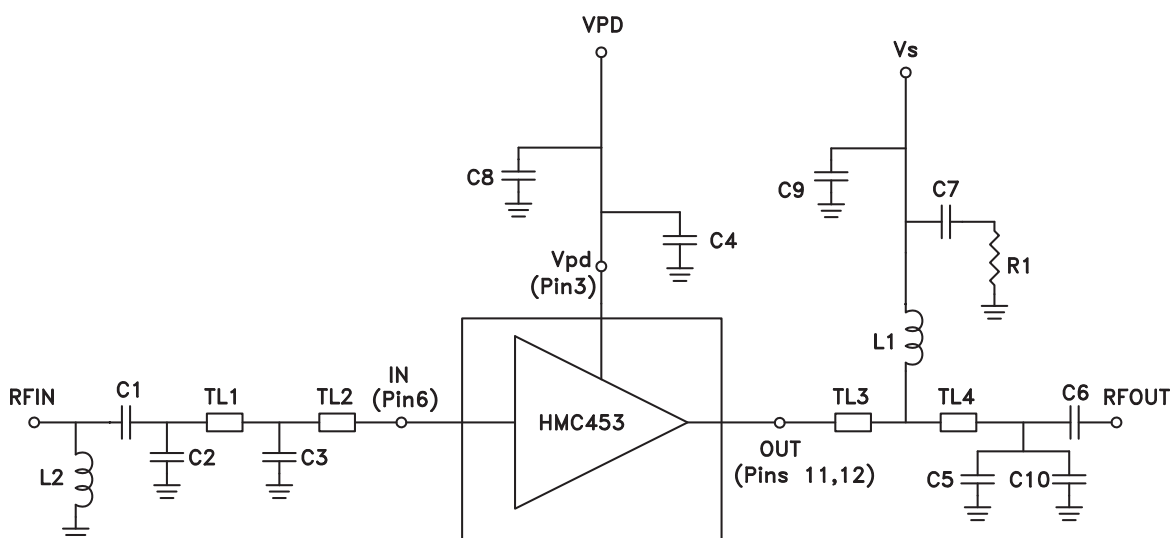


| | TL1 | TL2 | TL3 | TL4 |
|---|--------|--------|--------|--------|
| Impedance | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm |
| Physical Length | 0.26" | 0.08" | 0.12" | 0.15" |
| Electrical Length | 14° | 4° | 6° | 8° |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 | | | | |

| Recommended Component Values | |
|------------------------------|---------|
| C1 | 5 pF |
| C2, C3 | 3.3 pF |
| C4, C7 | 100 pF |
| C5 | 8.2 pF |
| C6 | 56 pF |
| C8, C9 | 2.2 μF |
| C10 | 1 pF |
| L1 | 30 nH |
| L2 | 20 nH |
| R1 | 5.6 Ohm |



900 MHz Evaluation PCB

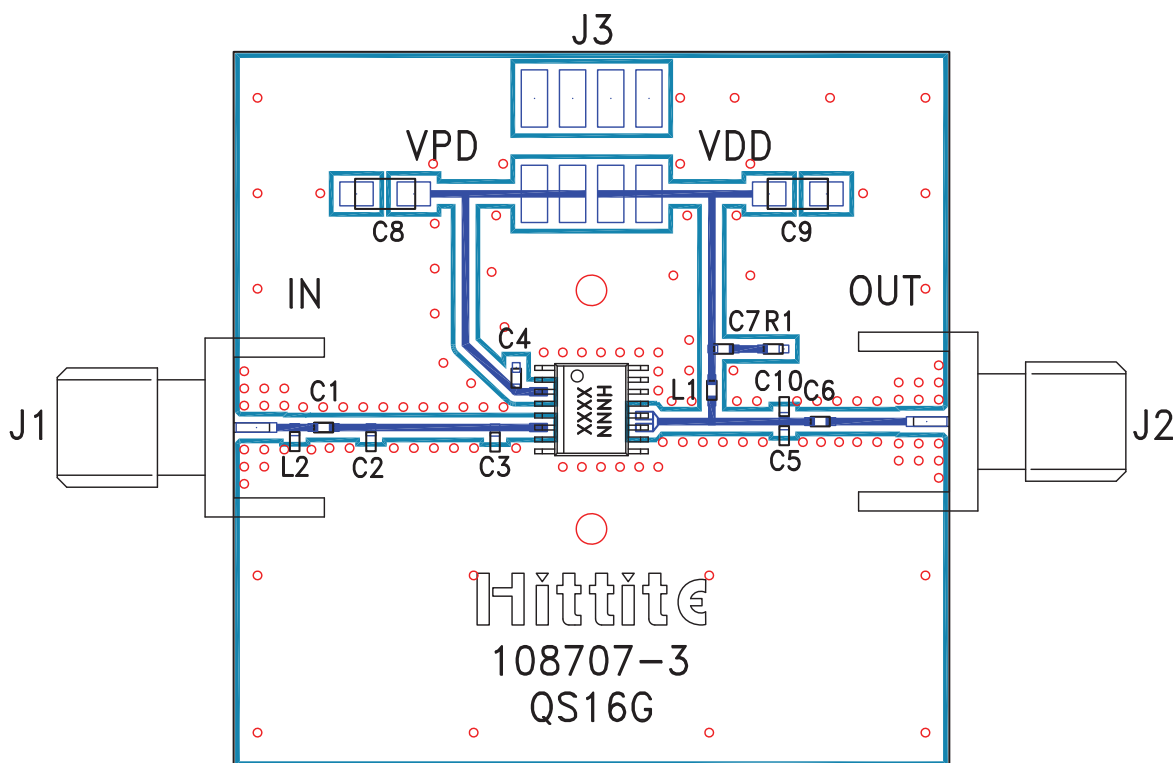

List of Materials for Evaluation PCB 108709-900 ^[1]

| Item | Description |
|--------------------|---------------------------------------|
| J1 - J2 | PCB Mount SMA Connector |
| J3 | 2 mm DC Header |
| C1 | 5.0 pF Capacitor, 0402 Pkg. |
| C2, C3 | 3.3 pF Capacitor, 0402 Pkg. |
| C4, C7 | 100 pF Capacitor, 0402 Pkg. |
| C5 | 8.2 pF Capacitor, 0402 Pkg. |
| C6 | 56 pF Capacitor, 0402 Pkg. |
| C8, C9 | 2.2 μ F Capacitor, Tantalum |
| C10 | 1.0 pF Capacitor, 0402 Pkg. |
| L1 | 30 nH Inductor, 0402 Pkg. |
| L2 | 20 nH Inductor, 0402 Pkg. |
| R1 | 5.6 Ohm Resistor, 0402 Pkg. |
| U1 | HMC453QS16G / HMC453QS16GE Linear Amp |
| PCB ^[2] | 108707 Evaluation PCB, 10 mils |

[1] Reference this number when ordering complete evaluation PCB


[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.




1900 MHz Application Circuit

This circuit was used to specify the performance for 1710-1990 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

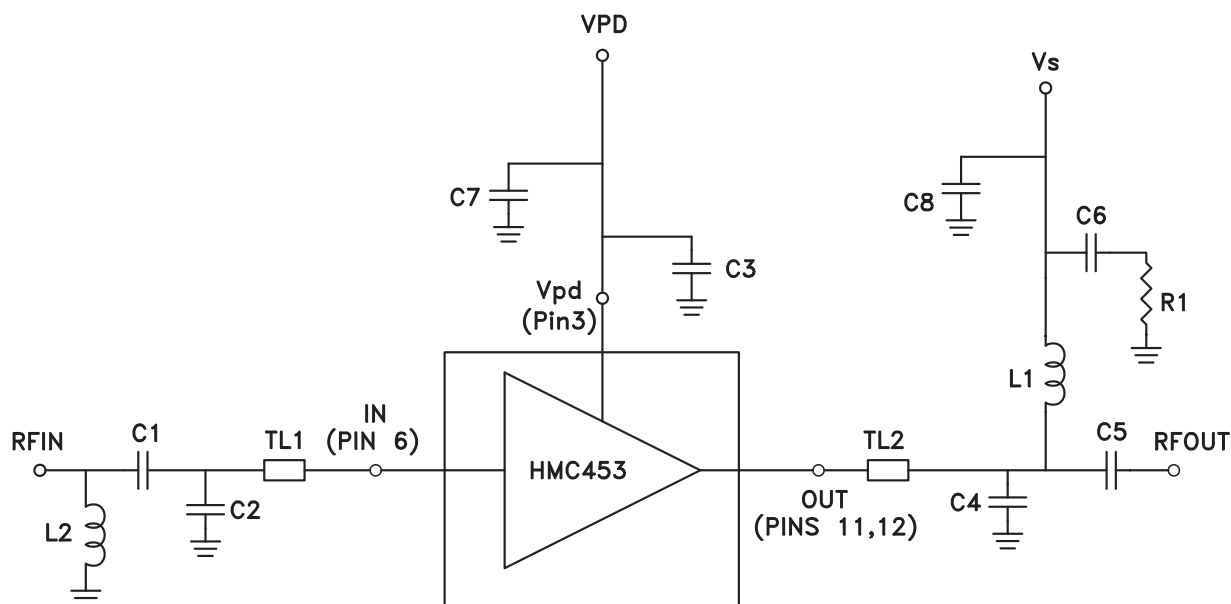

| | TL1 | TL2 |
|---|--------|--------|
| Impedance | 50 Ohm | 50 Ohm |
| Physical Length | 0.04" | 0.04" |
| Electrical Length | 4° | 4° |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 | | |

| Recommended Component Values | |
|------------------------------|----------|
| C1 | 0.8 pF |
| C2 | 1.2 pF |
| C3, C6 | 100 pF |
| C4 | 4.7 pF |
| C5 | 15 pF |
| C7, C8 | 2.2 μF |
| L1 | 18 nH |
| L2 | 20 nH |
| R1 | 5.6 Ohms |

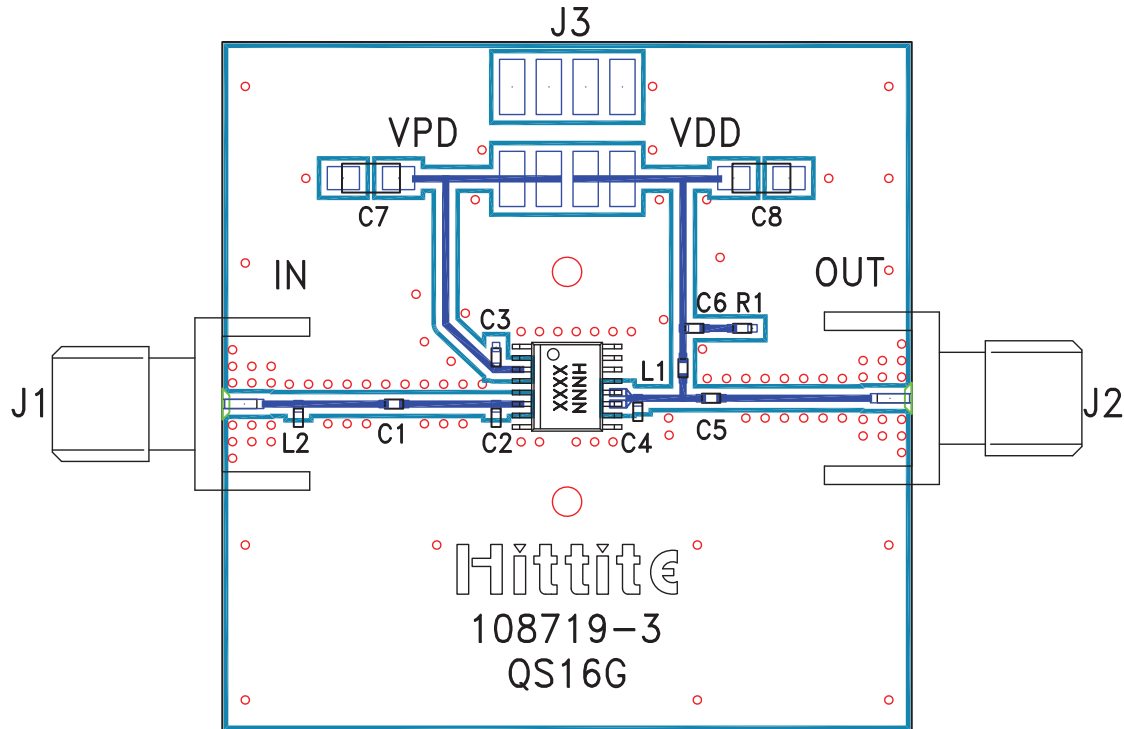
1900 MHz Evaluation PCB

List of Materials for Evaluation PCB 108721-1900 [1]

| Item | Description |
|---------|---------------------------------------|
| J1 - J2 | PCB Mount SMA Connector |
| J3 | 2 mm DC Header |
| C1 | 0.8 pF Capacitor, 0402 Pkg. |
| C2 | 1.2 pF Capacitor, 0402 Pkg. |
| C3, C6 | 100 pF Capacitor, 0402 Pkg. |
| C4 | 4.7 pF Capacitor, 0402 Pkg. |
| C5 | 15 pF Capacitor, 0402 Pkg. |
| C7, C8 | 2.2 μ F Capacitor, Tantalum |
| L1 | 18 nH Inductor, 0402 Pkg. |
| L2 | 20 nH Inductor, 0402 Pkg. |
| R1 | 5.6 Ohm Resistor, 0402 Pkg. |
| U1 | HMC453QS16G / HMC453QS16GE Linear Amp |
| PCB [2] | 108719 Evaluation PCB, 10 mils |

[1] Reference this number when ordering complete evaluation PCB


[2] Circuit Board Material: Rogers 4350, $\epsilon_r = 3.48$

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



2100 MHz Application Circuit

This circuit was used to specify the performance for 2100-2170 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

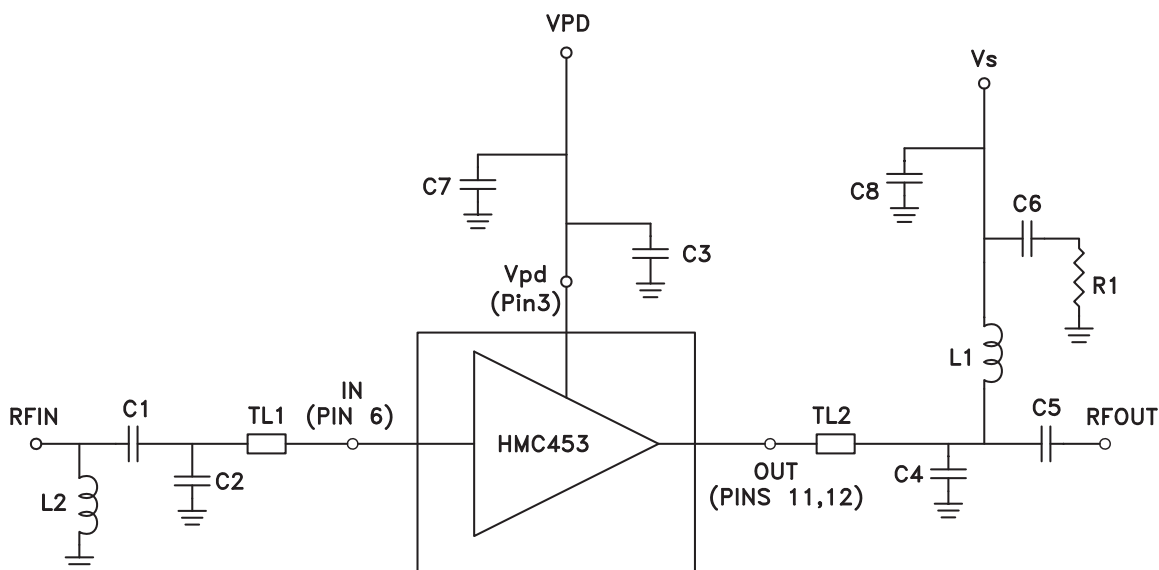


| | TL1 | TL2 |
|---|--------|--------|
| Impedance | 50 Ohm | 50 Ohm |
| Physical Length | 0.04" | 0.04" |
| Electrical Length | 5° | 5° |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 | | |

| Recommended Component Values | |
|------------------------------|---------|
| C1 | 0.8 pF |
| C2 | 1 pF |
| C3, C6 | 100 pF |
| C4 | 3.9 pF |
| C5 | 15 pF |
| C7, C8 | 2.2 μF |
| L1 | 12 nH |
| L2 | 20 nH |
| R1 | 5.1 Ohm |



2100 MHz Evaluation PCB

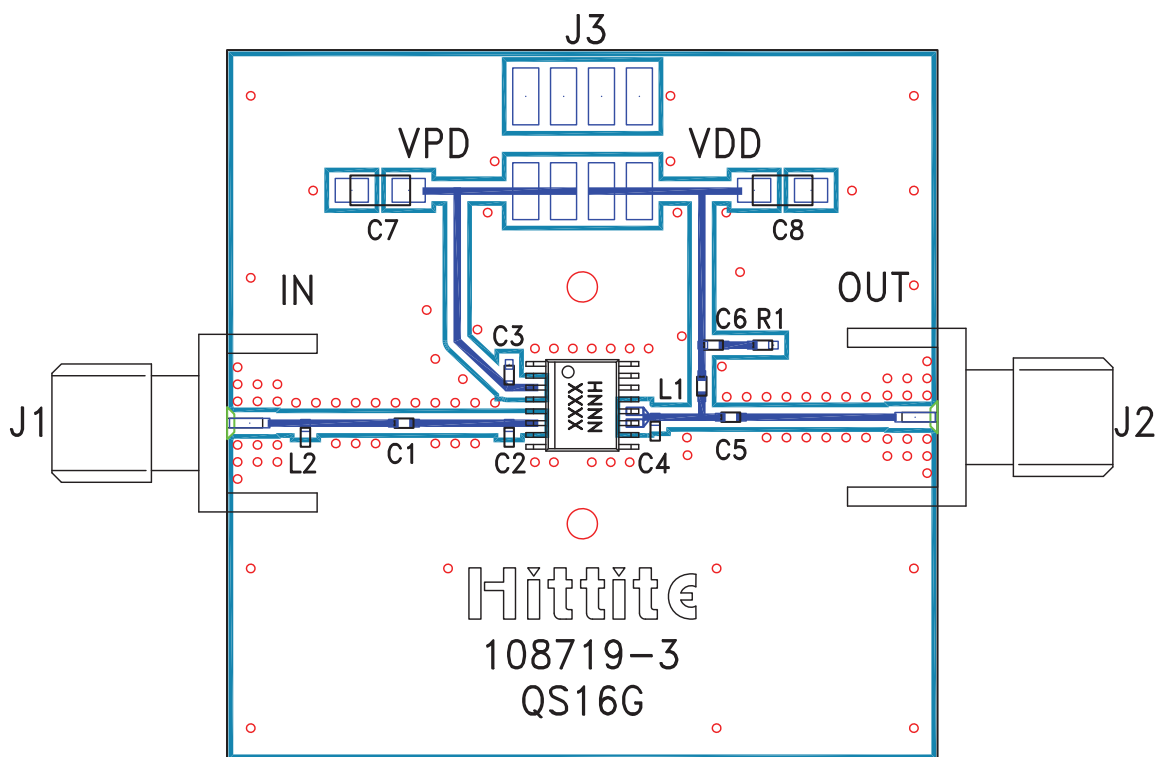

List of Materials for Evaluation PCB 109994-2100 ^[1]

| Item | Description |
|--------------------|---------------------------------------|
| J1 - J2 | PCB Mount SMA Connector |
| J3 | 2 mm DC Header |
| C1 | 0.8 pF Capacitor, 0402 Pkg. |
| C2 | 1.0 pF Capacitor, 0402 Pkg. |
| C3, C6 | 100 pF Capacitor, 0402 Pkg. |
| C4 | 3.9 pF Capacitor, 0402 Pkg. |
| C5 | 15 pF Capacitor, 0402 Pkg. |
| C7, C8 | 2.2 μ F Capacitor, Tantalum |
| L1 | 12 nH Inductor, 0402 Pkg. |
| L2 | 20 nH Inductor, 0402 Pkg. |
| R1 | 5.1 Ohm Resistor, 0402 Pkg. |
| U1 | HMC453QS16G / HMC453QS16GE Linear Amp |
| PCB ^[2] | 108719 Evaluation PCB, 10 mils |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.