



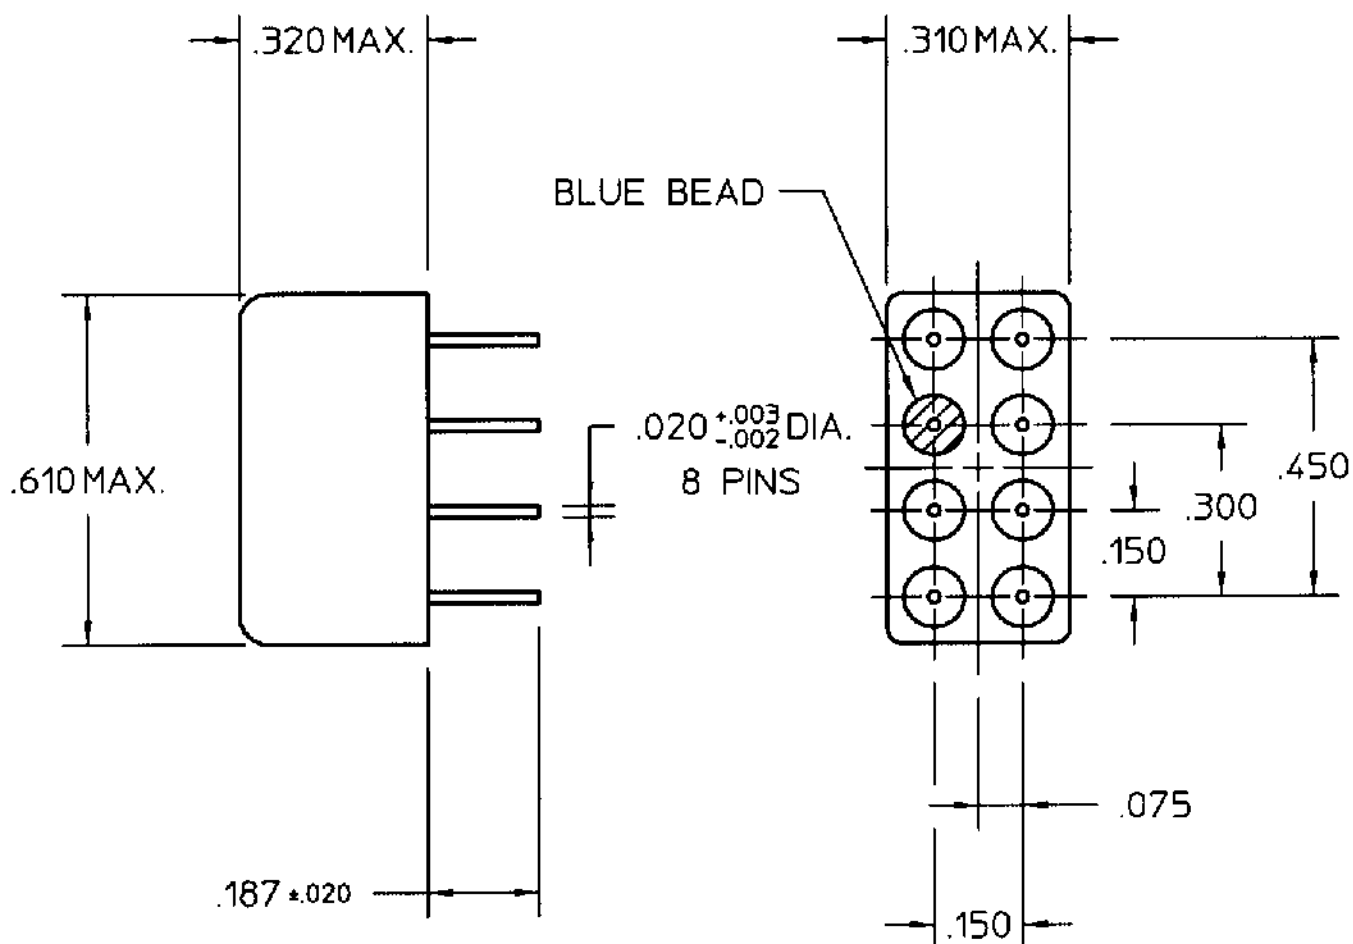

REV. 2

DCO 141326

OMER DATA SHEET



TERMINAL VIEW

RATING: LOW LEVEL TO
AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

11/21/96 CK. Gg # 9/20/99

COMMUNICATIONS
INSTRUMENTS, INC.

3SBC1503A2

COIL: @ 25°C

RESISTANCE 1350 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS. MAX.
BOUNCE 2 MS. MAX.

CUST. QPL

CUST. NO. M39016/13-057L REV.

3SBC RELAY

CUSTOMER



CONTACT 2 A

DR. R.B.

3S