

## TABLE OF CONTENTS

Features .....	1	Timing Specifications .....	5
Enhanced Product Features .....	1	Absolute Maximum Ratings .....	7
Applications.....	1	ESD Caution.....	7
General Description .....	1	Pin Configuration and Function Descriptions.....	8
Functional Block Diagram .....	1	Typical Performance Characteristics .....	10
Product Highlights .....	1	Outline Dimensions.....	14
Revision History .....	2	Ordering Guide .....	14
Specifications.....	3		

## REVISION HISTORY

### 5/2018—Rev. 0 to Rev. A

Changes to Features Section.....	1
Added Enhanced Product Features Section.....	1
Updated Outline Dimensions .....	14
Changes to Ordering Guide .....	14

### 6/2010—Revision 0: Initial Version

## SPECIFICATIONS

$AV_{DD} = DV_{DD} = 5.0 \text{ V} \pm 5\%$ ,  $CLKIN = 8.192 \text{ MHz} \pm 25\%$ ,  $EXC$ ,  $\overline{EXC}$  frequency = 10 kHz to 20 kHz (10-bit); 6 kHz to 20 kHz (12-bit); 3 kHz to 12 kHz (14-bit); 2 kHz to 10 kHz (16-bit);  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.<sup>1</sup>

Table 1.

Parameter	Min	Typ	Max	Unit	Conditions/Comments
SINE, COSINE INPUTS <sup>2</sup>					
Voltage Amplitude	2.3	3.15	4.0	V p-p	Sinusoidal waveforms, differential SIN to SINLO, COS to COSLO
Input Bias Current			8.25	$\mu\text{A}$	$V_{IN} = 4.0 \text{ V p-p}$ , $CLKIN = 8.192 \text{ MHz}$
Input Impedance	485			$\text{k}\Omega$	$V_{IN} = 4.0 \text{ V p-p}$ , $CLKIN = 8.192 \text{ MHz}$
Phase Lock Range	-44		+44	Degrees	Sine/cosine vs. EXC output, Control Register D3 = 0
Common-Mode Rejection		$\pm 20$		arc sec/V	10 Hz to 1 MHz, Control Register D4 = 0
ANGULAR ACCURACY <sup>3</sup>					
Angular Accuracy		$\pm 2.5 + 1 \text{ LSB}$	$\pm 7 + 1 \text{ LSB}$	arc min	
Resolution		10, 12, 14, 16		Bits	No missing codes
Linearity INL					
10-Bit			$\pm 1$	LSB	
12-Bit			$\pm 2$	LSB	
14-Bit			$\pm 4$	LSB	
16-Bit			$\pm 16$	LSB	
Linearity DNL			$\pm 0.9$	LSB	
Repeatability		$\pm 1$		LSB	
VELOCITY OUTPUT					
Velocity Accuracy <sup>4</sup>					
10-Bit			$\pm 2$	LSB	Zero acceleration
12-Bit			$\pm 2$	LSB	Zero acceleration
14-Bit			$\pm 4$	LSB	Zero acceleration
16-Bit			$\pm 16$	LSB	Zero acceleration
Resolution <sup>5</sup>		9, 11, 13, 15		Bits	
DYNAMIC PERFORMANCE					
Bandwidth					
10-Bit	2000	6600	Hz		
12-Bit	2900	5400	Hz		$CLKIN = 8.192 \text{ MHz}$
14-Bit	900	2800	Hz		$CLKIN = 8.192 \text{ MHz}$
16-Bit	1200	2200	Hz		$CLKIN = 8.192 \text{ MHz}$
Tracking Rate					
10-Bit	400	1500	Hz		$CLKIN = 8.192 \text{ MHz}$
12-Bit	600	1200	Hz		$CLKIN = 8.192 \text{ MHz}$
14-Bit	100	350	Hz		$CLKIN = 8.192 \text{ MHz}$
16-Bit	125	275	Hz		$CLKIN = 8.192 \text{ MHz}$
Acceleration Error					
10-Bit		3125	rps		$CLKIN = 10.24 \text{ MHz}$
12-Bit		2500	rps		$CLKIN = 8.192 \text{ MHz}$
14-Bit		1250	rps		$CLKIN = 10.24 \text{ MHz}$
16-Bit		1000	rps		$CLKIN = 8.192 \text{ MHz}$
		625	rps		$CLKIN = 10.24 \text{ MHz}$
		500	rps		$CLKIN = 8.192 \text{ MHz}$
		156.25	rps		$CLKIN = 10.24 \text{ MHz}$
		125	rps		$CLKIN = 8.192 \text{ MHz}$

Parameter	Min	Typ	Max	Unit	Conditions/Comments
Settling Time 10° Step Input					
10-Bit		0.6	0.9	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
12-Bit		2.2	3.3	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
14-Bit		6.5	9.8	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
16-Bit		27.5	48	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
Settling Time 179° Step Input					
10-Bit		1.5	2.4	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
12-Bit		4.75	6.1	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
14-Bit		10.5	15.2	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
16-Bit		45	68	ms	To settle to within $\pm 2$ LSB, CLKIN = 8.192 MHz
EXC, EXC OUTPUTS					
Voltage	3.2	3.6	4.0	V p-p	Load $\pm 100 \mu A$ , typical differential output (EXC to EXC) = 7.2 V p-p
Center Voltage	2.40	2.47	2.53	V	
Frequency	2		20	kHz	
EXC/EXC DC Mismatch			30	mV	
EXC/EXC AC Mismatch			132	mV	
THD		−58		dB	First five harmonics
VOLTAGE REFERENCE					
REFOUT	2.40	2.47	2.53	V	
Drift		100		ppm/°C	
PSRR		−60		dB	
CLKIN, XTALOUT <sup>6</sup>					
V <sub>IL</sub> Voltage Input Low			0.8	V	
V <sub>IH</sub> Voltage Input High	2.0			V	
LOGIC INPUTS					
V <sub>IL</sub> Voltage Input Low			0.8	V	V <sub>DRIVE</sub> = 2.7 V to 5.25 V
			0.7	V	V <sub>DRIVE</sub> = 2.3 V to 2.7 V
V <sub>IH</sub> Voltage Input High	2.0			V	V <sub>DRIVE</sub> = 2.7 V to 5.25 V
	1.7			V	V <sub>DRIVE</sub> = 2.3 V to 2.7 V
I <sub>IL</sub> Low Level Input Current (Non-Pull-Up)			10	μA	
I <sub>IL</sub> Low Level Input Current (Pull-Up)			80	μA	RES0, RES1, RD, WR/FSYNC, A0, A1, and RESET pins
I <sub>IH</sub> High Level Input Current	−10			μA	
LOGIC OUTPUTS					
V <sub>OL</sub> Voltage Output Low			0.4	V	V <sub>DRIVE</sub> = 2.3 V to 5.25 V
V <sub>OH</sub> Voltage Output High	2.4			V	V <sub>DRIVE</sub> = 2.7 V to 5.25 V
	2.0			V	V <sub>DRIVE</sub> = 2.3 V to 2.7 V
I <sub>OZH</sub> High Level Three-State Leakage	−10			μA	
I <sub>OZL</sub> Low Level Three-State Leakage			10	μA	
POWER REQUIREMENTS					
AV <sub>DD</sub>	4.75		5.25	V	
DV <sub>DD</sub>	4.75		5.25	V	
V <sub>DRIVE</sub>	2.3		5.25	V	
POWER SUPPLY					
I <sub>AVDD</sub>			12	mA	
I <sub>DVDD</sub>			35	mA	
I <sub>OVDD</sub>			2	mA	

<sup>1</sup> Temperature range is as follows:  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .<sup>2</sup> The voltages SIN, SINLO, COS, and COSLO, relative to AGND, must always be between 0.15 V and AV<sub>DD</sub> − 0.2 V.<sup>3</sup> All specifications within the angular accuracy parameter are tested at constant velocity, that is, zero acceleration.<sup>4</sup> The velocity accuracy specification includes velocity offset and dynamic ripple.<sup>5</sup> For example, when RES0 = 0 and RES1 = 1, the position output has a resolution of 12 bits. The velocity output has a resolution of 11 bits with the MSB indicating the direction of rotation. In this example, with a CLKIN frequency of 8.192 MHz, the velocity LSB is 0.488 rps, that is, 1000 rps/(2<sup>11</sup>).<sup>6</sup> The clock frequency of the AD2S1210-EP can be supplied with a crystal, an oscillator, or directly from a DSP/microprocessor digital output. When using a single-ended clock signal directly from the DSP/microprocessor, the XTALOUT pin should remain open circuit and the logic levels outlined under the logic inputs parameter in Table 1 apply.

## TIMING SPECIFICATIONS

AV<sub>DD</sub> = DV<sub>DD</sub> = 5.0 V ± 5%, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.<sup>1</sup>

Table 2.

Parameter	Description	Limit at T <sub>MIN</sub> , T <sub>MAX</sub>	Unit
f <sub>CLKIN</sub>	Frequency of clock input	6.144 10.24	MHz min MHz max
t <sub>Ck</sub>	Clock period (t <sub>Ck</sub> = 1/f <sub>CLKIN</sub> )	98 163	ns min ns max
t <sub>1</sub>	A0 and A1 setup time before RD/CS low	2	ns min
t <sub>2</sub>	Delay CS falling edge to WR/FSYNC rising edge	22	ns min
t <sub>3</sub>	Address/data setup time during a write cycle	3	ns min
t <sub>4</sub>	Address/data hold time during a write cycle	2	ns min
t <sub>5</sub>	Delay WR/FSYNC rising edge to CS rising edge	2	ns min
t <sub>6</sub>	Delay CS rising edge to CS falling edge	10	ns min
t <sub>7</sub>	Delay between writing address and writing data	2 × t <sub>Ck</sub> + 20	ns min
t <sub>8</sub>	A0 and A1 hold time after WR/FSYNC rising edge	2	ns min
t <sub>9</sub>	Delay between successive write cycles	6 × t <sub>Ck</sub> + 20	ns min
t <sub>10</sub>	Delay between rising edge of WR/FSYNC and falling edge of RD	2	ns min
t <sub>11</sub>	Delay CS falling edge to RD falling edge	2	ns min
t <sub>12</sub>	Enable delay RD low to data valid in configuration mode		
	V <sub>DRIVE</sub> = 4.5 V to 5.25 V	37	ns min
	V <sub>DRIVE</sub> = 2.7 V to 3.6 V	25	ns min
	V <sub>DRIVE</sub> = 2.3 V to 2.7 V	30	ns min
t <sub>13</sub>	RD rising edge to CS rising edge	2	ns min
t <sub>14A</sub>	Disable delay RD high to data high-Z	16	ns min
t <sub>14B</sub>	Disable delay CS high to data high-Z	16	ns min
t <sub>15</sub>	Delay between rising edge of RD and falling edge of WR/FSYNC	2	ns min
t <sub>16</sub>	SAMPLE pulse width	2 × t <sub>Ck</sub> + 20	ns min
t <sub>17</sub>	Delay from SAMPLE before RD/CS low	6 × t <sub>Ck</sub> + 20	ns min
t <sub>18</sub>	Hold time RD before RD low	2	ns min
t <sub>19</sub>	Enable delay RD/CS low to data valid		
	V <sub>DRIVE</sub> = 4.5 V to 5.25 V	17	ns min
	V <sub>DRIVE</sub> = 2.7 V to 3.6 V	21	ns min
	V <sub>DRIVE</sub> = 2.3 V to 2.7 V	33	ns min
t <sub>20</sub>	RD pulse width	6	ns min
t <sub>21</sub>	A0 and A1 set time to data valid when RD/CS low		
	V <sub>DRIVE</sub> = 4.5 V to 5.25 V	36	ns min
	V <sub>DRIVE</sub> = 2.7 V to 3.6 V	37	ns min
	V <sub>DRIVE</sub> = 2.3 V to 2.7 V	29	ns min
t <sub>22</sub>	Delay WR/FSYNC falling edge to SCLK rising edge	3	ns min
t <sub>23</sub>	Delay WR/FSYNC falling edge to SDO release from high-Z		
	V <sub>DRIVE</sub> = 4.5 V to 5.25 V	16	ns min
	V <sub>DRIVE</sub> = 2.7 V to 3.6 V	26	ns min
	V <sub>DRIVE</sub> = 2.3 V to 2.7 V	29	ns min
t <sub>24</sub>	Delay SCLK rising edge to DBx valid		
	V <sub>DRIVE</sub> = 4.5 V to 5.25 V	24	ns min
	V <sub>DRIVE</sub> = 2.7 V to 3.6 V	18	ns min
	V <sub>DRIVE</sub> = 2.3 V to 2.7 V	32	ns min
t <sub>25</sub>	SCLK high time	0.4 × t <sub>SCLK</sub>	ns min
t <sub>26</sub>	SCLK low time	0.4 × t <sub>SCLK</sub>	ns min
t <sub>27</sub>	SDI setup time prior to SCLK falling edge	3	ns min
t <sub>28</sub>	SDI hold time after SCLK falling edge	2	ns min

Parameter	Description	Limit at T <sub>MIN</sub> , T <sub>MAX</sub>	Unit
t <sub>29</sub>	Delay WR/FSYNC rising edge to SDO high-Z	15	ns min
t <sub>30</sub>	Delay from SAMPLE before WR/FSYNC falling edge	$6 \times t_{CK} + 20$ ns	ns min
t <sub>31</sub>	Delay CS falling edge to WR/FSYNC falling edge in normal mode	2	ns min
t <sub>32</sub>	A0 and A1 setup time before WR/FSYNC falling edge	2	ns min
t <sub>33</sub>	A0 and A1 hold time after WR/FSYNC falling edge <sup>2</sup>		
	In normal mode, A0 = 0, A1 = 0/1	$24 \times t_{CK} + 5$ ns	ns min
	In configuration mode, A0 = 1, A1 = 1	$8 \times t_{CK} + 5$ ns	ns min
t <sub>34</sub>	Delay WR/FSYNC rising edge to WR/FSYNC falling edge	10	ns min
f <sub>SCLK</sub>	Frequency of SCLK input		
	V <sub>DRIVE</sub> = 4.5 V to 5.25 V	20	MHz
	V <sub>DRIVE</sub> = 2.7 V to 3.6 V	25	MHz
	V <sub>DRIVE</sub> = 2.3 V to 2.7 V	15	MHz

<sup>1</sup> Temperature range is as follows:  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

<sup>2</sup> A0 and A1 should remain constant for the duration of the serial readback. This may require 24 clock periods to read back the 8-bit fault information in addition to the 16 bits of position/velocity data. If the fault information is not required, A0/A1 may be released after 16 clock cycles.

## ABSOLUTE MAXIMUM RATINGS

Table 3.

Parameter	Rating
AV <sub>DD</sub> to AGND, DGND	−0.3 V to +7.0 V
DV <sub>DD</sub> to AGND, DGND	−0.3 V to +7.0 V
V <sub>DRIVE</sub> to AGND, DGND	−0.3 V to AV <sub>DD</sub>
AV <sub>DD</sub> to DV <sub>DD</sub>	−0.3 V to +0.3 V
AGND to DGND	−0.3 V to +0.3 V
Analog Input Voltage to AGND	−0.3 V to AV <sub>DD</sub> + 0.3 V
Digital Input Voltage to DGND	−0.3 V to V <sub>DRIVE</sub> + 0.3 V
Digital Output Voltage to DGND	−0.3 V to V <sub>DRIVE</sub> + 0.3 V
Analog Output Voltage Swing	−0.3 V to AV <sub>DD</sub> + 0.3 V
Input Current to Any Pin Except Supplies <sup>1</sup>	±10 mA
Operating Temperature Range (Ambient)	
EP Grade	−55°C to +125°C
Storage Temperature Range	−65°C to +150°C
θ <sub>JA</sub> Thermal Impedance <sup>2</sup>	54°C/W
θ <sub>Jc</sub> Thermal Impedance <sup>2</sup>	15°C/W
RoHS-Compliant Temperature, Soldering Reflow	260(−5/+0)°C
ESD	2 kV HBM

<sup>1</sup> Transient currents of up to 100 mA do not cause latch-up.

<sup>2</sup> JEDEC 252P standard board.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.


### ESD CAUTION



#### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

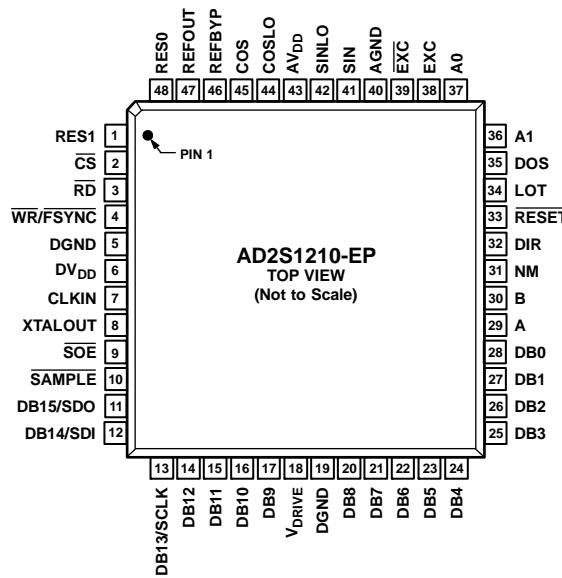

09154-002

Figure 2. Pin Configuration



Table 4. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	RES1	Resolution Select 1. Logic input. RES1 in conjunction with RES0 allows the resolution of the AD2S1210-EP to be programmed.
2	CS	Chip Select. Active low logic input. The device is enabled when CS is held low.
3	RD	Edge-Triggered Logic Input. When the SOE pin is high, this pin acts as a frame synchronization signal and output enable for the parallel data outputs, DB15 to DB0. The output buffer is enabled when CS and RD are held low. When the SOE pin is low, the RD pin should be held high.
4	WR/FSYNC	Edge-Triggered Logic Input. When the SOE pin is high, this pin acts as a frame synchronization signal and input enable for the parallel data inputs, DB7 to DB0. The input buffer is enabled when CS and WR/FSYNC are held low. When the SOE pin is low, the WR/FSYNC pin acts as a frame synchronization signal and enable for the serial data bus.
5, 19	DGND	Digital Ground. These pins are ground reference points for digital circuitry on the AD2S1210-EP. Refer all digital input signals to this DGND voltage. Both of these pins can be connected to the AGND plane of a system. The DGND and AGND voltages should ideally be at the same potential and must not be more than 0.3 V apart, even on a transient basis.
6	DV <sub>DD</sub>	Digital Supply Voltage, 4.75 V to 5.25 V. This is the supply voltage for all digital circuitry on the AD2S1210-EP. The AV <sub>DD</sub> and DV <sub>DD</sub> voltages should ideally be at the same potential and must not be more than 0.3 V apart, even on a transient basis.
7	CLKIN	Clock Input. A crystal or oscillator can be used at the CLKIN and XTALOUT pins to supply the required clock frequency of the AD2S1210-EP. Alternatively, a single-ended clock can be applied to the CLKIN pin. The input frequency of the AD2S1210-EP is specified from 6.144 MHz to 10.24 MHz.
8	XTALOUT	Crystal Output. When using a crystal or oscillator to supply the clock frequency to the AD2S1210-EP, apply the crystal across the CLKIN and XTALOUT pins. When using a single-ended clock source, the XTALOUT pin should be considered a no connect pin.
9	SOE	Serial Output Enable. Logic input. This pin enables either the parallel or serial interface. The serial interface is selected by holding the SOE pin low, and the parallel interface is selected by holding the SOE pin high.
10	SAMPLE	Sample Result. Logic input. Data is transferred from the position and velocity integrators to the position and velocity registers after a high-to-low transition on the SAMPLE signal. The fault register is also updated after a high-to-low transition on the SAMPLE signal.
11	DB15/SDO	Data Bit 15/Serial Data Output Bus. When the SOE pin is high, this pin acts as DB15, a three-state data output pin controlled by CS and RD. When the SOE pin is low, this pin acts as SDO, the serial data output bus controlled by CS and WR/FSYNC. The bits are clocked out on the rising edge of SCLK.
12	DB14/SDI	Data Bit 14/Serial Data Input Bus. When the SOE pin is high, this pin acts as DB14, a three-state data output pin controlled by CS and RD. When the SOE pin is low, this pin acts as SDI, the serial data input bus controlled by CS and WR/FSYNC. The bits are clocked in on the falling edge of SCLK.


Pin No.	Mnemonic	Description
13	DB13/SCLK	Data Bit 13/Serial Clock. In parallel mode, this pin acts as DB13, a three-state data output pin controlled by $\overline{CS}$ and $\overline{RD}$ . In serial mode, this pin acts as the serial clock input.
14 to 17	DB12 to DB9	Data Bit 12 to Data Bit 9. Three-state data output pins controlled by $\overline{CS}$ and $\overline{RD}$ .
18	$V_{DRIVE}$	Logic Power Supply Input. The voltage supplied at this pin determines at what voltage the interface operates. Decouple this pin to DGND. The voltage range on this pin is 2.3 V to 5.25 V and may be different from the voltage range at $AV_{DD}$ and $DV_{DD}$ but should never exceed either by more than 0.3 V.
20	DB8	Data Bit 8. Three-state data output pin controlled by $\overline{CS}$ and $\overline{RD}$ .
21 to 28	DB7 to DB0	Data Bit 7 to Data Bit 0. Three-state data input/output pins controlled by $\overline{CS}$ , $\overline{RD}$ , and $\overline{WR}/\overline{FSYNC}$ .
29	A	Incremental Encoder Emulation Output A. Logic output. This output is free running and is valid if the resolver format input signals applied to the converter are valid.
30	B	Incremental Encoder Emulation Output B. Logic output. This output is free running and is valid if the resolver format input signals applied to the converter are valid.
31	NM	North Marker Incremental Encoder Emulation Output. Logic output. This output is free running and is valid if the resolver format input signals applied to the converter are valid.
32	DIR	Direction. Logic output. This output is used in conjunction with the incremental encoder emulation outputs. The DIR output indicates the direction of the input rotation and is high for increasing angular rotation.
33	RESET	Reset. Logic input. The AD2S1210-EP requires an external reset signal to hold the RESET input low until $V_{DD}$ is within the specified operating range of 4.75 V to 5.25 V.
34	LOT	Loss of Tracking. Logic output. Loss of tracking (LOT) is indicated by a logic low on the LOT pin and is not latched.
35	DOS	Degradation of Signal. Logic output. Degradation of signal (DOS) is detected when either resolver input (sine or cosine) exceeds the specified DOS sine/cosine threshold or when an amplitude mismatch occurs between the sine and cosine input voltages. DOS is indicated by a logic low on the DOS pin.
36	A1	Mode Select 1. Logic input. A1 in conjunction with A0 allows the mode of the AD2S1210-EP to be selected.
37	A0	Mode Select 0. Logic input. A0 in conjunction with A1 allows the mode of the AD2S1210-EP to be selected.
38	EXC	Excitation Frequency. Analog output. An on-board oscillator provides the sinusoidal excitation signal (EXC) and its complement signal (EXC) to the resolver. The frequency of this reference signal is programmable via the excitation frequency register.
39	$\overline{EXC}$	Excitation Frequency Complement. Analog output. An on-board oscillator provides the sinusoidal excitation signal (EXC) and its complement signal (EXC) to the resolver. The frequency of this reference signal is programmable via the excitation frequency register.
40	AGND	Analog Ground. This pin is the ground reference points for analog circuitry on the AD2S1210-EP. Refer all analog input signals and any external reference signal to this AGND voltage. Connect the AGND pin to the AGND plane of a system. The AGND and DGND voltages should ideally be at the same potential and must not be more than 0.3 V apart, even on a transient basis.
41	SIN	Positive Analog Input of Differential SIN/SINLO Pair. The input range is 2.3 V p-p to 4.0 V p-p.
42	SINLO	Negative Analog Input of Differential SIN/SINLO Pair. The input range is 2.3 V p-p to 4.0 V p-p.
43	$AV_{DD}$	Analog Supply Voltage, 4.75 V to 5.25 V. This pin is the supply voltage for all analog circuitry on the AD2S1210-EP. The $AV_{DD}$ and $DV_{DD}$ voltages ideally should be at the same potential and must not be more than 0.3 V apart, even on a transient basis.
44	COSLO	Negative Analog Input of Differential COS/COSLO Pair. The input range is 2.3 V p-p to 4.0 V p-p.
45	COS	Positive Analog Input of Differential COS/COSLO Pair. The input range is 2.3 V p-p to 4.0 V p-p.
46	REFBYP	Reference Bypass. Connect reference decoupling capacitors at this pin. Typical recommended values are 10 $\mu$ F and 0.01 $\mu$ F.
47	REFOUT	Voltage Reference Output.
48	RES0	Resolution Select 0. Logic input. RES0 in conjunction with RES1 allows the resolution of the AD2S1210-EP to be programmed.

## TYPICAL PERFORMANCE CHARACTERISTICS


$T_A = 25^\circ\text{C}$ ,  $\text{AV}_{\text{DD}} = \text{DV}_{\text{DD}} = \text{V}_{\text{DRIVE}} = 5 \text{ V}$ ,  $\text{SIN}/\text{SINLO} = 3.15 \text{ V p-p}$ ,  $\text{COS}/\text{COSLO} = 3.15 \text{ V p-p}$ ,  $\text{CLKIN} = 8.192 \text{ MHz}$ , unless otherwise noted.

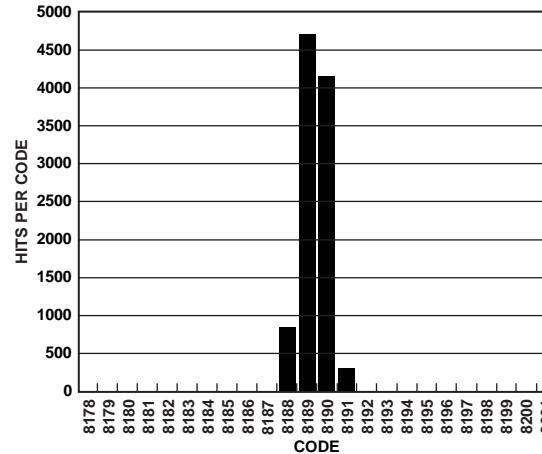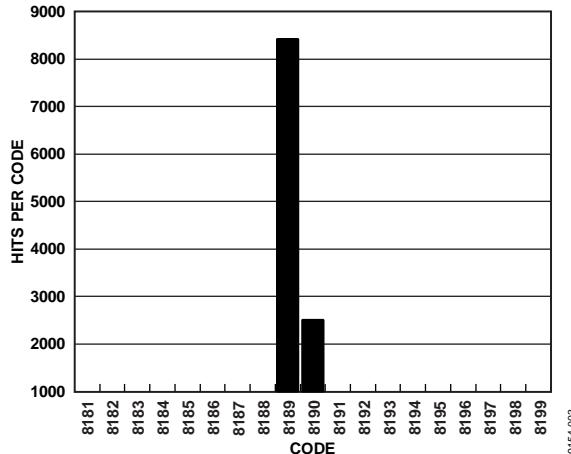


09154-003

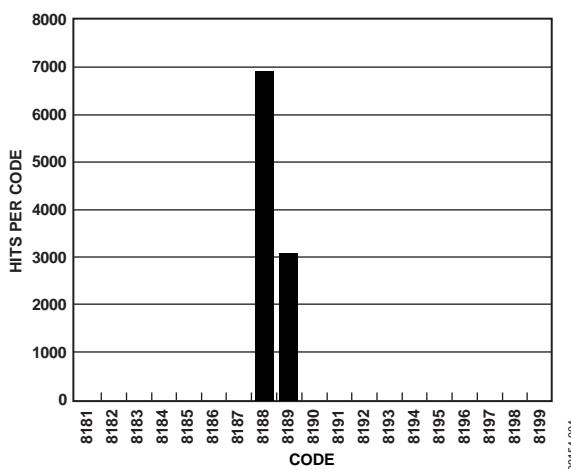


09154-004

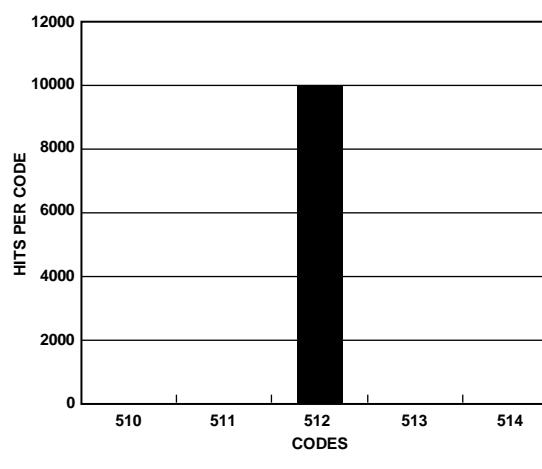

09154-017

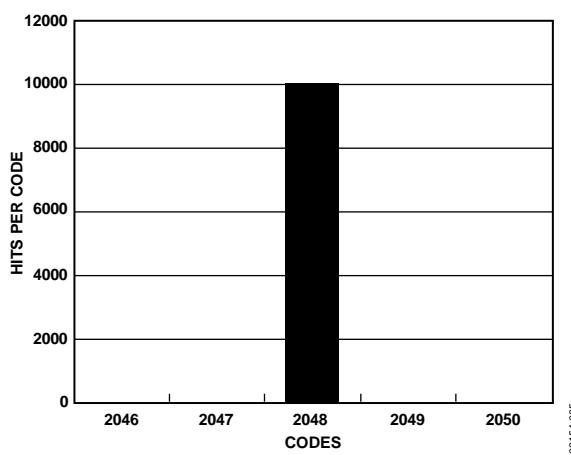

09154-005

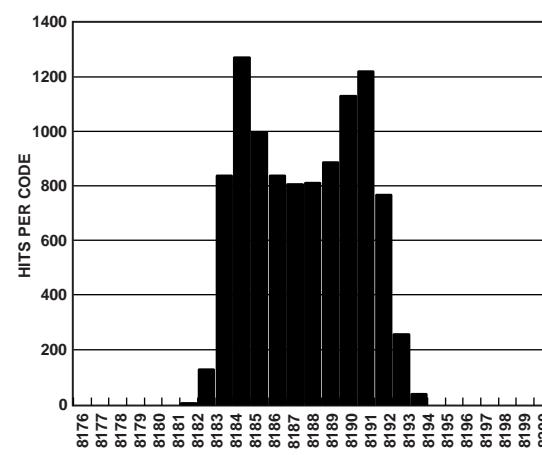

09154-018

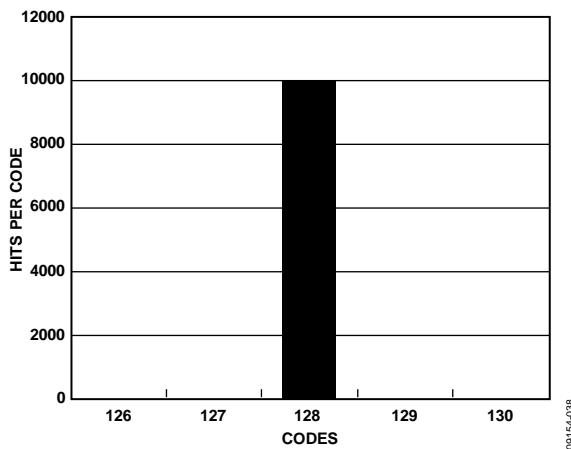


Figure 9. Typical 10-Bit Angular Accuracy Histogram of Codes,  
10,000 Samples, Hysteresis Enabled

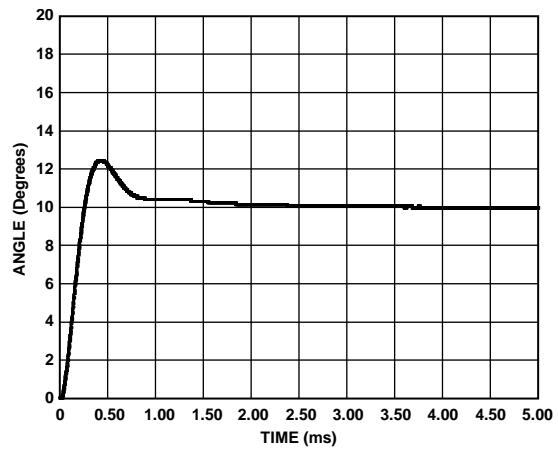


Figure 12. Typical 12-Bit 10° Step Response

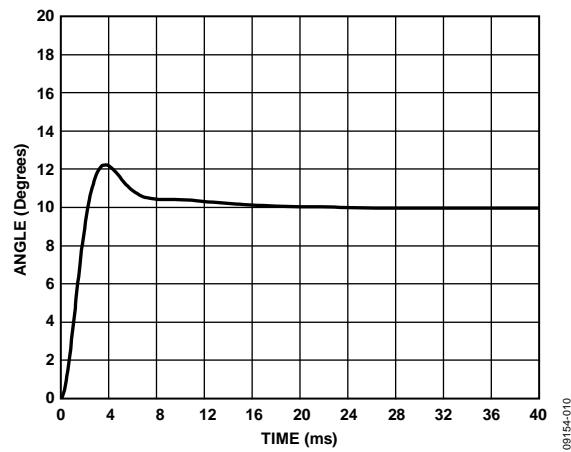


Figure 10. Typical 16-Bit 10° Step Response

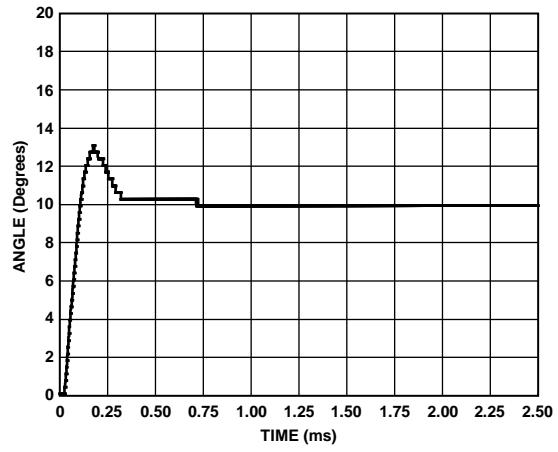


Figure 13. Typical 10-Bit 10° Step Response

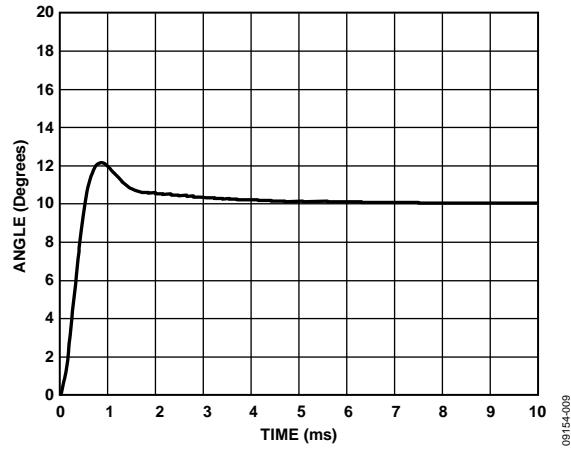


Figure 11. Typical 14-Bit 10° Step Response

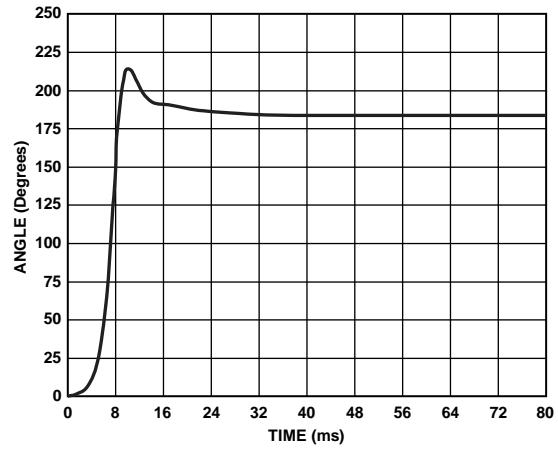
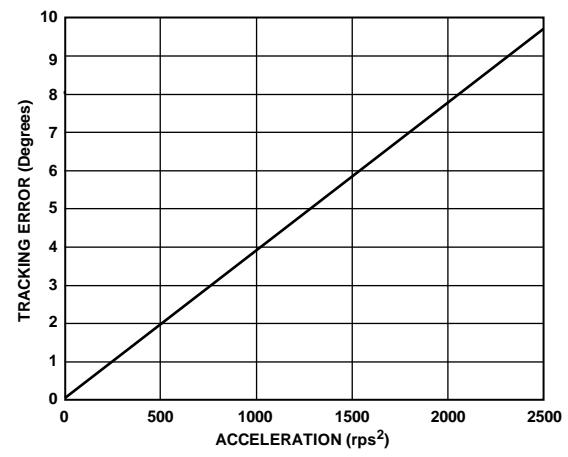
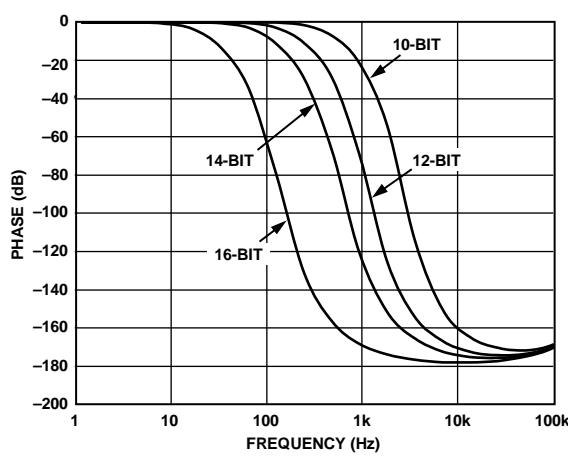
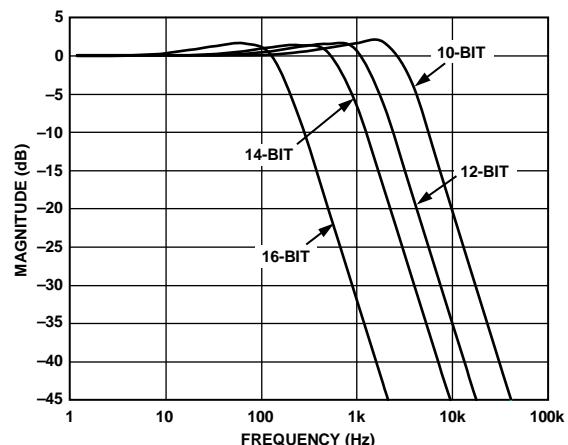
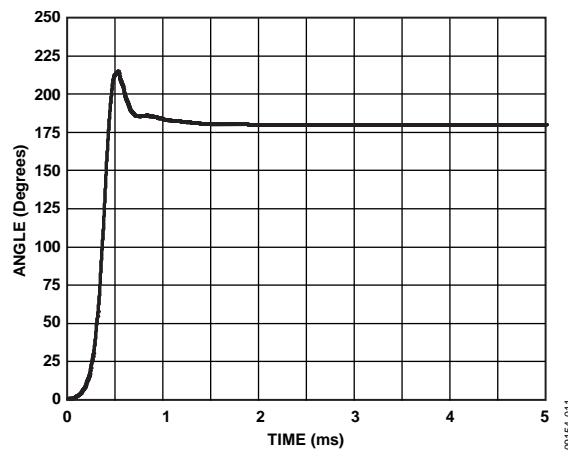
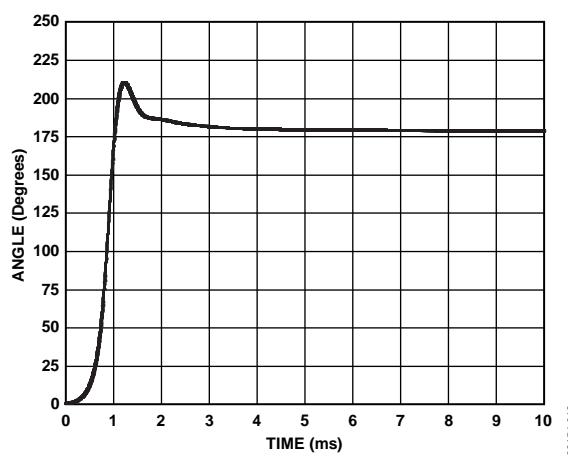
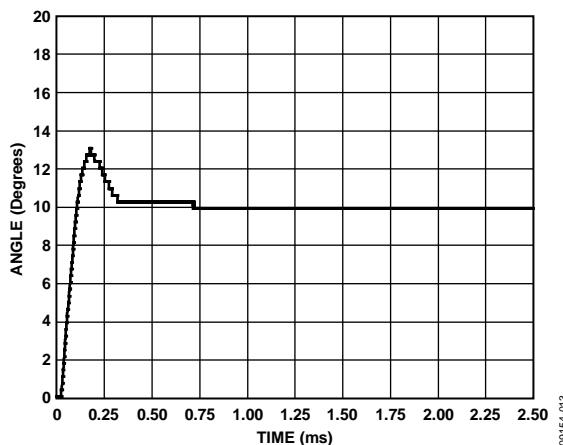


Figure 14. Typical 16-Bit 179° Step Response



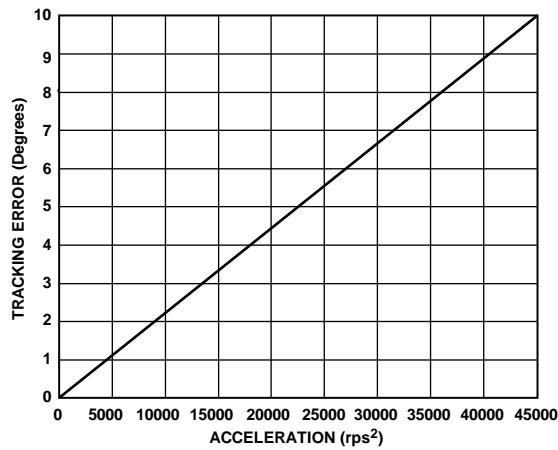


Figure 21. Typical 14-Bit Tracking Error vs. Acceleration

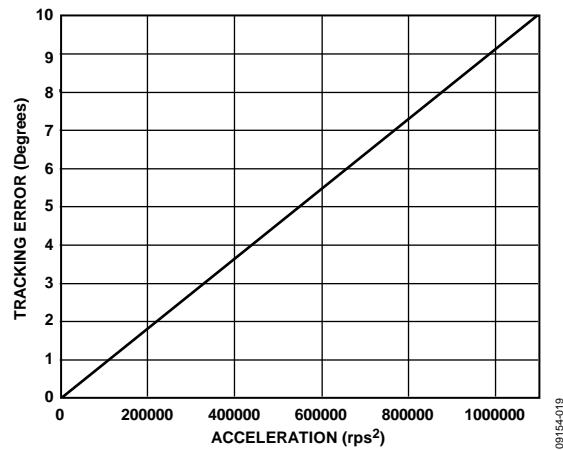


Figure 23. Typical 10-Bit Tracking Error vs. Acceleration

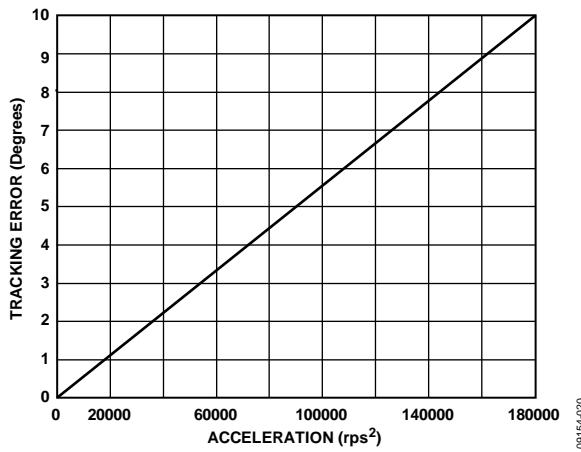



Figure 22. Typical 12-Bit Tracking Error vs. Acceleration

09154-021

09154-020

09154-019

## OUTLINE DIMENSIONS

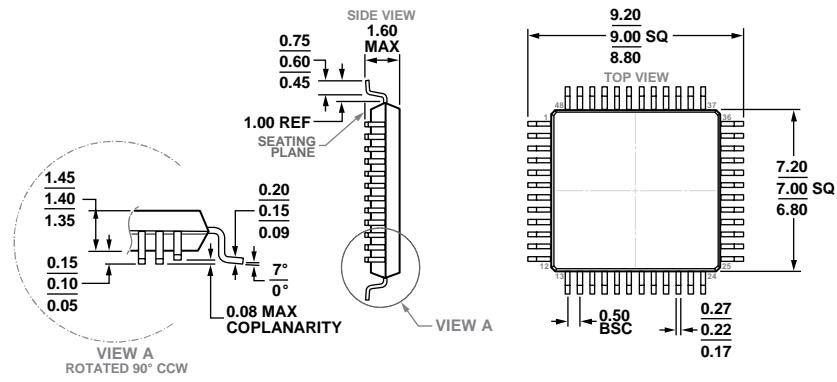

PN:0-00450

01-17-2018-A

Figure 24. 48-Lead Low Profile Quad Flat Package [LQFP]  
(ST-48)

Dimensions shown in millimeters

## ORDERING GUIDE

Model <sup>1</sup>	Temperature Range	Package Description	Package Option
AD2S1210SST-EP-RL7	−55°C to +125°C	48-Lead LQFP	ST-48
AD2S1210SSTZ-EPRL7	−55°C to +125°C	48-Lead LQFP	ST-48

<sup>1</sup> Z = RoHS Compliant Part

**NOTES**

## NOTES

©2010–2018 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.  
D09154-0-5/18(A)



[www.analog.com](http://www.analog.com)