

ABSOLUTE MAXIMUM RATINGS

| | |
|--|-----------------------------------|
| Voltage Range on Any Pin (except CTG) Relative to Ground | -0.5V to +6.0V |
| Voltage Range on CTG Relative to Ground | -0.5 to +0.5V |
| Operating Temperature Range | -40°C to +125°C |
| Storage Temperature Range | -55°C to +125°C |
| Soldering Temperature (10s) | +260°C (See IPC/JEDEC J-STD-020A) |
| Reflow Oven Temperature | +220°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

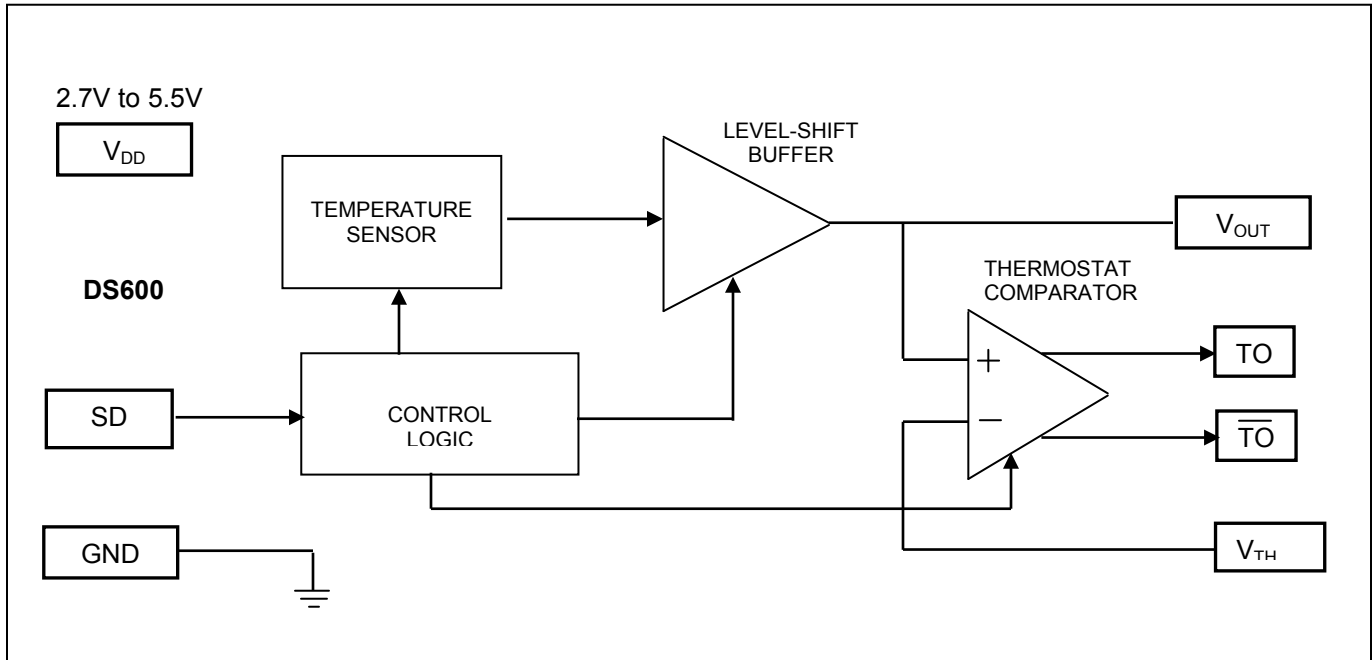
($V_{CC} = 2.7\text{V}$ to 5.5V , $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|---------------------|------------------|---------------------|------|---------------------|-------|
| Supply Voltage | V_{DD} | | 2.7 | | 5.5 | V |
| Thermometer Error | T_{ERR} | -20°C to +100°C | | | ± 0.5 | °C |
| | | -40°C to +125°C | | | ± 0.75 | |
| Output Gain | $\Delta V/\Delta T$ | | | 6.45 | | mV/°C |
| V_{OUT} DC Offset | V_{OS} | 0°C | | 509 | | mV |
| Low-Level Input Voltage (SD) | V_{IL} | | -0.5 | | $0.3 \times V_{DD}$ | V |
| High-Level Input Voltage (SD) | V_{IH} | | $0.7 \times V_{DD}$ | | $V_{DD} + 0.5$ | V |
| SD Input Capacitance | C_{SD} | | | 5 | | pF |
| VTH Input Capacitance | C_{VTH} | | | 5 | | pF |
| Low-Level Output Voltage (TO, \overline{TO}) | V_{OL} | 4mA sink current | 0 | | 0.4 | V |
| Supply Current | I_{DD} | | | | 140 | μA |
| Shutdown Current | I_{SD} | | | | 2.5 | μA |
| Input Current (V_{TH}) | I_{TH} | | | 0.01 | 1 | μA |
| Input Resistance (V_{TH}) | R_{TH} | | 5 | | | MΩ |
| Leakage Current (SD) | I_L | | | 0.01 | 1 | μA |
| External Load Capacitance on V_{OUT} | C_{EL} | | | | 50 | pF |
| V_{OUT} Source Current | I_{OSO} | | 10 | | | μA |
| V_{OUT} Sink Current | I_{OSI} | | 10 | | | μA |
| Output Impedance (V_{OUT}) | R_{OUT} | | | | 100 | Ω |
| Power-Up Time | $t_{POWERUP}$ | | | | 10 | ms |
| Nonlinearity | | | | | ± 0.2 | °C |
| Comparator Offset | | | | | ± 3 | mV |
| Comparator Response Time | t_{COMP} | | | | 20 | ms |

PIN DESCRIPTION

| PIN | NAME | FUNCTION |
|-----|-----------------|---|
| 1 | V_{DD} | Supply Voltage. 2.7V to 5.5V |
| 2 | TO | Active-High Thermostat Output. Open-drain output transitions from low to high when the output voltage exceeds V_{TH} . In shutdown mode, (SD = 1), TO is low. |
| 3 | \overline{TO} | Active-Low Thermostat Output. Open-drain output transitions from high to low when the output voltage exceeds V_{TH} . In shutdown mode, (SD = 1), \overline{TO} is high. |
| 4 | V_{OUT} | Temperature Output. Outputs a voltage that is proportional to the die temperature in degrees centigrade. In shutdown mode, this pin goes high-Z. |
| 5 | V_{TH} | Thermostat Trip Voltage. User-selectable voltage that sets the thermostat trip-point temperature. TO and \overline{TO} are asserted when V_{OUT} crosses this voltage. (No on-chip hysteresis is present). |
| 6 | SD | Shutdown. Power consumption and thermal sensor function are controlled through SD. This pin functions as an active-high input pin. Driving this pin high puts the device in a low-power state and discontinues thermal sensing. |
| 7 | CTG | Must be connected to GND. |
| 8 | GND | Ground. |
| | PAD | PAD. Connect to GND or float. DO NOT CONNECT TO SUPPLY. The exposed pad is the best way to conduct temperature into the package. Connecting PAD to a ground plane can assist in properly measuring the temperature of the circuit board. |

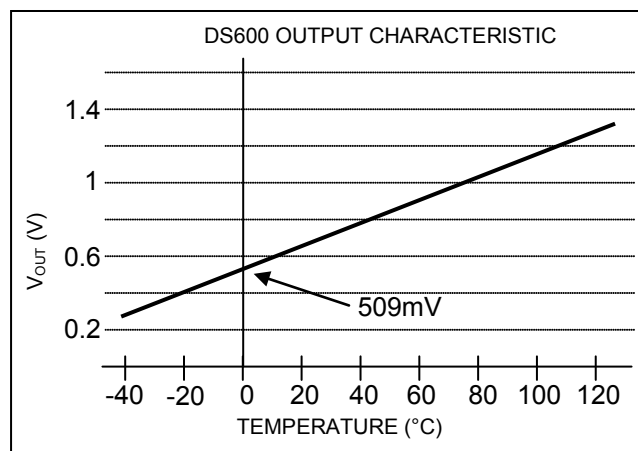
Figure 1. Block Diagram



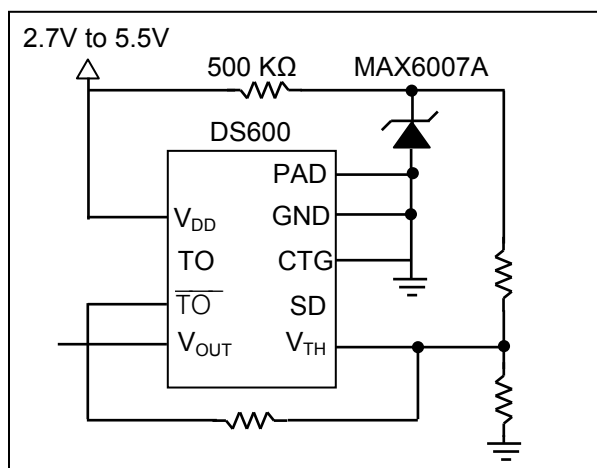
TEMPERATURE MEASUREMENT

The DS600 analog temperature sensor measures its own temperature and provides these measurements to the user in the form of an output voltage, V_{OUT} , that is proportional to degrees centigrade. The output voltage characteristic is factory-calibrated for a typical output gain ($\Delta V/\Delta T$) of $+6.45\text{mV}/^{\circ}\text{C}$ and a DC offset (V_{OS}) of 509mV . Its operating temperature range is -40°C to $+125^{\circ}\text{C}$, corresponding to an output voltage range of 251mV to 1315mV . ($V_{OUT} = \text{Device Temperature } (^{\circ}\text{C}) \times \Delta V/\Delta T + V_{OS}$). The DS600 has $\pm 0.5^{\circ}\text{C}$ accuracy over a -20°C to $+100^{\circ}\text{C}$ temperature range and over the full 2.7V to 5.5V voltage range. Because the output voltage is positive for the entire temperature range, there is no need for a negative supply.

Figure 2 shows the output voltage characteristic for the DS600.

Figure 2. Output Voltage Characteristic**THERMOSTAT OPERATION**

The DS600 can also be used as a thermostat with either an active-high (TO) or active-low ($\overline{\text{TO}}$) output. To function as a thermostat, a precise voltage reference equal to the desired threshold must be applied to the V_{TH} pin. When the temperature with the equivalent voltage value is reached (voltage on V_{OUT} = voltage on V_{TH}), thermostat outputs TO and $\overline{\text{TO}}$ become active. Figure 3 shows an example thermostat application circuit.

Figure 3. Thermostat Application Circuit

PACKAGE INFORMATION

For the latest package outline information, go to www.maximintegrated.com/DallasPackInfo.



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000

©2015 Maxim Integrated Products, Inc. Maxim Integrated and the Maxim Integrated logo are trademarks of Maxim Integrated Products, Inc.