

# LT1722/LT1723/LT1724

## ABSOLUTE MAXIMUM RATINGS

(Note 1)

|                                               |                   |                                           |                                                |
|-----------------------------------------------|-------------------|-------------------------------------------|------------------------------------------------|
| Total Supply Voltage ( $V^+$ to $V^-$ ) ..... | 12.6V             | Operating Temperature Range (Note 4) ...  | $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$  |
| Input Voltage.....                            | $\pm V_S$         | Specified Temperature Range (Note 5) .... | $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$  |
| Differential Input Voltage (Note 2) .....     | $\pm 0.7\text{V}$ | Maximum Junction Temperature .....        | $150^{\circ}\text{C}$                          |
| Input Current (Note 2).....                   | $\pm 10\text{mA}$ | Storage Temperature Range .....           | $-65^{\circ}\text{C}$ to $150^{\circ}\text{C}$ |
| Output Short-Circuit Duration (Note 3) .....  | Indefinite        | Lead Temperature (Soldering, 10 sec)..... | $300^{\circ}\text{C}$                          |

## PIN CONFIGURATION

|                                                                                                                                                                                   |                                                                                                                                                                                     |                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>LT1722</b></p> <p>TOP VIEW</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 150^{\circ}\text{C/W}</math></p>    | <p><b>LT1722</b></p> <p>TOP VIEW</p> <p>S5 PACKAGE<br/>5-LEAD PLASTIC TSOT-23<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 250^{\circ}\text{C/W}</math></p> | <p><b>LT1723</b></p> <p>TOP VIEW</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 190^{\circ}\text{C/W}</math></p> |
| <p><b>LT1723</b></p> <p>TOP VIEW</p> <p>MS8 PACKAGE<br/>8-LEAD PLASTIC MSOP<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 250^{\circ}\text{C/W}</math></p> | <p><b>LT1724</b></p> <p>TOP VIEW</p> <p>S PACKAGE<br/>14-LEAD PLASTIC SO<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 100^{\circ}\text{C/W}</math></p>      |                                                                                                                                                                                |

## ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL    | PART MARKING* | PACKAGE DESCRIPTION    | SPECIFIED TEMPERATURE RANGE |
|------------------|------------------|---------------|------------------------|-----------------------------|
| LT1722CS8#PBF    | LT1722CS8#TRPBF  | 1722          | 8-Lead Plastic SO      | 0°C to 70°C                 |
| LT1722IS8#PBF    | LT1722IS8#TRPBF  | 1722I         | 8-Lead Plastic SO      | -40°C to 85°C               |
| LT1722CS5#PBF    | LT1722CS5#TRPBF  | LTZB          | 5-Lead Plastic TSOT-23 | 0°C to 70°C                 |
| LT1722IS5#PBF    | LT1722IS5#TRPBF  | LTZB          | 5-Lead Plastic TSOT-23 | -40°C to 85°C               |
| LT1723CS8#PBF    | LT1723CS8#TRPBF  | 1723          | 8-Lead Plastic SO      | 0°C to 70°C                 |
| LT1723IS8#PBF    | LT1723IS8#TRPBF  | 1723I         | 8-Lead Plastic SO      | -40°C to 85°C               |
| LT1723CMS8#PBF   | LT1723CMS8#TRPBF | LYC           | 8-Lead Plastic MSOP    | 0°C to 70°C                 |
| LT1723IMS8#PBF   | LT1723IMS8#TRPBF | LTZA          | 8-Lead Plastic MSOP    | -40°C to 85°C               |
| LT1724CS#PBF     | LT1724CS#TRPBF   | LT1724CS      | 14-Lead Plastic SO     | 0°C to 70°C                 |
| LT1724IS#PBF     | LT1724IS#TRPBF   | LT1724IS      | 14-Lead Plastic SO     | -40°C to 85°C               |

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

# LT1722/LT1723/LT1724

## ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_S = \pm 5\text{V}$ , $V_{CM} = 0\text{V}$ , unless otherwise noted.

| SYMBOL        | PARAMETER                                      | CONDITIONS                                                                                       | MIN                    | TYP                    | MAX        | UNITS                                |
|---------------|------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------|------------------------|------------|--------------------------------------|
| $V_{OS}$      | Input Offset Voltage                           | (Note 6)<br>LT1722 SOT-23 and LT1723 MS8                                                         |                        | 100<br>150             | 400<br>650 | $\mu\text{V}$<br>$\mu\text{V}$       |
| $I_{OS}$      | Input Offset Current                           |                                                                                                  |                        | 40                     | 300        | nA                                   |
| $I_B$         | Input Bias Current                             |                                                                                                  |                        | 40                     | 300        | nA                                   |
| $e_n$         | Input Noise Voltage                            | $f = 10\text{kHz}$                                                                               |                        | 3.8                    |            | $\text{nV}/\sqrt{\text{Hz}}$         |
| $i_n$         | Input Noise Current                            | $f = 10\text{kHz}$                                                                               |                        | 1.2                    |            | $\text{pA}/\sqrt{\text{Hz}}$         |
| $R_{IN}$      | Input Resistance                               | $V_{CM} = \pm 3.5\text{V}$<br>Differential                                                       | 5                      | 35<br>50               |            | $\text{M}\Omega$<br>$\text{k}\Omega$ |
| $C_{IN}$      | Input Capacitance                              |                                                                                                  |                        | 2                      |            | pF                                   |
|               | Input Voltage Range +<br>Input Voltage Range – |                                                                                                  | 3.5                    | 4<br>–4                | –3.5       | V<br>V                               |
| CMRR          | Common Mode Rejection Ratio                    | $V_{CM} = \pm 3.5\text{V}$                                                                       | 80                     | 100                    |            | dB                                   |
| PSRR          | Power Supply Rejection Ratio                   | $V_S = \pm 2.3\text{V}$ to $\pm 5.5\text{V}$                                                     | 78                     | 90                     |            | dB                                   |
| $A_{VOL}$     | Large-Signal Voltage Gain                      | $V_{OUT} = \pm 3\text{V}$ , $R_L = 500\Omega$<br>$V_{OUT} = \pm 3\text{V}$ , $R_L = 150\Omega$   | 10<br>7                | 17<br>14               |            | V/mV<br>V/mV                         |
| $V_{OUT}$     | Output Swing                                   | $R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$<br>$R_L = 150\Omega$ , $V_{IN} = \pm 10\text{mV}$ | $\pm 3.2$<br>$\pm 3.1$ | $\pm 3.8$<br>$\pm 3.4$ |            | V<br>V                               |
| $I_{OUT}$     | Output Current                                 | $V_{OUT} = \pm 3\text{V}$ , 10mV Overdrive                                                       | 23                     | 50                     |            | mA                                   |
| $I_{SC}$      | Short-Circuit Current                          | $V_{OUT} = 0\text{V}$ , $V_{IN} = \pm 1\text{V}$                                                 | 35                     | 90                     |            | mA                                   |
| SR            | Slew Rate                                      | $A_V = -1$ , (Note 7)                                                                            | 45                     | 70                     |            | V/ $\mu\text{s}$                     |
|               | Full Power Bandwidth                           | 3V Peak, (Note 8)                                                                                |                        | 3.7                    |            | MHz                                  |
| GBW           | Gain Bandwidth                                 | $f = 200\text{kHz}$                                                                              | 115                    | 200                    |            | MHz                                  |
| $t_S$         | Settling Time                                  | $A_V = -1$ , 2V, 0.1%<br>$A_V = -1$ , 2V, 0.01%                                                  |                        | 91<br>112              |            | ns<br>ns                             |
| $t_r$ , $t_f$ | Rise Time, Fall Time                           | $A_V = 1$ , 10% to 90%, $V_{IN} = 0.2\text{V}_{P-P}$ , $R_L = 150\Omega$                         |                        | 6                      |            | ns                                   |
|               | Overshoot                                      | $A_V = 1$ , $V_{IN} = 0.2\text{V}_{P-P}$ , $R_L = 150\Omega$ , $R_F = 0\Omega$                   |                        | 15                     |            | %                                    |
|               | Propagation Delay                              | 50% $V_{IN}$ to 50% $V_{OUT} = 0.2\text{V}_{P-P}$ , $R_L = 150\Omega$                            |                        | 3                      |            | ns                                   |
| $R_O$         | Output Resistance                              | $A_V = 1$ , $f = 1\text{MHz}$                                                                    |                        | 0.15                   |            | $\Omega$                             |
|               | Channel Separation                             | $V_{OUT} = \pm 3\text{V}$ , $R_L = 150\Omega$                                                    | 82                     | 90                     |            | dB                                   |
| $I_S$         | Supply Current                                 | Per Amplifier                                                                                    |                        | 3.7                    | 4.5        | mA                                   |

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{V}$ ,  $V_{CM} = 2.5\text{V}$ ,  $R_L$  to 2.5V, unless otherwise noted.

|          |                                                |                                                         |     |            |            |                                      |
|----------|------------------------------------------------|---------------------------------------------------------|-----|------------|------------|--------------------------------------|
| $V_{OS}$ | Input Offset Voltage                           | (Note 6)<br>LT1722 SOT-23 and LT1723 MS8                |     | 250<br>350 | 550<br>800 | $\mu\text{V}$<br>$\mu\text{V}$       |
| $I_{OS}$ | Input Offset Current                           |                                                         |     | 20         | 300        | nA                                   |
| $I_B$    | Input Bias Current                             |                                                         |     | 20         | 300        | nA                                   |
| $e_n$    | Input Noise Voltage                            | $f = 10\text{kHz}$                                      |     | 4          |            | $\text{nV}/\sqrt{\text{Hz}}$         |
| $i_n$    | Input Noise Current                            | $f = 10\text{kHz}$                                      |     | 1.1        |            | $\text{pA}/\sqrt{\text{Hz}}$         |
| $R_{IN}$ | Input Resistance                               | $V_{CM} = 1.5\text{V}$ to $3.5\text{V}$<br>Differential | 5   | 32<br>55   |            | $\text{M}\Omega$<br>$\text{k}\Omega$ |
| $C_{IN}$ | Input Capacitance                              |                                                         |     | 2          |            | pF                                   |
|          | Input Voltage Range +<br>Input Voltage Range – |                                                         | 3.5 | 4<br>1     | 1.5        | V<br>V                               |

# ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ .  $V_S = 5\text{V}$ ,  $V_{CM} = 2.5\text{V}$ ,  $R_L$  to  $2.5\text{V}$ , unless otherwise noted.

| SYMBOL        | PARAMETER                      | CONDITIONS                                                                                       | MIN | TYP        | MAX | UNITS            |
|---------------|--------------------------------|--------------------------------------------------------------------------------------------------|-----|------------|-----|------------------|
| CMRR          | Common Mode Rejection Ratio    | $V_{CM} = 1.5\text{V}$ to $3.5\text{V}$                                                          | 80  | 100        |     | dB               |
| $A_{VOL}$     | Large-Signal Voltage Gain      | $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ , $R_L = 500\Omega$                                     | 4   | 10         |     | V/mV             |
| $V_{OUT}$     | Output Swing+<br>Output Swing– | $R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$<br>$R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$ | 3.6 | 3.8<br>0.9 | 1.4 | V<br>V           |
| $I_{OUT}$     | Output Current                 | $V_{OUT} = 3.5\text{V}$ or $1.5\text{V}$ , $10\text{mV}$ Overdrive                               | 10  | 20         |     | mA               |
| $I_{SC}$      | Short-Circuit Current          | $V_{OUT} = 2.5\text{V}$ , $V_{IN} = \pm 1\text{V}$                                               | 22  | 55         |     | mA               |
| SR            | Slew Rate                      | $A_V = -1$ , (Note 7)                                                                            | 40  | 70         |     | V/ $\mu\text{s}$ |
|               | Full Power Bandwidth           | $1\text{V}$ Peak, (Note 8)                                                                       |     | 8.7        |     | MHz              |
| GBW           | Gain Bandwidth (Note 10)       | $f = 200\text{kHz}$                                                                              | 115 | 180        |     | MHz              |
| $t_r$ , $t_f$ | Rise Time, Fall Time           | $A_V = 1$ , $10\%$ to $90\%$ , $V_{IN} = 0.2\text{V}_{P-P}$ , $R_L = 500\Omega$                  |     | 5          |     | ns               |
|               | Overshoot                      | $A_V = 1$ , $V_{IN} = 0.2\text{V}_{P-P}$ , $R_L = 500\Omega$                                     |     | 16         |     | %                |
|               | Propagation Delay              | $50\% V_{IN}$ to $50\% V_{OUT}$ , $0.1\text{V}$ , $R_L = 500\Omega$                              |     | 3          |     | ns               |
| $R_O$         | Output Resistance              | $A_V = 1$ , $f = 1\text{MHz}$                                                                    |     | 0.19       |     | $\Omega$         |
|               | Channel Separation             | $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ , $R_L = 500\Omega$                                     | 82  | 90         |     | dB               |
| $I_S$         | Supply Current                 | Per Amplifier                                                                                    |     | 3.8        | 5   | mA               |

The ● denotes the specifications which apply over the temperature range of  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ .  $V_S = \pm 5\text{V}$ ,  $V_{CM} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL    | PARAMETER                                      | CONDITIONS                                                                                       | MIN    | TYP                      | MAX        | UNITS                          |
|-----------|------------------------------------------------|--------------------------------------------------------------------------------------------------|--------|--------------------------|------------|--------------------------------|
| $V_{OS}$  | Input Offset Voltage                           | (Note 6)<br>LT1722 SOT-23 and LT1723 MS8                                                         | ●      |                          | 700<br>850 | $\mu\text{V}$<br>$\mu\text{V}$ |
|           | Input $V_{OS}$ Drift                           | (Note 9)                                                                                         | ●      | 3                        | 7          | $\mu\text{V}/^\circ\text{C}$   |
| $I_{OS}$  | Input Offset Current                           |                                                                                                  | ●      |                          | 350        | nA                             |
| $I_B$     | Input Bias Current                             |                                                                                                  | ●      |                          | 350        | nA                             |
|           | Input Voltage Range +<br>Input Voltage Range – |                                                                                                  | ●<br>● | 3.5                      | –3.5       | V<br>V                         |
| CMRR      | Common Mode Rejection Ratio                    | $V_{CM} = \pm 3.5\text{V}$                                                                       | ●      | 75                       |            | dB                             |
| PSRR      | Power Supply Rejection Ratio                   | $V_S = \pm 2.3\text{V}$ to $\pm 5.5\text{V}$                                                     | ●      | 76                       |            | dB                             |
| $A_{VOL}$ | Large-Signal Voltage Gain                      | $V_{OUT} = \pm 3\text{V}$ , $R_L = 500\Omega$<br>$V_{OUT} = \pm 3\text{V}$ , $R_L = 150\Omega$   | ●<br>● | 9<br>6                   |            | V/mV<br>V/mV                   |
| $V_{OUT}$ | Output Swing                                   | $R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$<br>$R_L = 150\Omega$ , $V_{IN} = \pm 10\text{mV}$ | ●<br>● | $\pm 3.15$<br>$\pm 3.05$ |            | V<br>V                         |
| $I_{OUT}$ | Output Current                                 | $V_{OUT} = \pm 3\text{V}$ , $10\text{mV}$ Overdrive                                              | ●      | 22                       |            | mA                             |
| $I_{SC}$  | Short-Circuit Current                          | $V_{OUT} = 0\text{V}$ , $V_{IN} = \pm 1\text{V}$                                                 | ●      | 30                       |            | mA                             |
| SR        | Slew Rate                                      | $A_V = -1$ , (Note 7)                                                                            | ●      | 35                       |            | V/ $\mu\text{s}$               |
| GBW       | Gain Bandwidth                                 | $f = 200\text{kHz}$                                                                              | ●      | 100                      |            | MHz                            |
|           | Channel Separation                             | $V_{OUT} = \pm 3\text{V}$ , $R_L = 150\Omega$                                                    | ●      | 81                       |            | dB                             |
| $I_S$     | Supply Current                                 | Per Amplifier                                                                                    | ●      |                          | 5.45       | mA                             |

# LT1722/LT1723/LT1724

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$ .  $V_S = 5\text{V}$ ,  $V_{CM} = 2.5\text{V}$ ,  $R_L$  to  $2.5\Omega$ , unless otherwise noted. (Note 5)

| SYMBOL    | PARAMETER                   | CONDITIONS                                                           | MIN | TYP  | MAX        | UNITS                          |
|-----------|-----------------------------|----------------------------------------------------------------------|-----|------|------------|--------------------------------|
| $V_{OS}$  | Input Offset Voltage        | (Note 6)<br>LT1722 SOT-23 and LT1723 MS8                             | ●   |      | 850<br>950 | $\mu\text{V}$<br>$\mu\text{V}$ |
|           | Input $V_{OS}$ Drift        | (Note 9)                                                             | ●   | 3    | 7          | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{OS}$  | Input Offset Current        |                                                                      | ●   |      | 350        | nA                             |
| $I_B$     | Input Bias Current          |                                                                      | ●   |      | 350        | nA                             |
|           | Input Voltage Range +       |                                                                      | ●   | 3.5  |            | V                              |
|           | Input Voltage Range –       |                                                                      | ●   |      | 1.5        | V                              |
| CMRR      | Common Mode Rejection Ratio | $V_{CM} = 1.5\text{V}$ to $3.5\text{V}$                              | ●   | 75   |            | dB                             |
| $A_{VOL}$ | Large-Signal Voltage Gain   | $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ , $R_L = 500\Omega$         | ●   | 3    |            | V/mV                           |
| $V_{OUT}$ | Output Swing+               | $R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$                       | ●   | 3.55 |            | V                              |
|           | Output Swing–               | $R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$                       | ●   |      | 1.45       | V                              |
| $I_{OUT}$ | Output Current              | $V_{OUT} = 3.5\text{V}$ , or $1.5\text{V}$ , $10\text{mV}$ Overdrive | ●   | 9    |            | mA                             |
| $I_{SC}$  | Short-Circuit Current       | $V_{OUT} = 2.5\text{V}$ , $V_{IN} = \pm 1\text{V}$                   | ●   | 11   |            | mA                             |
| SR        | Slew Rate                   | $A_V = -1$ , (Note 7)                                                | ●   | 30   |            | V/ $\mu\text{s}$               |
| GBW       | Gain Bandwidth (Note 10)    | $f = 200\text{kHz}$                                                  | ●   | 100  |            | MHz                            |
|           | Channel Separation          | $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ , $R_L = 500\Omega$         | ●   | 81   |            | dB                             |
| $I_S$     | Supply Current              |                                                                      | ●   |      | 5.95       | mA                             |

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ .  $V_S = \pm 5\text{V}$ ,  $V_{CM} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL    | PARAMETER                    | CONDITIONS                                          | MIN | TYP       | MAX         | UNITS                          |
|-----------|------------------------------|-----------------------------------------------------|-----|-----------|-------------|--------------------------------|
| $V_{OS}$  | Input Offset Voltage         | (Note 6)<br>LT1722 SOT-23 and LT1723 MS8            | ●   |           | 900<br>1100 | $\mu\text{V}$<br>$\mu\text{V}$ |
|           | Input $V_{OS}$ Drift         | (Note 9)                                            | ●   | 3         | 10          | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{OS}$  | Input Offset Current         |                                                     | ●   |           | 400         | nA                             |
| $I_B$     | Input Bias Current           |                                                     | ●   |           | 400         | nA                             |
|           | Input Voltage Range +        |                                                     | ●   | 3.5       |             | V                              |
|           | Input Voltage Range –        |                                                     | ●   |           | –3.5        | V                              |
| CMRR      | Common Mode Rejection Ratio  | $V_{CM} = \pm 3.5\text{V}$                          | ●   | 75        |             | dB                             |
| PSRR      | Power Supply Rejection Ratio | $V_S = \pm 2.0\text{V}$ to $\pm 5.5\text{V}$        | ●   | 75        |             | dB                             |
| $A_{VOL}$ | Large-Signal Voltage Gain    | $V_{OUT} = \pm 3\text{V}$ , $R_L = 500\Omega$       | ●   | 8         |             | V/mV                           |
|           |                              | $V_{OUT} = \pm 3\text{V}$ , $R_L = 150\Omega$       | ●   | 5         |             | V/mV                           |
| $V_{OUT}$ | Output Swing                 | $R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$      | ●   | $\pm 3.1$ |             | V                              |
|           |                              | $R_L = 150\Omega$ , $V_{IN} = \pm 10\text{mV}$      | ●   | $\pm 3.0$ |             | V                              |
| $I_{OUT}$ | Output Current               | $V_{OUT} = \pm 3\text{V}$ , $10\text{mV}$ Overdrive | ●   | 20        |             | mA                             |
| $I_{SC}$  | Short-Circuit Current        | $V_{OUT} = 0\text{V}$ , $V_{IN} = \pm 1\text{V}$    | ●   | 25        |             | mA                             |
| SR        | Slew Rate                    | $A_V = -1$ , (Note 7)                               | ●   | 25        |             | V/ $\mu\text{s}$               |
| GBW       | Gain Bandwidth               | $f = 200\text{kHz}$                                 | ●   | 90        |             | MHz                            |
|           | Channel Separation           | $V_{OUT} = \pm 3\text{V}$ , $R_L = 150\Omega$       | ●   | 80        |             | dB                             |
| $I_S$     | Supply Current               |                                                     | ●   |           | 5.95        | mA                             |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range of  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ .  $V_S = 5\text{V}$ ,  $V_{CM} = 2.5\text{V}$ ,  $R_L$  to  $2.5\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL    | PARAMETER                                      | CONDITIONS                                                                                       |   | MIN | TYP | MAX  | UNITS                          |
|-----------|------------------------------------------------|--------------------------------------------------------------------------------------------------|---|-----|-----|------|--------------------------------|
| $V_{OS}$  | Input Offset Voltage                           | (Note 6)<br>LT1722 SOT-23 and LT1723 MS8                                                         | ● |     |     | 1000 | $\mu\text{V}$                  |
|           | Input $V_{OS}$ Drift                           | (Note 9)                                                                                         | ● |     | 3   | 10   | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{OS}$  | Input Offset Current                           |                                                                                                  | ● |     |     | 400  | nA                             |
| $I_B$     | Input Bias Current                             |                                                                                                  | ● |     |     | 400  | nA                             |
|           | Input Voltage Range +<br>Input Voltage Range – |                                                                                                  | ● | 3.5 |     | 1.5  | V                              |
| CMRR      | Common Mode Rejection Ratio                    | $V_{CM} = 1.5\text{V}$ to $3.5\text{V}$                                                          | ● | 75  |     |      | dB                             |
| $A_{VOL}$ | Large-Signal Voltage Gain                      | $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ , $R_L = 500\Omega$                                     | ● | 2   |     |      | V/mV                           |
| $V_{OUT}$ | Output Swing+<br>Output Swing–                 | $R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$<br>$R_L = 500\Omega$ , $V_{IN} = \pm 10\text{mV}$ | ● | 3.5 |     | 1.5  | V                              |
|           |                                                |                                                                                                  | ● |     |     |      | V                              |
| $I_{OUT}$ | Output Current                                 | $V_{OUT} = 3.5\text{V}$ or $1.5\text{V}$ , 30mV Overdrive                                        | ● | 8   |     |      | mA                             |
| $I_{SC}$  | Short-Circuit Current                          | $V_{OUT} = 2.5\text{V}$ , $V_{IN} = \pm 1\text{V}$                                               | ● | 10  |     |      | mA                             |
| SR        | Slew Rate                                      | $A_V = -1$ , (Note 7)                                                                            | ● | 20  |     |      | V/ $\mu\text{s}$               |
| GBW       | Gain Bandwidth (Note 10)                       | $f = 200\text{kHz}$                                                                              | ● | 90  |     |      | MHz                            |
|           | Channel Separation                             | $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ , $R_L = 500\Omega$                                     | ● | 80  |     |      | dB                             |
| $I_S$     | Supply Current                                 |                                                                                                  | ● |     |     | 6.45 | mA                             |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** The inputs are protected by back-to-back diodes. If the differential input voltage exceeds 0.7V, the input current should be limited to less than 10mA.

**Note 3:** A heat sink may be required to keep the junction temperature below the absolute maximum rating when the output is shorted indefinitely.

**Note 4:** The LT1722C/LT1722I, LT1723C/LT1723I, LT1724C/LT1724I are guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

**Note 5:** The LT1722C/LT1723C/LT1724C are guaranteed to meet specified performance from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ . The LT1722C/LT1723C/LT1724C are

designed, characterized and expected to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  but are not tested or QA sampled at these temperatures. The LT1722I/LT1723I/LT1724I are guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

**Note 6:** Input offset voltage is pulse tested and is exclusive of warm-up drift.

**Note 7:** Slew rate is measured between  $\pm 2\text{V}$  on the output with  $\pm 3\text{V}$  input for  $\pm 5\text{V}$  supplies and  $\pm 1\text{V}$  on the output with  $\pm 1.5\text{V}$  input for single 5V supply. (For 5V supply, the voltage levels are 2.5V referred.)


**Note 8:** Full power bandwidth is calculated from the slew rate:  
$$\text{FPBW} = \text{SR} / 2\pi V_P$$

**Note 9 :** This parameter is not 100% tested.

**Note 10 :** This parameter is guaranteed through correlation with slew rate.


# TYPICAL PERFORMANCE CHARACTERISTICS

Supply Current vs Temperature

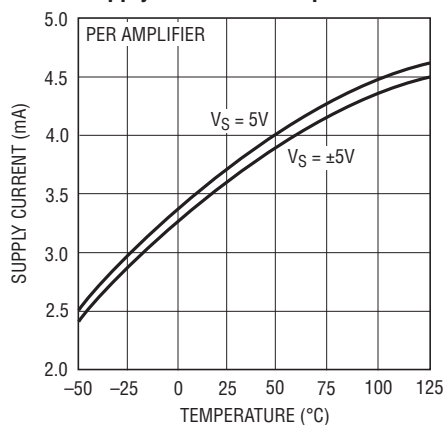


1723 G01

Input Common Mode Range vs Supply Voltage

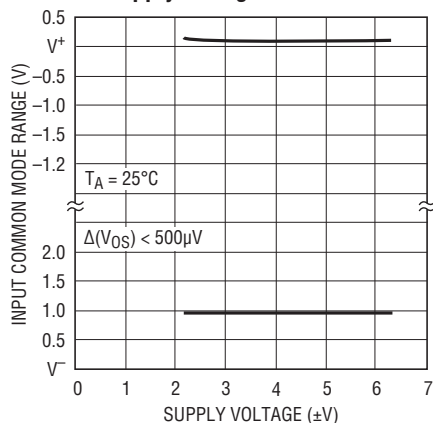


1723 G02

Input Bias Current vs Common Mode Voltage

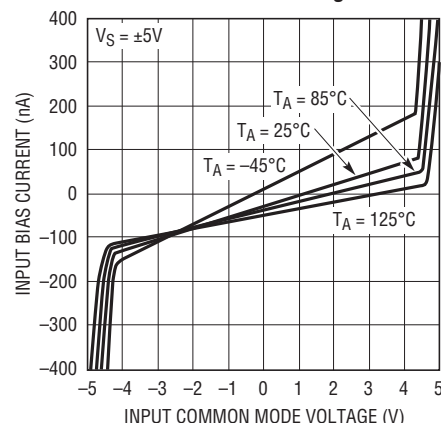


1723 G03

Input Bias Current vs Temperature

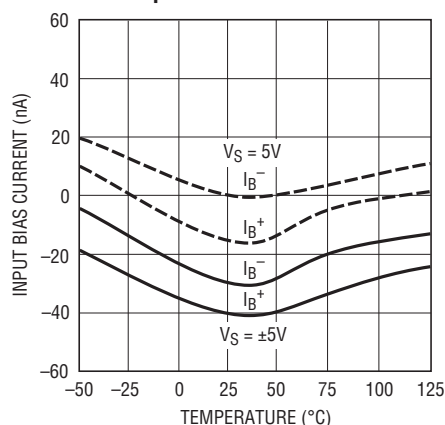


1723 G04

Input Noise Spectral Density

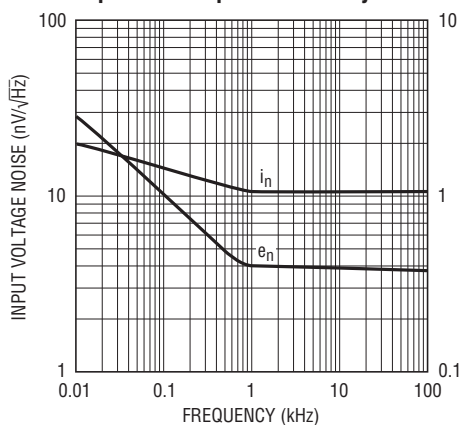


1723 G05

Open-Loop Gain vs Resistive Load

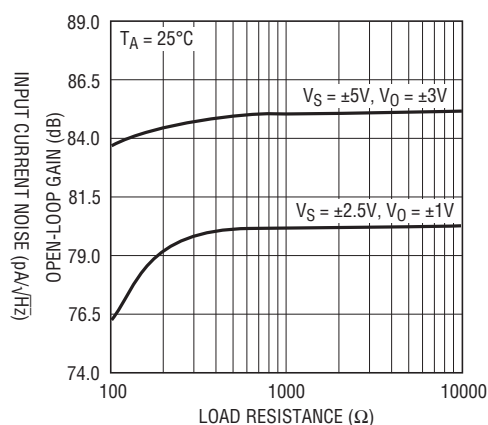


1723 G06

Total Noise vs Unmatched Source Resistance

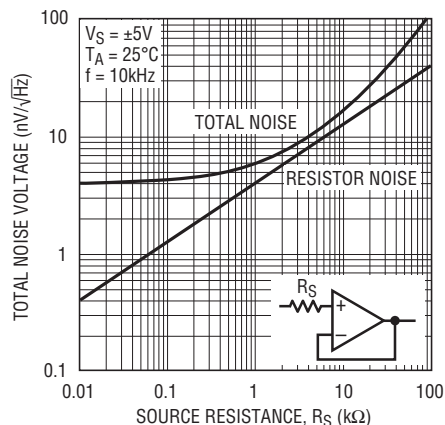


1723 G07

Warm-Up Drift vs Time

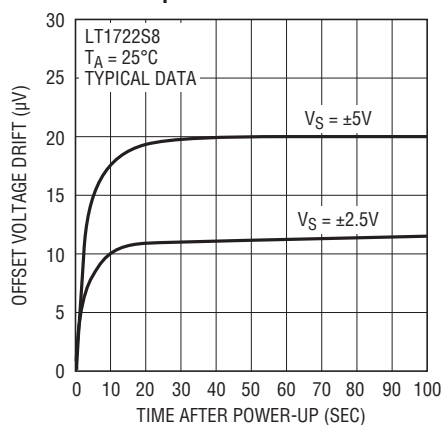

1723 G08


VOS Shift vs VCM and VS

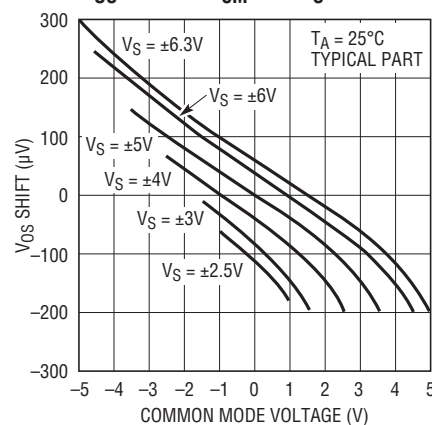


1723 G09

# TYPICAL PERFORMANCE CHARACTERISTICS


**$V_{OS}$  vs Temperature**

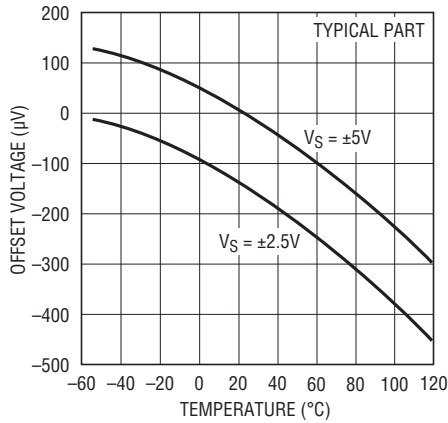


**Undistorted Output Swing vs Frequency**

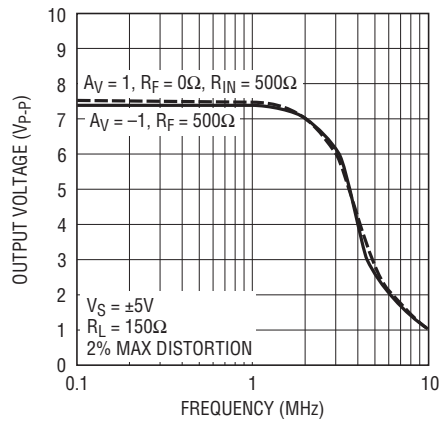


**Undistorted Output Swing vs Frequency**

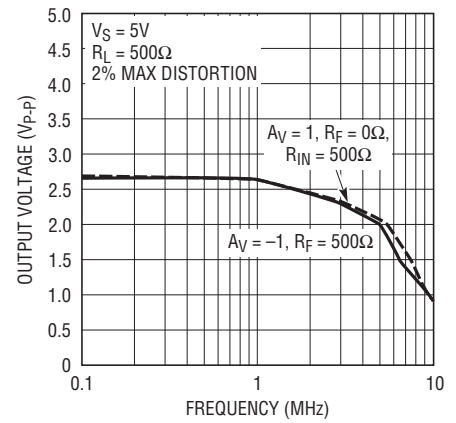


**Open-Loop Gain vs Temperature**

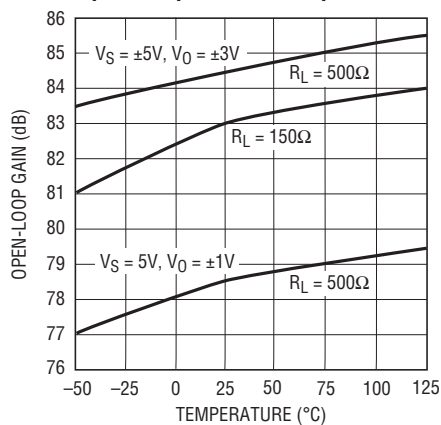


**Output Voltage Swing vs Supply Voltage**

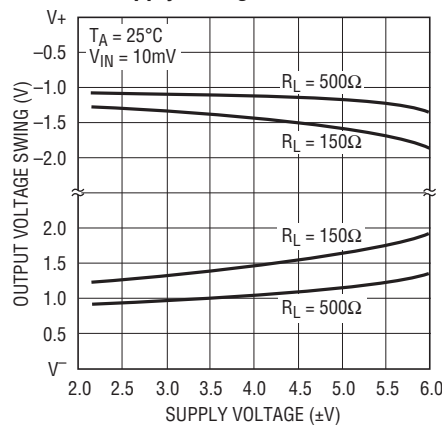


**Output Short-Circuit Current vs Temperature**

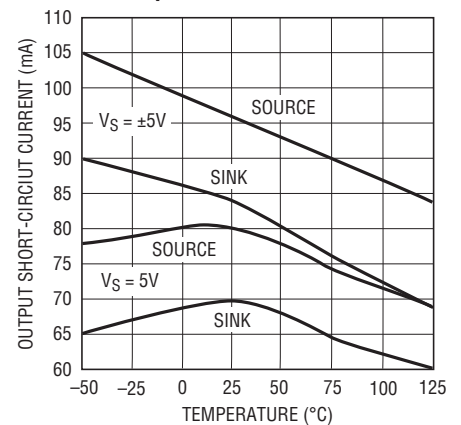


**Gain and Phase vs Frequency**

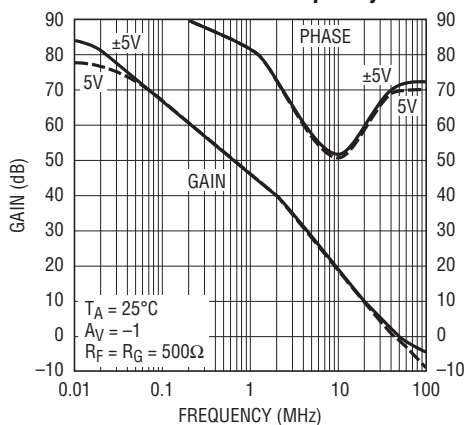

**Overshoot vs Capacitive Load**

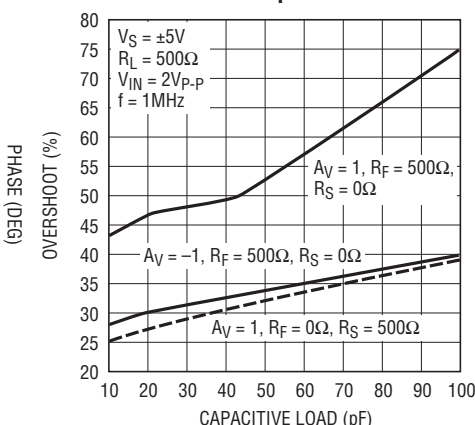


**Output Impedance vs Frequency**

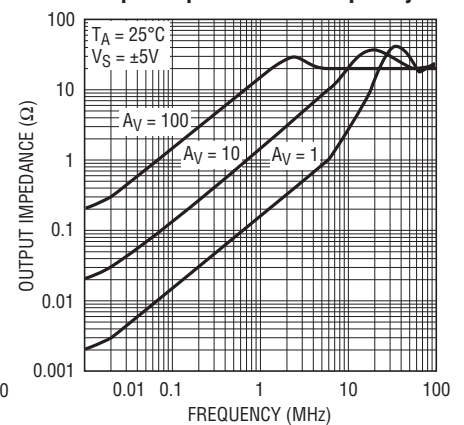


# TYPICAL PERFORMANCE CHARACTERISTICS

## Gain vs Frequency, $A_V = 1$

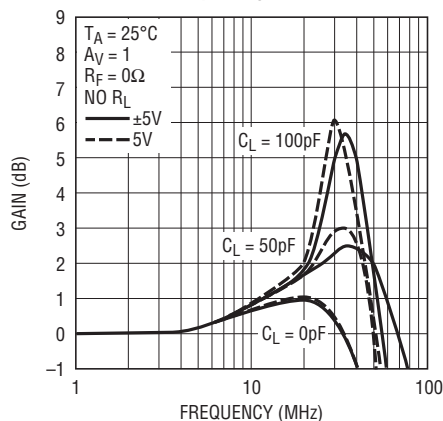


1723 G19

## Gain vs Frequency, $A_V = 1$

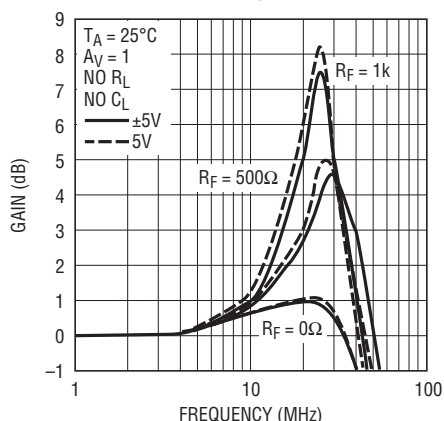


1723 G20

## Gain vs Frequency, $A_V = -1$

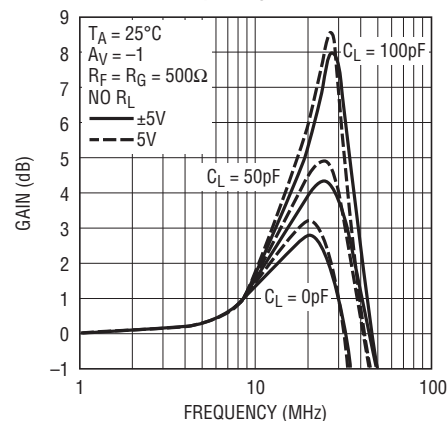


1723 G21

## Channel Separation vs Frequency

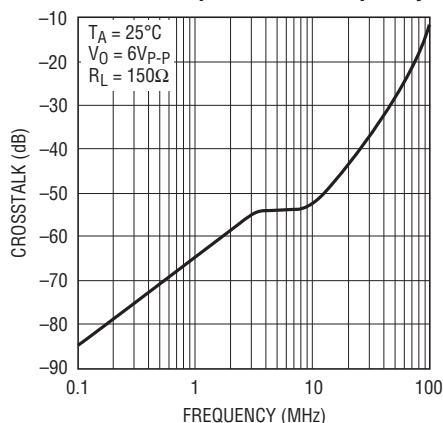


1723 G22

## Power Supply Rejection Ratio vs Frequency

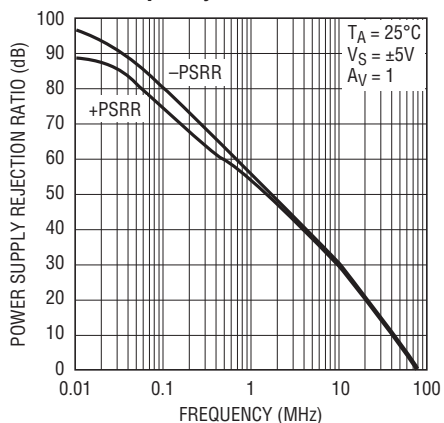


1723 G23

## Common Mode Rejection Ratio vs Frequency

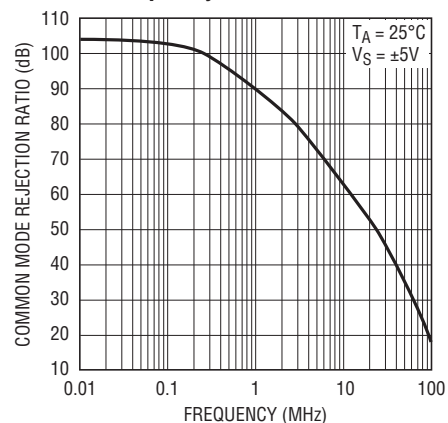


1723 G24

## Slew Rate vs Temperature

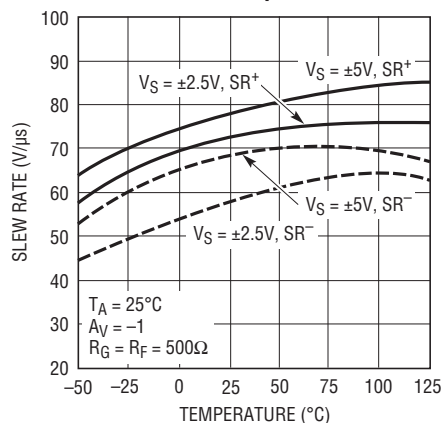


1723 G40

## Phase Margin vs Supply Voltage

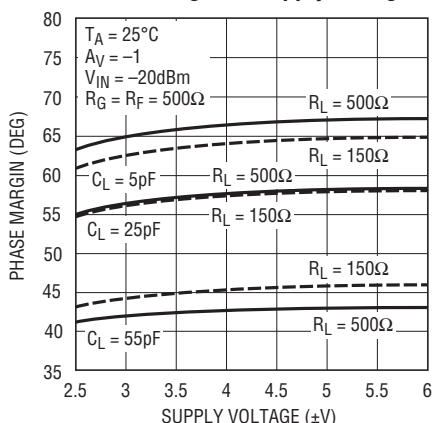

1723 G41

## Gain Bandwidth vs Supply Voltage

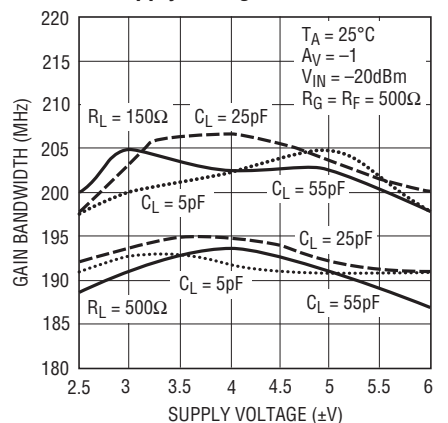


1723 G42


17234fb

# TYPICAL PERFORMANCE CHARACTERISTICS


**Slew Rate vs Supply Voltage**

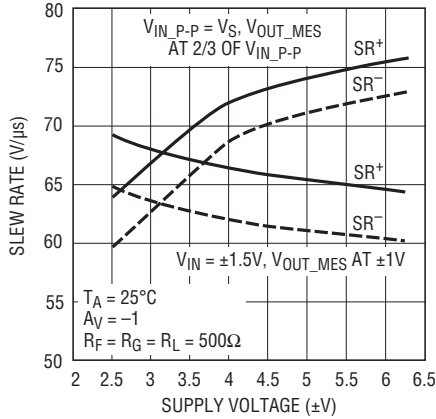


**Harmonic Distortion vs Frequency**  
 $A_V = 1, V_0 = 0.2V_{P-P}$

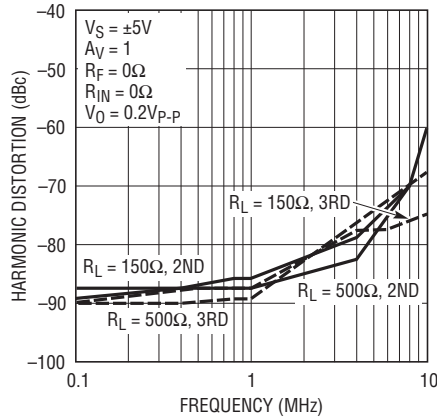


**Harmonic Distortion vs Frequency**  
 $A_V = 1, V_0 = 0.2V_{P-P}$

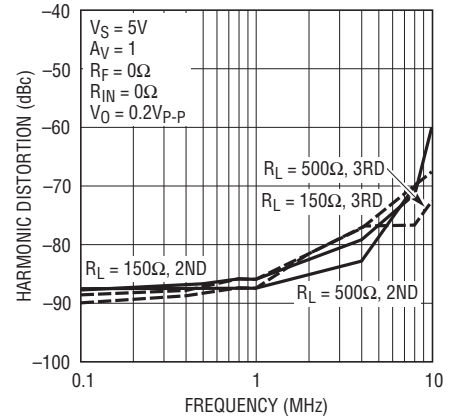


**Harmonic Distortion vs Frequency**  
 $A_V = 2, V_0 = 0.2V_{P-P}$

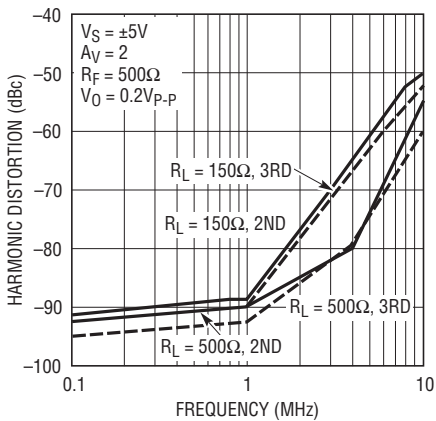


**Harmonic Distortion vs Frequency**  
 $A_V = 2, V_0 = 0.2V_{P-P}$

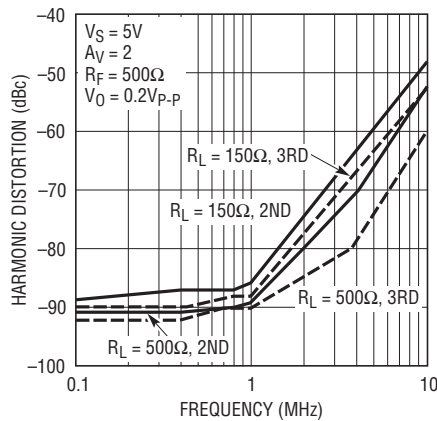


**Harmonic Distortion vs Frequency**  
 $A_V = 1, V_0 = 2V_{P-P}$

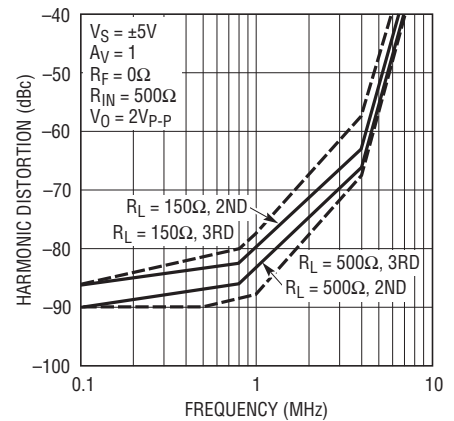



**Harmonic Distortion vs Frequency**  
 $A_V = 1, V_0 = 2V_{P-P}$

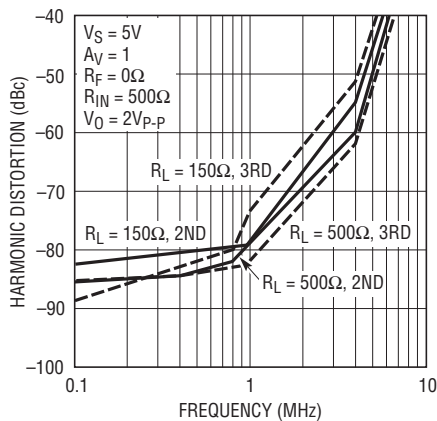


**Harmonic Distortion vs Frequency**  
 $A_V = 2, V_0 = 2V_{P-P}$

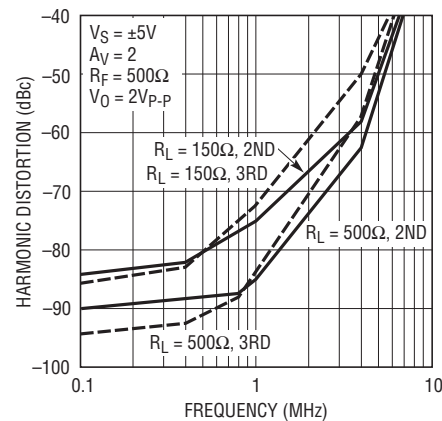


## TYPICAL PERFORMANCE CHARACTERISTICS

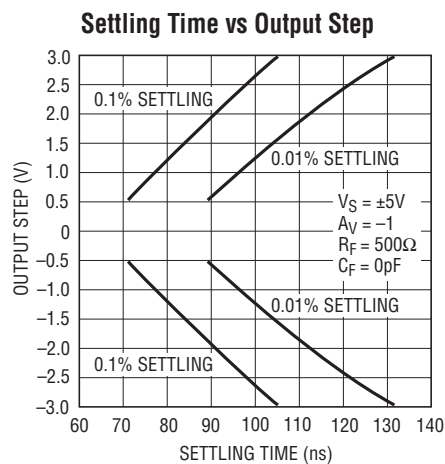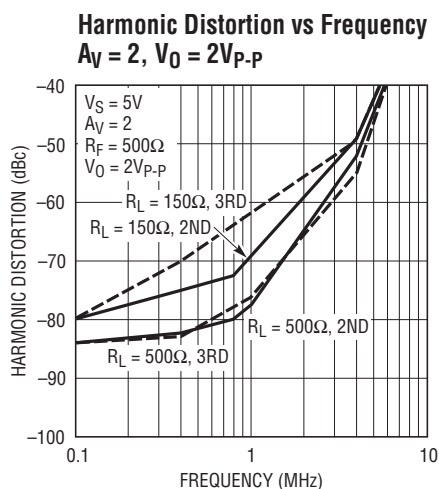


**Large-Signal Transient,  $A_V = 1$**

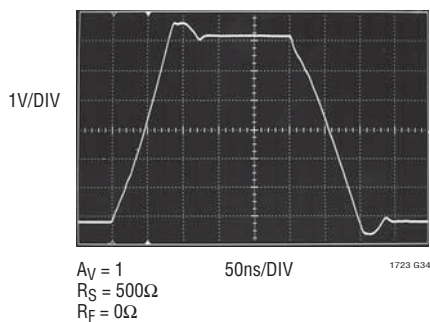


**Small-Signal Transient,  $A_V = 1$**

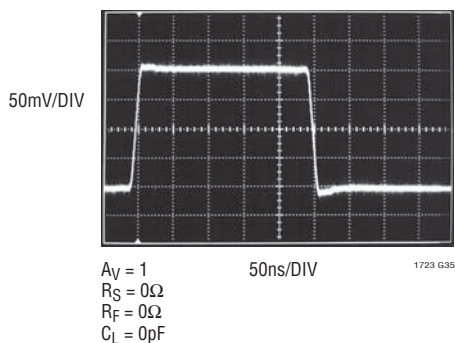


**Small-Signal Transient,  $A_V = 1$**

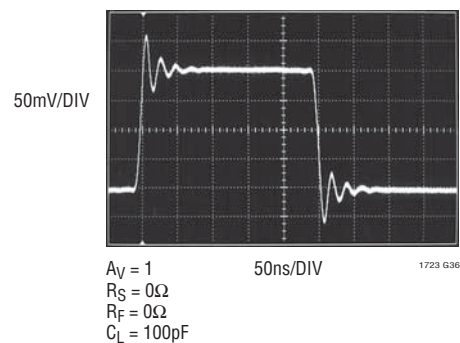


**Large-Signal Transient,  $A_V = -1$**

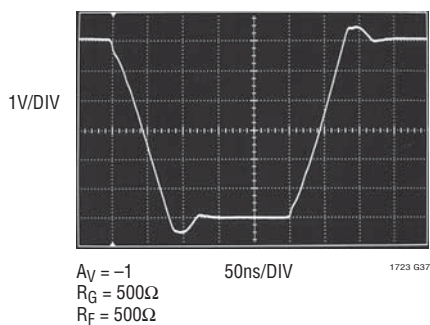

**Small-Signal Transient,  $A_V = -1$**

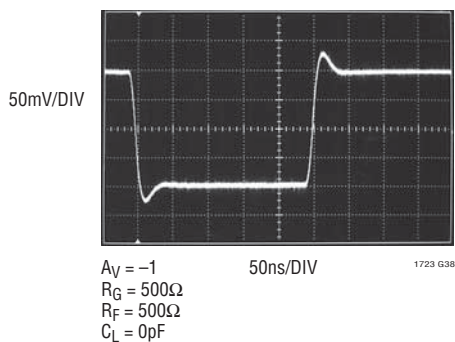

**Small-Signal Transient,  $A_V = -1$**

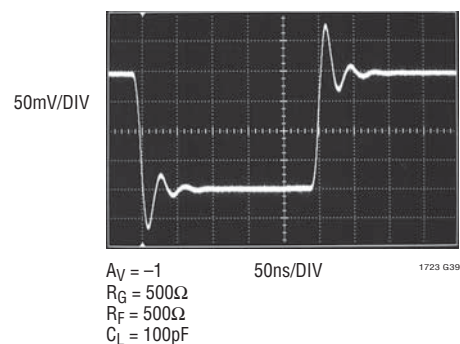

## APPLICATIONS INFORMATION

The LT1722/LT1723/LT1724 may be inserted directly into many operational amplifier applications improving both DC and AC performance, as well as noise and distortion.

### Layout and Passive Components

The LT1722/LT1723/LT1724 amplifiers are more tolerant of less than ideal layouts than other high speed amplifiers. For maximum performance (for example, fast settling time) use a ground plane, short lead lengths and RF quality bypass capacitors (0.01μF to 0.1μF). For high drive current applications, use low ESR supply bypass capacitors (1μF to 10μF tantalum). The output/input parasitic coupling should be minimized when high frequency performance is required.

The parallel combination of the feedback resistor and gain setting resistor on the inverting input combine with the input capacitance to form a pole that can cause peaking or even oscillations. In parallel with the feedback resistor, a capacitor of value:

$$C_F > R_G \cdot C_{IN}/R_F$$

should be used to cancel the input pole and optimize dynamic performance. For unity-gain applications where a feedback resistor is used, such as an I-to-V converter,  $C_F$  should be five times greater than  $C_{IN}$ ; an optimum value for  $C_F$  is 10pF.

### Input Considerations

Each of the LT1722/LT1723/LT1724 inputs is protected with back-to-back diodes across the bases of the NPN input devices. If greater than 0.7V differential input voltages are anticipated, the input current must be limited to less than 10mA with an external series resistor. Each input also has two ESD clamp diodes—one to each supply. If an input is driven beyond the supply, limit the current with an external resistor to less than 10mA. The input stage protection circuit is shown in Figure 1.

The input currents of the LT1722/LT1723/LT1724 are typically in the tens of nA range due to the bias current cancellation technique used at the input. As the input offset current can be greater than either input current,

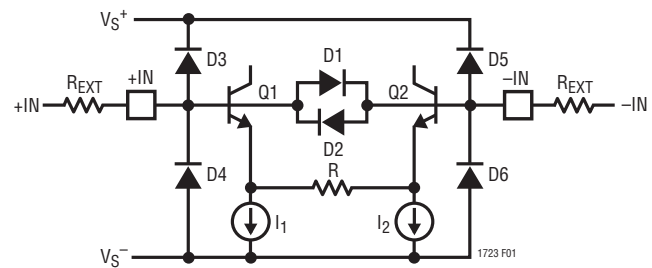


Figure 1. Input Stage Protection

adding resistance to balance source resistance is not recommended. The value of the source resistor should be below 12k as it actually degrades DC accuracy and also increases noise.

### Total Input Noise

The total input noise of the LT1722/LT1723/LT1724 is optimized for a source resistance between 0.8k and 12k. Within this range, the total input noise is dominated by the noise of the source resistance itself. When the source resistance is below 0.8k, voltage noise of the amplifier dominates. When the source resistance is above 12k, the input noise current is the dominant contributor.

### Capacitive Loading

The LT1722/LT1723/LT1724 drive capacitive loads up to 100pF with unity gain. As the capacitive load increases, both the bandwidth and the phase margin decrease causing peaking in the frequency response and overshoot in the transient response. When there is a need to drive a larger capacitive load, a 25Ω series resistance assures stability with any value of load capacitor. A feedback capacitor also helps to reduce any peaking.

### Power Dissipation

The LT1722/LT1723/LT1724 combine high speed and large output drive in a small package. Maximum junction temperature ( $T_J$ ) is calculated from the ambient temperature ( $T_A$ ), power dissipation per amplifier ( $P_D$ ) and number of amplifiers ( $n$ ) as follows:

$$T_J = T_A + (n \cdot P_D \cdot \theta_{JA})$$

## APPLICATIONS INFORMATION

Power dissipation is composed of two parts. The first is due to the quiescent supply current and the second is due to on-chip dissipation caused by the load current.

Worst-case instantaneous power dissipation for a given resistive load in one amplifier occurs at the maximum supply current and when the output voltage is at half of either supply voltage (or the maximum swing if less than half supply voltage).

Therefore  $P_{D(MAX)}$  in one amplifier is:

$$P_{D(MAX)} = (V^+ - V^-)(I_{S(MAX)}) + (V^+/2)^2/R_L$$

or

$$P_{D(MAX)} = (V^+ - V^-)(I_{S(MAX)}) + (V^+ - V_{O(MAX)})(V_{O(MAX)}/R_L)$$

Example. Worst-case conditions are: both op amps in the LT1723IS8 are at  $T_A = 85^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ ,  $R_L = 150\Omega$ ,  $V_{OUT} = 2.5\text{V}$ .

$$P_{D(MAX)} = 2 \cdot [(10\text{V})(5.95\text{mA}) + (2.5\text{V})^2/150\Omega] = 203\text{mW}$$

$$T_{J(MAX)} = 85^\circ\text{C} + (203\text{mW})(190^\circ\text{C/W}) = 124^\circ\text{C}$$


which is less than the absolute maximum rating at  $150^\circ\text{C}$ .

## Circuit Operation

The LT1722/LT1723/LT1724 circuit topology is a voltage feedback amplifier. The operation of the circuit can be understood by referring to the Simplified Schematic. The first stage is a folded cascode formed by the transistors Q1 through Q4. A degeneration resistor, R, is used in the input stage. The current mirror Q5, Q6 is bootstrapped by Q7. The capacitor, C, assures the bandwidth and the slew rate performance. The output stage is formed by complementary emitter followers, Q8 through Q11. The diodes D1 and D2 protect against input reversed biasing. The remaining part of the circuit assures optimum voltage and current biases for all stages.





Low noise, reduced current supply, high speed and DC accurate parameters are distinctive features of the LT1722/LT1723/LT1724.

## SIMPLIFIED SCHEMATIC

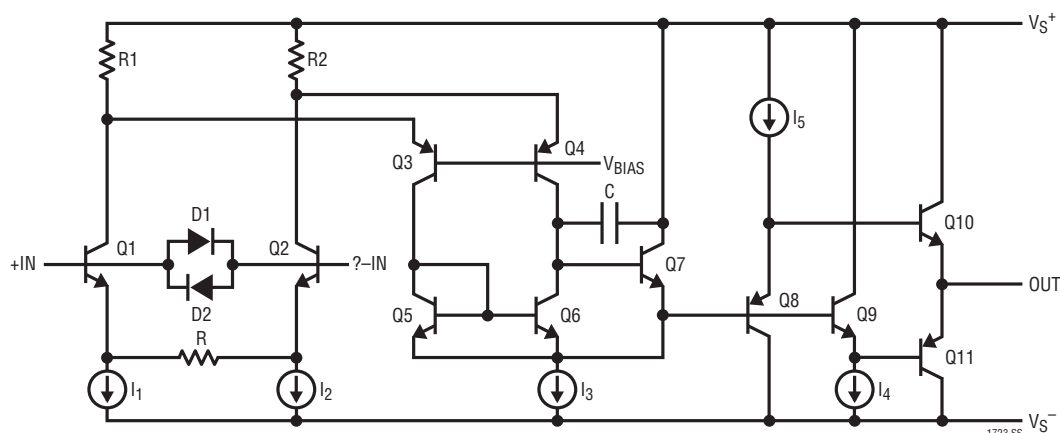

# PACKAGE DESCRIPTION

## S5 Package 5-Lead Plastic TSOT-23 (Reference LTC DWG # 05-08-1635)

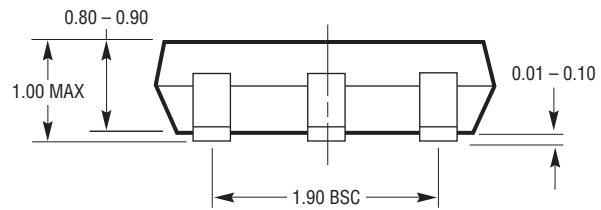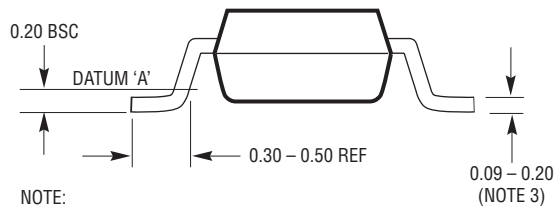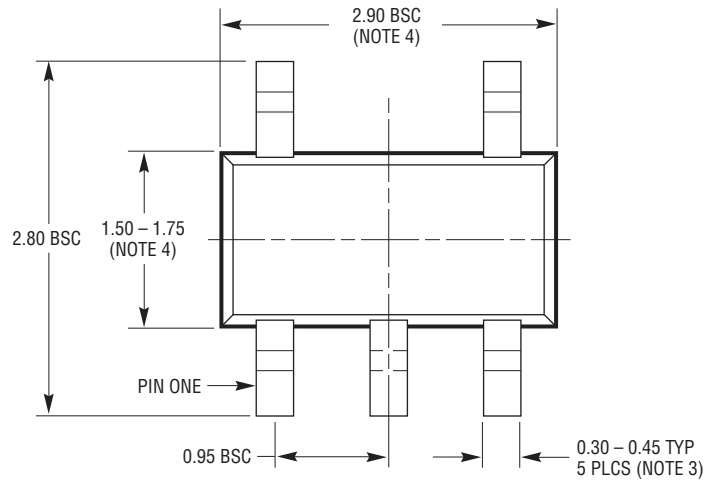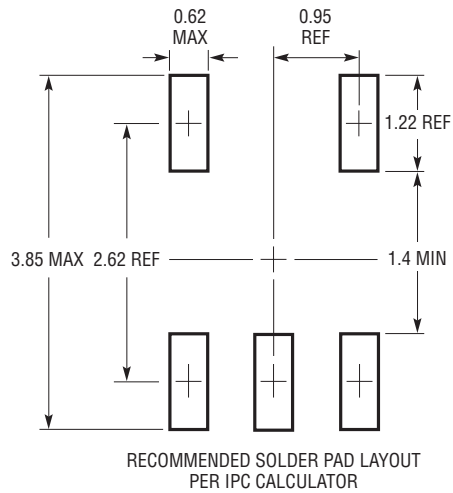


- NOTE:
1. DIMENSIONS ARE IN MILLIMETERS
  2. DRAWING NOT TO SCALE
  3. DIMENSIONS ARE INCLUSIVE OF PLATING
  4. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR
  5. MOLD FLASH SHALL NOT EXCEED 0.254mm
  6. JEDEC PACKAGE REFERENCE IS MO-193


S5 TSOT-23 0302 REV B

## PACKAGE DESCRIPTION

### S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

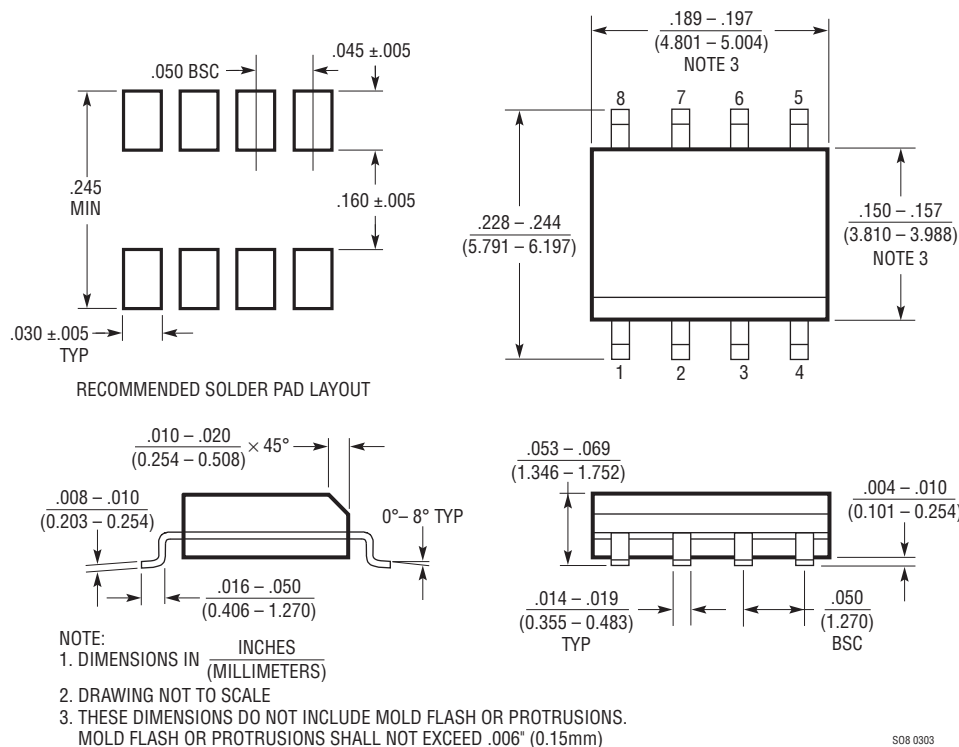

### MS8 Package 8-Lead Plastic MSOP (Reference LTC DWG # 05-08-1660 Rev F)

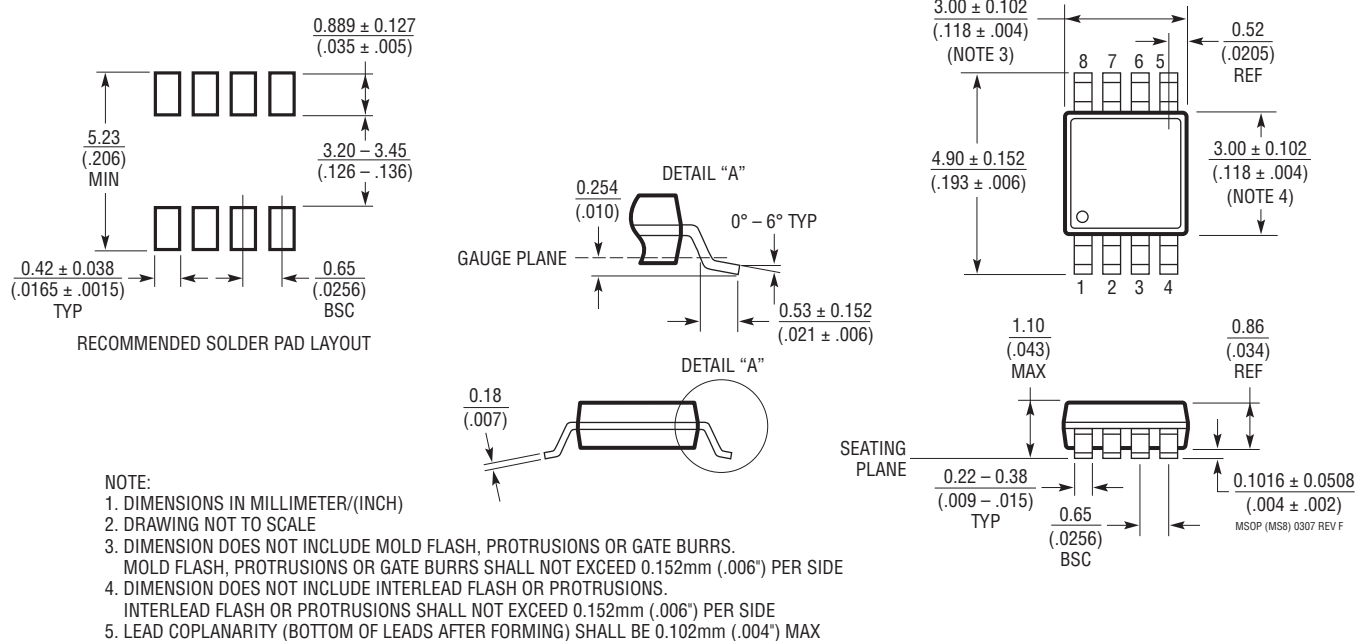

# PACKAGE DESCRIPTION

## S Package 14-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

