

## Absolute Maximum Ratings

$V_{CC}$ ,  $IN_{-}$ ,  $\overline{RESET}$  to GND.....-0.3V to +6V  
 Continuous  $\overline{RESET}$  Current.....20mA  
 Continuous Power Dissipation  
 6-Pin SOT23 (derate 8.7mW/°C above +70°C) .....695.7mW

Operating Temperature Range..... -40°C to +105°C  
 Storage Temperature Range..... -65°C to +150°C  
 Junction Temperature..... +150°C  
 Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Electrical Characteristics

( $V_{IN2} = 1V$  to 5.5V,  $T_A = -40^{\circ}C$  to  $+105^{\circ}C$ , unless otherwise noted. Typical values are at  $V_{IN2} = 3.0V$  to 3.3V,  $T_A = +25^{\circ}C$ .) (Note 1)

| PARAMETER                               | SYMBOL       | CONDITIONS                                                             |                                         | MIN   | TYP   | MAX   | UNITS      |
|-----------------------------------------|--------------|------------------------------------------------------------------------|-----------------------------------------|-------|-------|-------|------------|
| Operating Voltage Range<br>(Note 2)     | $V_{CC}$     | MAX6700/MAX6710Q                                                       |                                         | 2.0   |       | 5.5   | V          |
|                                         | $V_{IN2}$    | All others (Note 3)                                                    | $T_A = 0^{\circ}C$ to $+105^{\circ}C$   | 1.0   |       | 5.5   |            |
|                                         |              |                                                                        | $T_A = -40^{\circ}C$ to $+105^{\circ}C$ | 1.2   |       | 5.5   |            |
| Input Current                           | $I_{IN_{-}}$ | $IN_{-}$ = nominal input voltage (for 1.8V, 2.5V, and 5.0V supplies)   |                                         |       | 25    | 45    | $\mu A$    |
|                                         |              | $IN2$ = nominal input voltage (for 3.0V and 3.3V supplies) (Note 4)    |                                         |       | 55    | 115   |            |
|                                         |              | $V_{IN1} = 0$ to 0.85V (for adjustable thresholds)                     |                                         |       |       | 1     |            |
|                                         |              | $V_{IN3}, V_{IN4} = 0$ to 0.85V (for adjustable thresholds)            |                                         |       |       | 0.2   |            |
|                                         | $I_{CC}$     | MAX6700/MAX6710Q only, $V_{CC} = 5.5V$                                 |                                         |       | 35    | 65    |            |
| Threshold Voltage                       | $V_{TH}$     | $IN_{-}$ decreasing                                                    | 5V (-5%)                                | 4.50  | 4.63  | 4.75  | V          |
|                                         |              |                                                                        | 5V (-10%)                               | 4.25  | 4.38  | 4.50  |            |
|                                         |              |                                                                        | 3.3V (-5%)                              | 3.00  | 3.08  | 3.15  |            |
|                                         |              |                                                                        | 3.3V (-10%)                             | 2.85  | 2.93  | 3.00  |            |
|                                         |              |                                                                        | 3.0V (-5%)                              | 2.70  | 2.78  | 2.85  |            |
|                                         |              |                                                                        | 3.0V (-10%)                             | 2.55  | 2.63  | 2.70  |            |
|                                         |              |                                                                        | 2.5V (-5%)                              | 2.25  | 2.32  | 2.38  |            |
|                                         |              |                                                                        | 2.5V (-10%)                             | 2.13  | 2.19  | 2.25  |            |
|                                         |              |                                                                        | 1.8V (-5%)                              | 1.62  | 1.67  | 1.71  |            |
|                                         |              |                                                                        | 1.8V (-10%)                             | 1.53  | 1.58  | 1.62  |            |
| Adjustable Threshold                    | $V_{TH}$     | $IN_{-}$ decreasing                                                    |                                         | 0.611 | 0.620 | 0.629 | V          |
| Reset Threshold Hysteresis              | $V_{HYST}$   | $IN_{-}$ increasing relative to $IN_{-}$ decreasing                    |                                         |       | 0.3   |       | % $V_{TH}$ |
| Reset Threshold Temperature Coefficient | $TCV_{TH}$   |                                                                        |                                         |       | 60    |       | ppm/°C     |
| $IN_{-}$ to Reset Delay                 | $t_{RD}$     | $V_{IN}$ falling at 10mV/ $\mu s$ from $V_{TH}$ to ( $V_{TH} - 50mV$ ) |                                         |       | 30    |       | $\mu s$    |
| Propagation Delay                       | $t_{PD}$     | MAX6700 only                                                           |                                         |       | 5     |       | $\mu s$    |
| Reset Timeout Period                    | $t_{RP}$     | MAX6710 only                                                           |                                         | 140   | 200   | 280   | ms         |

**Electrical Characteristics (continued)**

( $V_{IN2} = 1V$  to  $5.5V$ ,  $T_A = -40^\circ C$  to  $+105^\circ C$ , unless otherwise noted. Typical values are at  $V_{IN2} = 3.0V$  to  $3.3V$ ,  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                     | SYMBOL   | CONDITIONS                                                                              | MIN | TYP                  | MAX | UNITS   |
|-----------------------------------------------|----------|-----------------------------------------------------------------------------------------|-----|----------------------|-----|---------|
| $\overline{RESET}$ Output Low                 | $V_{OL}$ | $V_{IN2}, V_{CC} = 5V, I_{SINK} = 2mA$                                                  |     |                      | 0.3 | V       |
|                                               |          | $V_{IN2}, V_{CC} = 2.5V, I_{SINK} = 1.2mA$                                              |     |                      | 0.4 |         |
|                                               |          | $V_{IN2} = 1.0V, I_{SINK} = 50\mu A, T_A = 0^\circ C$ to $+105^\circ C$                 |     |                      | 0.3 |         |
| $\overline{RESET}$ Output High                | $V_{OH}$ | $V_{CC} \geq 2.0V, I_{SOURCE} = 6\mu A, \overline{RESET}$ deasserted (MAX6700/MAX6710Q) |     | $0.8 \times V_{CC}$  |     | V       |
|                                               |          | $V_{IN2} \geq 2.0V, I_{SOURCE} = 6\mu A, \overline{RESET}$ deasserted                   |     | $0.8 \times V_{IN2}$ |     |         |
| $\overline{RESET}$ Output High Source Current | $I_{OH}$ | $V_{IN2} \geq 2.0V, \overline{RESET}$ deasserted                                        |     | 10                   |     | $\mu A$ |

**Note 1:** 100% production tested at  $T_A = +25^\circ C$ . Limits over temperature guaranteed by design.




**Note 2:** The devices are powered from  $IN2$  or  $V_{CC}$  (for MAX6700/MAX6710Q).

**Note 3:** The  $\overline{RESET}$  output is guaranteed to be in the correct state for  $IN1$  or  $IN2$  down to  $1V$ .







**Note 4:** Monitored  $IN2$  voltage ( $3.3V, 3.0V$ ) is also the device power supply. Supply current splits as follows:  $25\mu A$  for the resistor divider (for the monitored voltage) and  $30\mu A$  for other circuits.

**Typical Operating Characteristics**

( $V_{IN2} = V_{CC} = 3.0V, T_A = +25^\circ C$ )

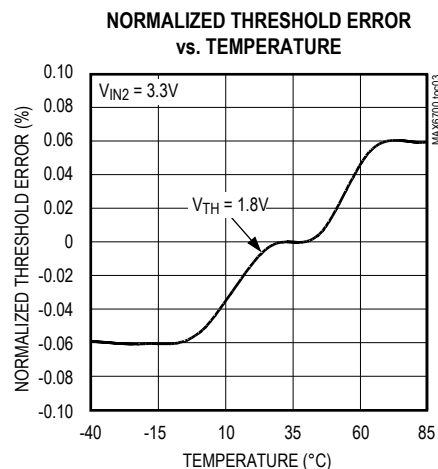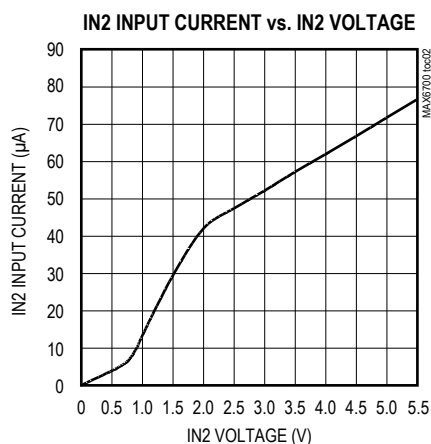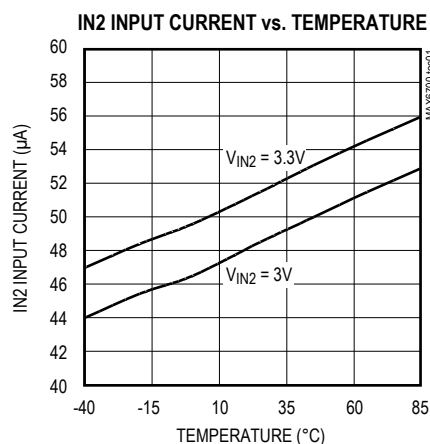

## Typical Operating Characteristics (continued)

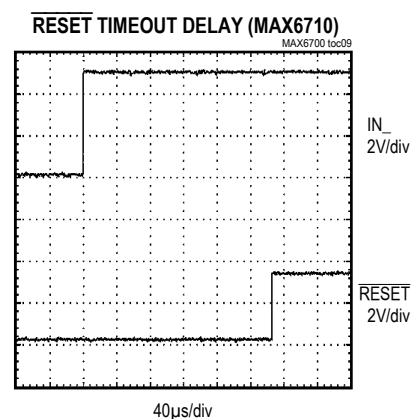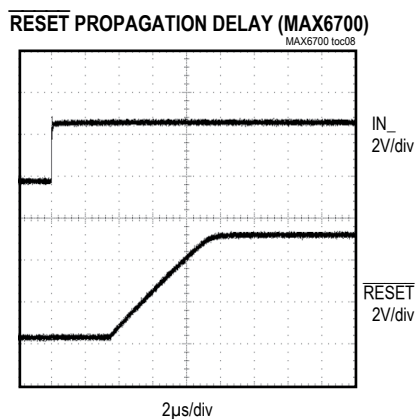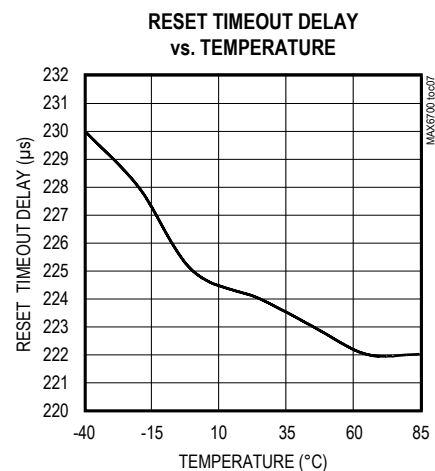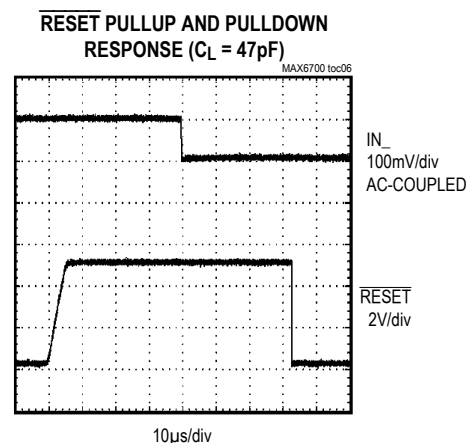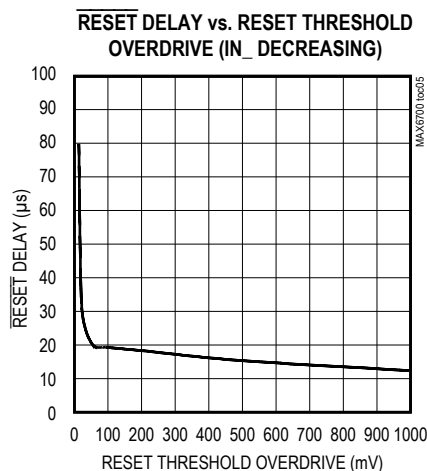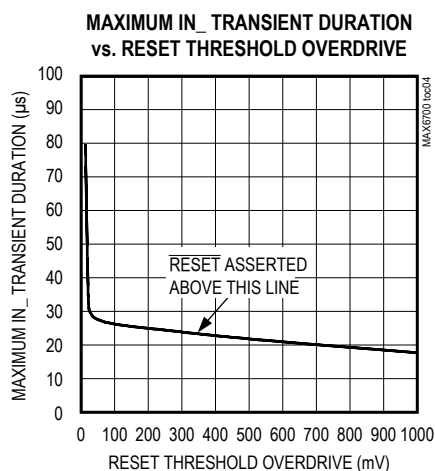 $(V_{IN2} = V_{CC} = 3.0V, T_A = +25^\circ C)$ 

## Pin Description

| PIN | NAME     | FUNCTION                                                                                                                                                                                                                                                                                                          |
|-----|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | IN1      | Input Voltage 1. See the Selector Guide for monitored voltages.                                                                                                                                                                                                                                                   |
| 2   | IN2      | Input Voltage 2. See the <i>Selector Guide</i> for monitored voltages. IN2 is the power-supply input for the device. For the MAX6700/MAX6710Q, $V_{CC}$ is the power-supply input for the device and is not a monitored voltage.                                                                                  |
|     | $V_{CC}$ |                                                                                                                                                                                                                                                                                                                   |
| 3   | IN3      | Input Voltage 3. See the <i>Selector Guide</i> for monitored voltages.                                                                                                                                                                                                                                            |
| 4   | IN4      | Input Voltage 4. See the <i>Selector Guide</i> for monitored voltages.                                                                                                                                                                                                                                            |
| 5   | GND      | Ground                                                                                                                                                                                                                                                                                                            |
| 6   | RESET    | Active-Low, Reset Output. RESET goes low when any input goes below its specified threshold. After all inputs rise above their threshold voltage, RESET remains low for 5μs (MAX6700) or for 200ms (MAX6710) before going high. The open-drain RESET output has a weak (10μA) internal pullup to IN2 or $V_{CC}$ . |

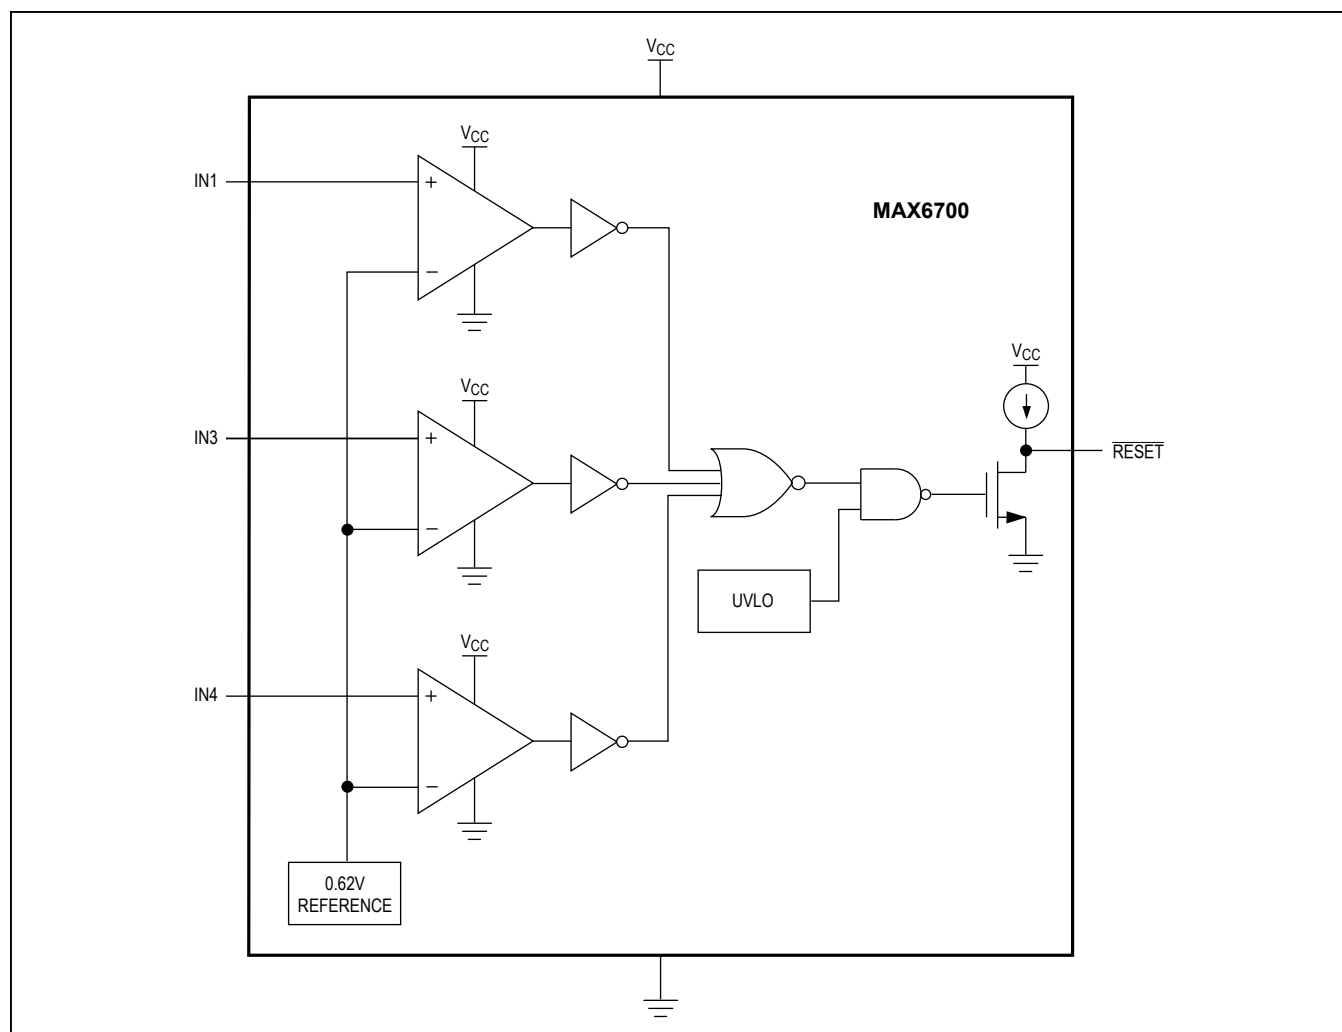


Figure 1. MAX6700 Functional Diagram

## Detailed Description

The MAX6700/MAX6710 are very small, low-power, triple/quad voltage  $\mu$ P supervisory circuits designed to maintain system integrity in multisupply systems (Figure 1 and Figure 2). The MAX6710 offers several internally trimmed undervoltage threshold options for monitoring 5.0V, 3.3V, 3.0V, 2.5V, and 1.8V supplies. The devices offer one-to-three adjustable thresholds for monitoring voltages down to 0.62V.

The triple/quad voltage monitors include an accurate bandgap reference, precision comparators, and a series of internally trimmed resistor-divider networks to set the factory-fixed reset threshold options. The resistor networks scale the specified IN\_ reset voltages to match the internal bandgap reference/

comparator voltage. Adjustable threshold options bypass the internal resistor networks and connect directly to one of the comparator inputs (use an external resistor-divider network for threshold matching). The MAX6700/MAX6710Q provide a separate unmonitored power-supply input ( $V_{CC}$ ) and three adjustable voltage inputs.

Each of the internal comparators has a typical hysteresis of 0.3% with respect to its reset threshold. This built-in hysteresis improves the monitor's immunity to ambient noise without significantly reducing threshold accuracy. The devices are immune to short IN\_ transients. See the [Typical Operating Characteristics](#) for a glitch immunity graph.

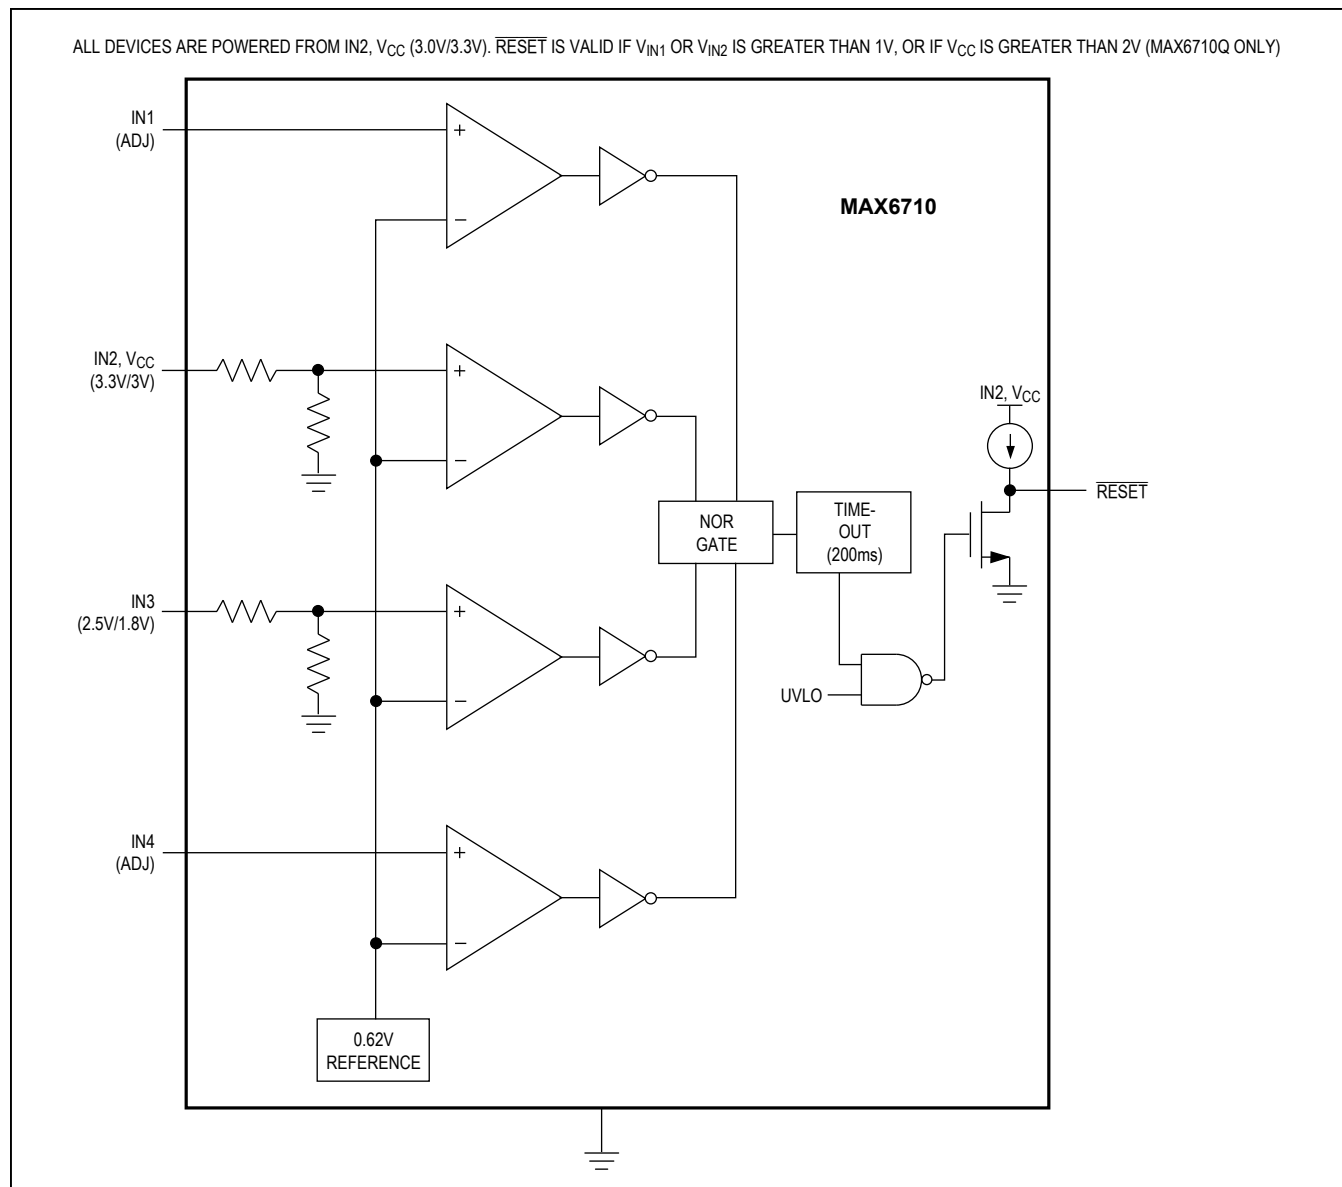


Figure 2. MAX6710 Functional Diagram

## Applications Information

### Reset Output

The MAX6700  $\overline{RESET}$  output asserts low when any monitored  $IN_{\_}$  voltage drops below its specified reset threshold and remains low for the propagation delay (5 $\mu$ s) after all inputs exceed their thresholds (Figure 3). The MAX6710 provides an extended reset timeout period of 140ms (min).

The output is open drain with a weak internal pullup to the monitored  $IN2$  or  $V_{CC}$  supply (10 $\mu$ A typ). For many applications no external pullup resistor is required to interface with other logic devices. An external pullup resistor to any voltage from 0 to 5.5V can overdrive the internal pullup if interfacing to different logic-supply voltages (Figure 4). Internal circuitry prevents reverse current flow from the external pullup voltage to  $IN2$ .

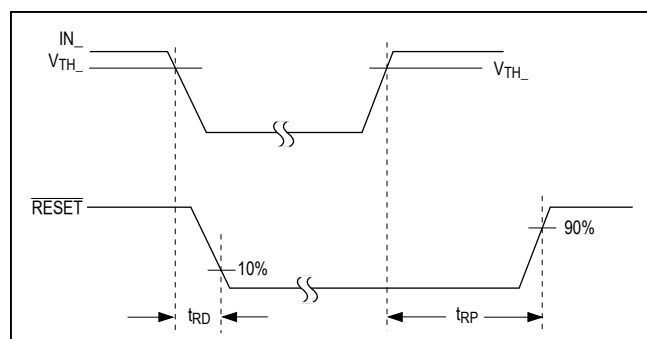
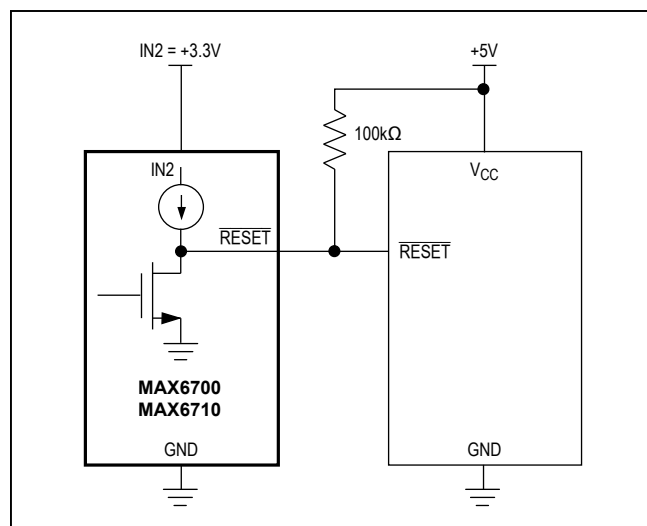
Figure 3.  $\overline{\text{RESET}}$  Output Timing Diagram

Figure 4. Interfacing to Different Logic-Supply Voltage

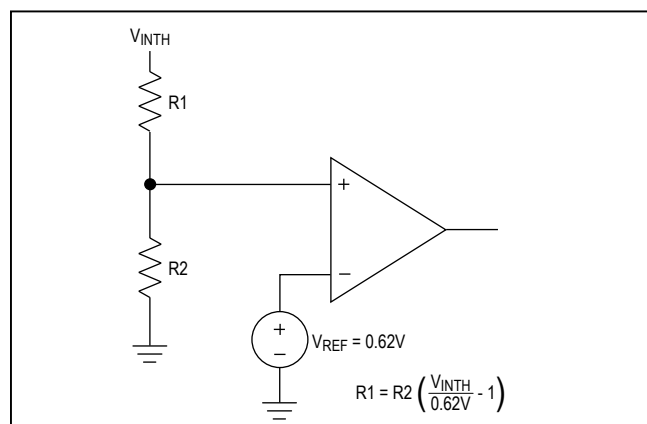


Figure 5. Setting the Auxiliary Monitor

$V_{CC}$  powers the MAX6700/MAX6710Q and is not a monitored voltage. IN2 powers all other options for the MAX6710 and is a monitored voltage. When any supply drops below its threshold, the reset output asserts low and remains low while either IN1 or IN2 is above 1.0V.

### Adjustable Thresholds

The MAX6700/MAX6710 offer several monitor options with adjustable reset thresholds. The threshold voltage at each adjustable IN\_ input is typically 0.62V. To monitor a voltage  $> 0.62\text{V}$ , connect a resistor-divider network to the circuit as shown in Figure 5.

$$V_{\text{INTH}} = 0.62\text{V} \times (R1 + R2) / R2$$

or, solved in terms of R1:

$$R1 = R2 ((V_{\text{INTH}} / 0.62\text{V}) - 1)$$

Because the devices have a guaranteed input current of  $\pm 0.2\mu\text{A}$  ( $\pm 0.4\mu\text{A}$  for IN1) on their adjustable inputs, resistor values up to 100k $\Omega$  can be used for R2 with  $< 1\%$  error. The MAX6700/MAX6710Q include an internal voltage clamp (1.5V typ) at each of the adjustable voltage inputs. An input voltage higher than 1.5V induces a higher input current.

### Unused Inputs

Connect unused monitor inputs to a supply voltage greater in magnitude than their specified threshold voltages. For unused IN\_ adjustable inputs, connect a 1M $\Omega$  series resistor between the unused input and IN2 (or  $V_{CC}$ ) to limit the bias current. Use IN2 for normal operation (device power-supply pin). Do not connect unused monitor inputs to ground or allow them to float.

### Adding Manual Reset Capability (MAX6710)

Figure 6 shows an application circuit adding manual reset to the MAX6710. Depressing the pushbutton switch short-circuits the analog input to ground and initiates a  $\overline{\text{RESET}}$  pulse. The switch must be open for at least 140ms in order to deassert the  $\overline{\text{RESET}}$  output. No external switch debounce is required. Use a small capacitor to improve noise immunity when using long leads from the pushbutton switch to the adjustable input.

### Power-Supply Bypassing and Grounding

The MAX6700/MAX6710 are normally powered from the monitored IN2 or from the  $V_{CC}$  supply input. All monitored inputs are immune to short supply transients. For higher immunity in noisy applications, connect a 0.1 $\mu\text{F}$  bypass capacitor from the IN2 input to ground. Add capacitance to IN1, IN3, and IN4 to increase their noise immunity.


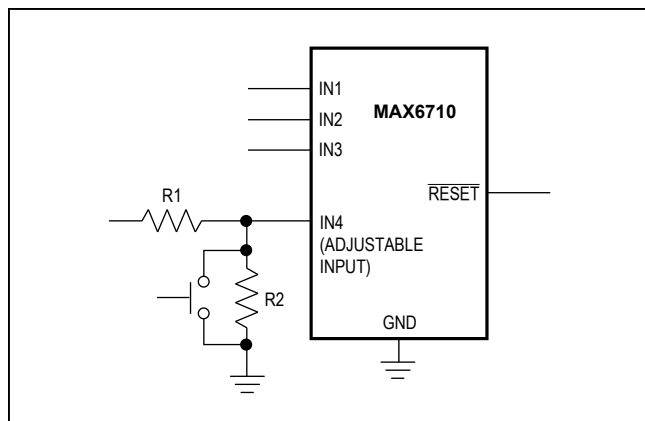


Figure 6. Adding Manual Reset Capability

### Pin Configuration

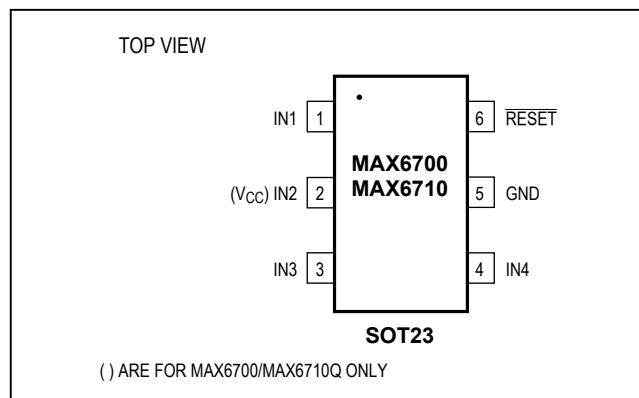

### Chip Information

TRANSISTOR COUNT: 699

PROCESS: BiCMOS

## Selector Guide

| PART**<br>(SUFFIX IN<br>BOLD) | TEMPERATURE<br>RANGE | Nominal Input Voltage |                 |            |            | Supply<br>Tolerance (%) | Top Mark |
|-------------------------------|----------------------|-----------------------|-----------------|------------|------------|-------------------------|----------|
|                               |                      | IN1<br>(V)            | IN2<br>(V)      | IN3<br>(V) | IN4<br>(V) |                         |          |
| MAX6700UT                     | -40°C to +85°C       | Adj*                  | V <sub>CC</sub> | Adj*       | Adj*       | N/A                     | ABEK     |
| MAX6710AUT                    | -40°C to +85°C       | 5                     | 3.3             | 2.5        | Adj*       | 10                      | AAZA     |
| MAX6710BUT                    | -40°C to +85°C       | 5                     | 3.3             | 2.5        | Adj*       | 5                       | AAZB     |
| MAX6710CUT                    | -40°C to +85°C       | 5                     | 3.3             | 1.8        | Adj*       | 10                      | AAZC     |
| MAX6710DUT                    | -40°C to +85°C       | 5                     | 3.3             | 1.8        | Adj*       | 5                       | AAZD     |
| MAX6710EUT                    | -40°C to +85°C       | Adj*                  | 3.3             | 2.5        | 1.8        | 10                      | AAZE     |
| MAX6710FUT                    | -40°C to +105°C      | Adj*                  | 3.3             | 2.5        | 1.8        | 5                       | AAZF     |
| MAX6710GUT                    | -40°C to +85°C       | 5                     | 3.3             | Adj*       | Adj*       | 10                      | AAZG     |
| MAX6710HUT                    | -40°C to +85°C       | 5                     | 3.3             | Adj*       | Adj*       | 5                       | AAZH     |
| MAX6710IUT                    | -40°C to +85°C       | Adj*                  | 3.3             | 2.5        | Adj*       | 10                      | AAZI     |
| MAX6710JUT                    | -40°C to +85°C       | Adj*                  | 3.3             | 2.5        | Adj*       | 5                       | AAZJ     |
| MAX6710KUT                    | -40°C to +105°C      | Adj*                  | 3.3             | 1.8        | Adj*       | 10                      | AAZK     |
| MAX6710LUT                    | -40°C to +85°C       | Adj*                  | 3.3             | 1.8        | Adj*       | 5                       | AAZL     |
| MAX6710MUT                    | -40°C to +85°C       | Adj*                  | 3               | 2.5        | Adj*       | 10                      | AAZM     |
| MAX6710NUT                    | -40°C to +85°C       | Adj*                  | 3               | 2.5        | Adj*       | 5                       | AAZN     |
| MAX6710OUT                    | -40°C to +85°C       | Adj*                  | 3               | 1.8        | Adj*       | 10                      | AAZO     |
| MAX6710PUT                    | -40°C to +85°C       | Adj*                  | 3               | 1.8        | Adj*       | 5                       | AAZP     |
| MAX6710QUT                    | -40°C to +85°C       | Adj*                  | V <sub>CC</sub> | Adj*       | Adj*       | N/A                     | AAZQ     |

\*Adjustable voltage based on 0.62V internal threshold. External threshold voltage can be set using an external resistor-divider.

\*\*The MAX6700 acts as a voltage detector with a 5 $\mu$ s propagation delay. The MAX6710 serves as a microprocessor reset circuit with a 140ms (min) reset timeout.

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE<br>TYPE | PACKAGE<br>CODE | OUTLINE<br>NO.          | LAND<br>PATTERN NO.     |
|-----------------|-----------------|-------------------------|-------------------------|
| 6 SOT           | U6+1            | <a href="#">21-0058</a> | <a href="#">90-0175</a> |

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                                                                                                                  | PAGES<br>CHANGED |
|--------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| 3                  | 9/14             | Added ordering information for F option, added extended temperature range information, updated <i>Selector Guide</i> and <i>Package Information</i> sections | 1, 2, 8, 9       |
| 4                  | 11/15            | Added MAX6710K with new limits                                                                                                                               | 1, 2, 9          |
| 5                  | 8/16             | Updated MAX6710 upper operating temperature range and EC limits to 105°C                                                                                     | 2–3              |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*