

Precision Adjustable Shunt Regulator

ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

Cathode-Anode Reverse Breakdown V_{KA} 37V
 Anode-Cathode Forward Current, ($<10\text{ms}$) I_{AK} 1A
 Operating Cathode Current I_{KA} 150mA
 Reference Input Current I_{REF} 10mA
 Continuous Power Dissipation at 25°C P_D
 NSOIC-8 750mW
 SOT-89-3 1000mW
 Junction Temperature T_J 150°C
 Storage Temperature T_{STG} -65°C to 150°C
 ESD Rating (HBM - Human Body Model) 2kV

OPERATING RATINGS

Cathode Voltage V_{KA} V_{REF} to 36V
 Cathode Current I_K 10mA
 Operating Junction Temperature T_J -55°C to 150°C
 Thermal Resistance
 θ_{JA} (NSOIC8) 175°C/W
 θ_{JC} (NSOIC8) 45°C/W
 θ_{JA} (SOT89-3) 110°C/W
 θ_{JC} (SOT89-3) 8°C/W

ELECTRICAL SPECIFICATIONS

Specifications with standard type are for an Operating Junction Temperature of $T_A = T_J = 25^\circ\text{C}$ only; limits applying over the full Operating Junction Temperature range are denoted by a “•”. Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at $T_A = T_J = 25^\circ\text{C}$, and are provided for reference purposes only. Unless otherwise indicated, $V_K = V_{REF}$, $I_K = 10\text{mA}$, $T_A = 25^\circ\text{C}$.

Parameter	Min.	Typ.	Max.	Units	Conditions
Reference Voltage V_{REF}	2.490	2.500	2.510	V	Figure 5
	2.465		2.535		$T_J = 0^\circ\text{C}$ to 105°C , figure 5
ΔV_{REF} with Temperature TC		0.07	.20	mV/°C	Figure 5
Ratio of Change in V_{REF} to Cathode Voltage $\Delta V_{REF} / \Delta V_K$	-2.0	-1.1		mV/V	$V_K = 3\text{V}$ to 36V , figure 6
Reference Input Current I_{REF}		0.7	1.9	μA	Figure 6
I_{REF} Temp Deviation ΔI_{REF}		0.4	1.2	μA	$T_J = 0^\circ\text{C}$ to 105°C , figure 6
Min I_K for Regulation $I_{K(MIN)}$		0.4	1	mA	Figure 5
Off State Leakage $I_{K(OFF)}$		0.04	250	nA	$V_{REF} = 0\text{V}$, $V_{KA} = 36\text{V}$, figure 7
Dynamic Output Impedance Z_{KA}		0.15	0.5	Ω	$f_z \leq 1\text{kHz}$, $I_K = 1$ to 150mA , figure 5

BLOCK DIAGRAM

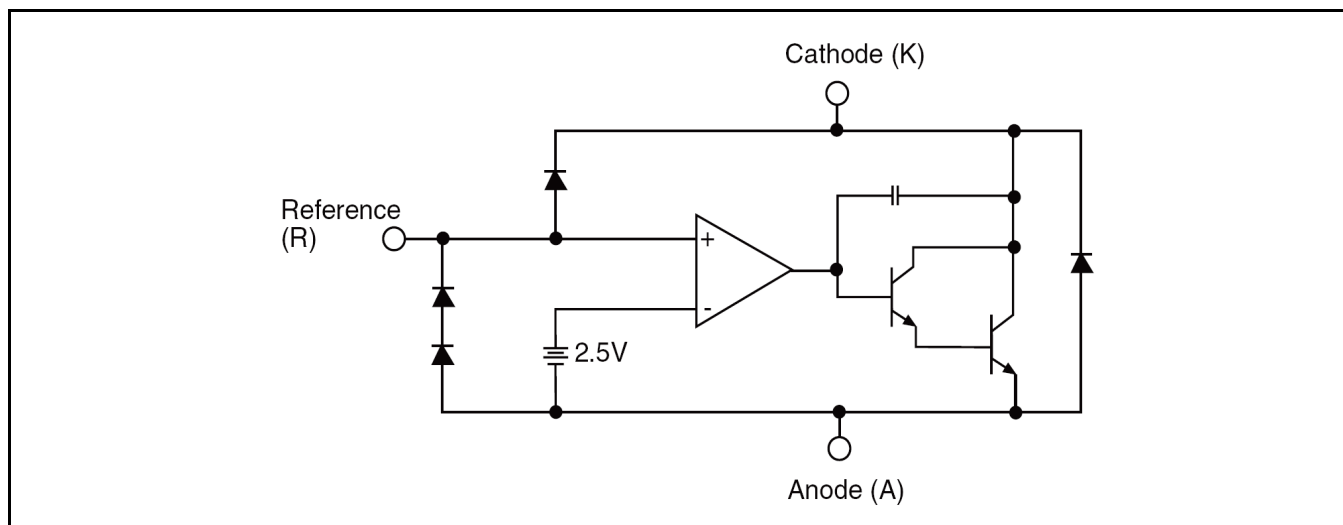


Fig. 2: SPX1431 Block Diagram

PIN ASSIGNMENT

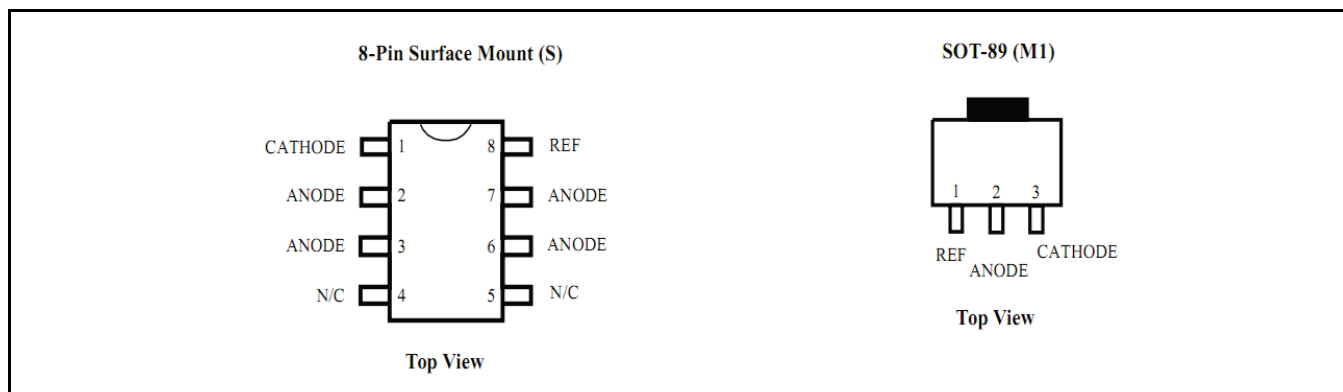


Fig. 3: SPX1431 Pin Assignment

ORDERING INFORMATION

Part Number	Temperature Range	Marking	Package	Packing Quantity	Note 1	Note 2
SPX1431M1-L	$-55^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$	N011 YWWXXX	SOT-89-3	Bulk	Halogen Free	Bar on left side of marking denotes "-L" Pb free product
SPX1431M1-L/TR				2.5K/Tape & Reel		
SPX1431S-L	$-55^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$	SPX1431 25YYWWL XXXXXXX	NSOIC8	Bulk	Halogen Free	
SPX1431S-L/TR				2.5K/Tape & Reel		

"YY" = Year (Last two digits) – "Y" = Year (Last Digit)

"WW" = Work Week

"XXX" = Lot Number (Example AA234567)

"XXXXXX" = Lot Number (Example AA234567)

These products have no bottom side marking.

CALCULATING AVERAGE TEMPERATURE COEFFICIENT (TC)

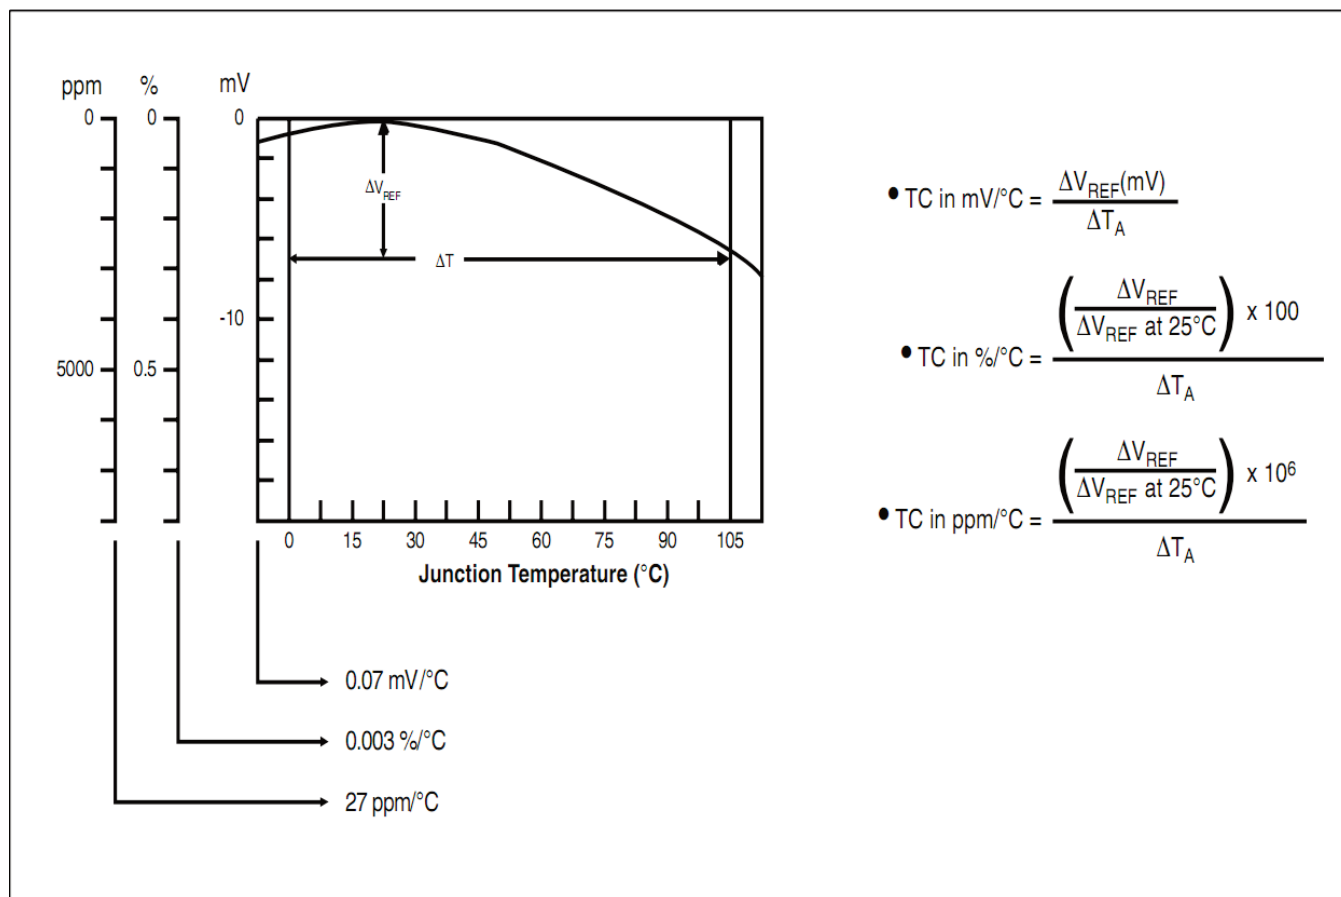


Fig. 4: V_{REF} vs. Temperature

TEST CIRCUITS




Fig. 5: Test Circuit for $V_{KA} = V_{REF}$

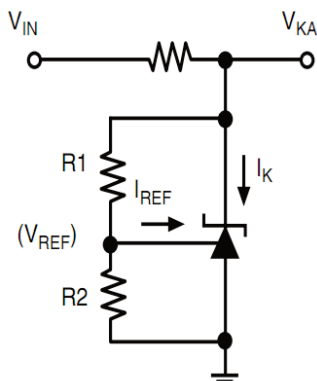


Fig. 6: Test Circuit for $V_{KA} > V_{REF}$

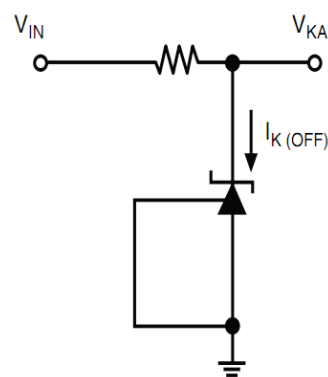


Fig. 7: Test Circuit for I_{KOFF}

Precision Adjustable Shunt Regulator

TYPICAL PERFORMANCE CHARACTERISTICS

All data taken at Unless otherwise indicated, $V_K = V_{REF}$, $I_K = 10\text{mA}$, $T_A = 25^\circ\text{C}$.

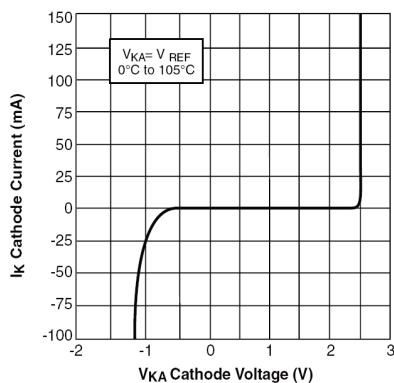


Fig. 8: High Current Operating Characteristics

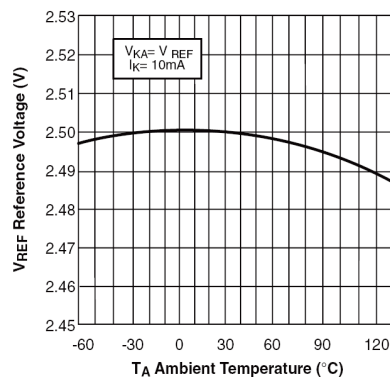


Fig. 9: Reference Voltage vs. Ambient Temperature

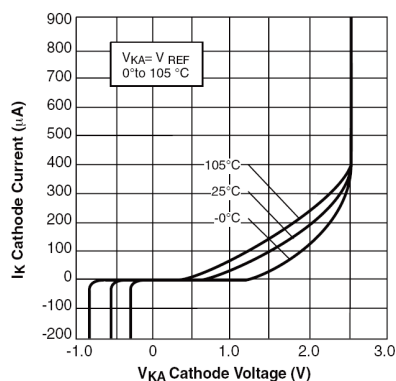


Fig. 10: Low Current Operating Characteristics

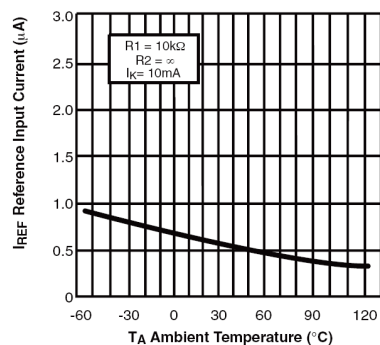


Fig. 11: Reference Input Current vs. Ambient Temperature

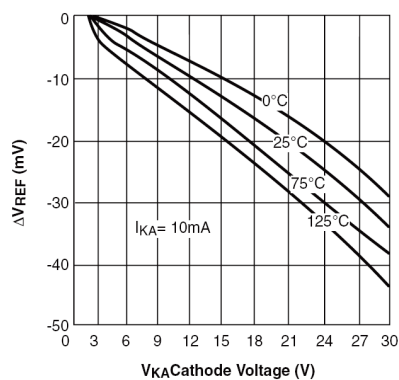


Fig. 12: Reference Voltage Line Regulation vs. Cathode Voltage and $T_{AMBIENT}$

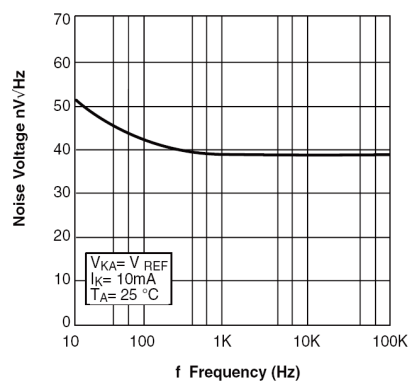


Fig. 13: Noise Voltage vs. Frequency

Precision Adjustable Shunt Regulator

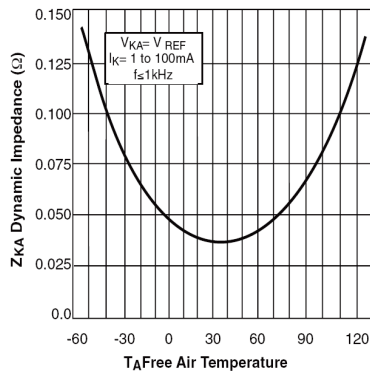


Fig. 14: Low Frequency Dynamic Output Impedance vs. $T_{AMBIENT}$

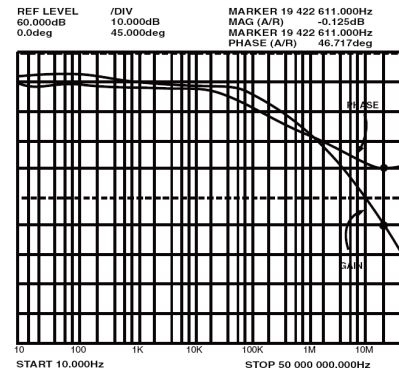


Fig. 15: Small Signal Gain and Phase vs. Frequency;
 $I_K = 10\text{mA}$, $T_A = 25^\circ\text{C}$

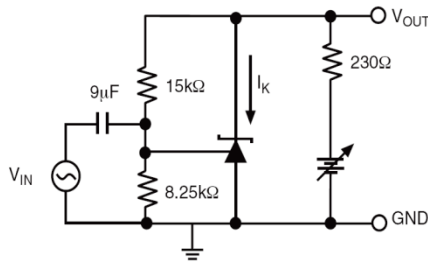


Fig. 16: Test Circuit for Gain and Phase Frequency Response

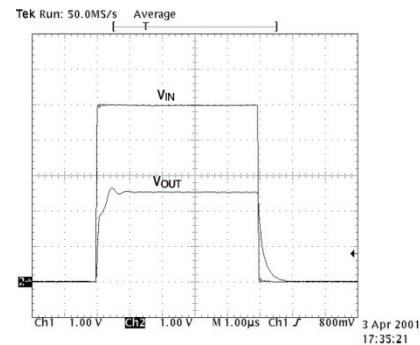


Fig. 17: Frequency = 100kHz
 $I_K = 10\text{mA}$, $T_A = 25^\circ\text{C}$

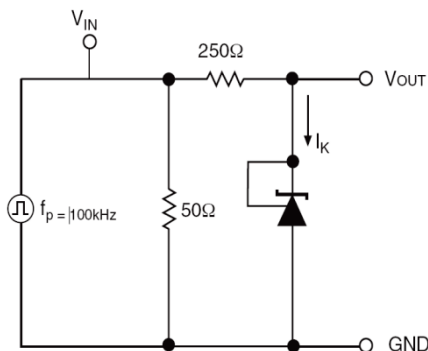


Fig. 18: Test Circuit for Pulse Response

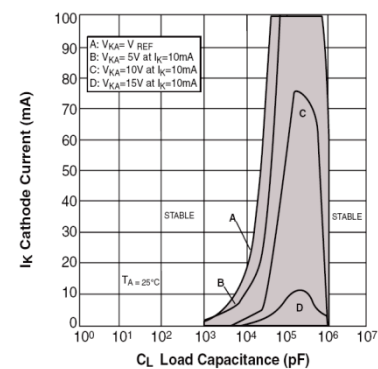


Fig. 19: Stability Boundary Conditions

Precision Adjustable Shunt Regulator

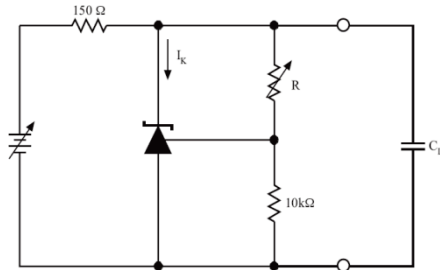


Fig. 20: Test Circuit for Stability

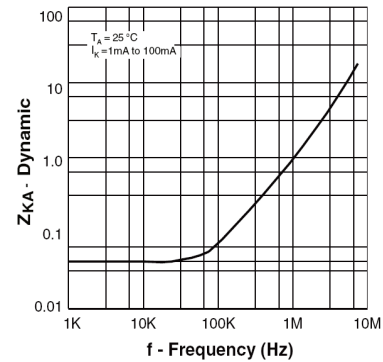


Fig. 21: Dynamic Output Impedance
 $T_A = 25^\circ\text{C}$, $I_K = 1$ to 100mA

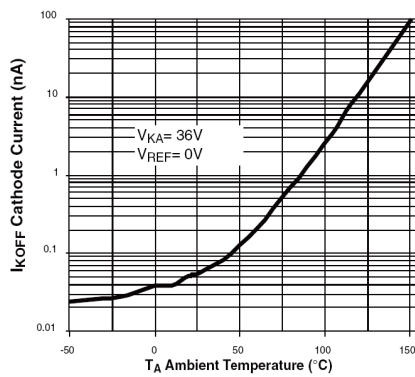


Fig. 22: Off State Leakage

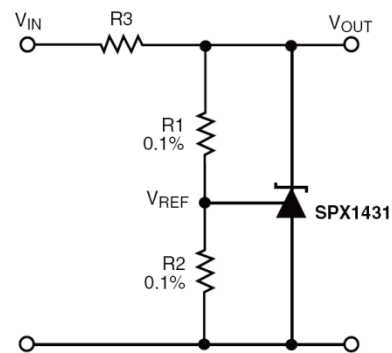


Fig. 23: Shunt Regulator $V_{OUT} = (1 + R1/R2) \cdot V_{REF}$

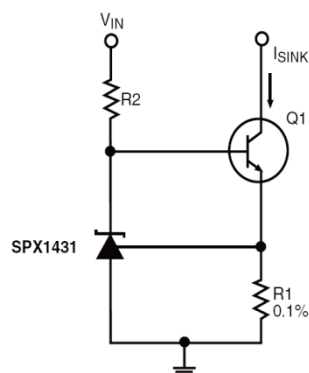


Fig. 24: Constant Current, Sink, $I_{SINK} = V_{REF}/R1$

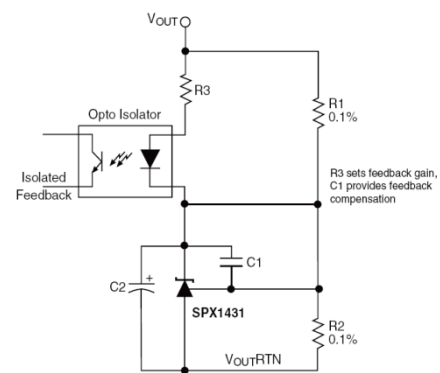


Fig. 25: Reference Amplifier for Isolated Feedback in Off-Line DC-DC Converters

Precision Adjustable Shunt Regulator

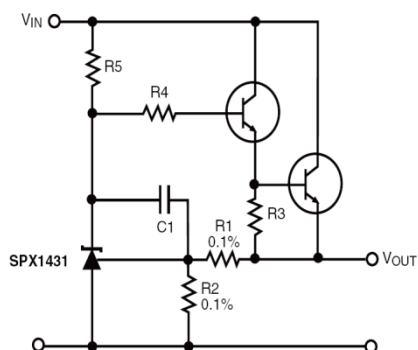


Fig. 26: Precision High Current Series Regulator
 $V_{OUT} = (1 + R1/R2)V_{REF}$

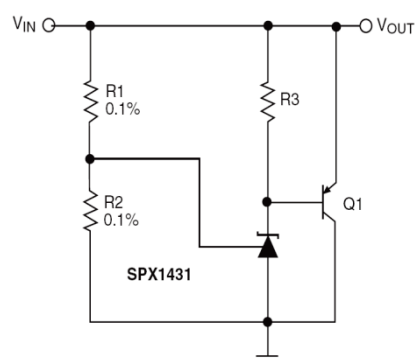


Fig. 27: High Current Shunt Regulator
 $V_{OUT} = (1 + R1/R2)V_{REF}$


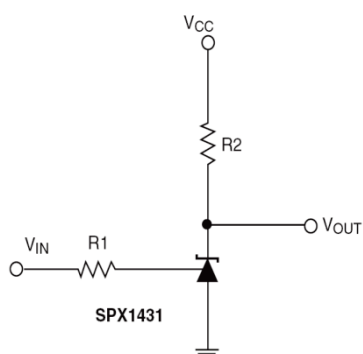


Fig. 28: Single Supply Comparator with Temperature Compensated Threshold. V_{IN} threshold = 2.5V

Resistor values are chosen such that the effect to I_{REF} is negligible.


PACKAGE SPECIFICATION

SOT-89-3

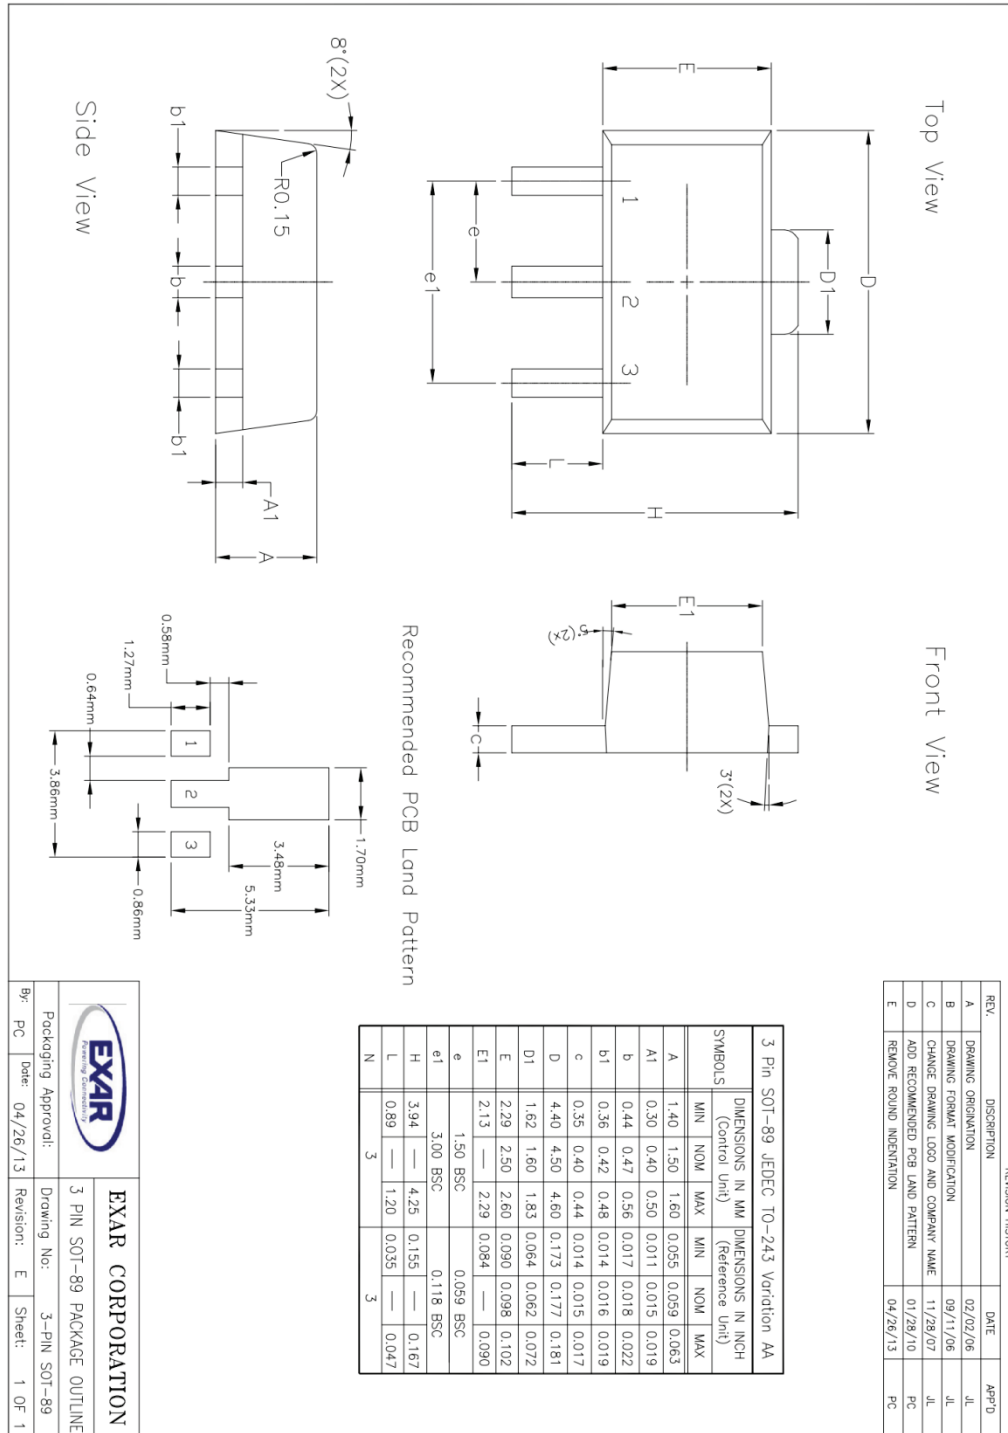

Precision Adjustable Shunt Regulator

NSOIC-8

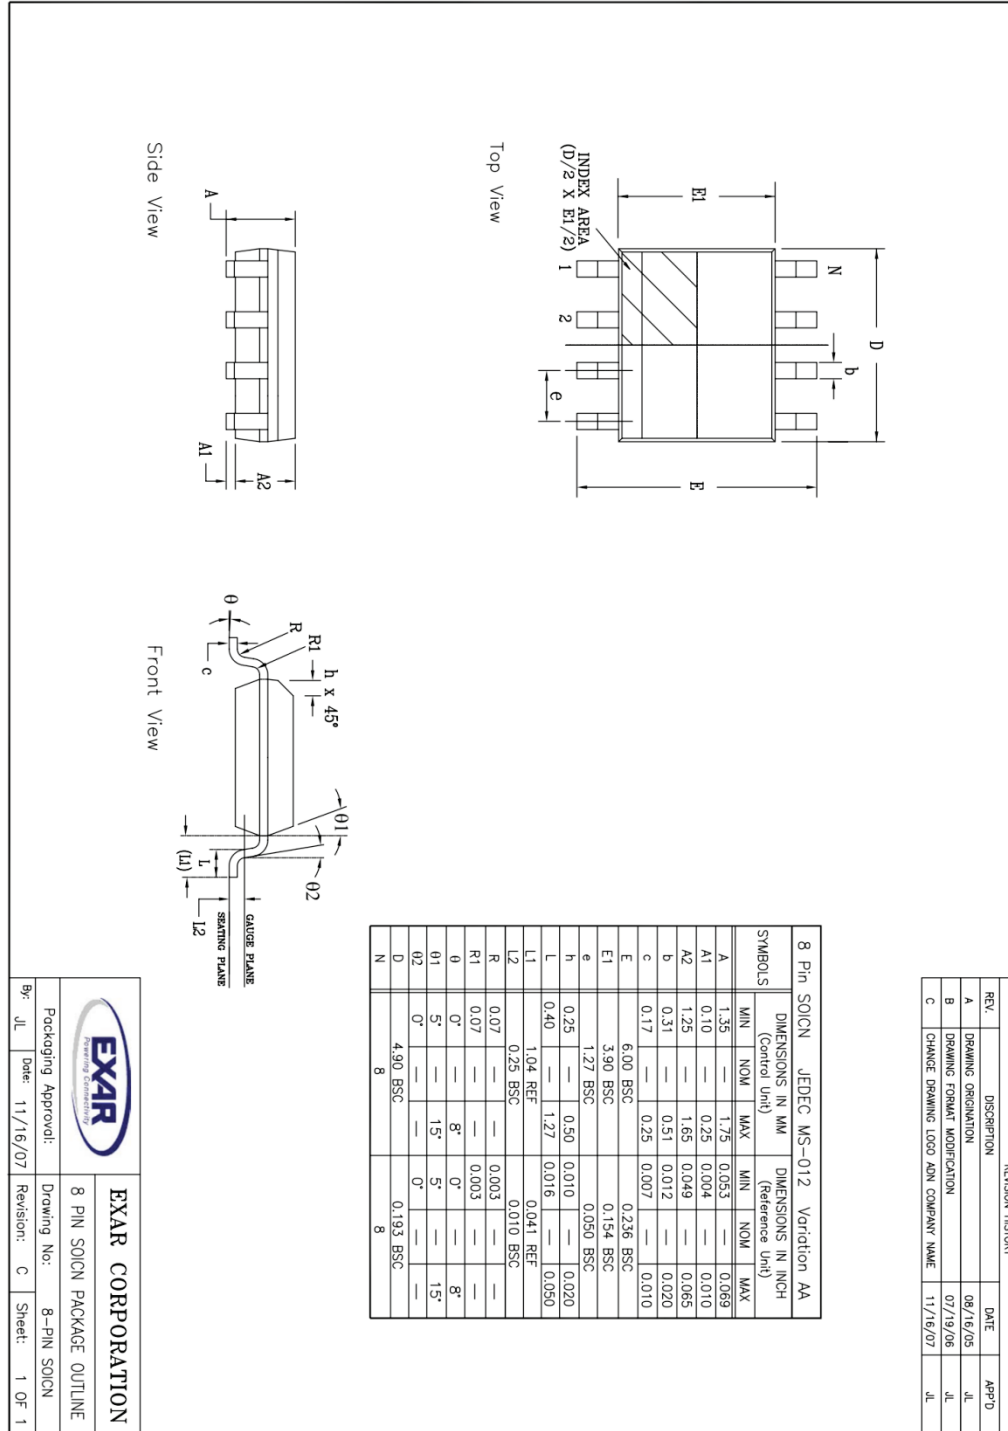

Precision Adjustable Shunt Regulator**REVISION HISTORY**

Revision	Date	Description
2.0.0	04/26/2013	Reformat of Datasheet Update of SOT89-3 package specification Added ESD rating in Absolute Maximum Ratings
2.0.1	07/19/2013	Updated Top Mark information and provided clarifying information

FOR FURTHER ASSISTANCE

Email:

customersupport@exar.compowertechsupport@exar.com

Exar Technical Documentation:

<http://www.exar.com/TechDoc/default.aspx?>**EXAR CORPORATION****HEADQUARTERS AND SALES OFFICES**

48720 Kato Road

Fremont, CA 94538 – USA

Tel.: +1 (510) 668-7000

Fax: +1 (510) 668-7030

www.exar.com**NOTICE**

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.