



## Pin Assignment

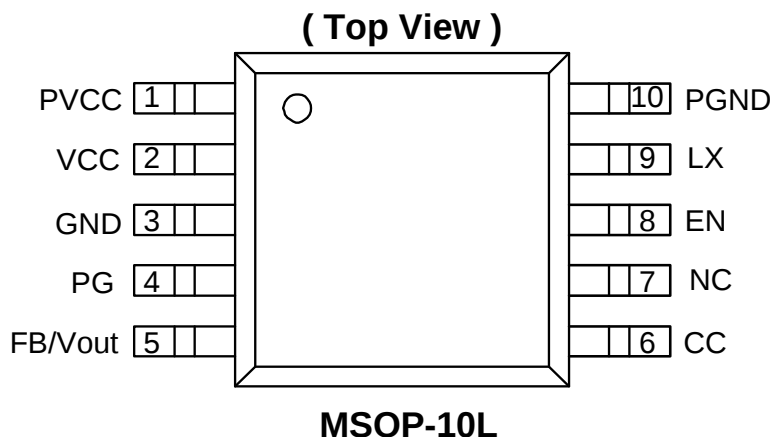

## Pin Descriptions

| Pin Name | Pin NO. | I/O | Description                                                                                             |
|----------|---------|-----|---------------------------------------------------------------------------------------------------------|
| PVCC     | 1       | I   | Supply voltage input                                                                                    |
| VCC      | 2       |     | Supply bypass pin. A 1 $\mu$ F coupling capacitor should be connected as close as possible to this pin. |
| GND      | 3       |     | Ground                                                                                                  |
| PG       | 4       | O   | Power good comparator output. A pull-up resistor should be connected between PG and V <sub>o</sub> .    |
| FB       | 5       | I   | Feedback pin for the fixed output voltage option.                                                       |
| CC       | 6       | I   | Compensation pin                                                                                        |
| NC       | 7       | NC  | No connect                                                                                              |
| EN       | 8       | I   | Enable.Pin, H: Enable. L:shutdown                                                                       |
| LX       | 9       | I/O | Connect the inductor to this pin.                                                                       |
| PGND     | 10      |     | Power ground                                                                                            |

## Block Diagram

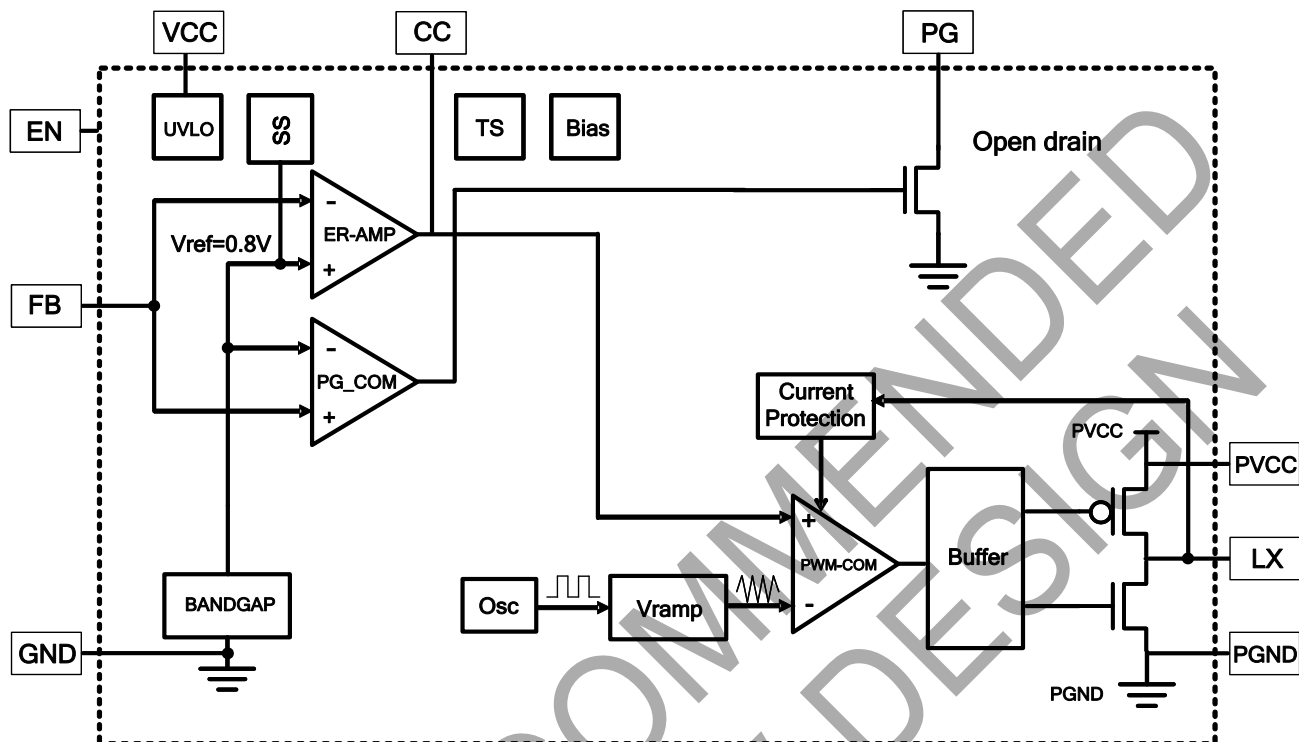

Notes: 3. The adjustable output voltage version does not use the internal feedback resistor divider. The FB pin is directly connected to the error amplifier.

## Absolute Maximum Ratings

| Symbol       | Parameter                            | Rating                 | Unit |
|--------------|--------------------------------------|------------------------|------|
| ESD HBM      | Human Body Model ESD Protection      | 2.5                    | KV   |
| ESD MM       | Machine Model ESD Protection         | 300                    | V    |
| PVCC, VCC    | Supply Voltage                       | -0.3 to +5.5           | V    |
|              | Voltages on pins EN, CC, PG, FB, LX  | -0.3 to $V_{IN} + 0.3$ | V    |
| $T_{J(MAX)}$ | Maximum Junction Temperature Range   | +150                   | °C   |
| $T_{ST}$     | Storage temperature range            | -65 to +150            | °C   |
| $T_{OP}$     | Operating Junction Temperature Range | -40 to +125            | °C   |

Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### Recommended Operating Conditions (T<sub>A</sub> :-40~85°C)

| Symbol          | Parameter                                                  | Rating                | Unit |
|-----------------|------------------------------------------------------------|-----------------------|------|
| T <sub>A</sub>  | Operating Ambient Temperature Range                        | -40 to +85            | °C   |
| V <sub>IN</sub> | Supply Voltage                                             | 2.0 to 5.5            | V    |
| V <sub>O</sub>  | Output voltage range for adjustable output voltage version | 0.8 to V <sub>I</sub> | V    |
| L               | Inductor (see Note 4)                                      | 3.3                   | μH   |
| C <sub>i</sub>  | Input capacitor (see Note 4)                               | 10                    | μF   |
| C <sub>o</sub>  | Output capacitor (see Note 4) V <sub>O</sub> ≥ 1.8V        | 10                    | μF   |

Notes: 4. Refer to application section for further information.

### Electrical Characteristics (T<sub>A</sub> =25°C)

Over recommended operating free-air temperature range, V<sub>I</sub>=3.6V, V<sub>O</sub>=2.5V, I<sub>O</sub>=300mA, EN=V<sub>IN</sub>. (unless otherwise noted)

| Symbol              | Parameter                       |              | Conditions                    | Min | Typ. | Max  | Unit |
|---------------------|---------------------------------|--------------|-------------------------------|-----|------|------|------|
| Supply current      |                                 |              |                               |     |      |      |      |
| V <sub>IN</sub>     | Input Voltage range             | -20 to 85 °C | I <sub>O</sub> = 0mA to 800mA | 2.5 | -    | 5.5  | V    |
|                     |                                 |              | I <sub>O</sub> = 0mA to 500mA | 2   | -    | 5.5  |      |
|                     |                                 | -40 to 85 °C | I <sub>O</sub> = 0mA to 600mA | 2.5 |      | 5.5  |      |
|                     |                                 |              | I <sub>O</sub> = 0mA to 400mA | 2   | -    | -    |      |
| I <sub>CCQ</sub>    | Operating quiescent current     |              | I <sub>O</sub> = 0mA          | -   | 150  | -    | μA   |
| I <sub>STBY</sub>   | Standby current                 |              | EN= GND                       | -   | 0.1  | 1    | μA   |
| Enable              |                                 |              |                               |     |      |      |      |
| V <sub>IH</sub>     | EN high-level input voltage     |              | V <sub>IN</sub> ≤ 3V          | 1.5 | -    | -    | V    |
|                     |                                 |              | V <sub>IN</sub> > 3V          | 2.5 | -    | -    |      |
| V <sub>IL</sub>     | EN low-level input voltage      |              |                               | -   | -    | 0.7  | V    |
| I <sub>L</sub>      | EN input leakage current        |              | EN= GND or V <sub>IN</sub>    | -   | 0.01 | 0.1  | μA   |
| V <sub>(UVLO)</sub> | Under-voltage-lockout-threshold |              |                               | 1.2 | 1.6  | 1.95 | V    |

### Electrical Characteristics (Continued)

Over recommended operating free-air temperature range,  $V_I=3.6V$ ,  $V_O=2.5V$ ,  $I_O=300mA$ ,  $EN=V_{IN}$ . (unless otherwise noted)

| Symbol                                | Parameter                                          | Conditions                                                                   | Min                                                 | Typ.         | Max          | Unit |
|---------------------------------------|----------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------|--------------|--------------|------|
| <b>Power switch and current limit</b> |                                                    |                                                                              |                                                     |              |              |      |
| $R_{DS(on)}$                          | P-channel MOSFET on-resistance                     | $V_I=V_{GS}=3.6V$ ; $I=200mA$                                                | 200                                                 | 280          | 410          | mΩ   |
|                                       | P-channel leakage current                          | $V_I=V_{GS}=2V$ ; $I=200mA$                                                  | -                                                   | 480          | -            | μA   |
|                                       | N-channel MOSFET on-resistance                     | $V_I=V_{GS}=3.6V$ ; $I_O=200mA$                                              | 200                                                 | 280          | 410          | mΩ   |
|                                       | N-channel leakage current                          | $V_I=V_{GS}=2V$ ; $I_O=200mA$                                                | -                                                   | 500          | -            | μA   |
| $I_{(LIM)}$                           | P-channel current limit                            | $2.5V \leq V_I \leq 5.5V$                                                    | 1200                                                | -            | 1600         | mA   |
| <b>Power good output (see Note 5)</b> |                                                    |                                                                              |                                                     |              |              |      |
| $V_{(PG)}$                            | Power good threshold                               | Feedback voltage falling                                                     | 88%<br>$V_O$                                        | 92%<br>$V_O$ | 94%<br>$V_O$ | V    |
|                                       | Power good hysteresis                              |                                                                              | 2.5% $V_O$                                          |              |              |      |
| $V_{OL}$                              | PG output low voltage                              | $V_{(FB)}=0.8 \times V_O$ nominal;<br>$I_{(sink)}=10\mu A$                   | -                                                   | -            | 0.3          | V    |
| $I_{LKG}$                             | PG output leakage current                          | $V_{(FB)}=V_O$ nominal                                                       |                                                     | 0.01         | 1            | μA   |
|                                       | Minimum supply voltage for valid power good signal |                                                                              | 1.2                                                 | -            | -            | V    |
| <b>Oscillator</b>                     |                                                    |                                                                              |                                                     |              |              |      |
| $F_S$                                 | Oscillator frequency                               |                                                                              | 800                                                 | 1000         | 1200         | KHz  |
| <b>Output</b>                         |                                                    |                                                                              |                                                     |              |              |      |
| $V_O$                                 | Adjustable output voltage range                    |                                                                              | 0.8                                                 |              | 5.5          | V    |
| $V_{REF}$                             | Reference voltage                                  |                                                                              | 0.784                                               | 0.8          | 0.816        | V    |
| $V_O$                                 | Fixed output voltage (see Note 6)                  | AP6015-Adj                                                                   | $V_I=2.5V$ to $5.5V$ ;<br>$0mA \leq I_O \leq 800mA$ | -3%          | -            | 4%   |
|                                       |                                                    | AP6015-1.8V                                                                  | $10mA \leq I_O \leq 800mA$                          | -3%          | -            | 3%   |
|                                       |                                                    | AP6015-2.5V                                                                  | $V_I=2.7V$ to $5.5V$ ;<br>$0mA \leq I_O \leq 800mA$ | -3%          | -            | 4%   |
|                                       |                                                    |                                                                              | $10mA \leq I_O \leq 800mA$                          | -3%          | -            | 3%   |
|                                       |                                                    | AP6015-3.3V                                                                  | $V_I=3.6V$ to $5.5V$ ;<br>$0mA \leq I_O \leq 800mA$ | -3%          | -            | 4%   |
|                                       |                                                    |                                                                              | $10mA \leq I_O \leq 800mA$                          | -3%          | -            | 3%   |
|                                       | Line regulation                                    | $V_I=V_O + 0.5V$ (min.2V) to 6.0V; $I_O=10mA$                                | 0.3                                                 |              |              | %/V  |
|                                       | Load regulation                                    | $V_I=5.0V$ ;<br>$I_O=10mA$ to 800mA                                          | 0.8                                                 |              |              | %    |
| $\eta$                                | Efficiency                                         | $V_I=5V$ ; $V_O=3.3V$ ; $I_O=300mA$<br>$V_I=3.6V$ ; $V_O=2.5V$ ; $I_O=200mA$ | 94                                                  |              |              | %    |
|                                       | Start-up time                                      | $I_O=0mA$ , time from active EN to $V_O$                                     | 0.4                                                 | 1            | 4            | ms   |
| $\theta_{JA}$                         | Thermal Resistance Junction-to-Ambient             | MSOP-10L (Note 7)                                                            |                                                     | 161          |              | °C/W |
| $\theta_{JC}$                         | Thermal Resistance Junction-to-Case                | MSOP-10L (Note 7)                                                            |                                                     | 39           |              | °C/W |


- Notes: 5. Power good is not valid for the first 100μs after EN goes high. Please refer to the application section for more information.  
6. The output voltage accuracy includes line and load regulation over the full temperature range.  
7. Test condition for MSOP-10L: Device mounted on 2oz copper, minimum recommended pad layout on top & bottom layer with thermal vias, double sided FR-4 PCB

## Typical Application Circuit

For best transient response we suggest that  $R_{CC}$ ,  $C_{CC}$  and  $L1$  values as below.

|                                          | $R_{CC}$      | $C_{CC}$ | L1-WURTH    | C1, C2 (MLCC) |
|------------------------------------------|---------------|----------|-------------|---------------|
| $V_{IN} < 3.0V$ , $V_{OUT} < 2.5V$       | 200K $\Omega$ | 33PF     | 1.8 $\mu$ H | 10 $\mu$ F    |
| $V_{IN} \geq 3.0V$ , $V_{OUT} < 2.5V$    | 68K $\Omega$  | 100PF    | 1.8 $\mu$ H | 10 $\mu$ F    |
| $V_{IN} \geq 3.0V$ , $V_{OUT} \geq 2.5V$ | 82K $\Omega$  | 100PF    | 3.3 $\mu$ H | 10 $\mu$ F    |

### (1) ADJ Output

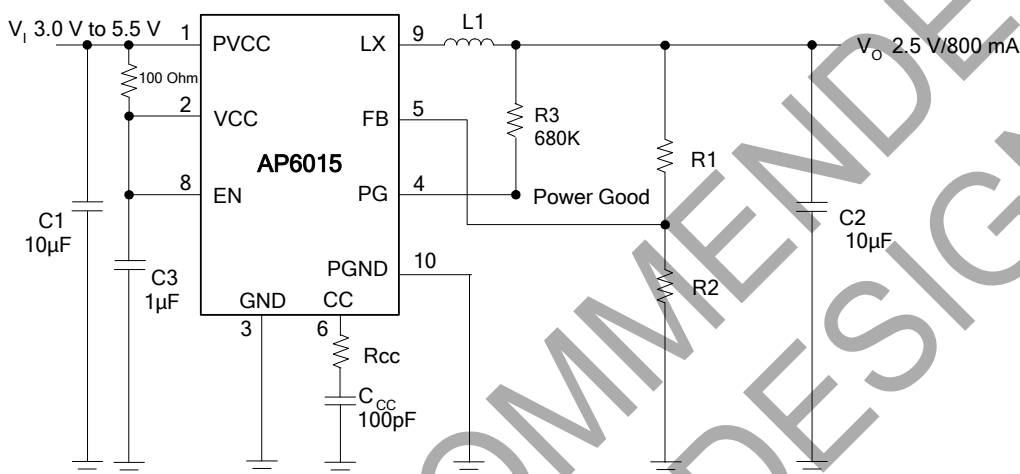


R2: Suggest to be 39K~100K because of stability reasons.

$$V_O = V_{REF} \times \left(1 + \frac{R_1}{R_2}\right)$$

### Typical Application Circuit for Adjustable Output Voltage Option

### (2) FIXED Output

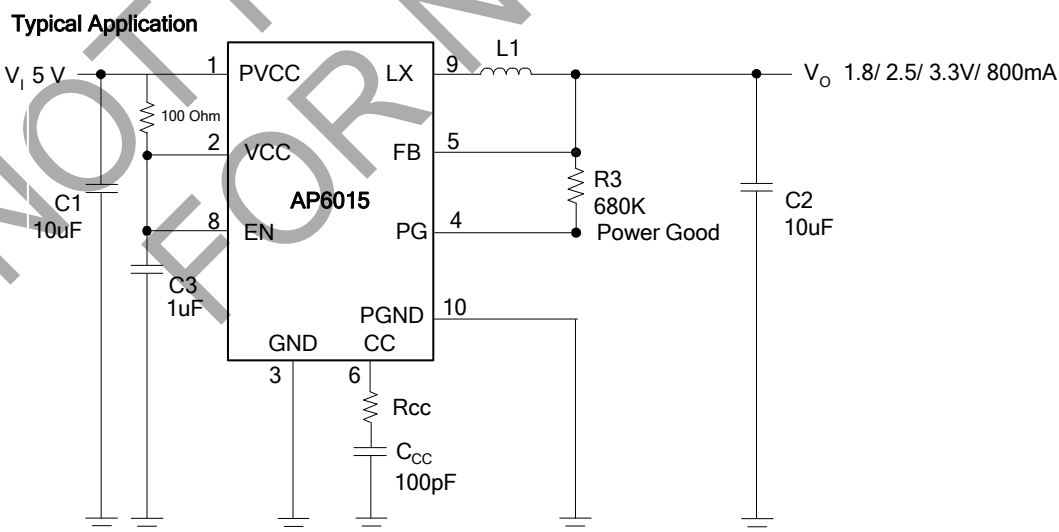

Standard 5 V to 1.8/ 2.5/ 3.3V/ 800mA Conversion; High Efficiency

## Typical Operating Characteristics

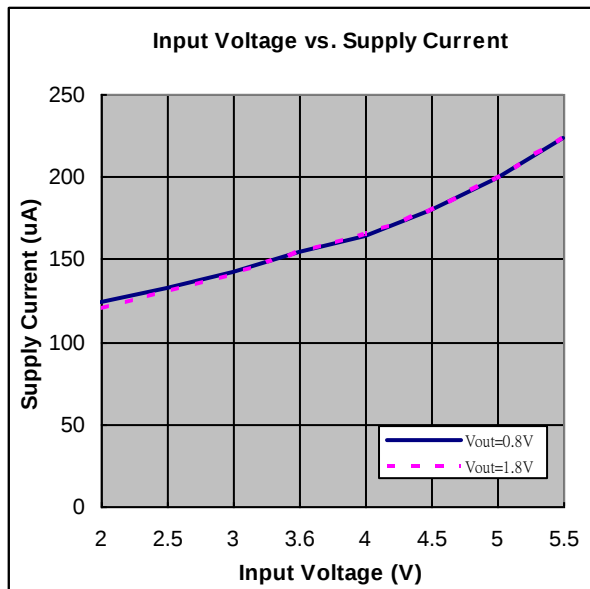


Figure 1

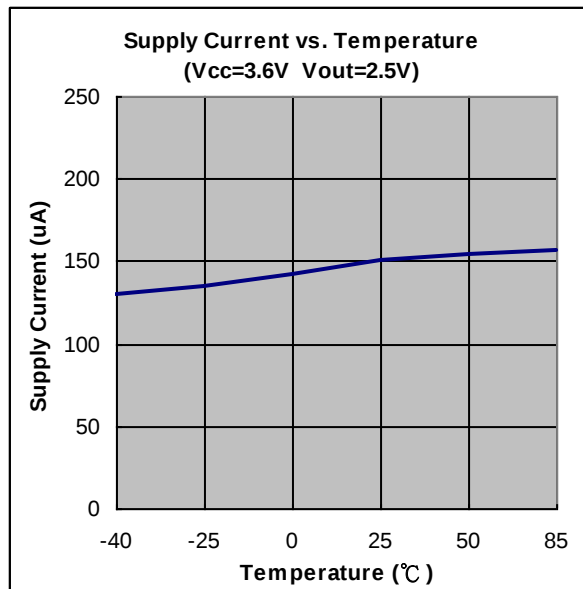


Figure 2

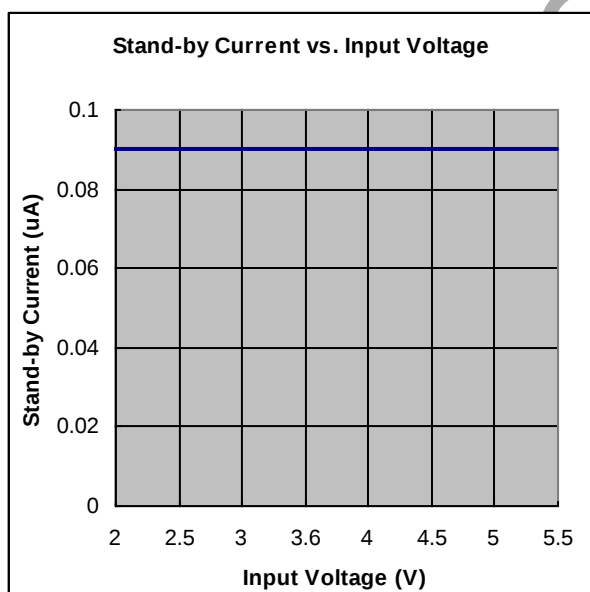


Figure 3

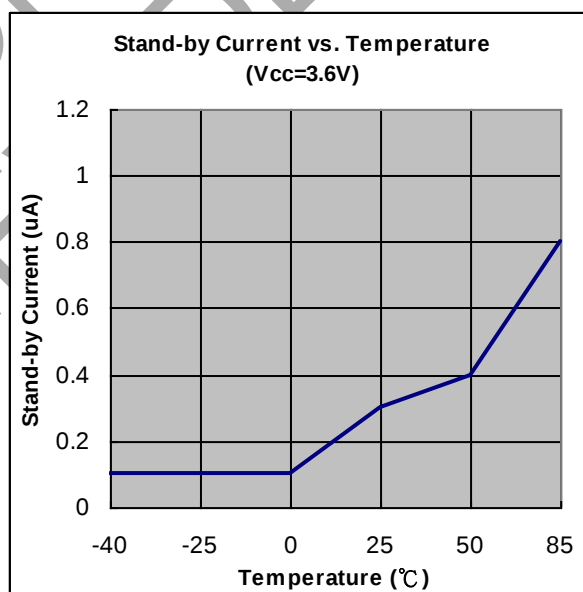


Figure 4

## Typical Operating Characteristics (Continued)

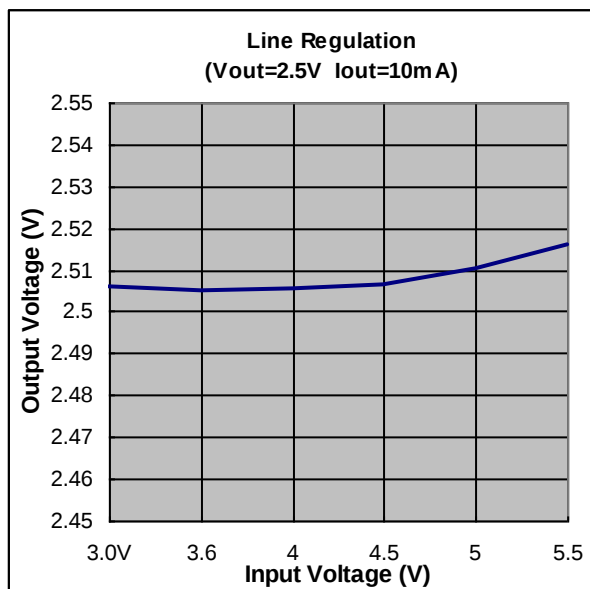


Figure 5

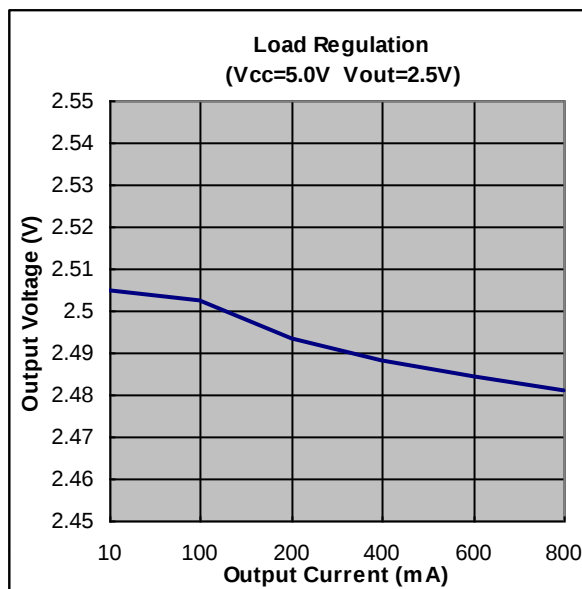


Figure 6

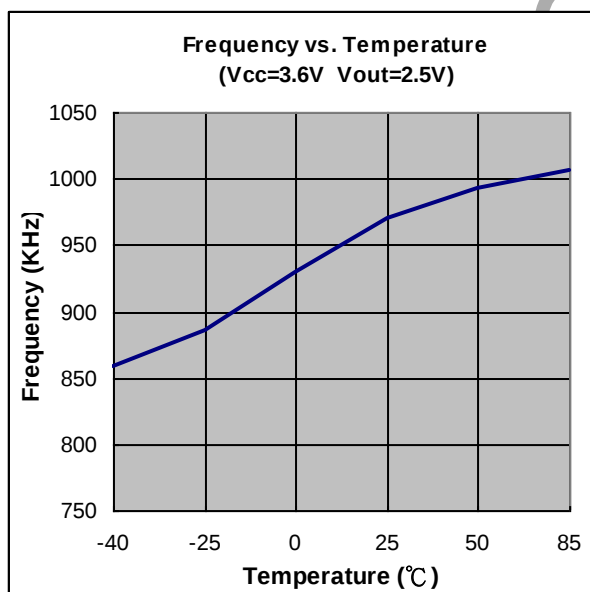


Figure 7

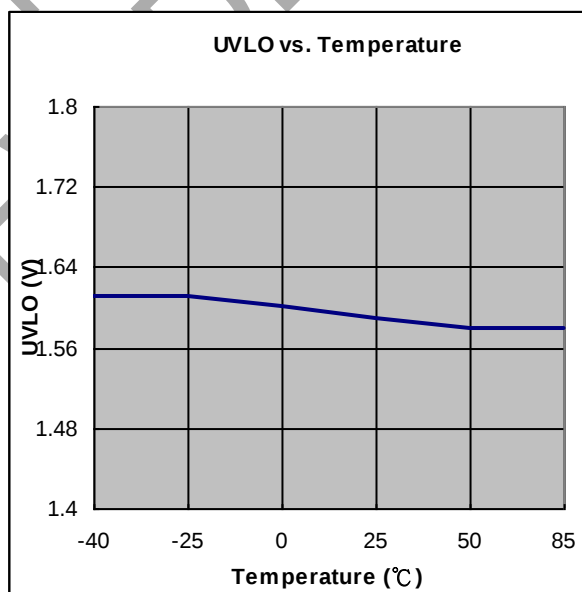


Figure 8

## Typical Operating Characteristics (Continued)

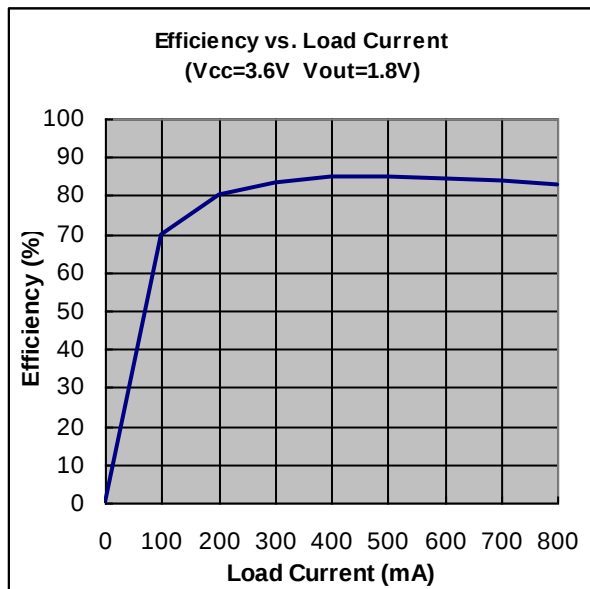


Figure 9

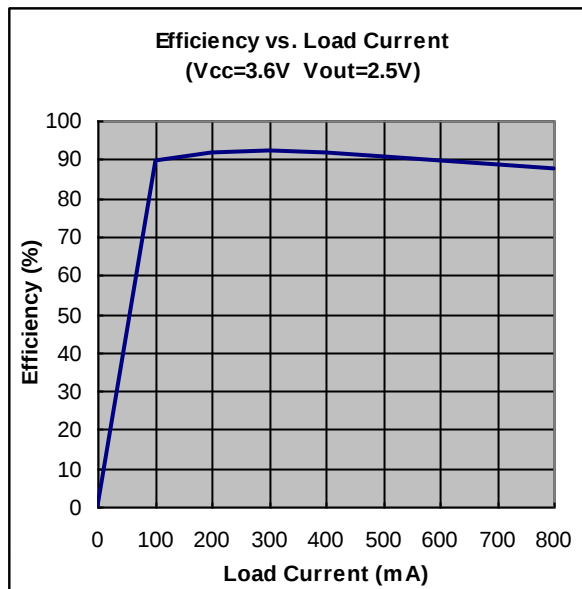


Figure 10

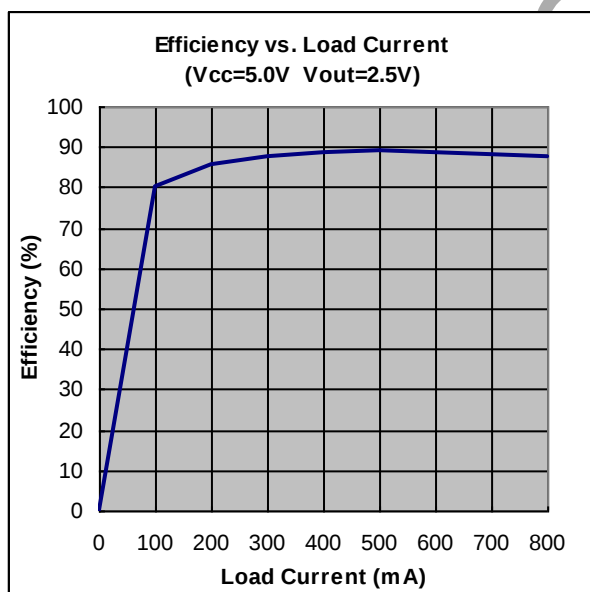


Figure 11

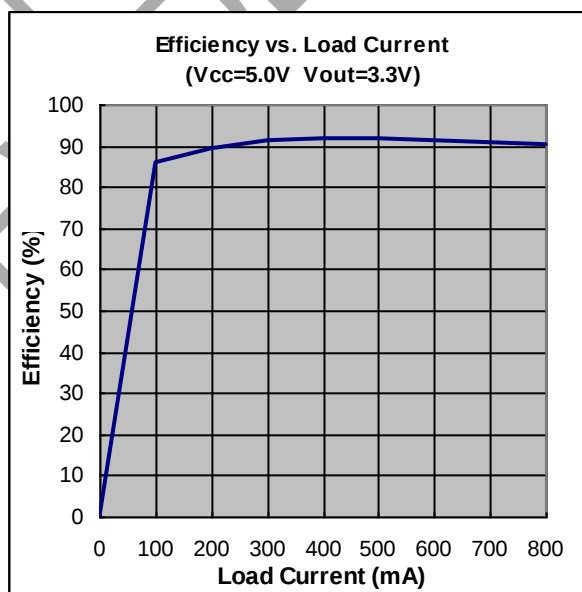


Figure 12

## Typical Operating Characteristics (Continued)

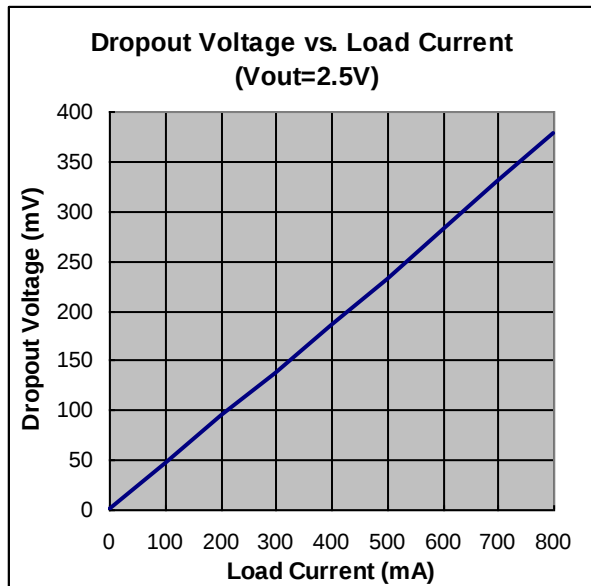


Figure 13

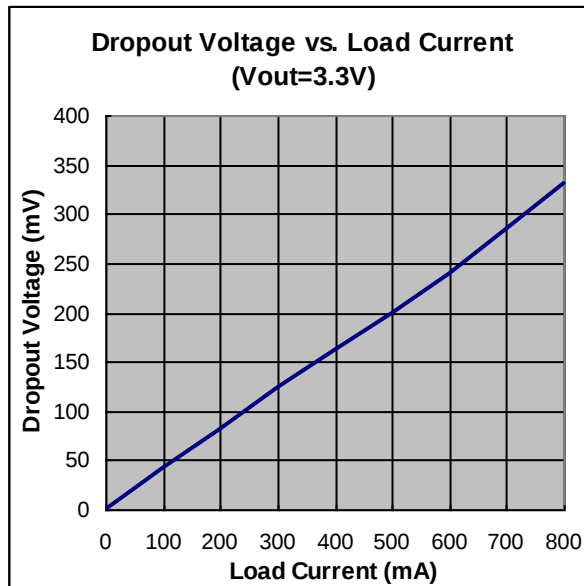


Figure 14

### Output Ripple

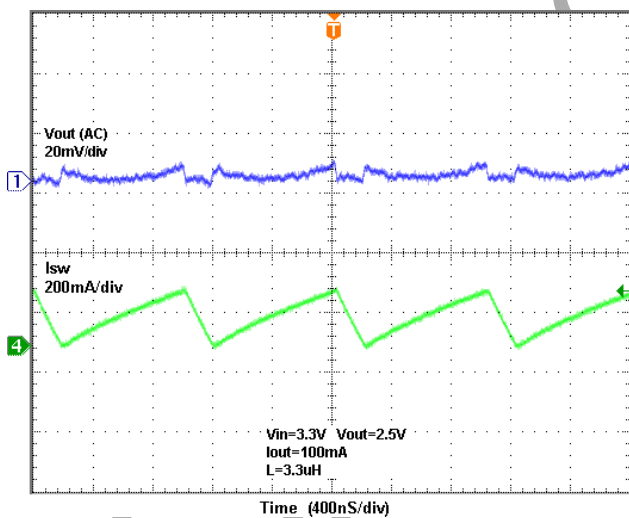


Figure 15

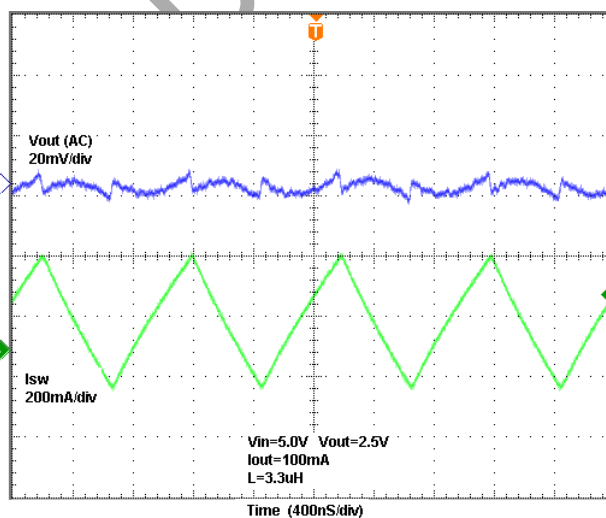


Figure 16

Typical Operating Characteristics (Continued)

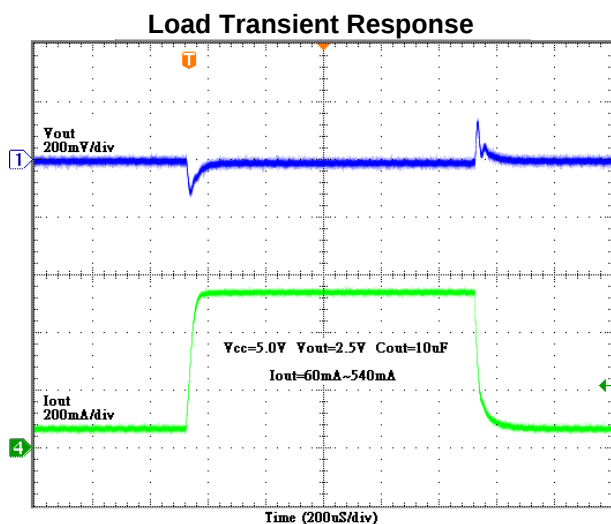


Figure 17

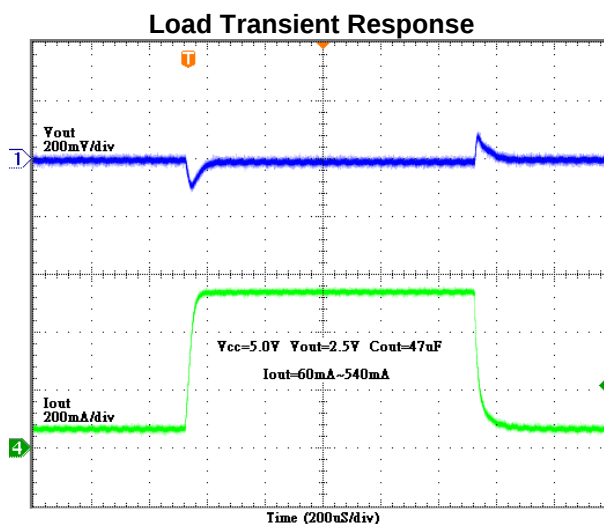


Figure 18

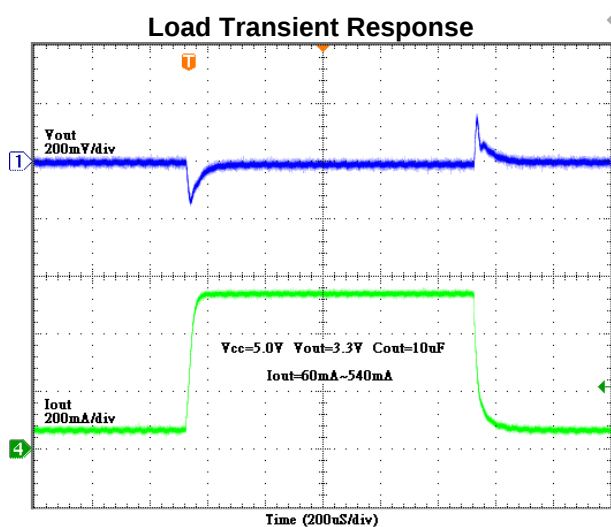


Figure 19

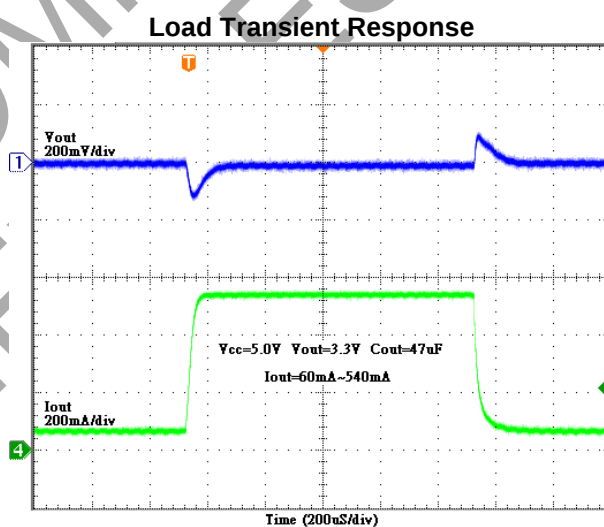


Figure 20


## Application Information

### ■ Enable (EN)

When EN is on logic low, the AP6015 goes into shutdown mode. In shutdown, all other functions are turned off. The supply current is reduced to 1uA (Typ.).


### ■ Soft Start

As the enable pin goes high, the soft-start function generates an internal voltage ramp. This causes the start-up current to slowly raise preventing output voltage overshoot and high inrush currents. The soft-start duration is typical 1mSec.

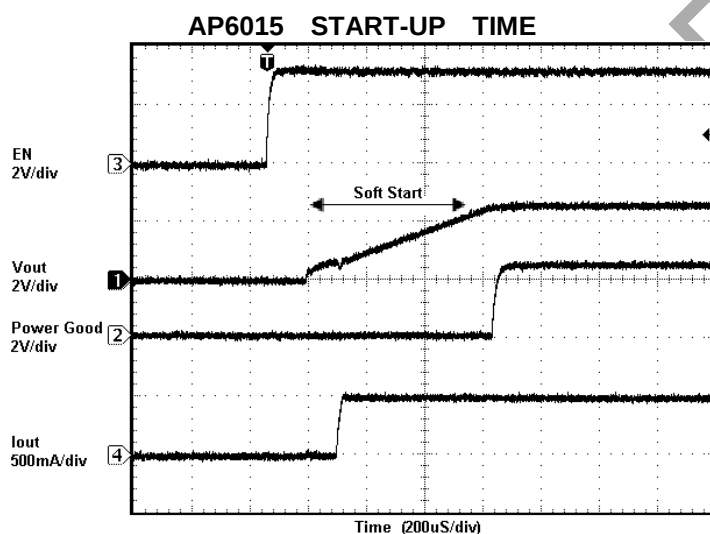


### ■ Under Voltage Lock Out (UVLO)

The UVLO prevents the converter from turning on when the voltage on  $V_{CC}$  is less than typically 1.6V.

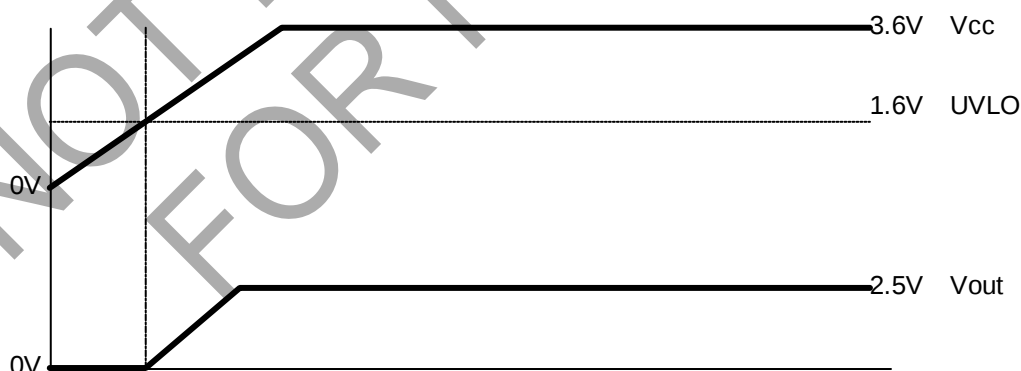


## Application Information (Continued)

### ■ Power Good (PG)

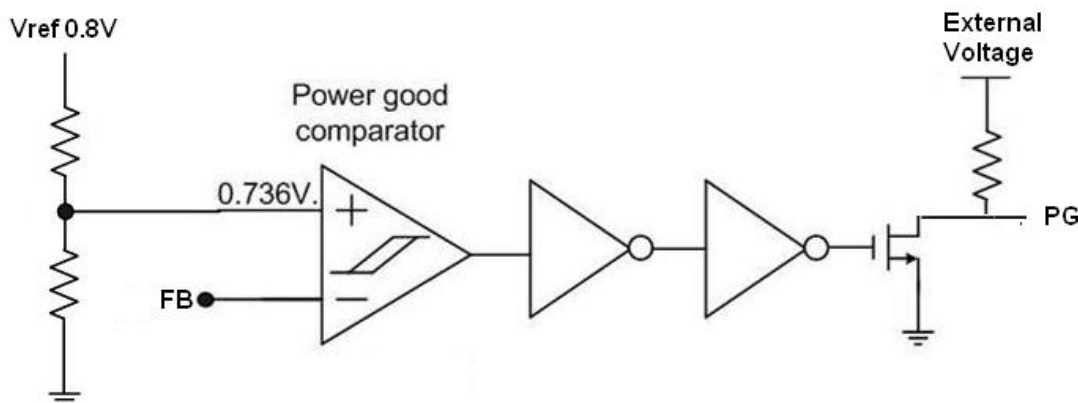

The PG comparator has an open drain output capable of sinking typically 10mA. The PG is only active when the AP6015 is enable (EN=high). When the AP6015 is disable (EN=low), the PG pin is high impedance. If the PG pin is connected to the output of the AP6015 with a pull-up resistor, no initial spike occurs and precautions have to be taken during start-up.

The PG pin becomes active high when the output voltage exceeds typically 92% of its nominal value. Leave the PG pin unconnected when not used.

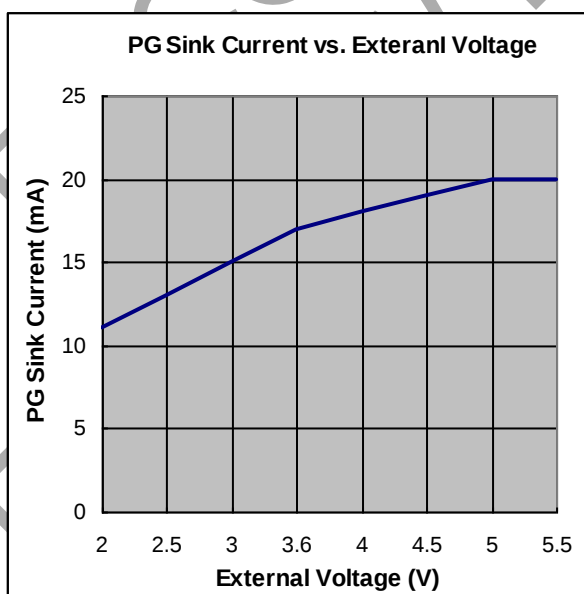

## Application Information (Continued)

### Inductor Selection

In order to avoid saturation of the inductor, the inductor should be rated at least for the maximum output current plus the inductor ripple current which is calculated as:

$$\Delta I_L = V_O \times \frac{1 - \left(\frac{V_O}{V_{CC}}\right)}{L \times f} \quad I_{L(MAX)} = I_{O(MAX)} + \frac{\Delta I_L}{2}$$


Where:

f = Switching frequency (1MHz typical)

L = Inductor value

$\Delta I_L$  = Peak-to-peak inductor ripple current

$I_L(max)$  = Maximum inductor current

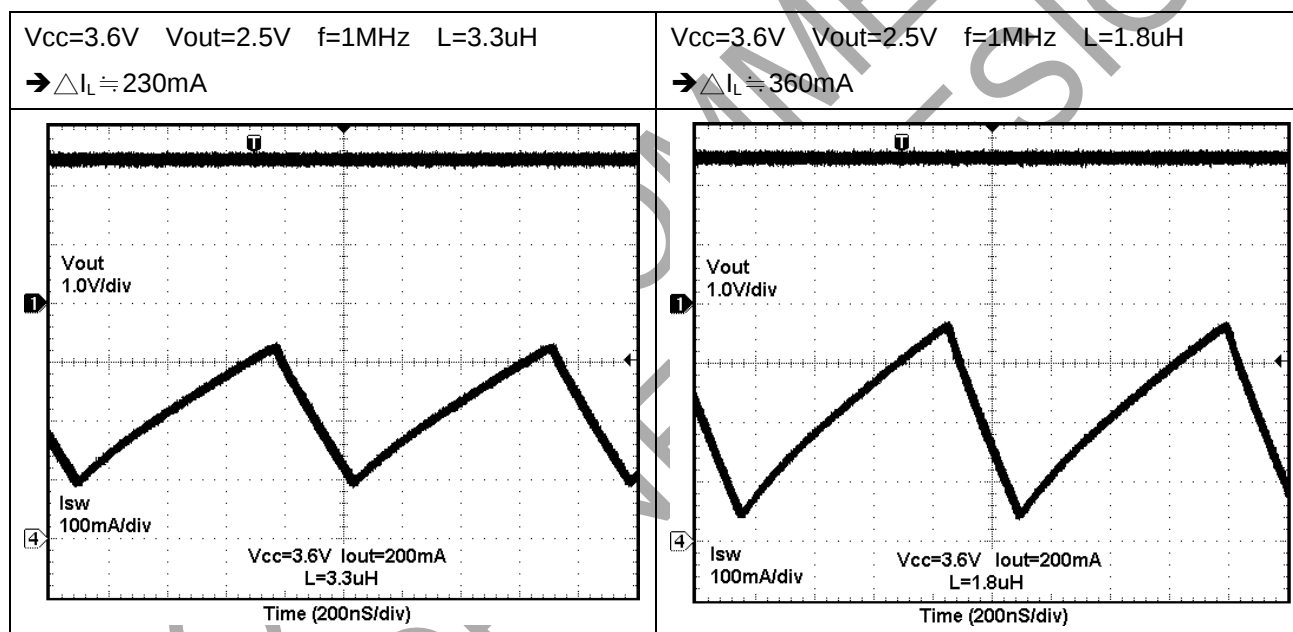

## Application Information (Continued)

### Input Capacitor Selection

Though there is no special requirement for the ESR (Equivalent Series Resistance) of the input capacitor, due attention should be paid to the tolerance and temperature coefficient of the capacitor used. A 10uF or larger capacitance is required between the PVCC and the GND pins. The input capacitor should be placed as close as possible to the PVCC pin in order to achieve good overall system performance.

### Output Capacitor Selection

Ripple at the voltage output pin is caused by the charge-and-discharge of the output capacitor. For the best performance, a low ESR output capacitor should be used. The equation below demonstrates how the size of the ripple can be calculated.

$$\Delta V_o = V_o \times \frac{1 - \left(\frac{V_o}{V_{CC}}\right)}{L \times f} \times \left(\frac{1}{8 \times C_o \times f} + ESR\right) = \Delta I_L \times \left(\frac{1}{8 \times C_o \times f} + ESR\right)$$


Where:

$\Delta V_o$  = Output voltage ripple

L = Inductor value

f = Switching frequency (1MHz typical)


$\Delta I_L$  = Peak-to-peak inductor ripple current

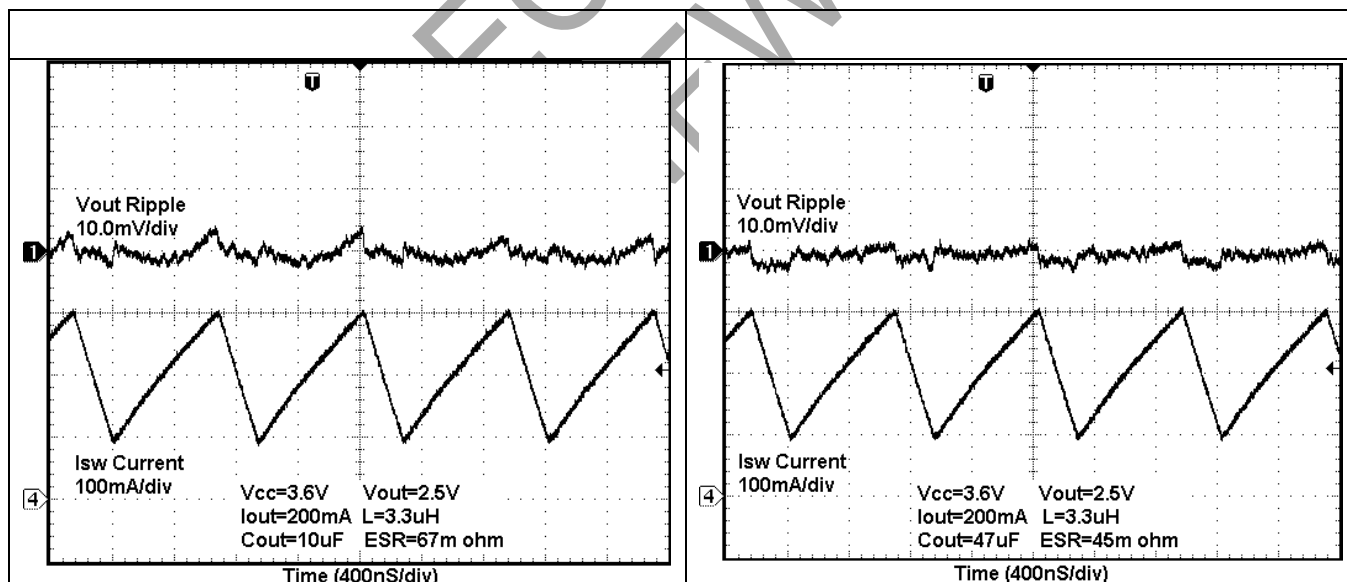

## Application Information (Continued)


### Layout Considerations

A good board layout practice can significantly improve the stability of the application circuit and reduce the system noise. The feedback path must be as short as possible. The input capacitor and bypass capacitor must be placed close to the PVCC and the VCC pins for optimal performance. It is recommended that the ground planes for System Ground / Power Ground / Analog Ground are isolated from each others, while they should all be joined together at a common point. An example drawing of a circuit with good ground noise performance is shown below.

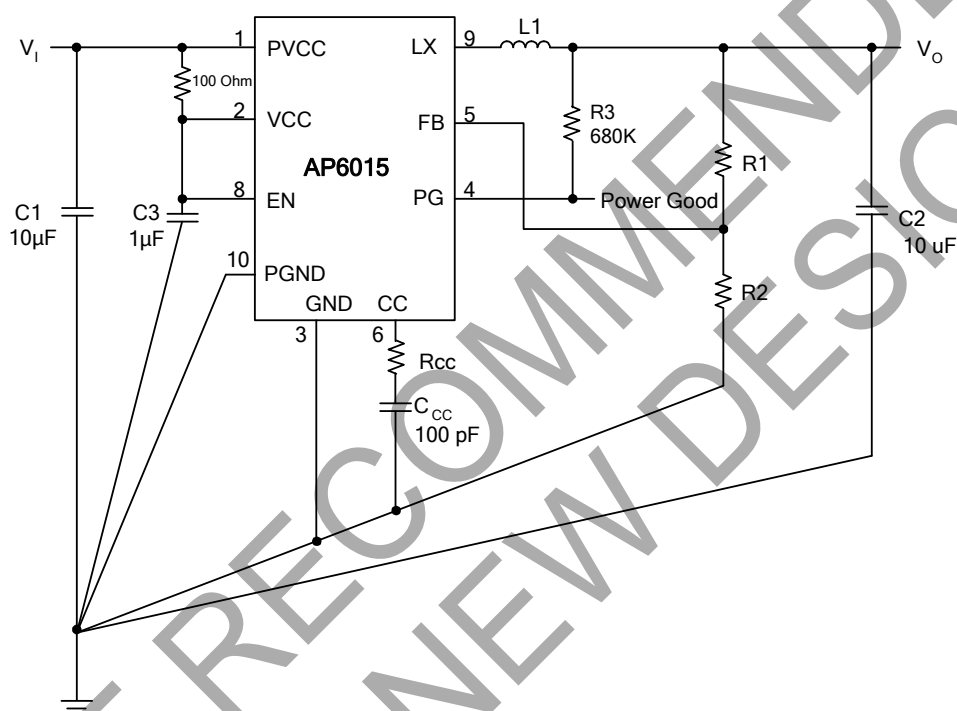


The external inductor must be placed as close as possible to the switching node, i.e. the LX pin. The copper traces on the pcb, where high peak switching current may flow through, should be kept 'wide' and 'short'. This results in low inductance and capacitance in the current path, hence ground shift problem is avoided and system stability stay within bound.

## Marking Information

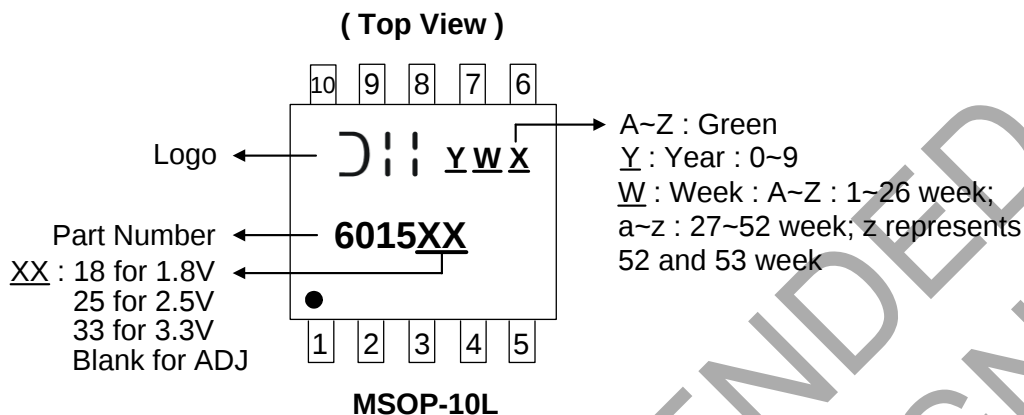

## Package Information (All Dimensions in mm)

### (1) Package type: MSOP-10L

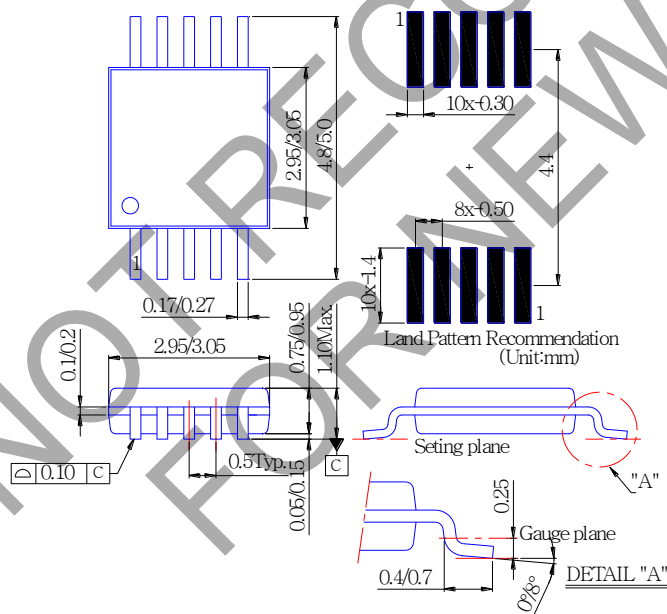

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

NOT RECOMMENDED  
FOR NEW DESIGN