

LA73076V

Recommended Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended Operating supply voltage	V _{CC} STD		3.1	V
Operating supply voltage range	V _{CC} RANGE		2.7 to 3.6	V

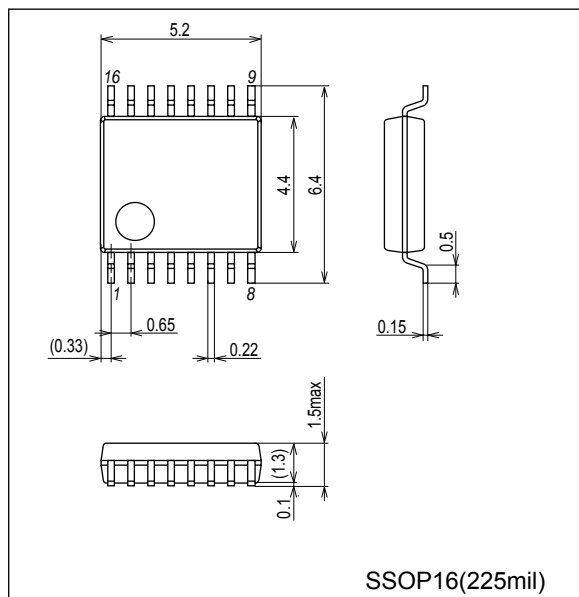
Electrical Characteristics at Ta = 25°C, V_{CC} = 3.1V

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current dissipation part						
Current dissipation 1 (Non-signal active mode)	I _{CC}	2pin = Low, Input = White50%	25	37	44	mA
Current dissipation 2 (Non-signal active mode)	I _{CC} 2	2pin = Low, Input = No signal	10.0	14	17.5	mA
Current dissipation 3 (Standby mode)	I _{CC} -STBY	2pin = High		0	5.0	μA
Control terminal part						
Stand-by control pin H voltage (SET = STANDBY MODE)	V _{TH} -STBY-H	2 pin voltage range at which I _{CC} ≤ 5μA	V _{CC} -0.5		V _{CC}	V
Stand-by control pin L voltage (SET = ACTIVE MODE)	V _{TH} -STBY-L	2 pin voltage range at which I _{CC} ≥ 5μA	GND		0.5	V
Output control pin H voltage range (SET=MIX_OUT)	V _{OUT} _M	Voltage in which only output of MIX is selected	2.2		V _{CC}	V
Output control pin M voltage range (SET=Y,C_OUT)	V _{OUT} _YC	Voltage in which output of Y and C is selected	1.5		1.7	V
Output control pin L voltage range (SET=ALL_OUT)	V _{OUT} _ALL	Voltage in which all outputs are selected	GND		0.5	V
SW, MUTE control pin voltage range (SET=MUTE MODE)	V _{SW} _MUTE	As for this voltage, SW selects MUTE	V _{CC} -0.5		V _{CC}	V
SW, through control pin voltage range (SET=through MODE)	V _{SW} _THR	As for this voltage, SW selects through	GND		0.5	V
Y-in						
Voltage gain	V _{Gain} Y	100% white V _{YIN} = 1Vp-p	5.7	6.2	6.7	dB
Freq. characteristics	V _{f7.2} Y	f = 100kHz/7.2MHz	-1.0	0	+1.0	dB
	V _{f20} Y	f = 100kHz/20MHz			-30	dB
Allowable sync input level	V _{IN} -Sync	V _{YIN} = Black burst, Output R conditions Mix_out: 150Ω, Y_out: 150Ω	200			mVp-p
C-in						
Voltage gain	V _{gain} c	V _{CIN} = 350mVp-p	5.7	6.2	6.7	dB
Freq. characteristics	V _{f20} C	f = 4MHz/20MHz			-25	dB

Package Dimensions

unit : mm (typ)

3178B

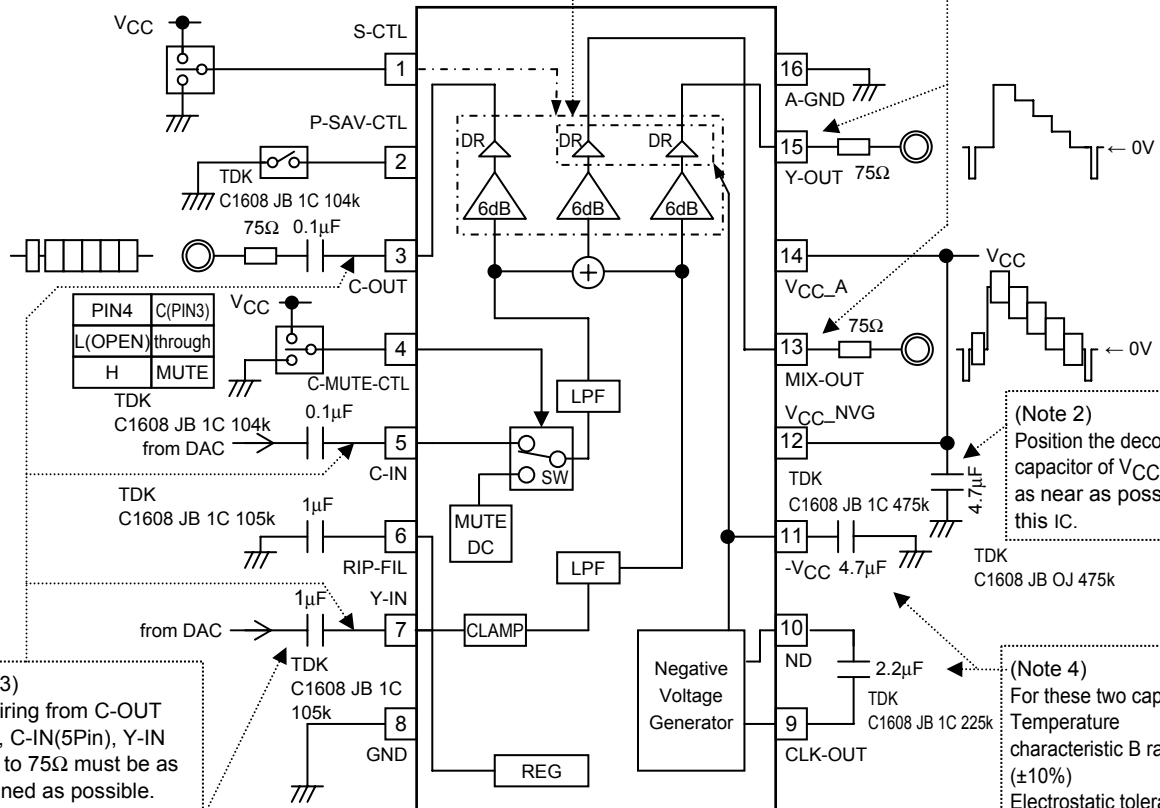


Pin Assignment, Pin Function Diagram and Block Diagram

Control		OUT		
PIN2	PIN1	MIX	Y	C
L	L(GND)	○	○	○
	M(OPEN)	×	○	○
	H	○	×	×
H(OPEN)	*	×	×	×

☆ Active
(Input signal)
Signal → ON
No signal → OFF
☆ Standby → OFF

(Note 1)
The wiring from MIX-OUT(13Pin),
Y_OUT(Pin15) to 75Ω must be as
shortened as possible.



(Note 3)
The wiring from C-OUT
(3Pin), C-IN(5Pin), Y-IN
(7Pin) to 75Ω must be as
shortened as possible.

(Note 5)
Use the input capacity value within a range of
0.1μF to 1μF while checking the sag
condition of the output waveform.

(Note 2)
Position the decoupling
capacitor of V_{CC}-GND
as near as possible to
this IC.

(Note 4)
For these two capacitors;
Temperature
characteristic B rank
(±10%)
Electrostatic tolerance
K rank(±10%)
and Withstand voltage
of 6.3V or more are
recommended.

(Note 6)

As the minus power supply in this IC generates the clock for charge pump power supply by extracting the sink component of the input video signal (synchronous isolation) and by detecting its fall, the portion around the V-synchronization of this IC output may be reduced when the pseudo V signal without cut-in pulse is inserted as in the case of certain analog VCR special play (search). On the contrary, there is no problem when the pseudo V signal has the cut-in pulse. Pay due attention on this fact during use.


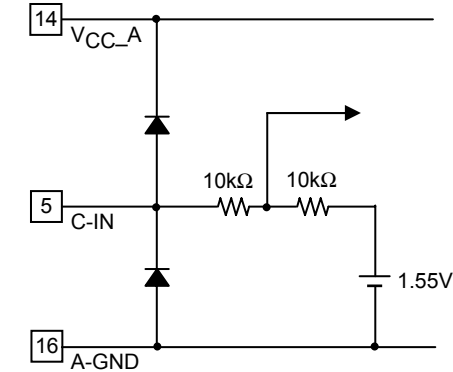
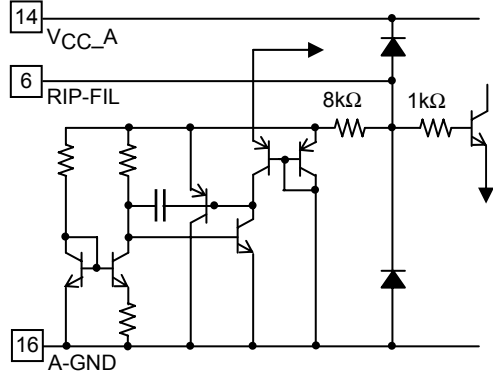
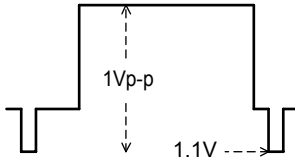
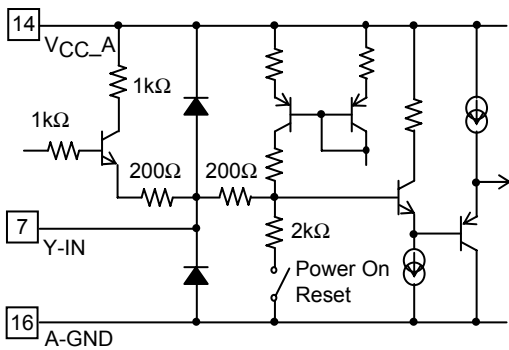
Pin Functions

Pin No	Symbol	Voltage	Description	Equivalent Circuit																														
1	S-CTL	V_{CC} or OPEN or 0V	Output select pin <table><tr><th colspan="2">Control of Pin1</th><th></th><th colspan="3">OUT</th></tr><tr><th></th><th></th><th></th><th>MIX</th><th>Y</th><th>C</th></tr><tr><td>L(GND)</td><td>0V to 0.5V</td><td>\Rightarrow</td><td>○</td><td>○</td><td>○</td></tr><tr><td>M(OPEN)</td><td>OPEN or 1.6V±0.1V</td><td>\Rightarrow</td><td>×</td><td>○</td><td>○</td></tr><tr><td>H(V_{CC})</td><td>2.2V to V_{CC}</td><td>\Rightarrow</td><td>○</td><td>×</td><td>×</td></tr></table>	Control of Pin1			OUT						MIX	Y	C	L(GND)	0V to 0.5V	\Rightarrow	○	○	○	M(OPEN)	OPEN or 1.6V±0.1V	\Rightarrow	×	○	○	H(V_{CC})	2.2V to V_{CC}	\Rightarrow	○	×	×	
Control of Pin1			OUT																															
			MIX	Y	C																													
L(GND)	0V to 0.5V	\Rightarrow	○	○	○																													
M(OPEN)	OPEN or 1.6V±0.1V	\Rightarrow	×	○	○																													
H(V_{CC})	2.2V to V_{CC}	\Rightarrow	○	×	×																													
2	P-SAV-CTL	V_{CC} or 0V	Power save mode select pin <table><tr><th colspan="2">Control of Pin2</th><th></th><th>Mode</th></tr><tr><td>L(GND)</td><td>0V to 0.5V</td><td>\Rightarrow</td><td>Active</td></tr><tr><td>H(V_{CC})</td><td>OPEN or $V_{CC} \pm 0.5V$</td><td>\Rightarrow</td><td>Standby</td></tr></table>	Control of Pin2			Mode	L(GND)	0V to 0.5V	\Rightarrow	Active	H(V_{CC})	OPEN or $V_{CC} \pm 0.5V$	\Rightarrow	Standby																			
Control of Pin2			Mode																															
L(GND)	0V to 0.5V	\Rightarrow	Active																															
H(V_{CC})	OPEN or $V_{CC} \pm 0.5V$	\Rightarrow	Standby																															
3	C-OUT	1.55V	Video output terminal (Push-pull output low-impedance) 																															
4	C-MUTE-CTL	V_{CC} or 0V	Mute select pin <table><tr><th colspan="2">Control of Pin</th><th></th><th>OUT</th></tr><tr><td>L(GND)</td><td>0V to 0.5V or OPEN</td><td>\Rightarrow</td><td>through</td></tr><tr><td>H(V_{CC})</td><td>$V_{CC} \pm 0.5V$</td><td>\Rightarrow</td><td>Pin4: H→MUTE</td></tr></table>	Control of Pin			OUT	L(GND)	0V to 0.5V or OPEN	\Rightarrow	through	H(V_{CC})	$V_{CC} \pm 0.5V$	\Rightarrow	Pin4: H→MUTE																			
Control of Pin			OUT																															
L(GND)	0V to 0.5V or OPEN	\Rightarrow	through																															
H(V_{CC})	$V_{CC} \pm 0.5V$	\Rightarrow	Pin4: H→MUTE																															

Continued on next page.

LA73076V

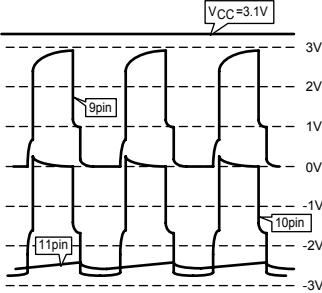
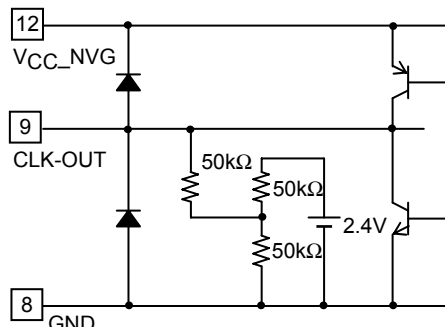
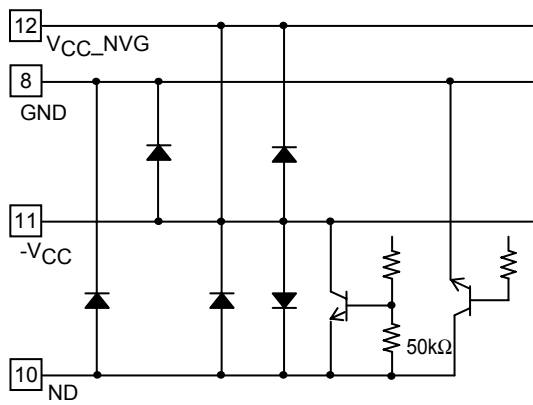
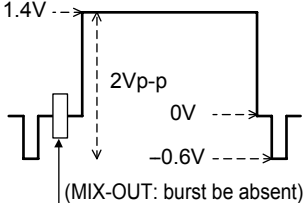
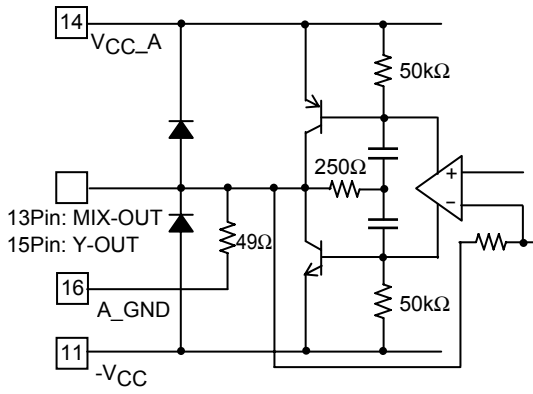
Continued from preceding page.

Pin No	Symbol	Voltage	Description	Equivalent Circuit
5	C-IN	1.55V	Video input terminal (Input high-impedance) 1.55V → 	
6	RIP-FIL	1.2V		
7	Y-IN	1.1V	Video input terminal (Sync-chip clamp (Input high-impedance)) 	
8	GND	0V		

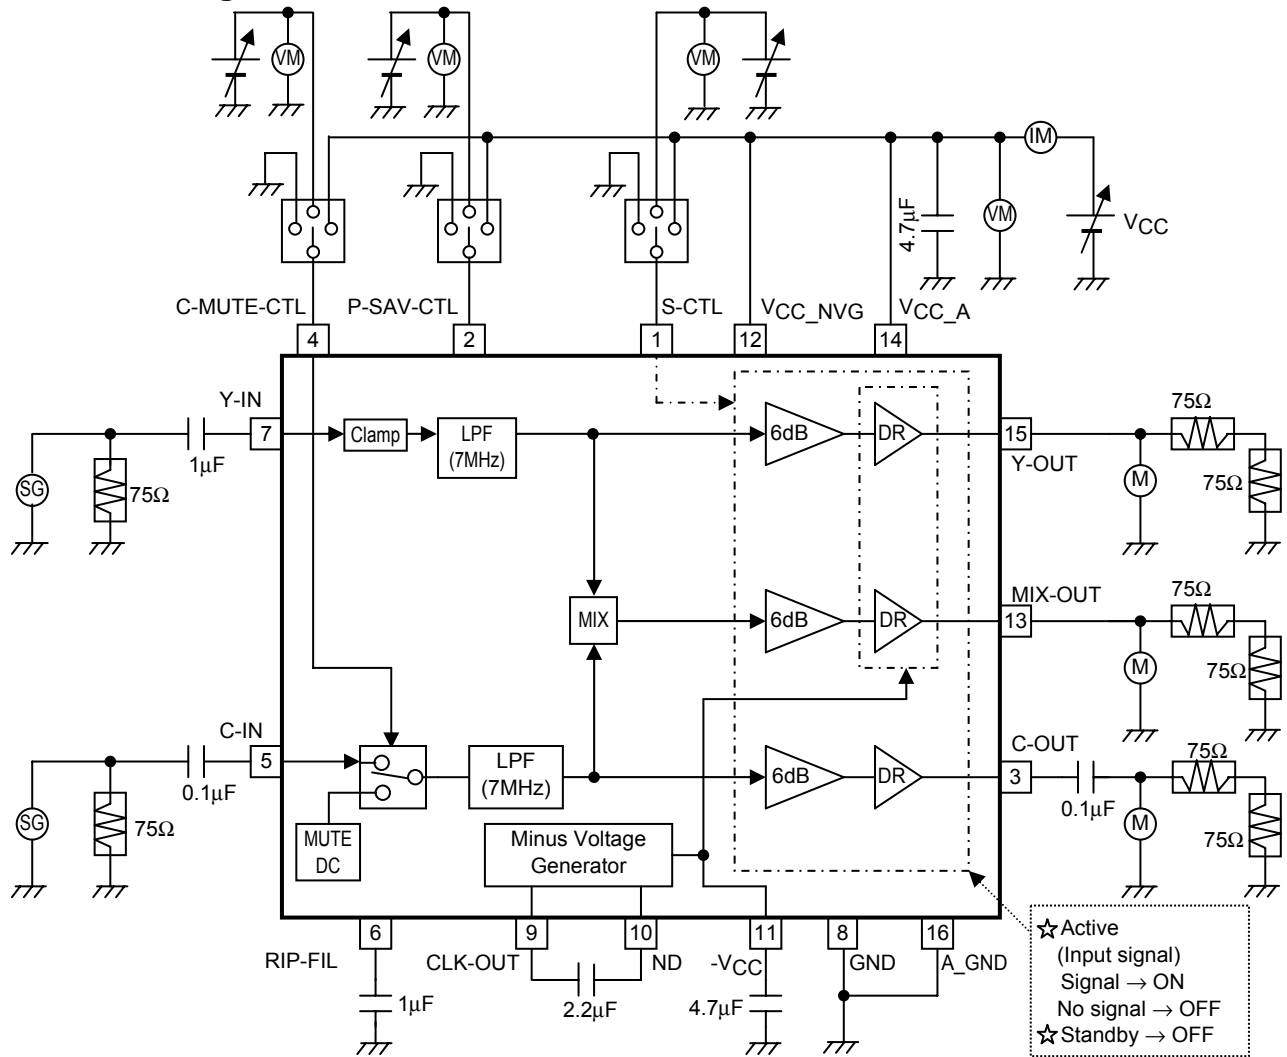
Continued on next page.

LA73076V

Continued from preceding page.

Pin No	Symbol	Voltage	Description	Equivalent Circuit
9	CLK-OUT	V_{CC} ↑↓ 0V	Pin 9: Clock output terminal 	
10	ND	+0.5V ↑↓ -2.5V (-V _{CC})	Pin 10: The terminal which transmits an electric charge Pin 11: -V _{CC}	
11	-V _{CC}	0V ↑↓ -2.2V (-V _{CC})		
12	V _{CC_NVG}	2.7V to 3.6V		
13	MIX-OUT	0V	Video output terminal (Push-pull output low-impedance) 	
15	Y-OUT			
14	V _{CC_A}	2.7V to 3.6V	Analog V _{CC}	
16	A-GND	0V	Analog GND	

Test Circuit Diagram



ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.