

Maximum Ratings

Supply Voltage to Ground Potential -0.5V to $V_{DD} + 0.5V$
 DC Input Voltage (Except REF) -0.5V to $V_{DD} + 0.5V$
 DC Input Voltage REF -0.5V to $V_{DD} + 0.5V$

Storage Temperature -65°C to +150°C
 Max. Soldering Temperature (10 sec.) 260°C
 Junction Temperature 150°C
 Static Discharge Voltage
 (per MIL-STD-883, Method 3015) > 2,000V

Operating Conditions

| Parameter | Description | Min. | Max. | Unit |
|----------------------|--|------|------|------|
| V_{DD} | Supply Voltage | 3.0 | 3.6 | V |
| T_A | Operating Temperature (Ambient Temperature) | -40 | 85 | °C |
| C_L | Load Capacitance | – | 25 | pF |
| C_{IN} | Input Capacitance | – | 7 | pF |
| BUF_IN, OUTPUT [1:4] | Operating Frequency | DC | 140 | MHz |
| t_{PU} | Power-up time for all V_{DD} 's to reach minimum specified voltage (power ramps must be monotonic) | 0.05 | 50 | ms |

Electrical Characteristics


| Parameter | Description | Test Conditions | Min. | Max. | Unit |
|-----------|------------------------------------|-------------------------------|------|------|------|
| V_{IL} | Input LOW Voltage ^[1] | | – | 0.8 | V |
| V_{IH} | Input HIGH Voltage ^[1] | | 2.0 | – | V |
| I_{IL} | Input LOW Current | $V_{IN} = 0V$ | –5 | 5 | μA |
| I_{IH} | Input HIGH Current | $V_{IN} = V_{DD}$ | –5 | 5 | μA |
| V_{OL} | Output LOW Voltage ^[2] | $I_{OL} = 24\text{ mA}$ | – | 0.8 | V |
| | | $I_{OL} = 12\text{ mA}$ | – | 0.55 | V |
| V_{OH} | Output HIGH Voltage ^[2] | $I_{OH} = -24\text{ mA}$ | 2.0 | – | V |
| | | $I_{OH} = -12\text{ mA}$ | 2.4 | – | V |
| I_{DD} | Supply Current | Unloaded outputs at 66.66 MHz | – | 25 | mA |

Switching Characteristics^[3] for Commercial and Industrial Temperature Devices

| Parameter | Name | Description | Min. | Typ. | Max. | Unit |
|-----------|--|--------------------------------|------|------|------|------|
| | Duty Cycle ^[2] = $t_2 \div t_1$ | Measured at 1.5V | 40.0 | 50.0 | 60.0 | % |
| t_3 | Rise Time ^[2] | Measured between 0.8V and 2.0V | – | – | 1.50 | ns |
| t_4 | Fall Time ^[2] | Measured between 0.8V and 2.0V | – | – | 1.50 | ns |
| t_5 | Output to Output Skew ^[2] | All outputs equally loaded | – | 60 | 100 | ps |
| t_6 | Propagation Delay, BUF_IN Rising Edge to OUTPUT Rising Edge ^[2] | Measured at $V_{DD}/2$ | 2.5 | 3.5 | 5 | ns |

Switching Waveforms

Duty Cycle Timing

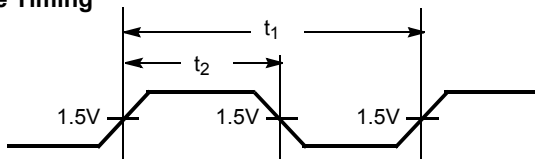


Notes:


1. BUF_IN input has a threshold voltage of $V_{DD}/2$.
2. Parameter is guaranteed by design and characterization. It is not 100% tested in production.
3. All parameters specified with loaded outputs.

Switching Waveforms (continued)


All Outputs Rise/Fall Time

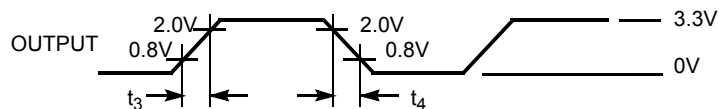

Output-Output Skew

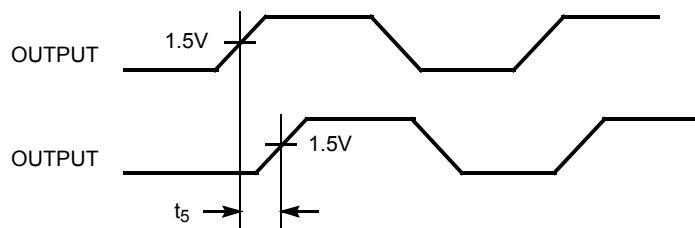

Input-Output Propagation Delay

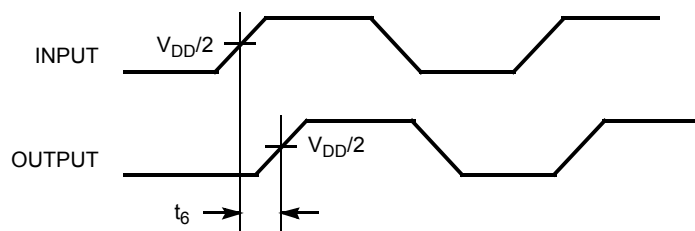


Ordering Information

| Ordering Code | Package Type | Operating Range |
|------------------|-----------------------------|---------------------------|
| Standard | | |
| CY2304NZZC-1 | 8-pin TSSOP | Commercial, 0°C to 70°C |
| CY2304NZZC-1T | 8-pin TSSOP – Tape and Reel | Commercial, 0°C to 70°C |
| CY2304NZZI-1 | 8-pin TSSOP | Industrial, -40°C to 85°C |
| CY2304NZZI-1T | 8-pin TSSOP – Tape and Reel | Industrial, -40°C to 85°C |
| Lead-free | | |
| CY2304NZZXC-1 | 8-pin TSSOP | Commercial, 0°C to 70°C |
| CY2304NZZXC-1T | 8-pin TSSOP – Tape and Reel | Commercial, 0°C to 70°C |
| CY2304NZZXI-1 | 8-pin TSSOP | Industrial, -40°C to 85°C |
| CY2304NZZXI-1T | 8-pin TSSOP – Tape and Reel | Industrial, -40°C to 85°C |

Package Diagram

8-Lead Thin Shrunk Small Outline Package (4.40 MM Body) Z8

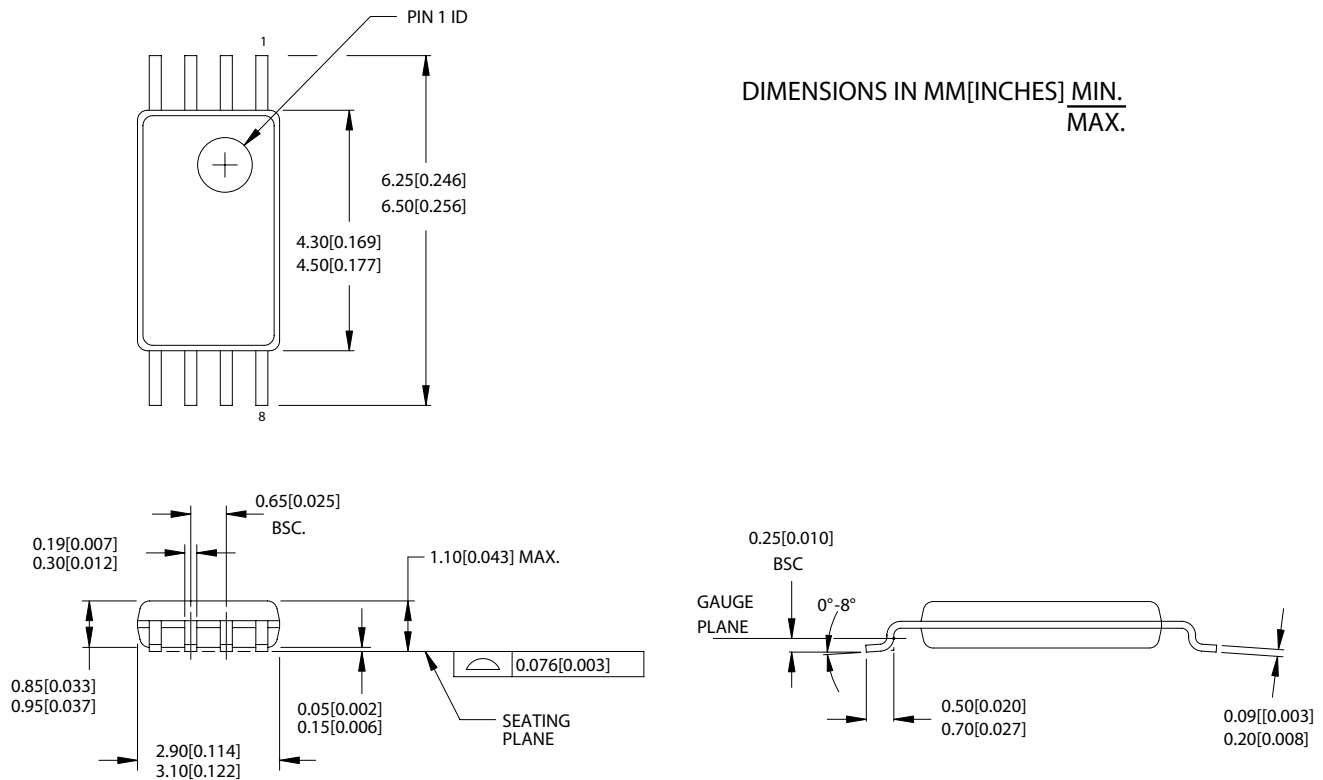

51-85093-A

All product and company names mentioned in this document are the trademarks of their respective holders.

Document History Page

| Document Title: CY2304NZ Four Output PCI-X and General Purpose Buffer Document Number: 38-07099 | | | | |
|--|---------|------------|-----------------|---|
| REV. | ECN NO. | Issue Date | Orig. of Change | Description of Change |
| ** | 111420 | 02/12/02 | IKA | New data sheet |
| *A | 118610 | 09/25/02 | HWT | Added Industrial Temperature Range in the Ordering Information |
| *B | 121820 | 12/14/02 | RBI | Power-up requirements added to Operating Conditions Information |
| *C | 291098 | See ECN | RGL | Added Lead-free Devices Specified typical value for output-output skew |