



Technical Data Sheet -Preliminary


Top View LEDs


67-21/R6C-FS1U1B/2T


Package Dimensions

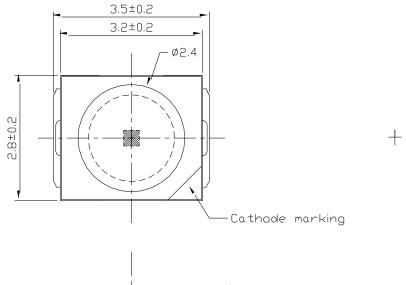












Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 2

Page: 2 of 10

Device No.: DSE-0004388

Prepared date:26-Oct.-2010

Prepared by: Irene Lin



Technical Data Sheet -Preliminary

Top View LEDs

67-21/R6C-FS1U1B/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	I F	50	mA	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA	
Power Dissipation	Pd	120	mW	
Electrostatic Discharge(HBM)	ESD	2000	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~+90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Electro-Optical Characteristics (Ta=25 C)						
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	180		565	mcd	I _F =20mA
Viewing Angle	$2\theta_{1/2}$		120		deg	I _F =20mA
Peak Wavelength	λр		632		nm	I _F =20mA
Dominant Wavelength	λd	621		631	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	I _F =20mA
Forward Voltage	V_{F}	1.75		2.35	V	I _F =20mA
Reverse Current	I_R			10	μΑ	V _R =5V

Notes:

1.Tolerance of Luminous Intensity: ±11%

2.Tolerance of Dominant Wavelength: ±1nm

3.Tolerance of Forward Voltage: ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 10

Device No.: DSE-0004388 Prepared date:26-Oct.-2010 Prepared by: Irene Lin

Downloaded from Arrow.com.



Technical Data Sheet -Preliminary

Top View LEDs

67-21/R6C-FS1U1B/2T

Bin Rang of Luminous Intensity

Bin	Min	Max	Unit	Condition
S1	180	225		
S2	225	285		
T1	285	360	mcd	I _F =20mA
T2	360	450		
U1	450	565		

Bin Range of Dominant Wavelength

Group	Bin Code	Min.	Max.	Unit	Condition
F	FF1	621	626	nm	I _F =20mA
F	FF2	626	631	nm	

Bin Rang of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
	0	1.75	1.95	V		
В	1	1.95	2.15		I _F =20mA	
	2	2.15	2.35			

Notes:

1. Tolerance of Luminous Intensity: $\pm 11\%$

2. Tolerance of Dominant Wavelength: $\pm 1 \text{nm}$

3. Tolerance of Forward Voltage: $\pm 0.1 V$


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 4 of 10





Technical Data Sheet -Preliminary Top View LEDs


67-21/R6C-FS1U1B/2T


Typical Electro-Optical Characteristics Curves














Page: 5 of 10

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2



Technical Data Sheet -Preliminary

Top View LEDs


67-21/R6C-FS1U1B/2T

Label Explanation

CAT: Luminous Intensity Rank HUE: Dom. Wavelength Rank REF: Forward Voltage Rank



Reel Dimensions

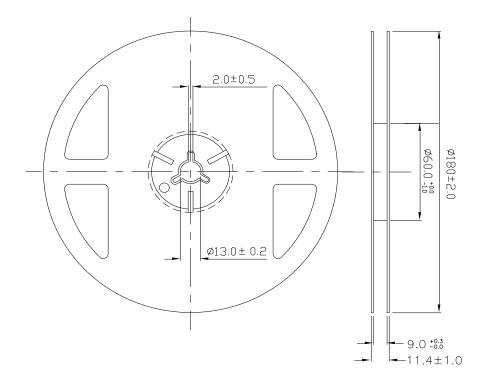

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 6 of 10



Technical Data Sheet -Preliminary Top View LEDs


67-21/R6C-FS1U1B/2T

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel.

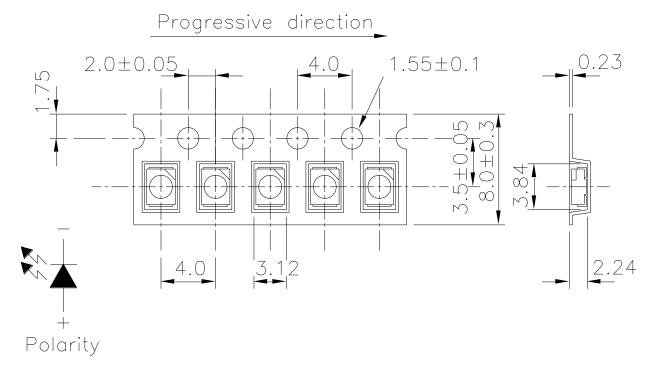

Note: The tolerances unless mentioned is ± 0.1 mm Unit = mm

Moisture Resistant Packaging

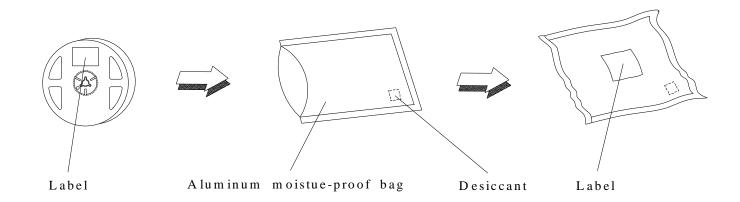

Everlight Electronics Co., Ltd.

http://www.everlight.com

_ .. .

Rev. 2

Page: 7 of 10

Device No.: DSE-0004388

Prepared date:26-Oct.-2010

Prepared by: Irene Lin



Technical Data Sheet -Preliminary Top View LEDs

67-21/R6C-FS1U1B/2T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 10 sec.	6 Min.	22 PCS	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40° C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA} / 25^{\circ}\text{C}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 10



Technical Data Sheet -Preliminary

Top View LEDs


67-21/R6C-FS1U1B/2T

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 168 hours under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60±5℃ for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

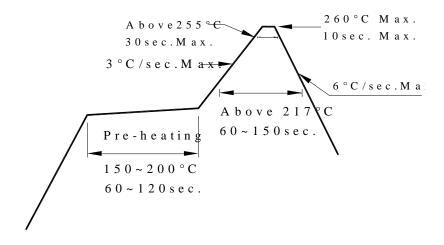

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 10



Technical Data Sheet -Preliminary

Top View LEDs


67-21/R6C-FS1U1B/2T

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

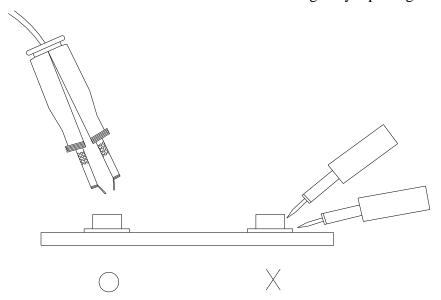

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 10 of 10

Device No.: DSE-0004388 Prepared date:26-Oct.-2010 Prepared by: Irene Lin

Downloaded from Arrow.com.