

# 1.5A LOW DROPOUT LINEAR REGULATOR

**AZ1086**

## Pin Configuration

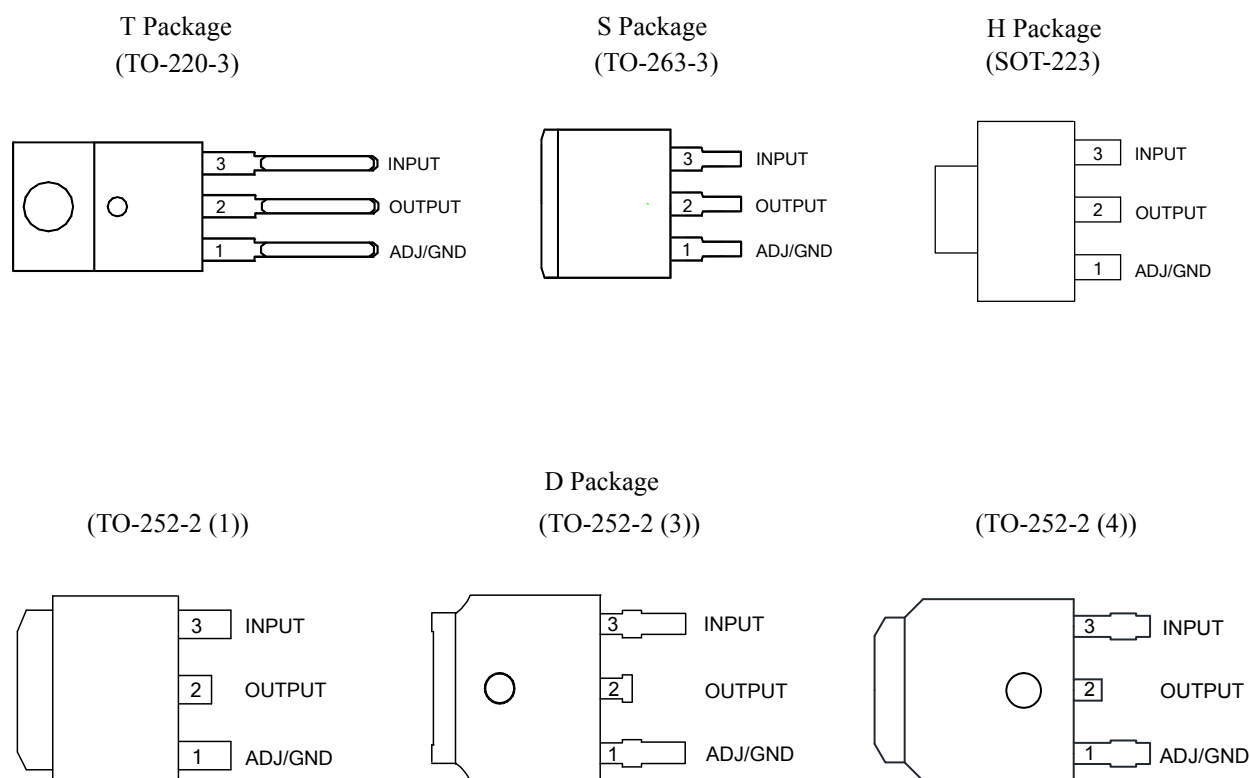


Figure 2. Pin Configuration of AZ1086 (Top View)

# 1.5A LOW DROPOUT LINEAR REGULATOR

AZ1086

## Functional Block Diagram


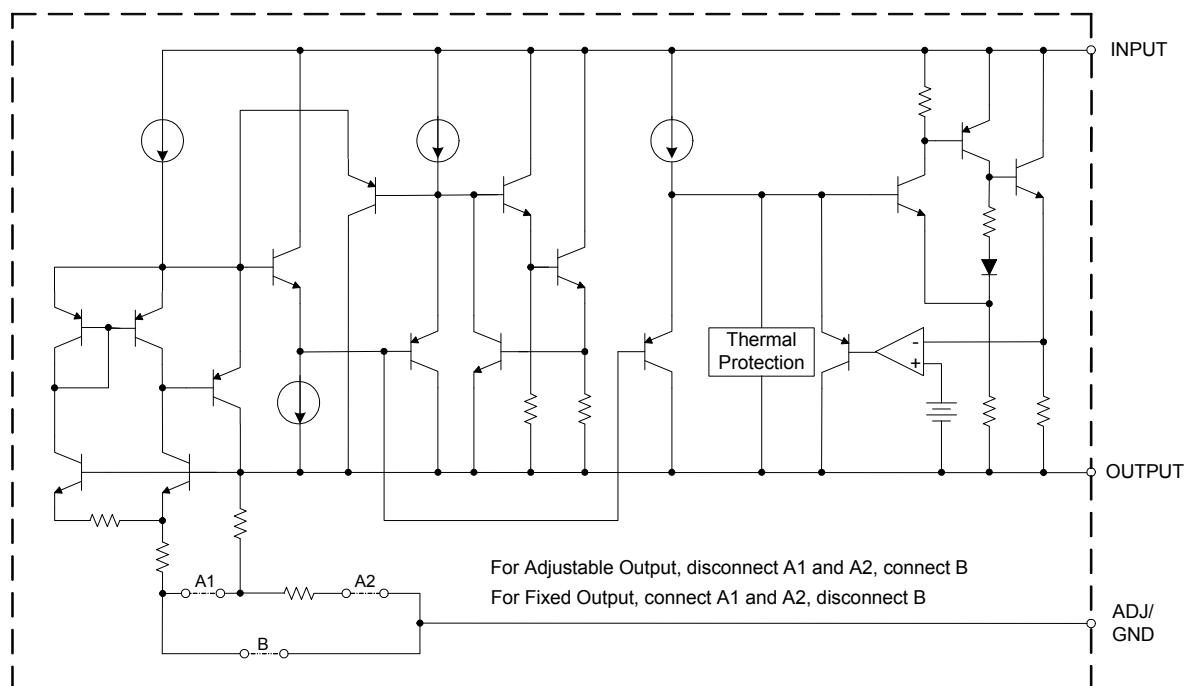


Figure 3. Functional Block Diagram of AZ1086

**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Ordering Information**

| Package                                        | Temperature Range | Part Number     |                 | Marking ID    |               | Packing Type |
|------------------------------------------------|-------------------|-----------------|-----------------|---------------|---------------|--------------|
|                                                |                   | Lead Free       | Green           | Lead Free     | Green         |              |
| TO-252-2 (1)/<br>TO-252-2 (3)/<br>TO-252-2 (4) | 0 to 125°C        | AZ1086D-ADJTRE1 | AZ1086D-ADJTRG1 | AZ1086D-ADJE1 | AZ1086D-ADJG1 | Tape & Reel  |
|                                                |                   | AZ1086D-1.5TRE1 | AZ1086D-1.5TRG1 | AZ1086D-1.5E1 | AZ1086D-1.5G1 | Tape & Reel  |
|                                                |                   | AZ1086D-1.8TRE1 | AZ1086D-1.8TRG1 | AZ1086D-1.8E1 | AZ1086D-1.8G1 | Tape & Reel  |
|                                                |                   | AZ1086D-2.5TRE1 | AZ1086D-2.5TRG1 | AZ1086D-2.5E1 | AZ1086D-2.5G1 | Tape & Reel  |
|                                                |                   | AZ1086D-3.0TRE1 | AZ1086D-3.0TRG1 | AZ1086D-3.0E1 | AZ1086D-3.0G1 | Tape & Reel  |
|                                                |                   | AZ1086D-3.3TRE1 | AZ1086D-3.3TRG1 | AZ1086D-3.3E1 | AZ1086D-3.3G1 | Tape & Reel  |
|                                                |                   | AZ1086D-5.0TRE1 | AZ1086D-5.0TRG1 | AZ1086D-5.0E1 | AZ1086D-5.0G1 | Tape & Reel  |
| TO-220-3                                       | 0 to 125°C        | AZ1086T-ADJE1   | AZ1086T-ADJG1   | AZ1086T-ADJE1 | AZ1086T-ADJG1 | Tube         |
|                                                |                   | AZ1086T-1.5E1   | AZ1086T-1.5G1   | AZ1086T-1.5E1 | AZ1086T-1.5G1 | Tube         |
|                                                |                   | AZ1086T-1.8E1   | AZ1086T-1.8G1   | AZ1086T-1.8E1 | AZ1086T-1.8G1 | Tube         |
|                                                |                   | AZ1086T-2.5E1   | AZ1086T-2.5G1   | AZ1086T-2.5E1 | AZ1086T-2.5G1 | Tube         |
|                                                |                   | AZ1086T-3.0E1   | AZ1086T-3.0G1   | AZ1086T-3.0E1 | AZ1086T-3.0G1 | Tube         |
|                                                |                   | AZ1086T-3.3E1   | AZ1086T-3.3G1   | AZ1086T-3.3E1 | AZ1086T-3.3G1 | Tube         |
|                                                |                   | AZ1086T-5.0E1   | AZ1086T-5.0G1   | AZ1086T-5.0E1 | AZ1086T-5.0G1 | Tube         |

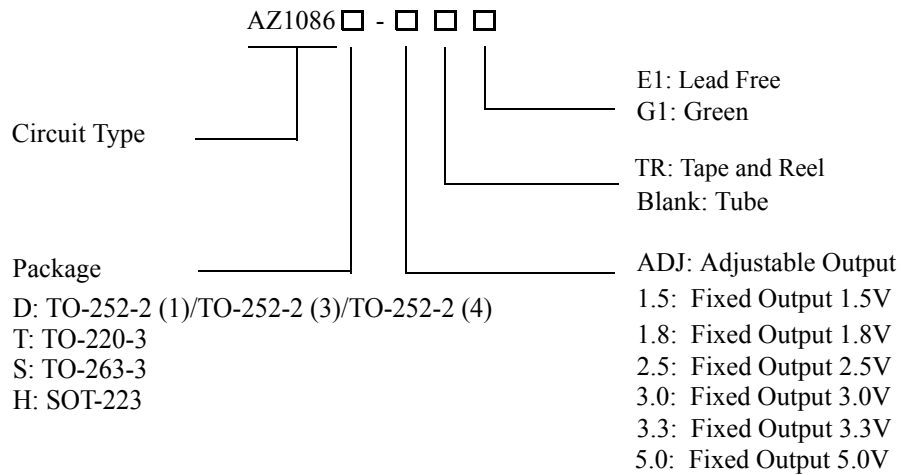

# 1.5A LOW DROPOUT LINEAR REGULATOR

AZ1086

## Ordering Information (Continued)

| Package  | Temperature Range | Part Number     |                 | Marking ID    |               | Packing Type |
|----------|-------------------|-----------------|-----------------|---------------|---------------|--------------|
|          |                   | Lead Free       | Green           | Lead Free     | Green         |              |
| TO-263-3 | 0 to 125°C        | AZ1086S-ADJE1   | AZ1086S-ADJG1   | AZ1086S-ADJE1 | AZ1086S-ADJG1 | Tube         |
|          |                   | AZ1086S-ADJTRE1 | AZ1086S-ADJTRG1 | AZ1086S-ADJE1 | AZ1086S-ADJG1 | Tape & Reel  |
|          |                   | AZ1086S-1.5E1   | AZ1086S-1.5G1   | AZ1086S-1.5E1 | AZ1086S-1.5G1 | Tube         |
|          |                   | AZ1086S-1.5TRE1 | AZ1086S-1.5TRG1 | AZ1086S-1.5E1 | AZ1086S-1.5G1 | Tape & Reel  |
|          |                   | AZ1086S-1.8E1   | AZ1086S-1.8G1   | AZ1086S-1.8E1 | AZ1086S-1.8G1 | Tube         |
|          |                   | AZ1086S-1.8TRE1 | AZ1086S-1.8TRG1 | AZ1086S-1.8E1 | AZ1086S-1.8G1 | Tape & Reel  |
|          |                   | AZ1086S-2.5E1   | AZ1086S-2.5G1   | AZ1086S-2.5E1 | AZ1086S-2.5G1 | Tube         |
|          |                   | AZ1086S-2.5TRE1 | AZ1086S-2.5TRG1 | AZ1086S-2.5E1 | AZ1086S-2.5G1 | Tape & Reel  |
|          |                   | AZ1086S-3.0E1   | AZ1086S-3.0G1   | AZ1086S-3.0E1 | AZ1086S-3.0G1 | Tube         |
|          |                   | AZ1086S-3.0TRE1 | AZ1086S-3.0TRG1 | AZ1086S-3.0E1 | AZ1086S-3.0G1 | Tape & Reel  |
|          |                   | AZ1086S-3.3E1   | AZ1086S-3.3G1   | AZ1086S-3.3E1 | AZ1086S-3.3G1 | Tube         |
|          |                   | AZ1086S-3.3TRE1 | AZ1086S-3.3TRG1 | AZ1086S-3.3E1 | AZ1086S-3.3G1 | Tape & Reel  |
|          |                   | AZ1086S-5.0E1   | AZ1086S-5.0G1   | AZ1086S-5.0E1 | AZ1086S-5.0G1 | Tube         |
|          |                   | AZ1086S-5.0TRE1 | AZ1086S-5.0TRG1 | AZ1086S-5.0E1 | AZ1086S-5.0G1 | Tape & Reel  |
| SOT-223  | 0 to 125°C        | AZ1086H-ADJTRE1 | AZ1086H-ADJTRG1 | EH86A         | GH86A         | Tape & Reel  |
|          |                   | AZ1086H-1.5TRE1 | AZ1086H-1.5TRG1 | EH86B         | GH86B         | Tape & Reel  |
|          |                   | AZ1086H-1.8TRE1 | AZ1086H-1.8TRG1 | EH86E         | GH86E         | Tape & Reel  |
|          |                   | AZ1086H-2.5TRE1 | AZ1086H-2.5TRG1 | EH86C         | GH86C         | Tape & Reel  |
|          |                   | AZ1086H-3.0TRE1 | AZ1086H-3.0TRG1 | EH86G         | GH86G         | Tape & Reel  |
|          |                   | AZ1086H-3.3TRE1 | AZ1086H-3.3TRG1 | EH86D         | GH86D         | Tape & Reel  |
|          |                   | AZ1086H-5.0TRE1 | AZ1086H-5.0TRG1 | EH86F         | GH86F         | Tape & Reel  |

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Absolute Maximum Ratings (Note 1)**

| Parameter                           | Symbol        | Value                                          |     | Unit |
|-------------------------------------|---------------|------------------------------------------------|-----|------|
| Operating Junction Temperature      | $T_J$         | 150                                            |     | °C   |
| Storage Temperature Range           | $T_{STG}$     | -65 to 150                                     |     | °C   |
| Lead Temperature (Soldering, 10sec) | $T_{LEAD}$    | 260                                            |     | °C   |
| Thermal Resistance (Note 2)         | $\theta_{JA}$ | TO-252-2 (1)/<br>TO-252-2 (3)/<br>TO-252-2 (4) | 100 | °C/W |
|                                     |               | TO-263-3                                       | 60  |      |
|                                     |               | TO-220-3                                       | 60  |      |
|                                     |               | SOT-223                                        | 120 |      |
| ESD (Machine Model)                 | ESD           | 400                                            |     | V    |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its operating ratings. The maximum allowable power dissipation is a function of the maximum junction temperature,  $T_{J(max)}$ , the junction-to-ambient thermal resistance,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is calculated using:  $P_{D(max)} = (T_{J(max)} - T_A) / \theta_{JA}$ . Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.

**Recommended Operating Conditions**

| Parameter                            | Symbol   | Min | Max | Unit |
|--------------------------------------|----------|-----|-----|------|
| Input Voltage                        | $V_{IN}$ |     | 15  | V    |
| Operating Junction Temperature Range | $T_J$    | 0   | 125 | °C   |

**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Electrical Characteristics**

Typicals and limits appearing in normal type apply for  $T_J = 25^\circ\text{C}$ . Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $0^\circ\text{C}$  to  $125^\circ\text{C}$ . ( $P_D$  = maximum power dissipation, see Note 3.)

| Parameter                               | Symbol           | Conditions                                                                                                                                                                                     | Min                   | Typ                   | Max                   | Unit               |
|-----------------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------|--------------------|
| Reference Voltage                       | $V_{REF}$        | AZ1086-ADJ,<br>$I_{OUT}=10\text{mA}$ , $V_{IN}-V_{OUT}=2\text{V}$ , $T_J=25^\circ\text{C}$ ,<br>$10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ , $1.4\text{V} \leq V_{IN}-V_{OUT} \leq 6\text{V}$ | 1.238<br><b>1.225</b> | 1.250<br><b>1.250</b> | 1.262<br><b>1.270</b> | V                  |
| Output Voltage                          | $V_{OUT}$        | AZ1086-1.5,<br>$I_{OUT}=10\text{mA}$ , $V_{IN}=3.5\text{V}$ , $T_J=25^\circ\text{C}$ ,<br>$10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ , $3\text{V} \leq V_{IN} \leq 10\text{V}$                | 1.485<br><b>1.47</b>  | 1.5<br><b>1.5</b>     | 1.515<br><b>1.53</b>  | V                  |
|                                         |                  | AZ1086-1.8,<br>$I_{OUT}=10\text{mA}$ , $V_{IN}=3.8\text{V}$ , $T_J=25^\circ\text{C}$ ,<br>$10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ , $3.2\text{V} \leq V_{IN} \leq 10\text{V}$              | 1.782<br><b>1.746</b> | 1.8<br><b>1.8</b>     | 1.818<br><b>1.854</b> | V                  |
|                                         |                  | AZ1086-2.5,<br>$I_{OUT}=10\text{mA}$ , $V_{IN}=4.5\text{V}$ , $T_J=25^\circ\text{C}$ ,<br>$10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ , $3.9\text{V} \leq V_{IN} \leq 10\text{V}$              | 2.475<br><b>2.45</b>  | 2.5<br><b>2.5</b>     | 2.525<br><b>2.55</b>  | V                  |
|                                         |                  | AZ1086-3.0,<br>$I_{OUT}=10\text{mA}$ , $V_{IN}=4.5\text{V}$ , $T_J=25^\circ\text{C}$ ,<br>$10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ , $4.9\text{V} \leq V_{IN} \leq 10\text{V}$              | 2.97<br><b>2.94</b>   | 3.0<br><b>3.0</b>     | 3.03<br><b>3.06</b>   | V                  |
|                                         |                  | AZ1086-3.3,<br>$I_{OUT}=10\text{mA}$ , $V_{IN}=5\text{V}$ , $T_J=25^\circ\text{C}$ ,<br>$10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ , $4.75\text{V} \leq V_{IN} \leq 10\text{V}$               | 3.267<br><b>3.235</b> | 3.3<br><b>3.3</b>     | 3.333<br><b>3.365</b> | V                  |
|                                         |                  | AZ1086-5.0,<br>$I_{OUT}=10\text{mA}$ , $V_{IN}=7\text{V}$ , $T_J=25^\circ\text{C}$ ,<br>$10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ , $6.5\text{V} \leq V_{IN} \leq 10\text{V}$                | 4.95<br><b>4.9</b>    | 5<br><b>5</b>         | 5.05<br><b>5.1</b>    | V                  |
| Line Regulation                         | $\Delta V_{OUT}$ | AZ1086-ADJ, $I_{OUT} = 10\text{mA}$ ,<br>$1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$                                                                                                     |                       | 0.015<br><b>0.035</b> | 0.2<br><b>0.2</b>     | %                  |
|                                         |                  | AZ1086-1.5, $I_{OUT}=10\text{mA}$ ,<br>$1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$                                                                                                       |                       | 0.3<br><b>0.6</b>     | 6<br><b>6</b>         | mV                 |
|                                         |                  | AZ1086-1.8, $I_{OUT}=10\text{mA}$ ,<br>$1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$                                                                                                       |                       | 0.3<br><b>0.6</b>     | 6<br><b>6</b>         | mV                 |
|                                         |                  | AZ1086-2.5, $I_{OUT}=10\text{mA}$ ,<br>$1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$                                                                                                       |                       | 0.3<br><b>0.6</b>     | 6<br><b>6</b>         | mV                 |
|                                         |                  | AZ1086-3.0, $I_{OUT}=10\text{mA}$ ,<br>$1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$                                                                                                       |                       | 0.3<br><b>0.6</b>     | 6<br><b>6</b>         | mV                 |
|                                         |                  | AZ1086-3.3, $I_{OUT}=10\text{mA}$ ,<br>$1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$                                                                                                       |                       | 0.5<br><b>1</b>       | 10<br><b>10</b>       | mV                 |
|                                         |                  | AZ1086-5.0, $I_{OUT}=10\text{mA}$ ,<br>$1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$                                                                                                       |                       | 0.5<br><b>1</b>       | 10<br><b>10</b>       | mV                 |
| Thermal Resistance,<br>Junction to Case | $\theta_{JC}$    | TO-220-3                                                                                                                                                                                       |                       | 7.22                  |                       | $^\circ\text{C/W}$ |
|                                         |                  | TO-252-2 (1)/TO-252-2 (3)/TO-252-2 (4)                                                                                                                                                         |                       | 12.81                 |                       |                    |
|                                         |                  | TO-263-3                                                                                                                                                                                       |                       | 7.22                  |                       |                    |
|                                         |                  | SOT-223                                                                                                                                                                                        |                       | 19.35                 |                       |                    |



## 1.5A LOW DROPOUT LINEAR REGULATOR

**AZ1086**

### Electrical Characteristics (Continued)

Typicals and limits appearing in normal type apply for  $T_J=25^{\circ}\text{C}$ . Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $0^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . ( $P_D \leq$  maximum power dissipation, see Note 3.)

| Parameter                   | Symbol           | Conditions                                                                                                                    | Min       | Typ               | Max               | Unit               |
|-----------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------|-------------------|--------------------|
| Load Regulation             | $\Delta V_{OUT}$ | AZ1086-ADJ, $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$V_{IN} - V_{OUT} = 2\text{V}$                                   |           | 0.1<br><b>0.2</b> | 0.3<br><b>0.4</b> | %                  |
|                             |                  | AZ1086-1.5, $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$V_{IN} - V_{OUT} = 2\text{V}$                                   |           | 3<br><b>6</b>     | 12<br><b>20</b>   | mV                 |
|                             |                  | AZ1086-1.8, $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$V_{IN} - V_{OUT} = 2\text{V}$                                   |           | 3<br><b>6</b>     | 12<br><b>20</b>   | mV                 |
|                             |                  | AZ1086-2.5, $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$V_{IN} - V_{OUT} = 2\text{V}$                                   |           | 3<br><b>6</b>     | 12<br><b>20</b>   | mV                 |
|                             |                  | AZ1086-3.0, $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$V_{IN} - V_{OUT} = 2\text{V}$                                   |           | 3<br><b>7</b>     | 15<br><b>20</b>   | mV                 |
|                             |                  | AZ1086-3.3, $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$V_{IN} - V_{OUT} = 2\text{V}$                                   |           | 3<br><b>7</b>     | 15<br><b>20</b>   | mV                 |
|                             |                  | AZ1086-5.0, $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$V_{IN} - V_{OUT} = 2\text{V}$                                   |           | 5<br><b>10</b>    | 20<br><b>35</b>   | mV                 |
| Dropout Voltage             | $V_{DROP}$       | $I_{OUT} = 1.5\text{A}$ , $\Delta V_{REF} = 1\%$                                                                              |           | 1.3               | 1.5               | V                  |
| Current Limit               | $I_{LIMIT}$      | $V_{IN} - V_{OUT} = 2\text{V}$                                                                                                | 1.5       | 2.3               |                   | A                  |
| Minimum Load Current        | $I_{LOAD(MIN)}$  | $1.4\text{V} \leq V_{IN} - V_{OUT} \leq 10\text{V}$ (For ADJ)                                                                 |           | 2                 | 5                 | mA                 |
| Quiescent Current           | $I_Q$            | $V_{IN} = V_{OUT} + 1.3\text{V}$                                                                                              |           | 5                 | 10                | mA                 |
| Ripple Rejection            | PSRR             | $f_{RIPPLE} = 120\text{Hz}$ , $C_{OUT} = 25\mu\text{F}$ Tantalum,<br>$I_{OUT} = 1.5\text{A}$ , $V_{IN} - V_{OUT} = 3\text{V}$ | <b>60</b> | <b>75</b>         |                   | dB                 |
| Adjust Pin Current          | $I_{ADJ}$        |                                                                                                                               |           | 60                | 120               | $\mu\text{A}$      |
| Adjust Pin Current Change   | $\Delta I_{ADJ}$ | $10\text{mA} \leq I_{OUT} \leq 1.5\text{A}$ ,<br>$1.4\text{V} \leq V_{IN} - V_{OUT} \leq 10\text{V}$                          |           | <b>0.2</b>        | 5                 | $\mu\text{A}$      |
| Temperature Stability       |                  |                                                                                                                               |           | <b>0.5</b>        |                   | %                  |
| RMS Noise (% of $V_{OUT}$ ) |                  | $T_A = 25^{\circ}\text{C}$ , $10\text{Hz} \leq f \leq 10\text{kHz}$                                                           |           | 0.003             |                   | %                  |
| Thermal Shutdown            |                  | Junction Temperature                                                                                                          |           | 165               |                   | $^{\circ}\text{C}$ |
| Thermal Shutdown Hysteresis |                  |                                                                                                                               |           | 30                |                   | $^{\circ}\text{C}$ |

Note 3: Maximum power dissipation see Figure 5.

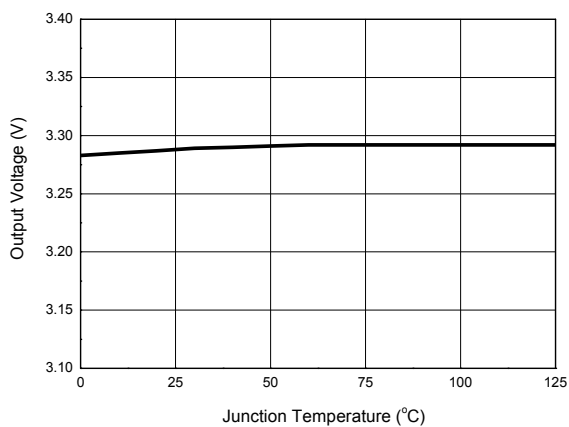
**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Typical Performance Characteristics**

Figure 4. Output Voltage vs. Junction Temperature

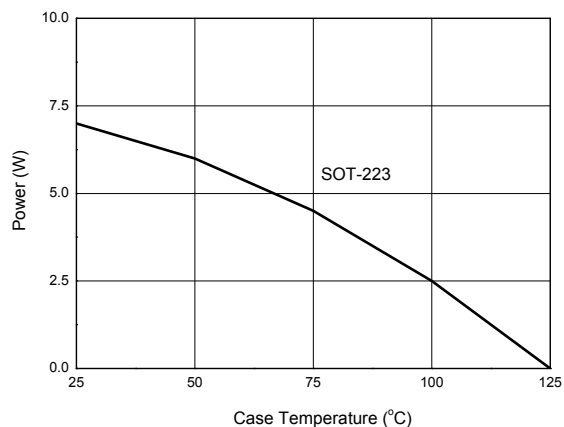


Figure 5. Maximum Power Dissipation

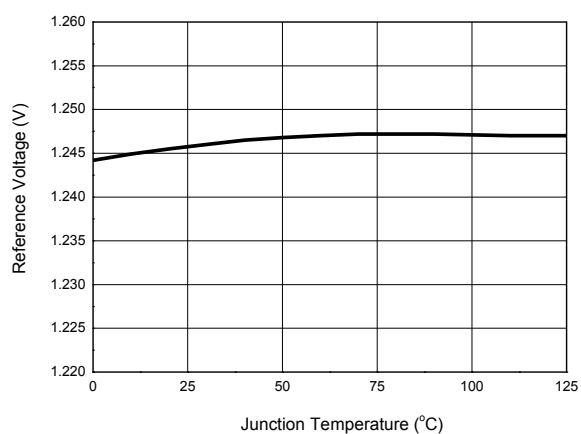


Figure 6. Reference Voltage vs. Junction Temperature

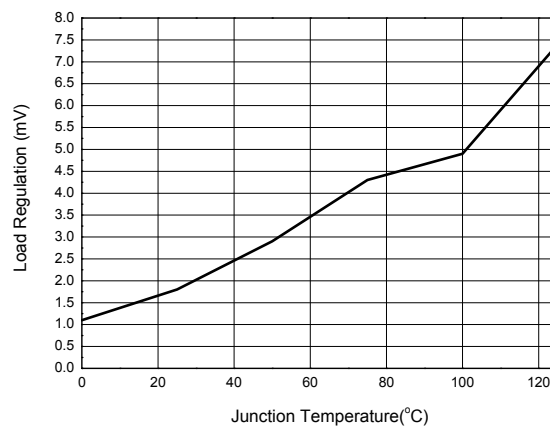


Figure 7. Load Regulation vs. Junction Temperature

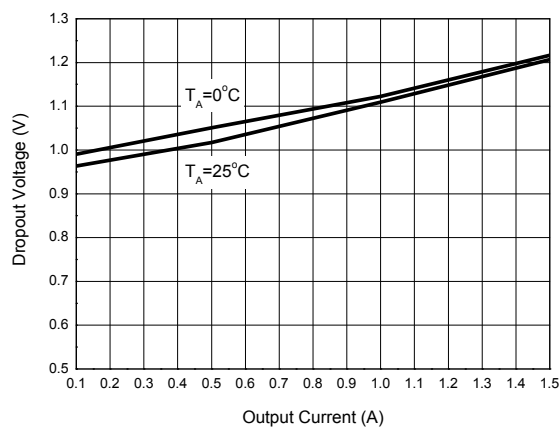
**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Typical Performance Characteristics (Continued)**

Figure 8. Dropout Voltage vs. Output Current

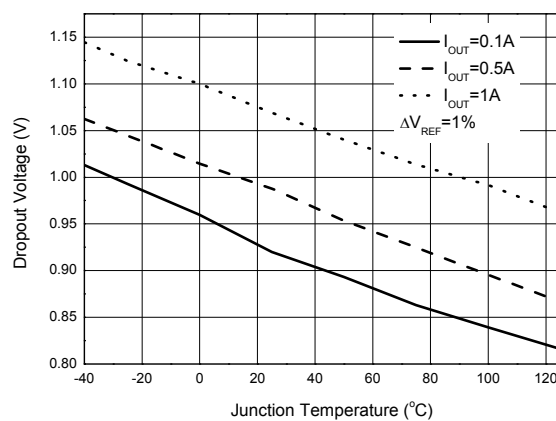


Figure 9. Dropout Voltage vs. Junction Temperature

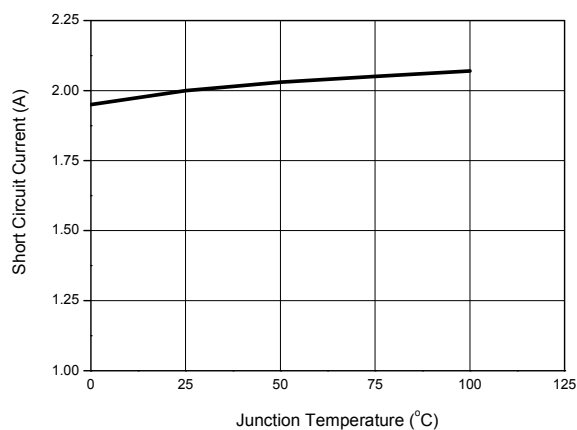


Figure 10. Short Circuit Current vs. Junction Temperature

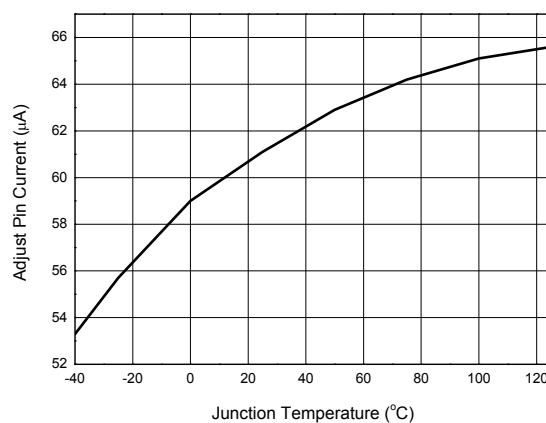


Figure 11. Adjust Pin Current vs. Junction Temperature

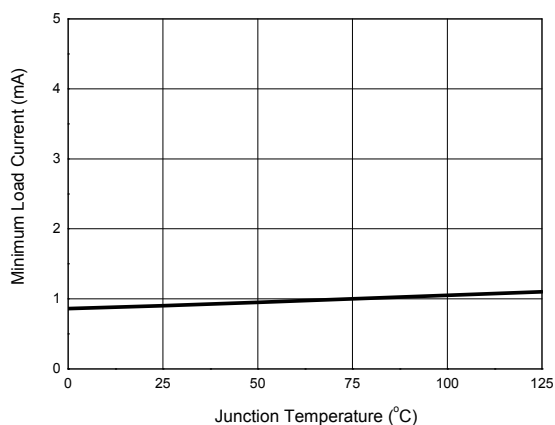
**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Typical Performance Characteristics (Continued)**

Figure 12. Minimum Load Current vs. Junction Temperature



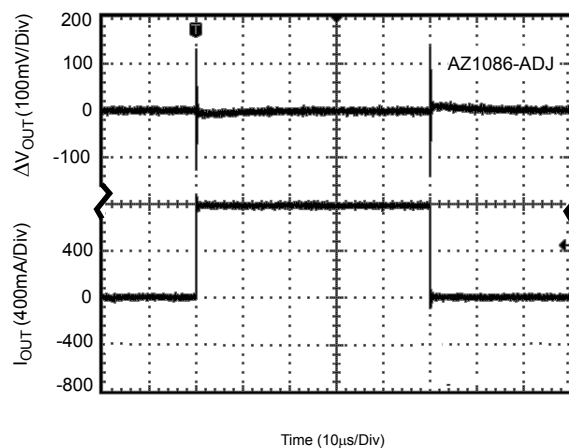
Figure 13. Load Transient Response  
(Conditions:  $V_{IN}=4.8V$ ,  $V_{OUT}=3.3V$ ,  $I_{OUT}=0.1$  to  $0.75A$ ,  
 $C_{IN}=C_{OUT}=10\mu F$ )Figure 14. Line Transient Response  
(Conditions:  $V_{IN}=4.8V$  to  $5.8V$ ,  $V_{OUT}=3.3V$ ,  $I_{OUT}=0.1A$ ,  
 $C_{IN}=1\mu F$ ,  $C_{OUT}=10\mu F$ )

Figure 15. Ripple Rejection vs. Frequency




**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Typical Application**


Figure 16. Typical Applications of AZ1086

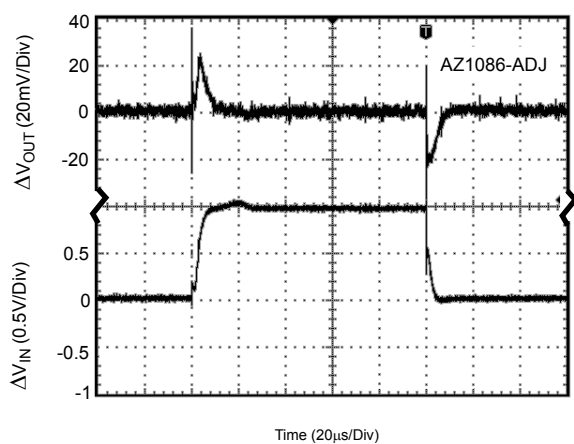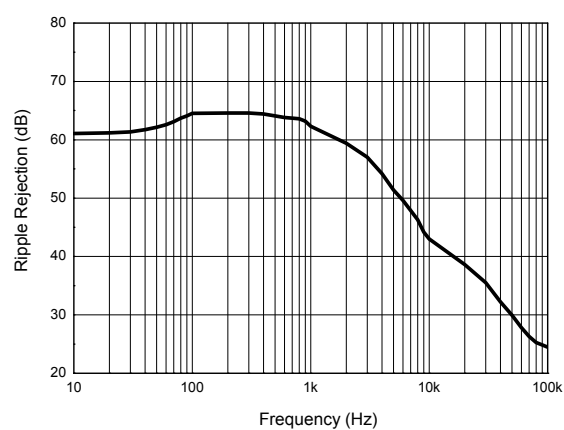

**AZ1086**


## Unit: mm(inch)

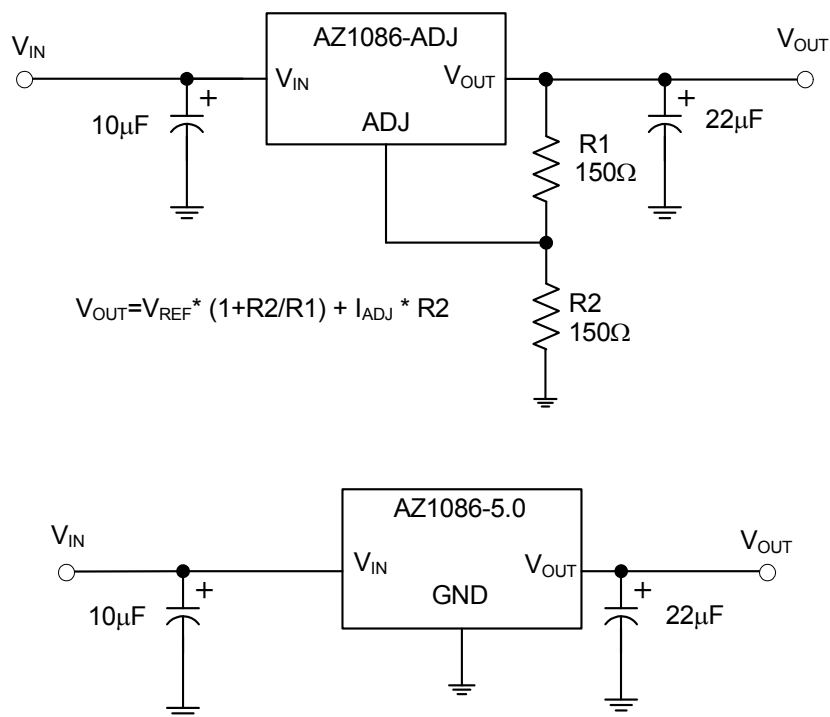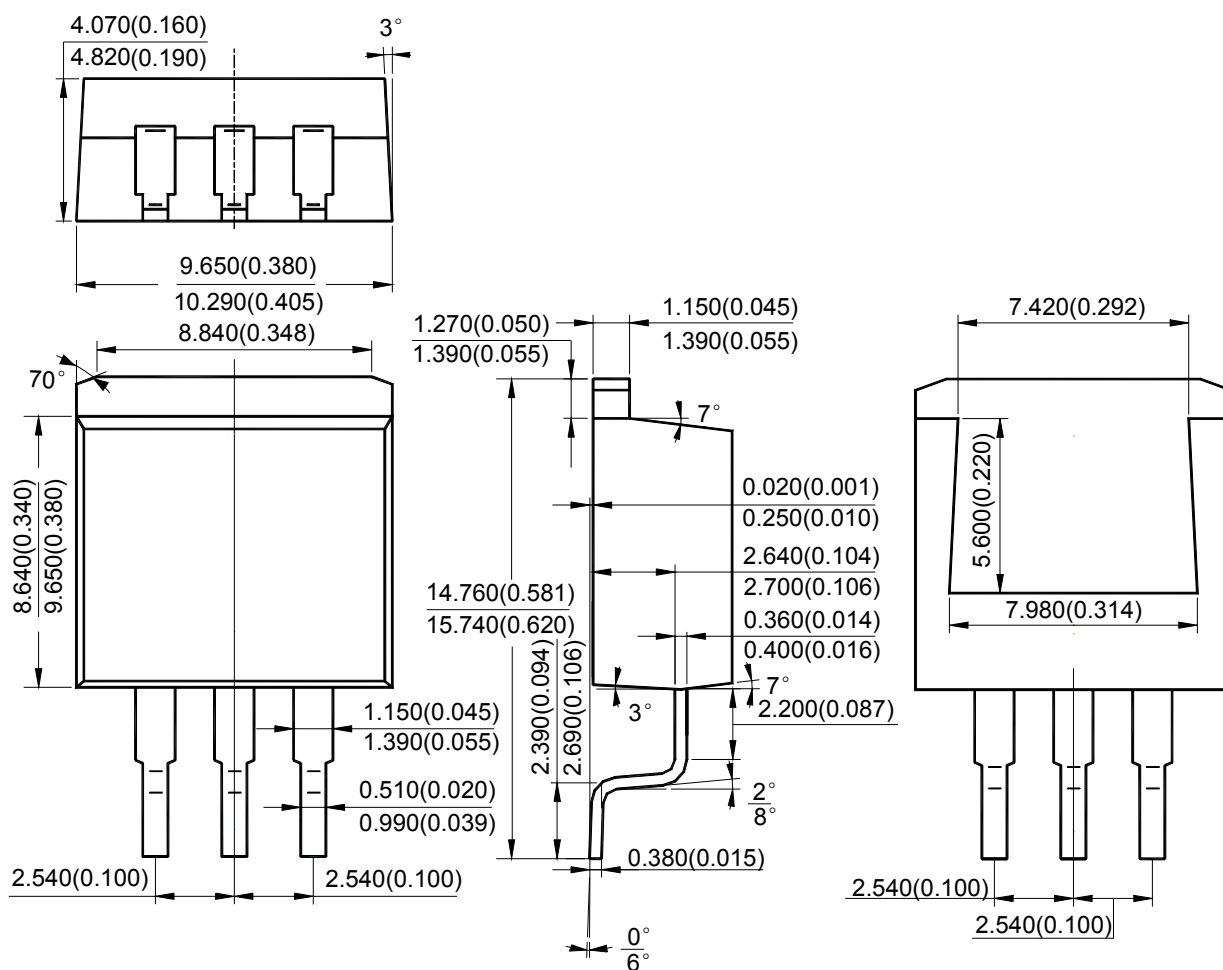





**AZ1086**


## Unit: mm(inch)

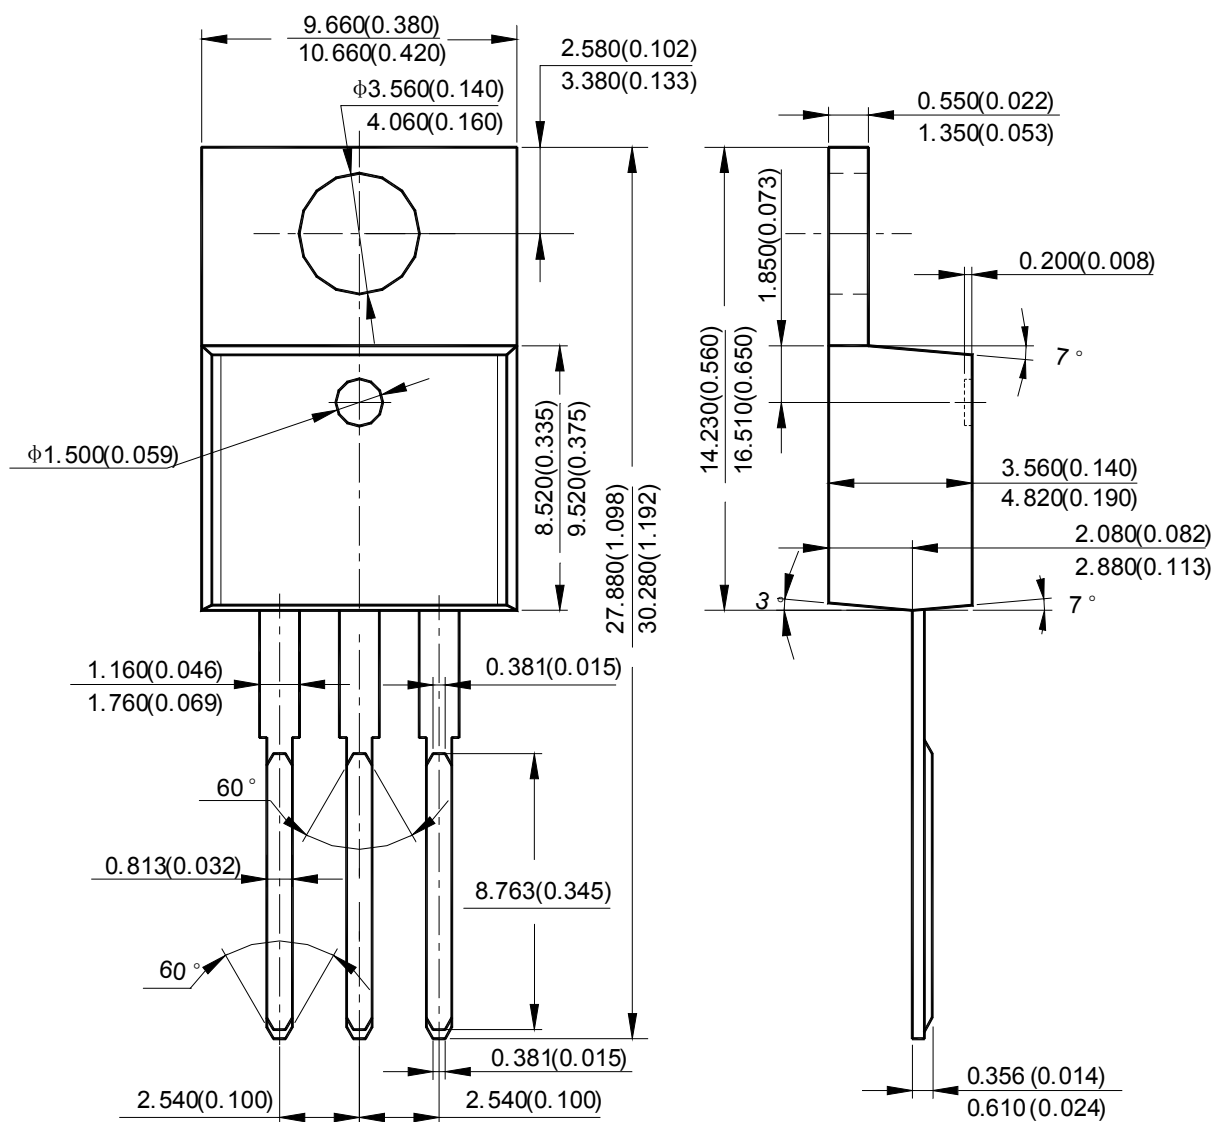


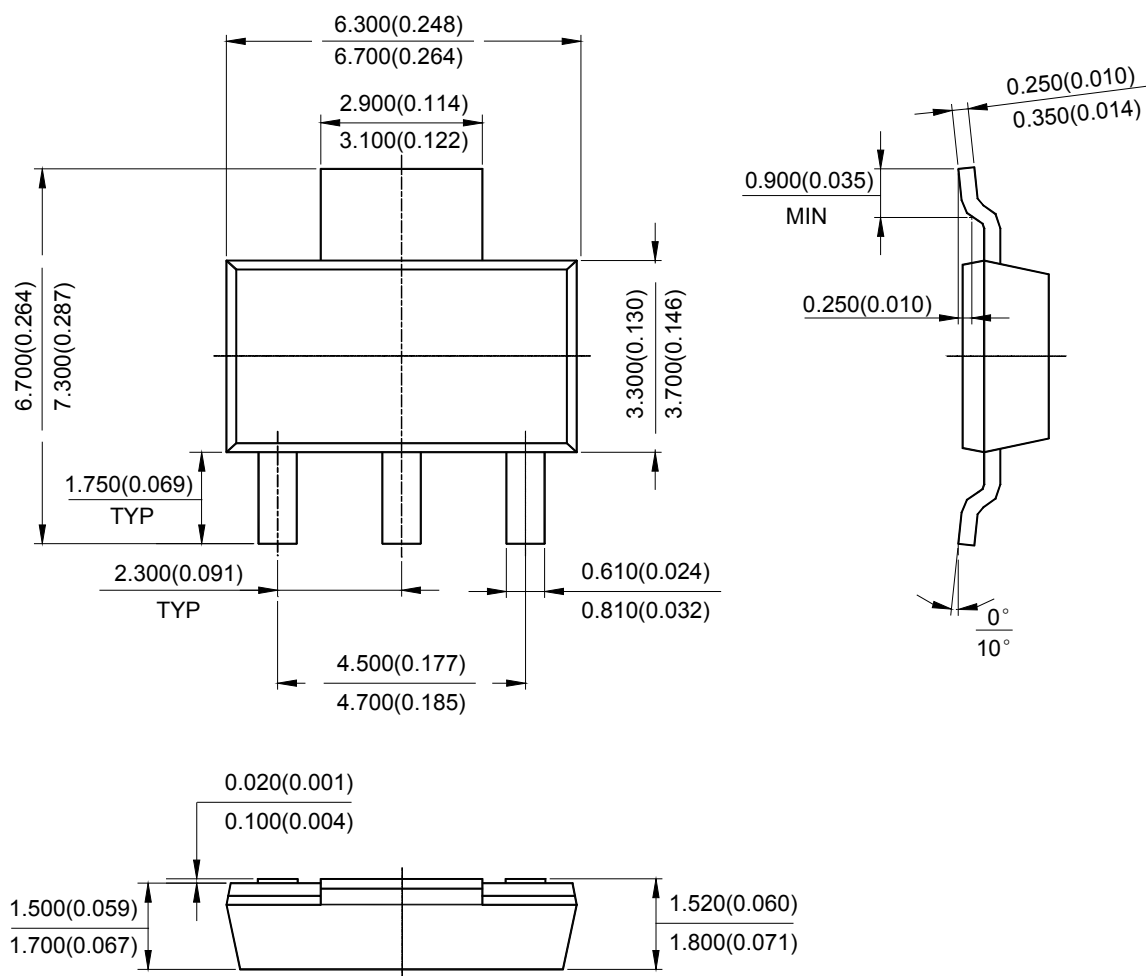
**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Mechanical Dimensions (Continued)****SOT-223****Unit: mm(inch)**

**AZ1086**

## Unit: mm(inch)

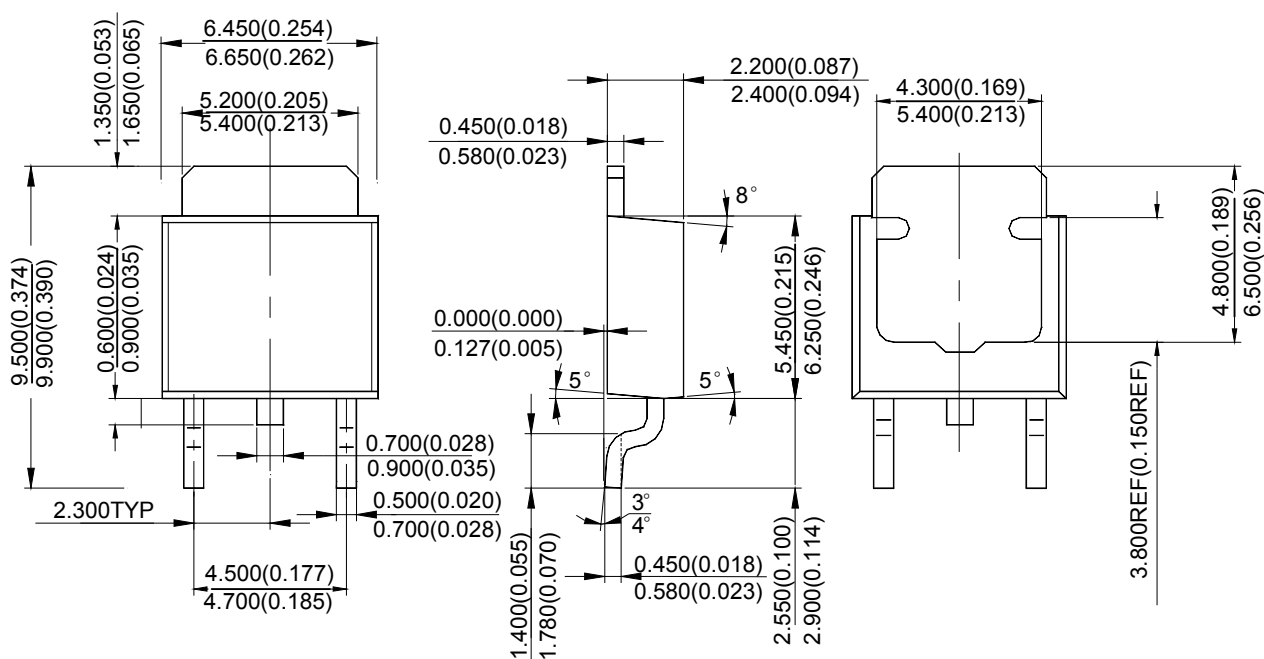

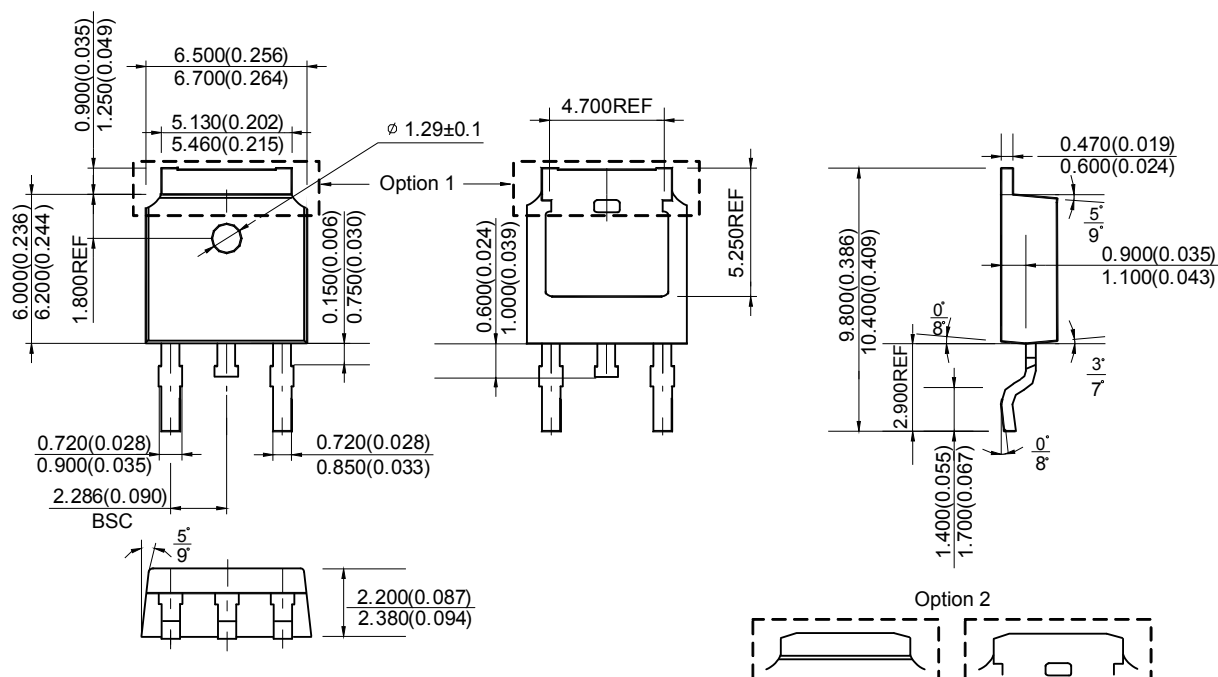**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Mechanical Dimensions (Continued)****TO-252-2 (3)****Unit: mm(inch)**

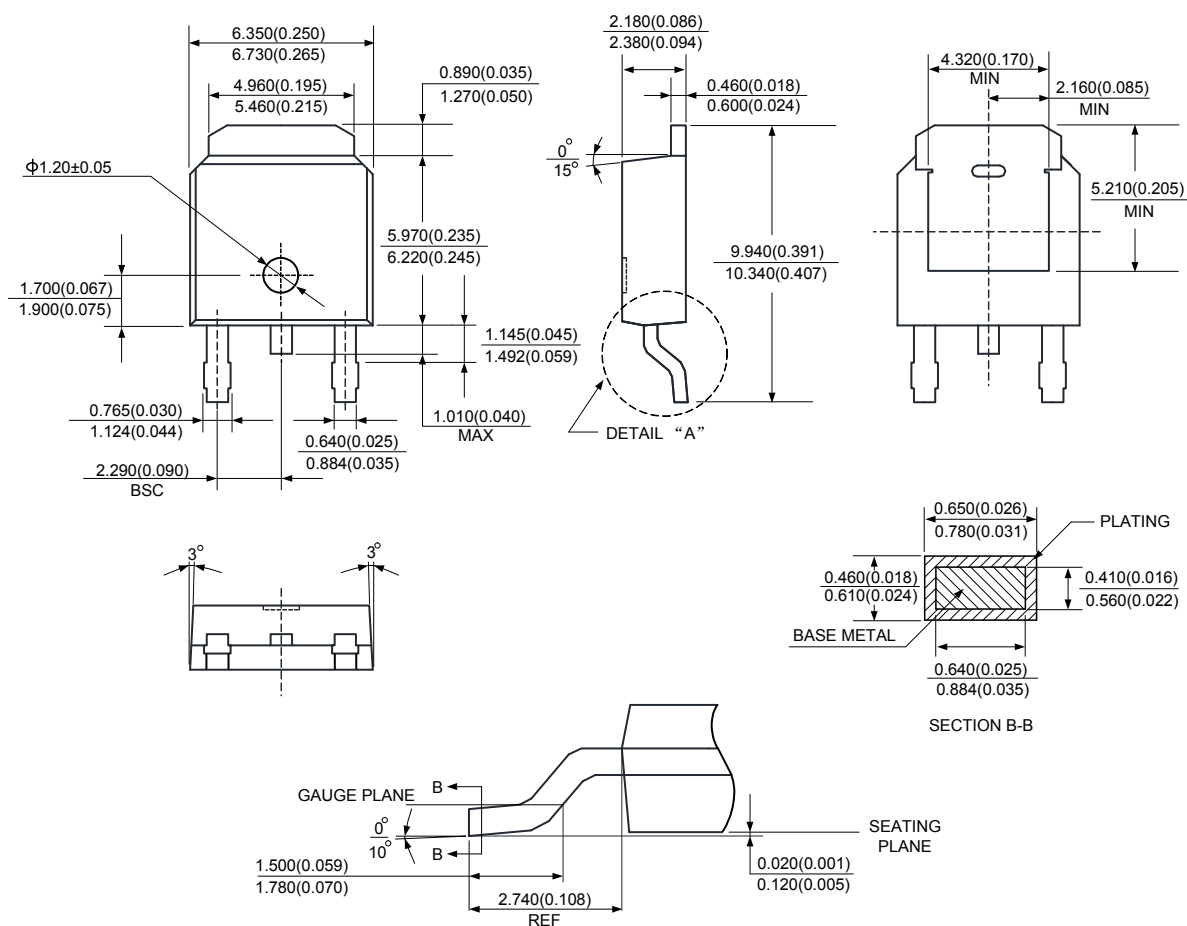**1.5A LOW DROPOUT LINEAR REGULATOR****AZ1086****Mechanical Dimensions (Continued)****TO-252-2 (4)****Unit: mm(inch)**



## BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

### IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### MAIN SITE

##### - Headquarters

##### BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### - Wafer Fab

##### Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### REGIONAL SALES OFFICE

##### Shenzhen Office

##### Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### Taiwan Office

##### BCD Semiconductor (Taiwan) Company Limited

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### USA Office

##### BCD Semiconductor Corp.

30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788