


## ■Electrical Characteristics (Ta = 25°C)

| Item                        |                                             |                   | Symbol          | G3VM-601G1 |     | G3VM-601G |    | Unit                                                                                                                                                                    | Measurement conditions                                                                                                         |
|-----------------------------|---------------------------------------------|-------------------|-----------------|------------|-----|-----------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Input                       | LED forward voltage                         | V <sub>F</sub>    | Minimum         | 1.1        |     | 1.0       |    | V                                                                                                                                                                       | I <sub>F</sub> =10 mA                                                                                                          |
|                             |                                             |                   | Typical         | 1.27       |     | 1.15      |    |                                                                                                                                                                         |                                                                                                                                |
|                             |                                             |                   | Maximum         | 1.4        |     | 1.3       |    |                                                                                                                                                                         |                                                                                                                                |
|                             | Reverse current                             | I <sub>R</sub>    | Maximum         | 10         |     |           |    | μA                                                                                                                                                                      | V <sub>R</sub> =5 V                                                                                                            |
|                             | Capacitance between terminals               | C <sub>T</sub>    | Typical         | 30         |     |           |    | pF                                                                                                                                                                      | V=0, f=1 MHz                                                                                                                   |
|                             | Trigger LED forward current                 | I <sub>FT</sub>   | Typical         | —          |     | 0.4       |    | mA                                                                                                                                                                      | G3VM-601G1 : I <sub>o</sub> =70 mA<br>G3VM-601G : I <sub>o</sub> =90 mA                                                        |
|                             |                                             |                   | Maximum         | 0.2        |     | 1         |    |                                                                                                                                                                         |                                                                                                                                |
| Release LED forward current | I <sub>FC</sub>                             | Minimum           | —               |            | 0.1 |           | mA | I <sub>OFF</sub> =100 μA                                                                                                                                                |                                                                                                                                |
|                             |                                             | Typical           | 0.001           |            | —   |           |    |                                                                                                                                                                         |                                                                                                                                |
| Output                      | Maximum resistance with output ON           | R <sub>ON</sub>   | Typical         | 35         |     | 45        |    | Ω                                                                                                                                                                       | G3VM-601G1 : I <sub>F</sub> =0.5 mA, I <sub>o</sub> =70 mA, t < 1 s<br>G3VM-601G : I <sub>F</sub> =2 mA, I <sub>o</sub> =90 mA |
|                             |                                             |                   | Maximum         | 60         |     |           |    |                                                                                                                                                                         |                                                                                                                                |
|                             | Current leakage when the relay is open      | I <sub>LEAK</sub> | Typical         | 1          |     | —         |    | nA                                                                                                                                                                      | V <sub>OFF</sub> =600 V                                                                                                        |
|                             |                                             |                   | Maximum         | 1,000      |     |           |    |                                                                                                                                                                         |                                                                                                                                |
|                             | Capacitance between terminals               | C <sub>OFF</sub>  | Typical         | 75         |     |           |    | pF                                                                                                                                                                      | V=0, f=1 MHz                                                                                                                   |
|                             | Capacitance between I/O terminals           | C <sub>I-O</sub>  | Typical         | 0.8        |     |           |    | pF                                                                                                                                                                      | f=1 MHz, V <sub>S</sub> =0 V                                                                                                   |
|                             | Insulation resistance between I/O terminals | R <sub>I-O</sub>  | Minimum         | 1000       |     |           |    | MΩ                                                                                                                                                                      | V <sub>I-O</sub> =500 VDC, R <sub>oH</sub> ≤60%                                                                                |
| Typical                     |                                             |                   | 10 <sup>8</sup> |            |     |           |    |                                                                                                                                                                         |                                                                                                                                |
| Turn-ON time                | t <sub>ON</sub>                             | Typical           | 2               |            |     |           | ms | G3VM-601G1 : I <sub>F</sub> =0.5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =10 V *<br>G3VM-601G : I <sub>F</sub> =2 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =10 V * |                                                                                                                                |
|                             |                                             | Maximum           | 10              |            | 8   |           |    |                                                                                                                                                                         |                                                                                                                                |
| Turn-OFF time               | t <sub>OFF</sub>                            | Typical           | 1               |            | 0.5 |           |    |                                                                                                                                                                         |                                                                                                                                |
|                             |                                             | Maximum           | 5               |            | 3   |           |    |                                                                                                                                                                         |                                                                                                                                |

\* Turn-ON and Turn-OFF Times



## ■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


| Item                                 | Symbol          |         | G3VM-601G1 |  | G3VM-601G |  | Unit |
|--------------------------------------|-----------------|---------|------------|--|-----------|--|------|
| Load voltage (AC peak/DC)            | V <sub>DD</sub> | Maximum | 480        |  |           |  | V    |
| Operating LED forward current        | I <sub>F</sub>  | Typical | 0.5        |  | 2         |  | mA   |
|                                      |                 | Maximum | 25         |  |           |  |      |
| Continuous load current (AC peak/DC) | I <sub>o</sub>  | Maximum | 60         |  | 70        |  |      |
| Ambient operating temperature        | T <sub>a</sub>  | Minimum | -20        |  |           |  | °C   |
|                                      |                 | Maximum | 65         |  |           |  |      |

## ■Spacing and Insulation


| Item                         | Minimum | Unit |
|------------------------------|---------|------|
| Creepage distances           | 4.0     | mm   |
| Clearance distances          | 4.0     |      |
| Internal isolation thickness | 0.1     |      |

## Engineering Data


### LED forward current vs. Ambient temperature

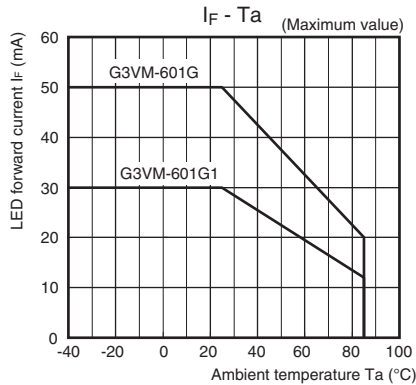


### Continuous load current vs. Ambient temperature

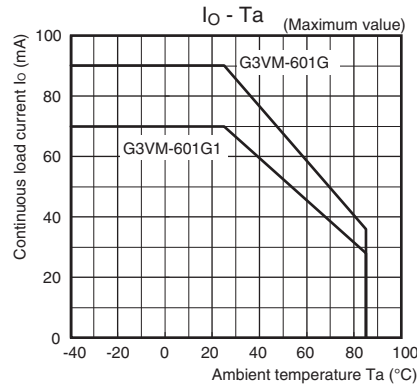


### LED forward current vs. LED forward voltage

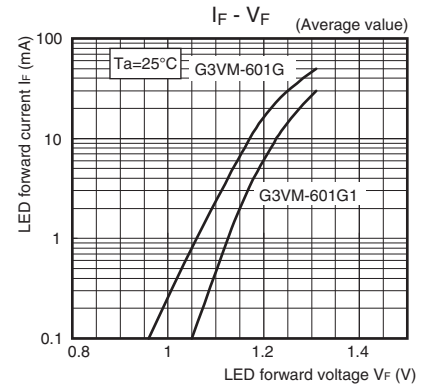


### Continuous load current vs. On-state voltage

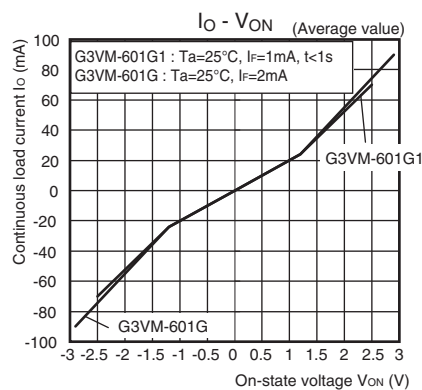


### On-state resistance vs. Ambient temperature

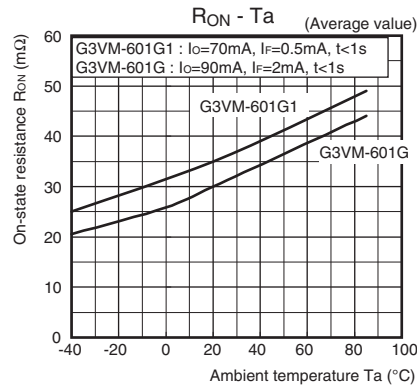


### Trigger LED forward current vs. Ambient temperature

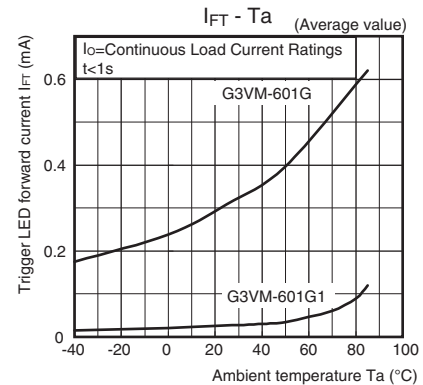


### Turn ON, Turn OFF time vs. LED forward current

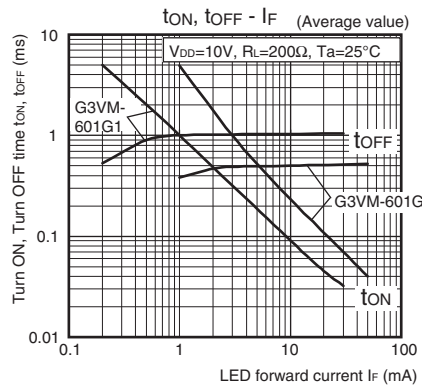


### Turn ON, Turn OFF time vs. Ambient temperature

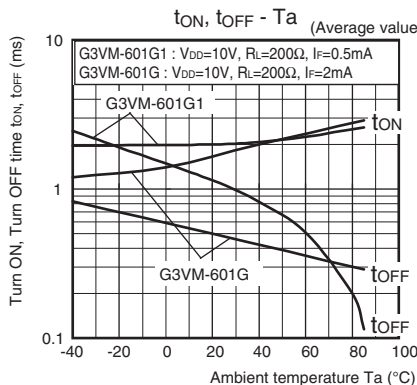

### Current leakage vs. Ambient temperature

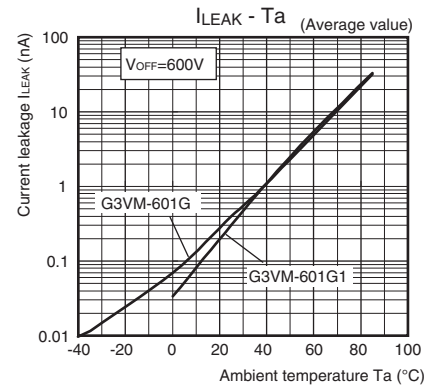

### Current leakage vs. Load voltage G3VM-601G1

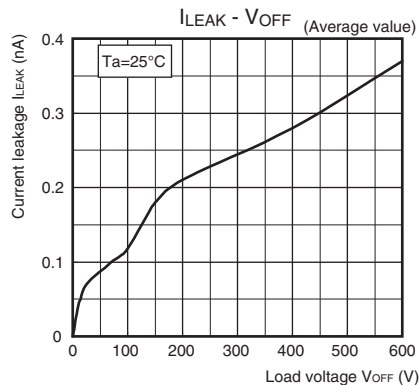


■Appearance / Terminal Arrangement / Internal Connections

●Appearance


SOP (Small Outline Package)

SOP 4-pin

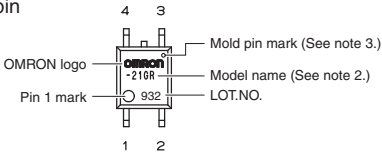

- Note: 1.** The actual product is marked differently from the image shown here.  
**Note: 2.** "G3VM" does not appear in the model number on the Relay.  
**Note: 3.** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)




■Dimensions (Unit: mm)




Surface-mounting Terminals

Weight: 0.1 g

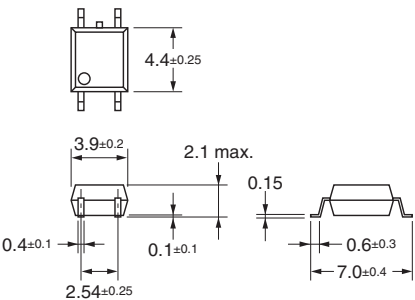

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



**Note:** The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

| Approved Standards | Contact form | File No. |
|--------------------|--------------|----------|
| UL (recognized)    | 1a (SPST-NO) | E80555   |

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

SOP

G3VM-601G□

Please check each region's Terms & Conditions by region website.

**OMRON Corporation**  
Electronic and Mechanical Components Company

| Regional Contact                                                                                     |                                                                                           |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>Americas</b><br><a href="https://www.components.omron.com/">https://www.components.omron.com/</a> | <b>Europe</b><br><a href="http://components.omron.eu/">http://components.omron.eu/</a>    |
| <b>Asia-Pacific</b><br><a href="https://ecb.omron.com.sg/">https://ecb.omron.com.sg/</a>             | <b>China</b><br><a href="https://www.ecb.omron.com.cn/">https://www.ecb.omron.com.cn/</a> |
| <b>Korea</b><br><a href="https://www.omron-ecb.co.kr/">https://www.omron-ecb.co.kr/</a>              | <b>Japan</b><br><a href="https://www.omron.co.jp/ecb/">https://www.omron.co.jp/ecb/</a>   |