





DB UNLIMITED

Part Number:	DRAWN	4/28/2016
	CJ	
	CHECKED	5/5/2016
Description:	P.D	
	APPROVED	5/5/2016
Electro-Mechanical Indicator		J.S
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com		


Top View

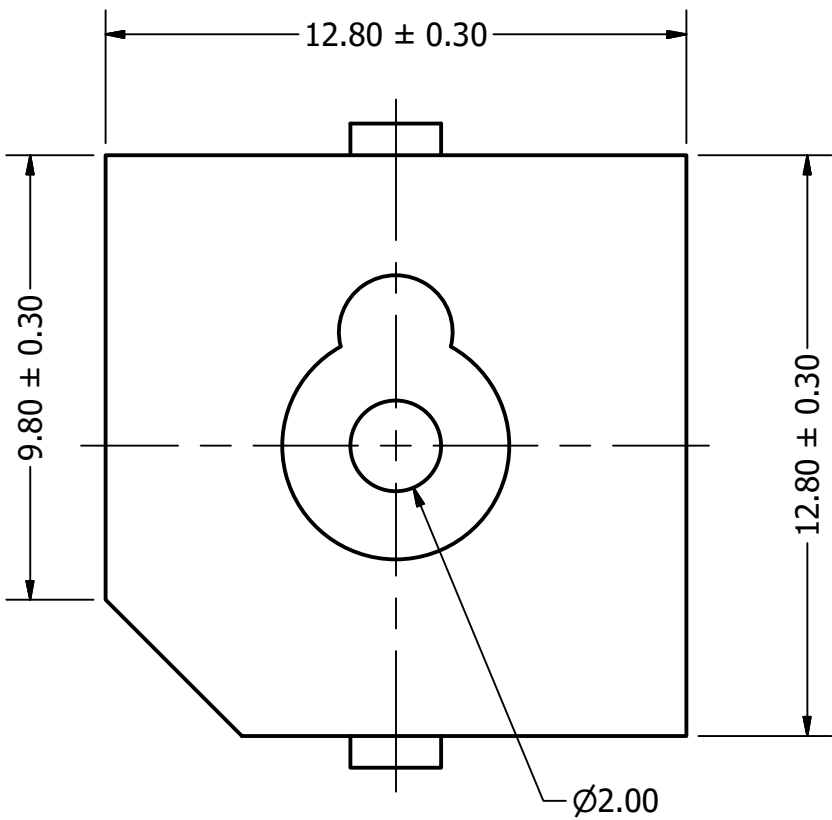


Side View (1)

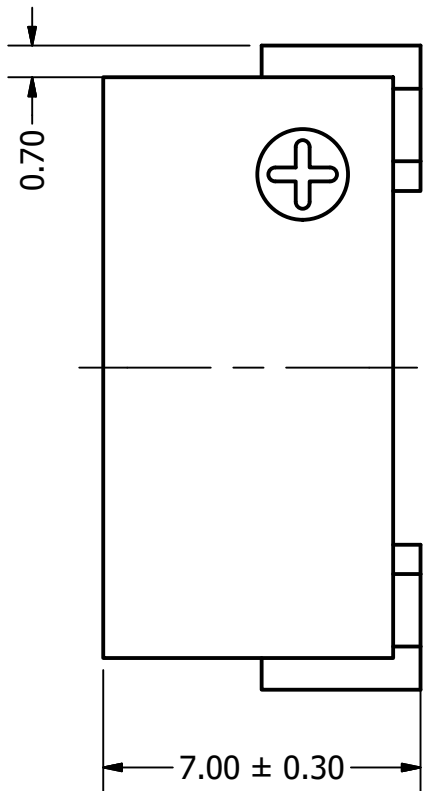

Side View (2)

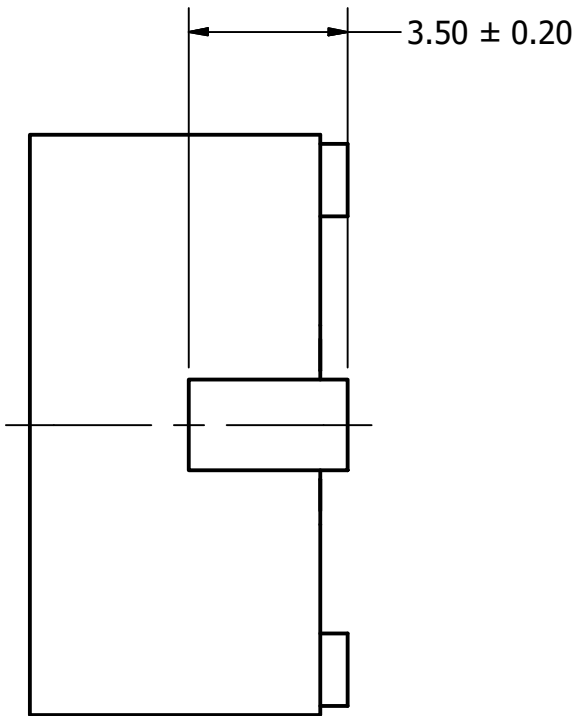

Bottom View

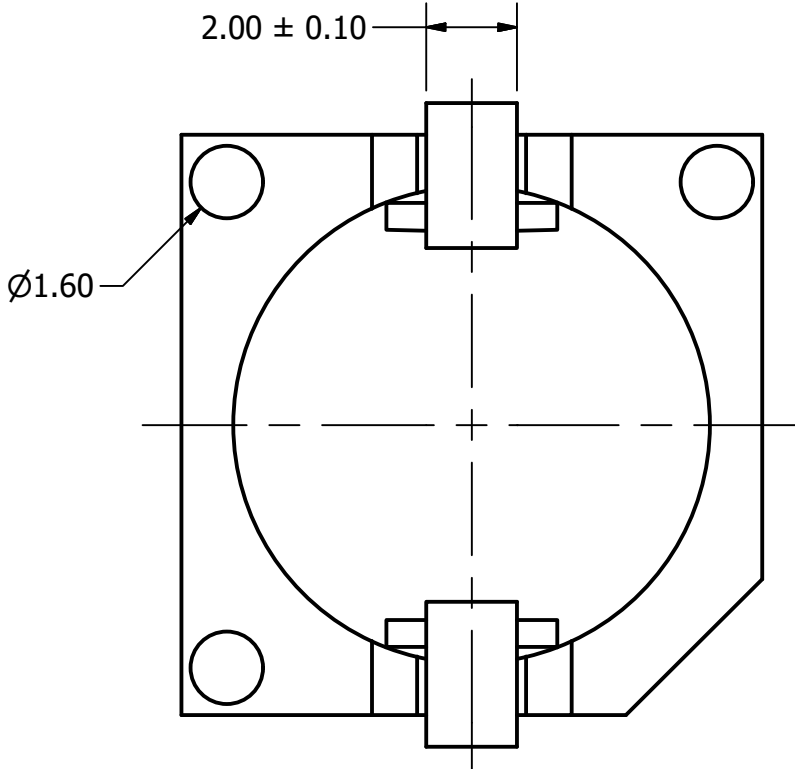

Items	Specifications	Conditions				
Sound Pressure Level	85	dB (@ 10cm)				
Tone	Single					
Resonant Frequency	2,400	Hz	REVISION HISTORY			
Rated Voltage	12	V	REV	DESCRIPTION	DATE	APPROVED
Voltage Range	8 ~ 15	V		Released from Engineering	10/21/2013	J.S.
Max. Rated Current	30	mA	1	Updated to new template	5/5/2016	J.S.
Storage Temperature	-20 ~ +70	°C	NOTES			
Operating Temperature	-20 ~ +70	°C	1) All dimensions are in mm unless otherwise noted			
Connection Method	Surface Mount Pads		2) All tolerances are ± 0.5 mm unless otherwise noted			
Mount Type	Surface Mount		3) All parts meet RoHS			
Housing Material	PPS		4) Subject to change or redrawn without notice			
Weight	2	g				