

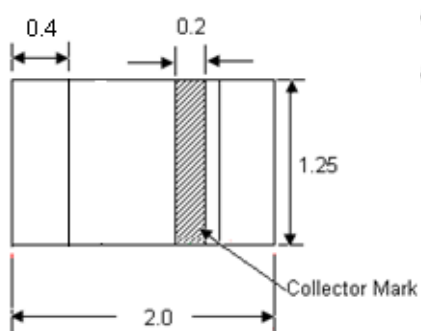
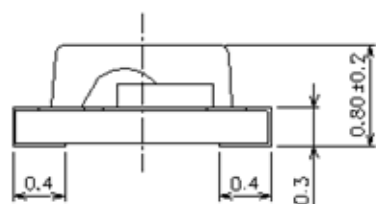


Package Dimensions

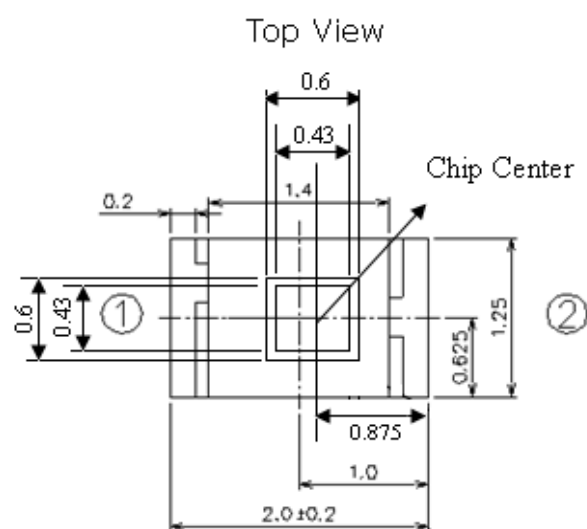

Bottom View

Solder Pad Footprint

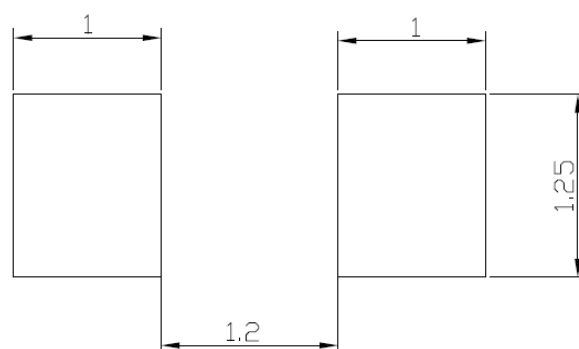

Unit: mm
Tolerance: ± 0.1 mm

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply Voltage	V _{cc}	-0.5~6.0	V
Operating Temperature Range	T _{opr}	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +100	°C
Soldering Temperature Range [Note1]	T _{sol}	260 ± 10	°C

Note1: For detail reflow time and the recommended temperature profile, please refer to page 7.

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Unit
Operating Temperature	T _{opr}	-40	+85	°C
Supply Voltage	V _{cc}	2.5	5.5	V

Electrical and Optical Characteristics (T_a=25°C)

Parameter	Symbol	MIN	TYP.	MAX.	Unit	Test Condition
Dark Current	I _D	---	2	100	nA	V _{CE} =5V, E _v = 0Lux
Light Current	I _{L1}	0.35	0.55	0.7	uA	V _{CE} =5V, E _v = 5Lx [Note1]
	I _{L2}	3.5	5.5	7	uA	V _{CE} =5V, E _v = 50Lx [Note1]
	I _{L3}	35	55	70	uA	V _{CE} =5V, E _v = 500Lx [Note1]
Saturation Output Voltage	V _O	---	4.5	---	V	V _{CE} =5V, E _v = 1000Lx R _L =75KΩ [Note2]
Peak Sensitivity Wavelength	λ _p	---	580	---	nm	
Sensitivity Wavelength Range	λ	400	---	700	nm	
Rise time	t _r	---	0.13	---	ms	V _{CE} = 5 V R _L = 7.5KΩ
Fall time	t _f	---	0.15	---	ms	
Angle of half Sensitivity	2θ _{1/2}	---	130	---	Deg.	

Note:

1. White Fluorescent light (Color Temperature = 6500K) is used as light source. However, White LED is substituted in mass production.
2. Illuminance by CIE standard illuminant-A / 2856K, incandescent lamp.

Typical Electrical and Optical Characteristics Curves

Fig.1 Light Current vs. Illuminance

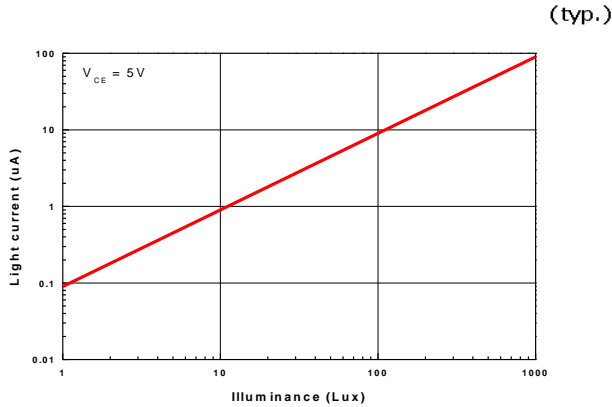


Fig.2 Output Voltage vs. Illuminance

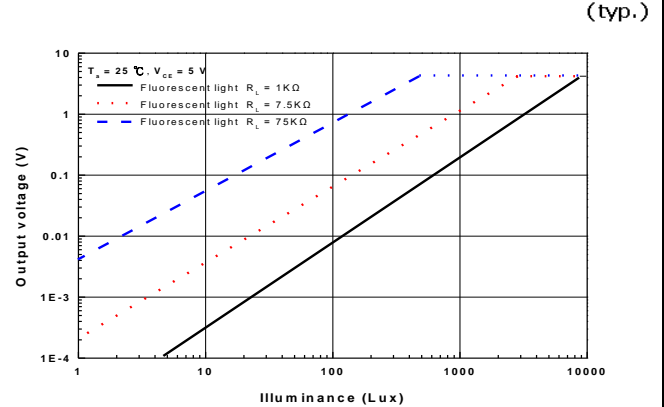


Fig.3 Spectral Response

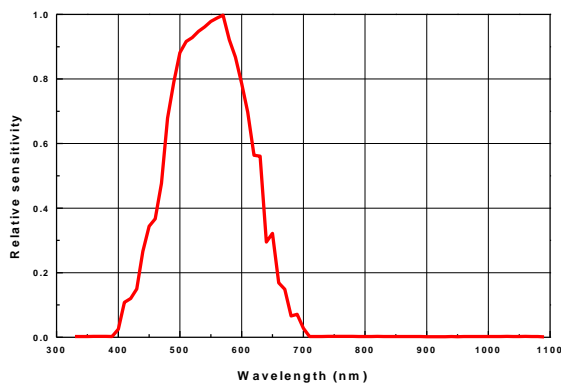


Fig.4 Light Current vs. Supply Voltage

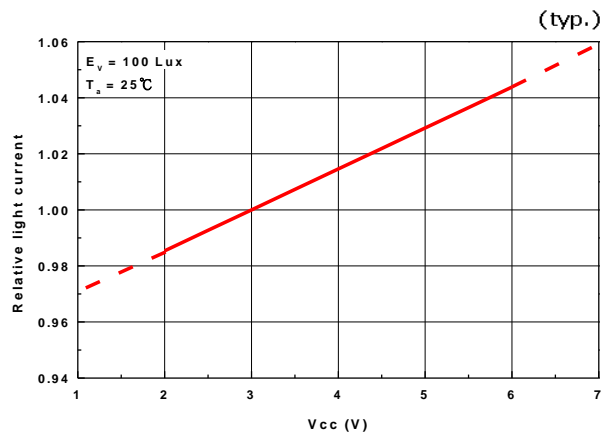


Fig.5 Light Current vs. Temperature

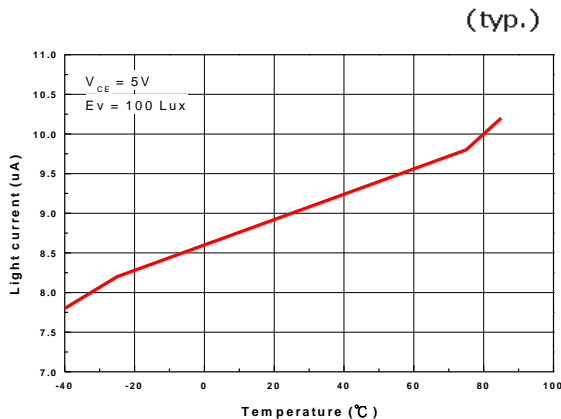


Fig.6 Dark Current vs. Temperature



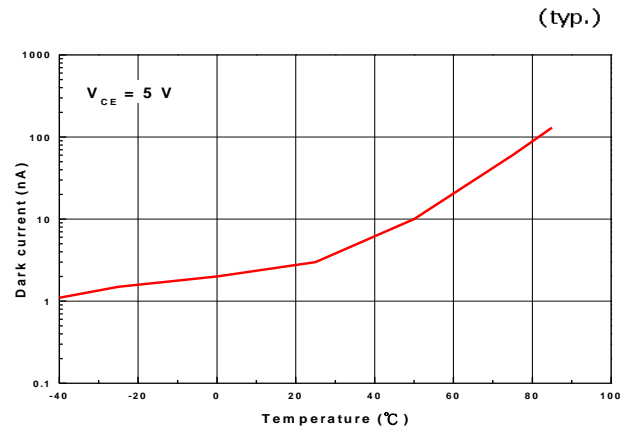


Fig.7 Angular response

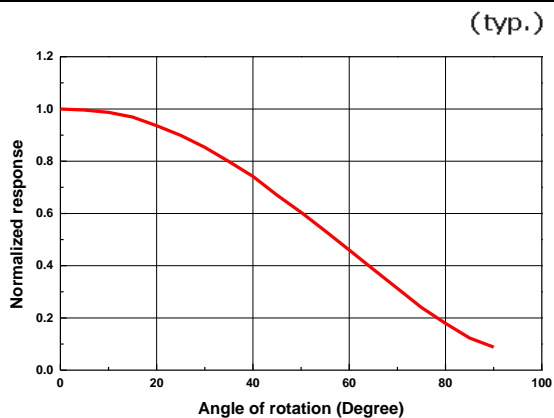

Converting Photocurrent to Voltage

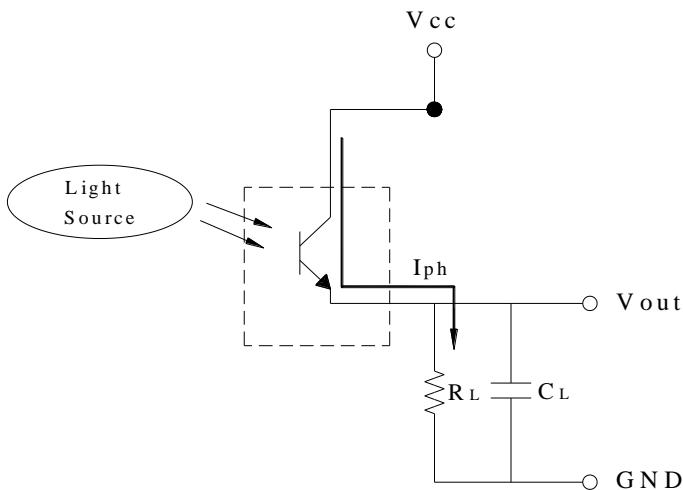

Note:

1. The output voltage (V_{out}) is the product of photocurrent (I_{PH}) and loading resistor (R_L)
2. A right loading resistor shall be chosen to meet the requirement of maximum ambient light, and output saturation voltage:

$$V_{out(max.)} = I_{out(max.)} \times R_L \leq V_{out(saturation)} = V_{CC} - 0.4V$$

3. To avoid 60Hz ripple from fluorescent lamps, we suggest that the time constant must be greater than 0.5 second:

$$R_L \times C_L \geq 0.5 \quad (\text{empirical data})$$

Recommended method of storage

Reflow Terms: JEDEC Level 3 Specification

Dry box storage is recommended as soon as the aluminum bag has been opened prevent

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift might cause big current happen. (Burned-out might happen).


2. Storage

- (1) Do not open moisture proof bag before components are ready to use.
- (2) Before opening moisture proof bag, components should be kept at 30°C or less and 90%RH or less.
- (3) Components should be used within a year.
- (4) After opened moisture proof bag, components should be kept at 30°C or less and 70%RH or less.
- (5) Components should be used within 168 hours after opened moisture proof bag.
- (6) If the moisture absorbent material (silica gel) has faded away or the components have exceeded the storage time, baking treatment should be performed using the following conditions. (Baking treatment: 60±5°C for 24 hours)

ESD Precaution:

Proper storage and handing procedures should be followed to prevent ESD damage to the devices especially when they are removed from the Anti-static bag. Electro-Static Sensitive Devices warning labels are on the packing.

Recommended Solder Profile

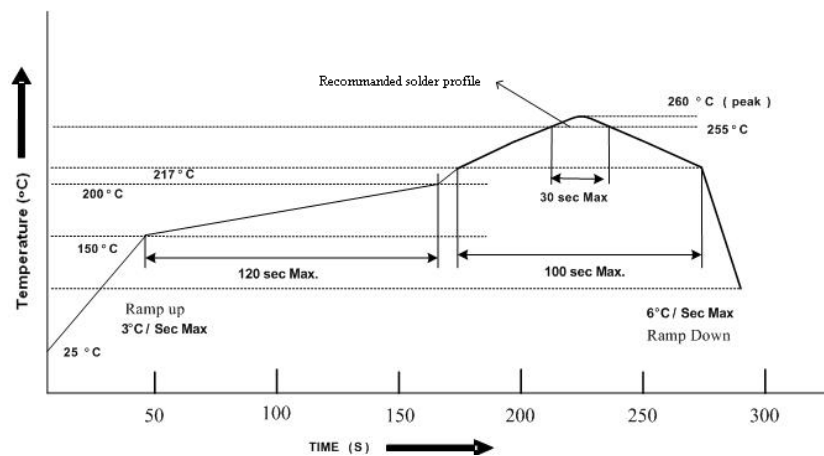

Notice:


- (1) Reflow soldering should not be done more than two times.
- (2) When soldering, do not put stress on the devices during heating.
- (3) After soldering, do not warp the circuit board.

Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Repairing



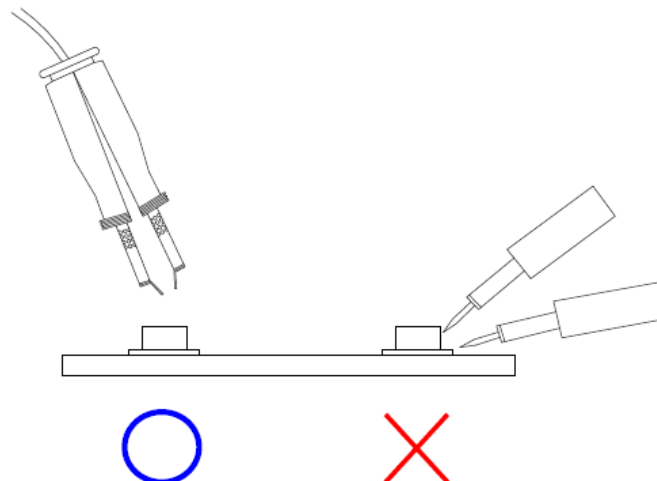




Repair should not be done after the device have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the device will or will not be damaged by repairing.




Packing Quantity Specification

4000 PCS/ 1 Reel

Label Format

		12
LIGHTING FOREVER		
CPN: XXXXXXXXXXXX		
P/N: SXXXXXXXXXX		
		
XXX-XXXXXXXX/XXXX-XX/XXXX		
QTY: X000	CAT: XX	
	HUE: XX-X	
	REF: XXXXXXXXXXXX	
LOT NO: XX81217XXXXXXXXX		
		
REFERENCE: BTP08121712345		
		
		MSL-3


Reel Dimensions

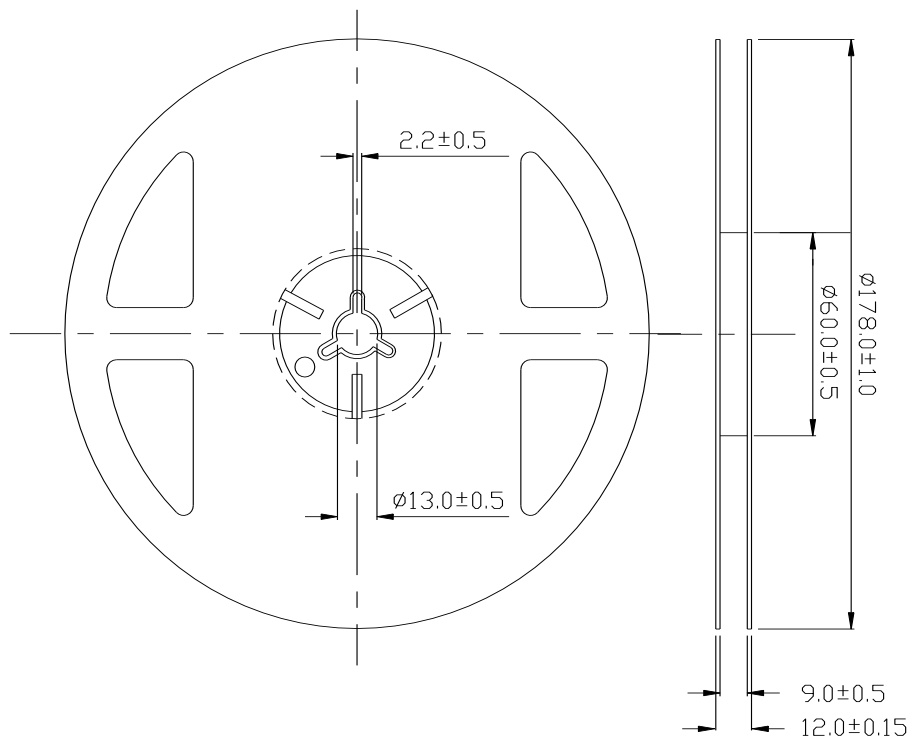

Unit: mm

Tolerance: ± 0.1 mm

Tape Dimensions

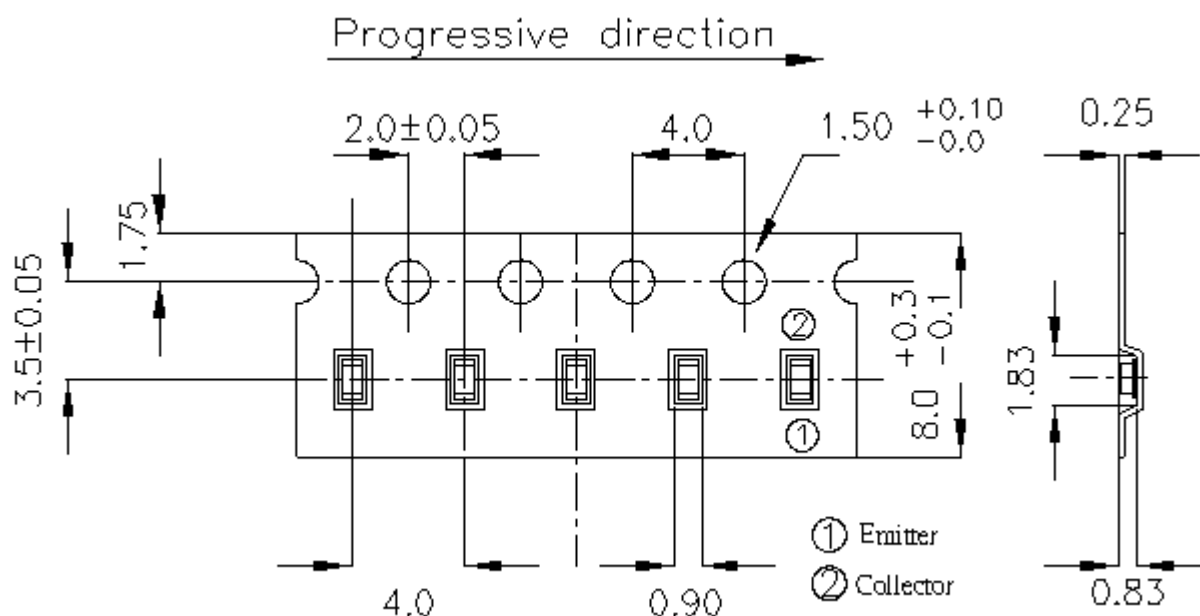

Note:

Unit: mm
Tolerance: ± 0.1 mm

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT Corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.