



Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

| Parameter | Symbol | Rating | Units | Conditions |
|---|-----------------|-----------|-------|------------|
| Drain-Source Voltage | V_{DS} | 120 | Volts | 25 °C |
| Gate-to-Source Voltage | V_{GS} | -10, +2 | Volts | 25 °C |
| Storage Temperature | T_{STG} | -65, +150 | °C | |
| Operating Junction Temperature | T_J | 225 | °C | |
| Maximum Forward Gate Current | I_{GMAX} | 60 | mA | 25 °C |
| Maximum Drain Current ¹ | I_{DMAX} | 24 | A | 25 °C |
| Soldering Temperature ² | T_S | 245 | °C | |
| Screw Torque | τ | 40 | in-oz | |
| Thermal Resistance, Junction to Case ³ | $R_{\theta JC}$ | 0.9 | °C/W | 85 °C |
| Case Operating Temperature ^{3,4} | T_C | -40, +85 | °C | |

Notes:

¹ Current limit for long term, reliable operation

² Refer to the Application Note on soldering at wolfspeed.com/RF/Document-Library

³ CGH40180PP at $P_{DISS} = 224$ W

⁴ See also, the Power Dissipation De-rating Curve on Page 6

Electrical Characteristics ($T_C = 25$ °C)

| Characteristics | Symbol | Min. | Typ. | Max. | Units | Conditions |
|---|--------------|------|------|--------|----------|--|
| DC Characteristics¹ | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | -3.8 | -3.0 | -2.3 | V_{DC} | $V_{DS} = 10$ V, $I_D = 57.6$ mA |
| Gate Quiescent Voltage | $V_{GS(Q)}$ | – | -2.7 | – | V_{DC} | $V_{DS} = 28$ V, $I_D = 2.0$ A |
| Saturated Drain Current ² | I_{DS} | 40.3 | 56.4 | – | A | $V_{DS} = 6.0$ V, $V_{GS} = 2.0$ V |
| Drain-Source Breakdown Voltage | V_{BR} | 84 | – | – | V_{DC} | $V_{GS} = -8$ V, $I_D = 57.6$ mA |
| RF Characteristics^{3,4} ($T_C = 25$ °C, $F_0 = 1.3$ GHz unless otherwise noted) | | | | | | |
| Power Gain | P_G | 13 | – | – | dB | $V_{DD} = 28$ V, $I_{DQ} = 2.0$ A, $P_{OUT} = P_{SAT}$ |
| Small Signal Gain | G_{SS} | – | 19 | – | dB | $V_{DD} = 28$ V, $I_{DQ} = 2.0$ A |
| Power Output at Saturation ⁵ | P_{SAT} | 180 | 220 | – | W | $V_{DD} = 28$ V, $I_{DQ} = 2.0$ A |
| Drain Efficiency ⁶ | η | 56 | 65 | – | % | $V_{DD} = 28$ V, $I_{DQ} = 2.0$ A, $P_{OUT} = P_{SAT}$ |
| Output Mismatch Stress | VSWR | – | – | 10 : 1 | Ψ | No damage at all phase angles, $V_{DD} = 28$ V, $I_{DQ} = 2.0$ A, $P_{OUT} = 180$ W CW |
| Dynamic Characteristics⁷ | | | | | | |
| Input Capacitance | C_{GS} | – | 35.7 | – | pF | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz |
| Output Capacitance | C_{DS} | – | 9.6 | – | pF | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz |
| Feedback Capacitance | C_{GD} | – | 1.6 | – | pF | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz |

Notes:

¹ Measured on wafer prior to packaging

² Scaled from PCM data

³ Measured in CGH40180PP-AMP, including all coupler losses



⁴ I_{DQ} of 2.0 A is by biasing each device at 1.0 A

⁵ P_{SAT} is defined as: $Q1$ or $Q2 = I_G = 2.8$ mA

⁶ Drain Efficiency = P_{OUT} / P_{DC}

⁷ Capacitance values are for each side of the device


Typical Performance

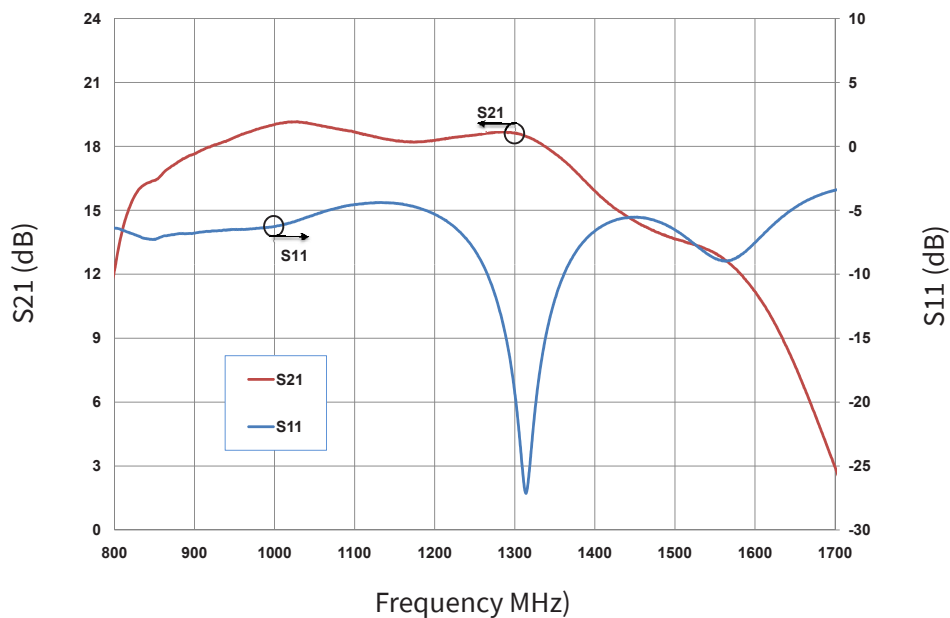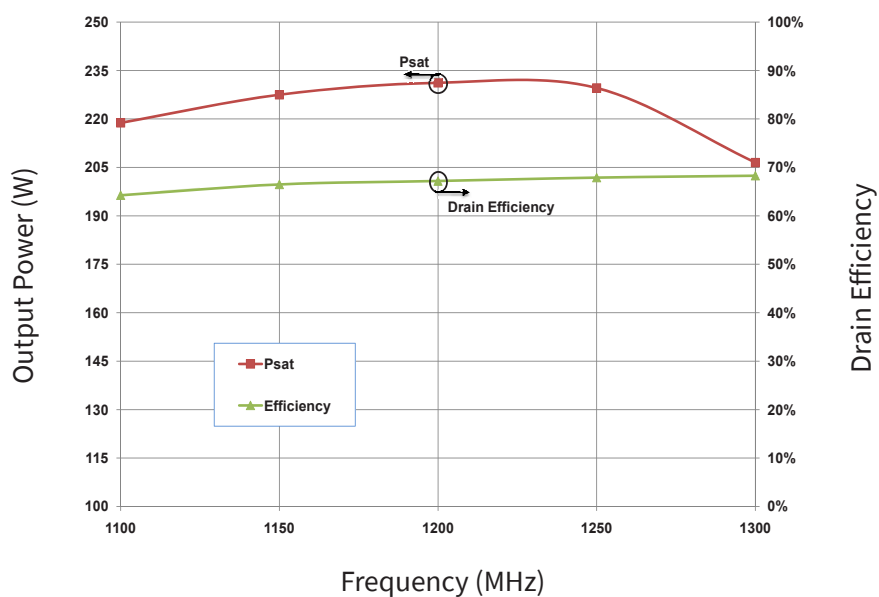Gain and Return Loss vs Frequency measured in
Broadband Amplifier Circuit CGH40180PP-AMP $V_{DD} = 28\text{ V}$, $I_{DQ} = 2.0\text{ A}$ Output Power and Drain Efficiency vs Frequency
measured in Broadband Amplifier Circuit CGH40180PP-AMP $V_{DD} = 28\text{ V}$, $I_{DQ} = 2.0\text{ A}$ 

Typical Performance


Gain and Drain Efficiency vs Output Power measured
in Broadband Amplifier Circuit CGH40180PP-AMP

$$V_{DD} = 28 \text{ V}, I_{DQ} = 2.0 \text{ A}$$

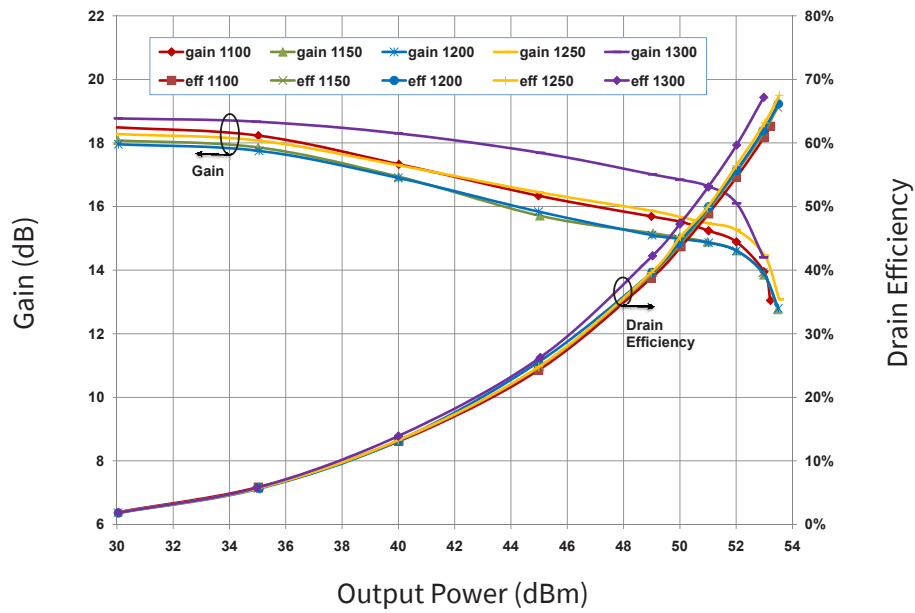




Typical Performance

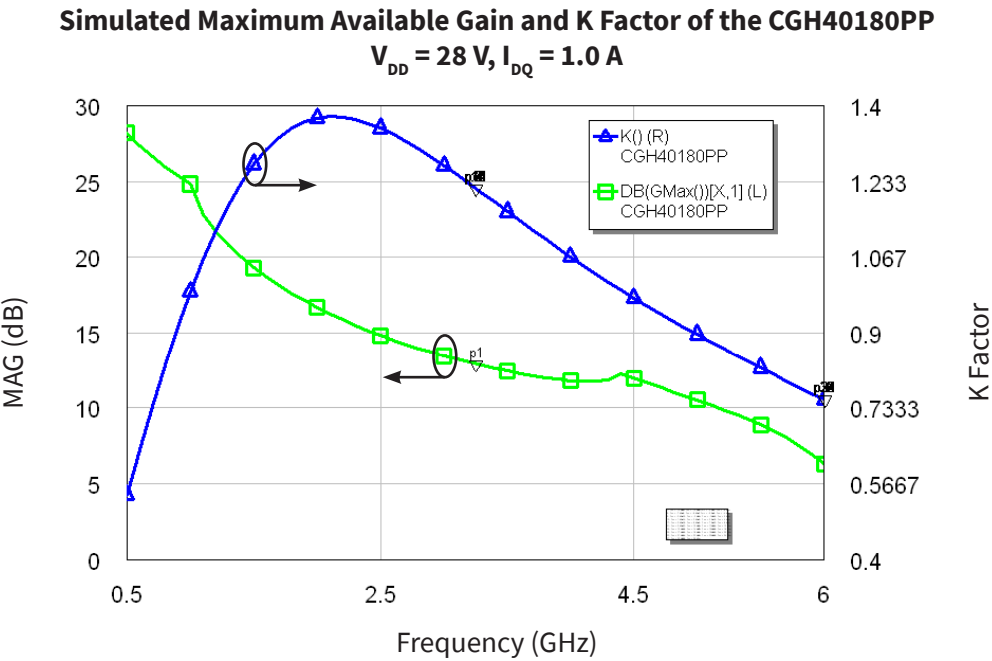

Typical Noise Performance

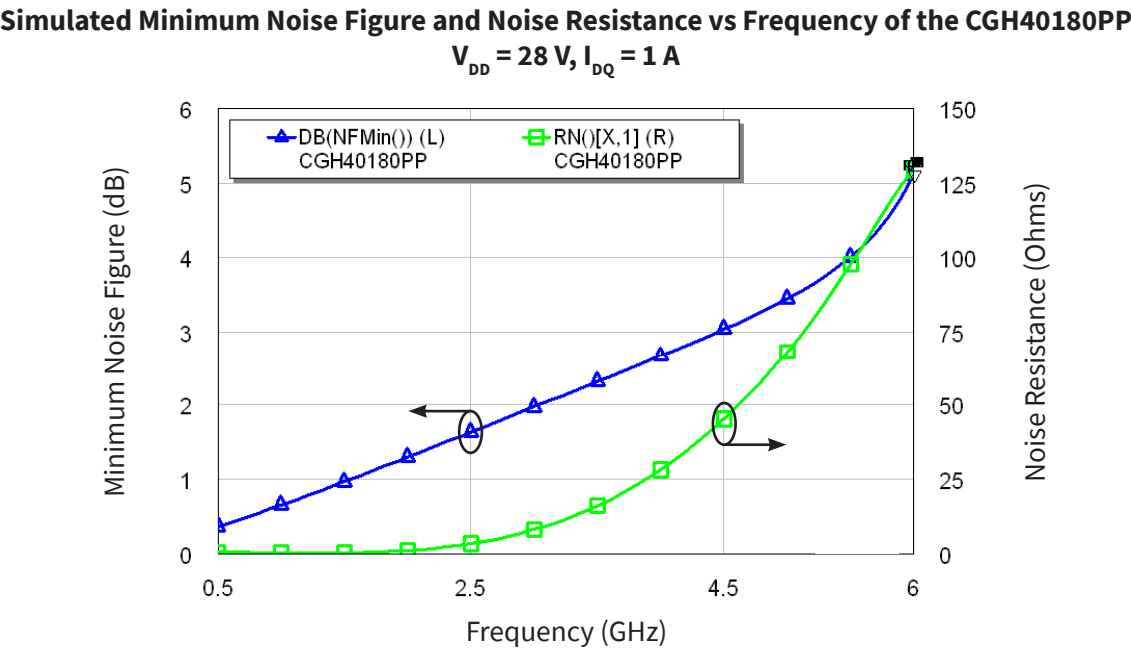


Electrostatic Discharge (ESD) Classifications

| Parameter | Symbol | Class | Test Methodology |
|---------------------|--------|------------|---------------------|
| Human Body Model | HBM | 1A > 250 V | JEDEC JESD22 A114-D |
| Charge Device Model | CDM | 1 < 200 V | JEDEC JESD22 C101-C |




CGH40180PP Power Dissipation De-rating Curve

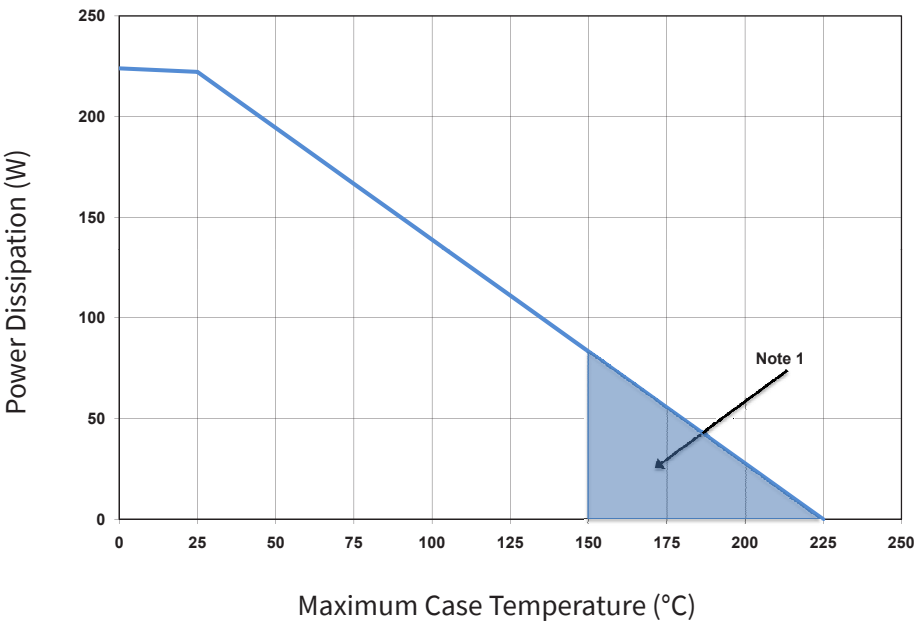

Note 1. Area exceeds Maximum Case Operating Temperature (See Page 2)


CGH40180PP Transient Power Dissipation De-rating Curve

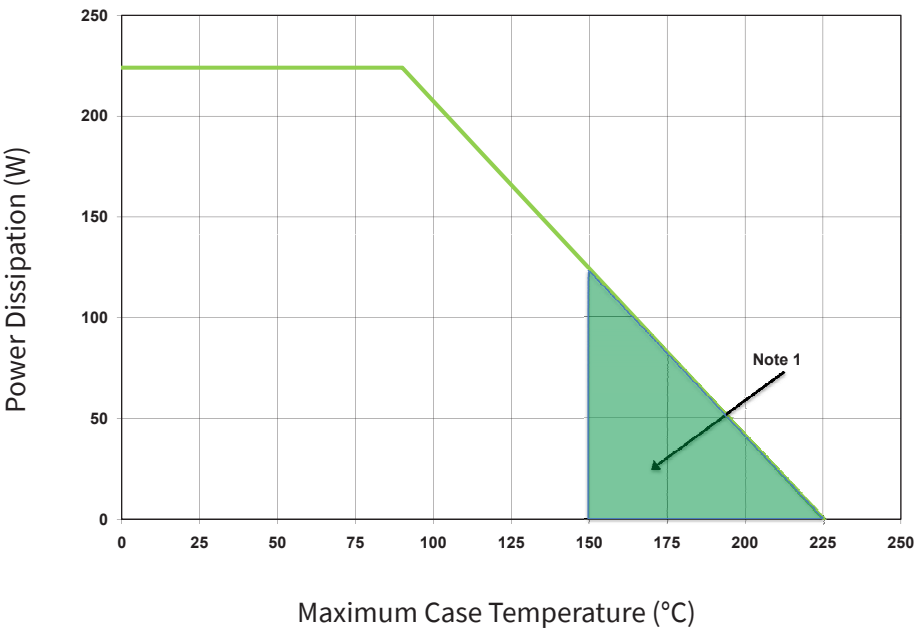

Note 1. Area exceeds Maximum Case Operating Temperature (See Page 2)
Note 2. This transient de-rating curve assumes a 1msec pulse with a 20% duty cycle with no power dissipated during the “off-cycle”




Thermal Resistance as a Function of Pulse Width

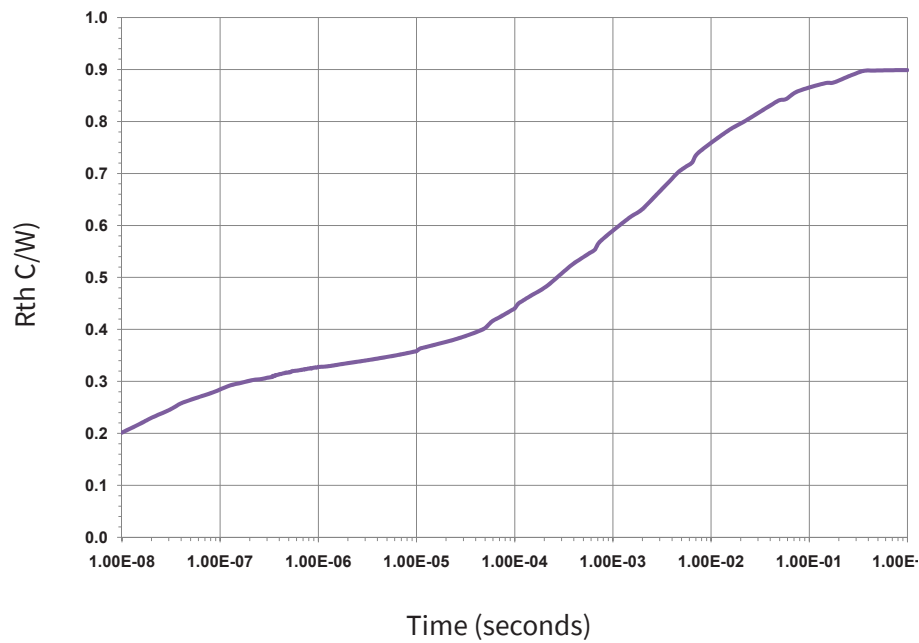

Note 1. This heating curve assumes zero power dissipation during the “off” portion of the duty cycle
Note 2. This data is for transient power dissipation at 224 W, Duty Cycle = 20%


Simulated Source and Load Impedances

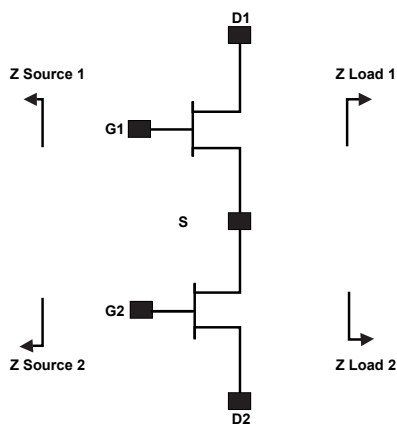


| Frequency (MHz) | Z Source | Z Load |
|-----------------|--------------|--------------|
| 500 | 2.85 + j1.99 | 5.27 + j0.68 |
| 1000 | 0.8 + j0.42 | 4.91 + j0.36 |
| 1500 | 0.84 - j1.69 | 4.65 - j0.24 |
| 2000 | 0.88 - j3.05 | 2.8 - j1.05 |
| 2500 | 1.08 - j4.5 | 3.1 - j2.47 |
| 3000 | 1.25 - j6.06 | 3.1 - j4.01 |

Note 1. $V_{DD} = 28V$, $I_{DQ} = 2.0 A$ in the 440199 package
Note 2. Optimized for power, gain, P_{SAT} and PAE
Note 3. When using this device at low frequency, series resistors should be used to maintain amplifier stability

CGH40180PP-AMP Demonstration Amplifier Circuit Schematic

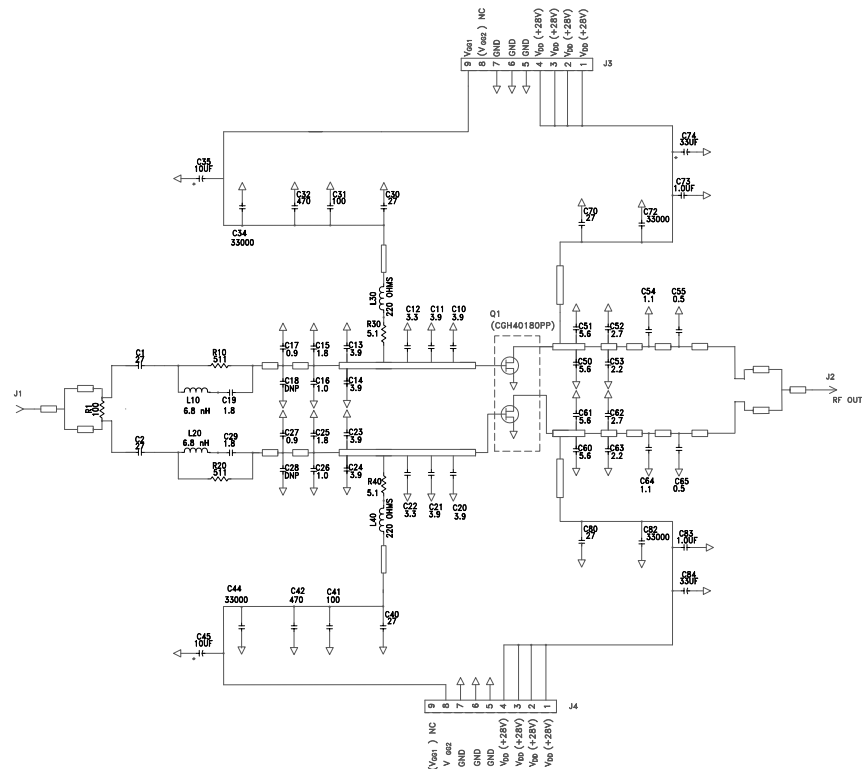


CGH40180PP-AMP Demonstration Amplifier Circuit Outline

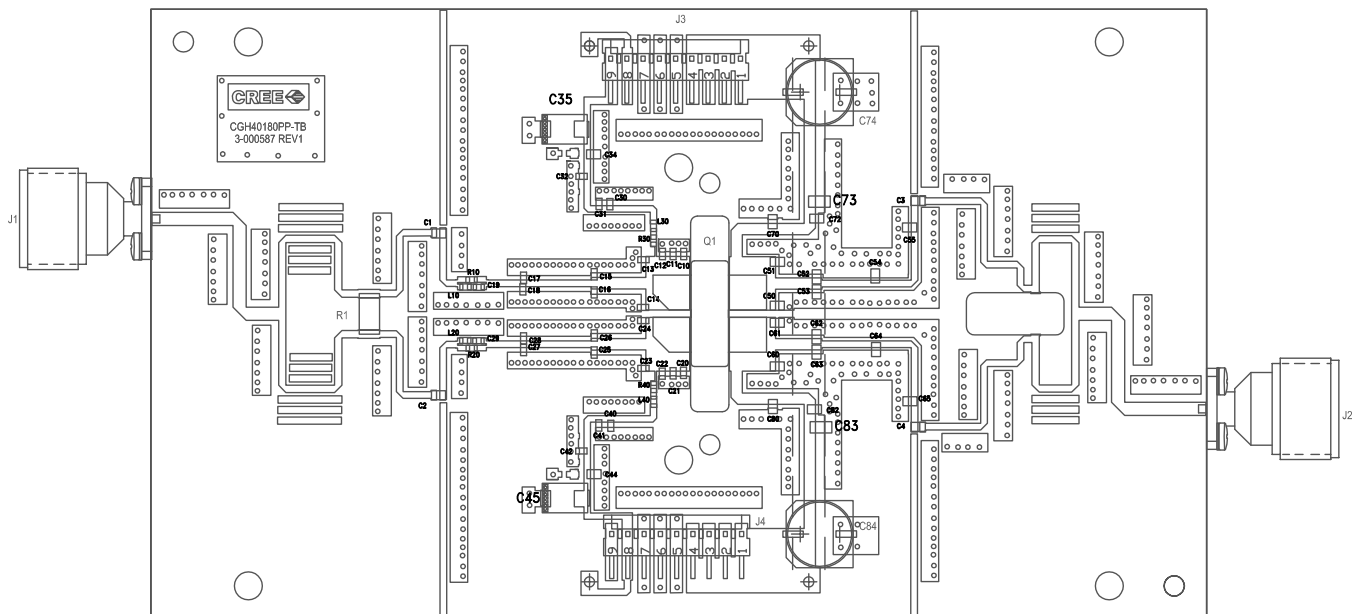

CGH40180PP-AMP Demonstration Amplifier Circuit Bill of Materials

| Designator | Description | Qty |
|--|---|-----|
| R1 | RES, 100 Ohm, +/-1%, 1 W, 2512 | 1 |
| R10, R20 | RES, 511 Ohm, +/- 5%, 1/16W, 0603 | 2 |
| R30, R40 | RES, 1/16W, 0603, 1%, 5.1 OHMS | 2 |
| C1, C2, C3, C4, C30, C40, C70, C80 | CAP, 27 pF, +/-5% 0805,ATC600F | 8 |
| C10, C11, C13, C14, C20, C21, C23, C24 | CAP, 3.9PF, +/-0.1 pF, 0603, ATC600S | 8 |
| C12, C22 | CAP, 3.3PF, +/-0.1 pF, 0603, ATC600S | 2 |
| C15, C19, C25, C29 | CAP, 3.3PF, +/-0.1 pF, 0603, ATC600S | 4 |
| C16, C26 | CAP, 1.0PF, +/-0.1 pF, 0603, ATC600S | 2 |
| C17, C27 | CAP, 0.9PF, +/-0.1 pF, 0603, ATC600S | 2 |
| C31, C41 | CAP, 100 pF, +/-5%, 0603,ATC600S | 2 |
| C32, C42 | CAP, 470 pF, 5%, 100V, 0603, X7R | 2 |
| C34, C44, C72, C82 | CAP, 33000 pF, 0805, 100V, X7R | 4 |
| C35, C45 | CAP, 10 uF, 16V, TANTALUM | 2 |
| C50, C51, C60, C61 | CAP, 5.6 pF, +/-0.1 pF, 0805, ATC600F | 4 |
| C52, C62 | CAP, 2.7 pF, +/-0.1 pF, 0805, ATC600F | 2 |
| C53, C63 | CAP, 2.2 pF, +/-0.1 pF, 0805, ATC600F | 2 |
| C54, C64 | CAP, 1.1 pF, +/-0.05 pF, 0805, ATC600F | 2 |
| C55, C65 | CAP, 0.5 pF, +/-0.05 pF, 0805, ATC600F | 2 |
| C73, C83 | CAP, 1.0 uF, +/-10%, 1210, 100V, X7R | 2 |
| C74, C84 | CAP, 33 uF, 100V, ELECT, FK, SMD | 2 |
| L10, L20 | IND, 6.8 nH, 0603, L-14C6N8ST | 2 |
| L30, L40 | FERRITE, 220 OHM, 0603, BLM21PG221SN1 | 2 |
| J1, J2 | CONN, N-Type, Female, 0.500 SMA Flange | 2 |
| J3, J4 | CONN, Header, RT> PLZ, 0.1 CEN, LK, 9 POS | 2 |
| - | PCB, RO4350, Er = 3.48, h = 20 mil | 1 |
| Q1 | CGH40180PP | 1 |

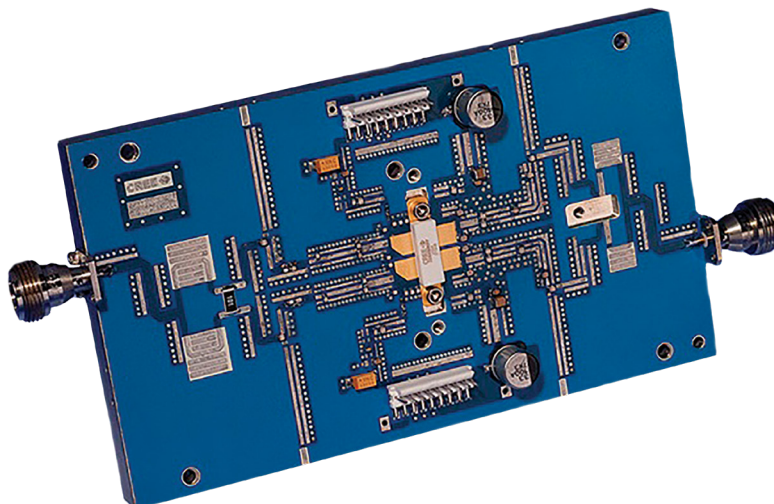
CGH40180PP-AMP Demonstration Amplifier Circuit

Typical Package S-Parameters for CGH40180PP, Single Side
(Small Signal, $V_{DS} = 28\text{ V}$, $I_{DQ} = 1000\text{ mA}$, angle in degrees)

| Frequency | Mag S11 | Ang S11 | Mag S21 | Ang S21 | Mag S12 | Ang S12 | Mag S22 | Ang S22 |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|
| 500 MHz | 0.957 | -177.48 | 4.22 | 79.26 | 0.007 | 10.74 | 0.798 | -179.16 |
| 600 MHz | 0.957 | -178.74 | 3.51 | 76.30 | 0.007 | 12.14 | 0.800 | -179.41 |
| 700 MHz | 0.957 | -179.78 | 3.00 | 73.47 | 0.007 | 13.71 | 0.802 | -179.63 |
| 800 MHz | 0.957 | 179.32 | 2.62 | 70.74 | 0.007 | 15.38 | 0.804 | -179.84 |
| 900 MHz | 0.957 | 178.51 | 2.33 | 68.08 | 0.007 | 17.15 | 0.807 | 179.96 |
| 1.0 GHz | 0.957 | 177.76 | 2.09 | 65.49 | 0.007 | 18.99 | 0.809 | 179.74 |
| 1.1 GHz | 0.957 | 177.06 | 1.90 | 62.95 | 0.007 | 20.87 | 0.812 | 179.52 |
| 1.2 GHz | 0.957 | 176.38 | 1.73 | 60.46 | 0.007 | 22.80 | 0.814 | 179.28 |
| 1.3 GHz | 0.957 | 175.72 | 1.60 | 58.02 | 0.008 | 24.73 | 0.817 | 179.03 |
| 1.4 GHz | 0.956 | 175.08 | 1.48 | 55.63 | 0.008 | 26.66 | 0.820 | 178.76 |
| 1.5 GHz | 0.956 | 174.44 | 1.38 | 53.29 | 0.008 | 28.57 | 0.823 | 178.46 |
| 1.6 GHz | 0.956 | 173.81 | 1.29 | 50.98 | 0.008 | 30.44 | 0.825 | 178.15 |
| 1.7 GHz | 0.956 | 173.18 | 1.22 | 48.72 | 0.008 | 32.25 | 0.828 | 177.82 |
| 1.8 GHz | 0.955 | 172.55 | 1.15 | 46.50 | 0.009 | 33.98 | 0.831 | 177.47 |
| 1.9 GHz | 0.955 | 171.91 | 1.09 | 44.32 | 0.009 | 35.62 | 0.833 | 177.10 |
| 2.0 GHz | 0.955 | 171.27 | 1.04 | 42.17 | 0.009 | 37.17 | 0.835 | 176.71 |
| 2.1 GHz | 0.954 | 170.62 | 0.99 | 40.06 | 0.010 | 38.61 | 0.838 | 176.30 |
| 2.2 GHz | 0.954 | 169.96 | 0.95 | 37.98 | 0.010 | 39.93 | 0.840 | 175.87 |
| 2.3 GHz | 0.953 | 169.29 | 0.91 | 35.93 | 0.011 | 41.14 | 0.842 | 175.42 |
| 2.4 GHz | 0.952 | 168.60 | 0.87 | 33.91 | 0.011 | 42.22 | 0.844 | 174.95 |
| 2.5 GHz | 0.952 | 167.90 | 0.84 | 31.92 | 0.012 | 43.18 | 0.845 | 174.47 |
| 2.6 GHz | 0.951 | 167.18 | 0.82 | 29.95 | 0.013 | 44.01 | 0.847 | 173.96 |
| 2.7 GHz | 0.950 | 166.45 | 0.79 | 28.00 | 0.013 | 44.73 | 0.848 | 173.44 |
| 2.8 GHz | 0.949 | 165.69 | 0.77 | 26.07 | 0.014 | 45.32 | 0.849 | 172.89 |
| 2.9 GHz | 0.948 | 164.91 | 0.75 | 24.15 | 0.015 | 45.79 | 0.850 | 172.33 |
| 3.0 GHz | 0.946 | 164.10 | 0.73 | 22.24 | 0.016 | 46.15 | 0.850 | 171.74 |
| 3.2 GHz | 0.943 | 162.39 | 0.71 | 18.45 | 0.018 | 46.53 | 0.851 | 170.51 |
| 3.4 GHz | 0.939 | 160.55 | 0.69 | 14.64 | 0.020 | 46.47 | 0.850 | 169.19 |
| 3.6 GHz | 0.935 | 158.53 | 0.67 | 10.80 | 0.023 | 45.97 | 0.848 | 167.76 |
| 3.8 GHz | 0.929 | 156.31 | 0.67 | 6.86 | 0.027 | 45.03 | 0.845 | 166.21 |
| 4.0 GHz | 0.922 | 153.83 | 0.67 | 2.78 | 0.031 | 43.63 | 0.841 | 164.53 |
| 4.2 GHz | 0.913 | 151.03 | 0.68 | -1.51 | 0.036 | 41.72 | 0.834 | 162.69 |
| 4.4 GHz | 0.901 | 147.82 | 0.69 | -6.12 | 0.042 | 39.23 | 0.825 | 160.65 |
| 4.6 GHz | 0.886 | 144.10 | 0.72 | -11.16 | 0.049 | 36.07 | 0.813 | 158.39 |
| 4.8 GHz | 0.866 | 139.68 | 0.76 | -16.81 | 0.059 | 32.05 | 0.797 | 155.86 |
| 5.0 GHz | 0.838 | 134.36 | 0.81 | -23.30 | 0.073 | 26.92 | 0.775 | 153.00 |
| 5.2 GHz | 0.799 | 127.78 | 0.88 | -30.99 | 0.091 | 20.30 | 0.747 | 149.76 |
| 5.4 GHz | 0.742 | 119.49 | 0.97 | -40.41 | 0.117 | 11.55 | 0.708 | 146.16 |
| 5.6 GHz | 0.658 | 108.92 | 1.08 | -52.33 | 0.157 | -0.34 | 0.657 | 142.31 |
| 5.8 GHz | 0.534 | 95.85 | 1.21 | -67.76 | 0.219 | -16.90 | 0.594 | 138.62 |
| 6.0 GHz | 0.373 | 82.93 | 1.34 | -87.69 | 0.321 | -40.38 | 0.534 | 134.70 |

To download the s-parameters in s2p format, go to the [CGH40180PP](#) Product page and click on the documentation tab.

Product Dimensions CGH40180PP (Package Type — 440199)

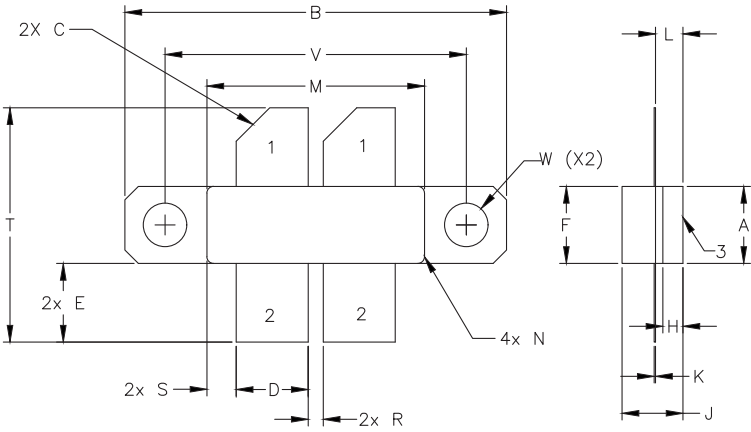

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|---------|-------------|---------|
| | MIN | MAX | MIN | MAX |
| A | 0.225 | 0.235 | 5.72 | 5.97 |
| B | 1.135 | 1.145 | 28.83 | 29.00 |
| C | 0.10 | 45° REF | 2.54 | 45° REF |
| D | 0.210 | 0.220 | 5.33 | 5.59 |
| E | 0.230 | 0.240 | 5.84 | 6.00 |
| F | 0.225 | 0.235 | 5.71 | 5.97 |
| H | 0.055 | 0.065 | 1.40 | 1.65 |
| J | 0.174 | 0.208 | 3.87 | 4.37 |
| K | 0.003 | 0.006 | 0.08 | 0.15 |
| L | 0.075 | 0.085 | 1.91 | 2.16 |
| M | 0.643 | 0.657 | 16.30 | 16.70 |
| N | R.010 | REF | R0.51 | REF |
| R | 0.040 | 0.050 | 1.00 | 1.27 |
| S | 0.083 | 0.093 | 2.10 | 2.36 |
| T | 0.680 | 0.720 | 17.30 | 18.30 |
| V | 0.895 | 0.905 | 22.70 | 22.98 |
| W | ø.130 | | ø 3.30 | |

Part Number System**CGH40180PP****Table 1.**



| Parameter | Value | Units |
|------------------------------|-----------|-------|
| Upper Frequency ¹ | 2.5 | GHz |
| Power Output | 180 | W |
| Package | Push Pill | - |

Note¹: Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value

Table 2.

| Character Code | Code Value |
|----------------|--------------------------------|
| A | 0 |
| B | 1 |
| C | 2 |
| D | 3 |
| E | 4 |
| F | 5 |
| G | 6 |
| H | 7 |
| J | 8 |
| K | 9 |
| Examples: | 1A = 10.0 GHz 2H = 27.0 GHz |

Product Ordering Information
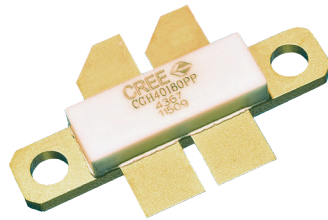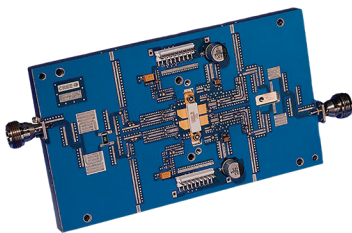
| Order Number | Description | Unit of Measure | Image |
|----------------|------------------------------------|-----------------|---|
| CGH40180PP | GaN HEMT | Each |  |
| CGH40180PP-AMP | Test board with GaN HEMT installed | Each |  |

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@cree.com

Notes

Disclaimer

Specifications are subject to change without notice. “Typical” parameters are the average values expected by Cree in large quantities and are provided for information purposes only. Cree products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. No responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Cree.