

ABSOLUTE MAXIMUM RATINGS (Notes 1, 2)

Terminal Voltage

$V_{CC3}, V_{CC5}, V_{CCA}$	–0.3V to 7V
$\overline{RST}, \overline{SRST}$	–0.3V to 7V
$\overline{RST}$	–0.3V to $V_{CC3} + 0.3V$
$\overline{PBR}$	–7V to 7V

Operating Temperature Range

LTC1536C	0°C to 70°C
LTC1536I	–40°C to 85°C
Storage Temperature Range	–65°C to 150°C
Lead Temperature (Soldering, 10 sec)	300°C

PACKAGE/ORDER INFORMATION

TOP VIEW MS8 PACKAGE 8-LEAD PLASTIC MSOP $T_{JMAX} = 125^{\circ}\text{C}, \theta_{JA} = 160^{\circ}\text{C/W}$		TOP VIEW S8 PACKAGE 8-LEAD PLASTIC SO $T_{JMAX} = 125^{\circ}\text{C}, \theta_{JA} = 150^{\circ}\text{C/W}$	
ORDER PART NUMBER	MS8 PART MARKING	ORDER PART NUMBER	S8 PART MARKING
LTC1536CMS8	LTV	LTC1536CS8	1536
		LTC1536IS8	1536I
Order Options Tape and Reel: Add #TR Lead Free: Add #PBF Lead Free Tape and Reel: Add #TRPBF Lead Free Part Marking: http://www.linear.com/leadfree/			

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. $V_{CC3} = 3.3V$, $V_{CC5} = 5V$, $V_{CCA} = V_{CC3}$ unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V _{RT3}	Reset Threshold V _{CC3}	0°C ≤ T _A ≤ 70°C	●	2.962	2.985	3.000	V
		−40°C ≤ T _A ≤ 85°C	●	2.925	2.985	3.008	V
V _{RT5}	Reset Threshold V _{CC5}	0°C ≤ T _A ≤ 70°C	●	4.687	4.725	4.750	V
		−40°C ≤ T _A ≤ 85°C	●	4.625	4.725	4.762	V
V _{RTA}	Reset Threshold V _{CCA}	0°C ≤ T _A ≤ 70°C	●	0.992	1.000	1.007	V
		−40°C ≤ T _A ≤ 85°C	●	0.980	1.000	1.007	V
V _{CC}	V _{CC3} or V _{CC5} Operating Voltage	RST in Correct Logic State	●	1		7	V
I _{VCC3}	V _{CC3} Supply Current	PBR = V _{CC3}	●		100	200	μA
I _{VCC5}	V _{CC5} Input Current	V _{CC5} = 5V	●		10	20	μA
I _{VCCA}	V _{CCA} Input Current	V _{CCA} = 1V	●	−15	0	15	nA
t _{RST}	Reset Pulse Width	RST Low with 10kΩ Pull-Up to V _{CC3} 0°C to 70°C	●	140	200	280	ms
		−40°C to 85°C	●	140	200	300	ms
t _{SRST}	Soft Reset Pulse Width	SRST Low with 10kΩ Pull-Up to V _{CC3}	●	50	100	200	μs
t _{UV}	V _{CC} Undervoltage Detect to RST	V _{CC5} , V _{CC3} or V _{CCA} Less Than Reset Threshold V _{RT} by 1%			13		μs

ELECTRICAL CHARACTERISTICS The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. $V_{CC3} = 3.3\text{V}$, $V_{CC5} = 5\text{V}$, $V_{CCA} = V_{CC3}$ unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
I_{PBR}	$\overline{PBR}$ Pull-Up Current	$\overline{PBR} = 0\text{V}$, $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$	●	3	7	10	μA
		$\overline{PBR} = 0\text{V}$, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$	●	3	7	15	μA
V_{IL}	$\overline{PBR}$, $\overline{RST}$ Input Low Voltage		●			0.8	V
V_{IH}	$\overline{PBR}$, $\overline{RST}$ Input High Voltage		●	2			V
t_{PW}	$\overline{PBR}$ Min Pulse Width		●	40			ns
t_{DB}	$\overline{PBR}$ Debounce	Deassertion of $\overline{PBR}$ Input to $\overline{SRST}$ Output ($\overline{PBR}$ Pulse Width = $1\mu\text{s}$)	●		20	35	ms
t_{PB}	$\overline{PBR}$ Assertion Time for Transition from Soft to Hard Reset Mode	$\overline{PBR}$ Held Less Than V_{IL} , 0°C to 70°C	●	1.4	2.0	2.8	s
		$\overline{PBR}$ Held Less Than V_{IL} , -40°C to 85°C	●	1.4	2.0	3.0	s
V_{OL}	$\overline{RST}$ Output Voltage Low	$I_{SINK} = 5\text{mA}$	●		0.15	0.4	V
		$I_{SINK} = 100\mu\text{A}$, $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$	●		0.05	0.4	V
		$V_{CC3} = 1\text{V}$, $V_{CC5} = 0\text{V}$	●		0.05	0.4	V
		$V_{CC3} = 0\text{V}$, $V_{CC5} = 1\text{V}$	●		0.05	0.4	V
		$V_{CC3} = 1\text{V}$, $V_{CC5} = 1\text{V}$	●		0.05	0.4	V
		$I_{SINK} = 100\mu\text{A}$, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$	●		0.05	0.4	V
		$V_{CC3} = 1.1\text{V}$, $V_{CC5} = 0\text{V}$	●		0.05	0.4	V
V_{OH}	$\overline{SRST}$ Output Voltage Low	$V_{CC3} = 0\text{V}$, $V_{CC5} = 1.1\text{V}$	●		0.05	0.4	V
		$V_{CC3} = 1.1\text{V}$, $V_{CC5} = 1.1\text{V}$	●		0.05	0.4	V
		$V_{CC3} = 1.1\text{V}$, $V_{CC5} = 1.1\text{V}$	●		0.05	0.4	V
	$\overline{SRST}$ Output Voltage Low	$I_{SINK} = 2.5\text{mA}$	●		0.15	0.4	V
	$\overline{RST}$ Output Voltage Low	$I_{SINK} = 2.5\text{mA}$	●		0.15	0.4	V
	$\overline{RST}$ Output Voltage High (Note 3)	$I_{SOURCE} = 1\mu\text{A}$	●	$V_{CC3} - 1$			V
	$\overline{SRST}$ Output Voltage High (Note 3)	$I_{SOURCE} = 1\mu\text{A}$	●	$V_{CC3} - 1$			V
t_{PHL}	$\overline{RST}$ Output Voltage High	$I_{SOURCE} = 600\mu\text{A}$	●	$V_{CC3} - 1$			V
	Propagation Delay $\overline{RST}$ to $\overline{RST}$ High Input to Low Output	$C_{RST} = 20\text{pF}$			25		ns
	Propagation Delay $\overline{RST}$ to $\overline{RST}$ Low Input to High Output	$C_{RST} = 20\text{pF}$			45		ns
t_{FAIL}	V_{CC5} or V_{CC3} 0.5V Undervoltage to $\overline{RST}$ (Note 4)	V_{CC5} Drops Below 4.25V or V_{CC3} Drops Below 2.5V (Note 5)	●		150	450	ns
t_{PF}	$V_{CC5} < (V_{CC3} - 300\text{mV})$ $\overline{RST}$ (Note 4)	V_{CC5} Drops Below V_{CC3} By 300mV (Note 6)	●		50	90	ns

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: All voltage values are with respect to GND.


Note 3: The output pins $\overline{SRST}$ and $\overline{RST}$ have weak internal pull-ups to V_{CC3} of $6\mu\text{A}$. However, external pull-up resistors may be used when faster rise times are required.

Note 4: Conforms to PCI Local Bus Specification Rev 2.1, Sect. 4.3.2 for t_{FAIL} .


Note 5: V_{CC3} or V_{CC5} falling at $-0.1\text{V}/\mu\text{s}$, time measured from $V_{RTX} - 500\text{mV}$ to $\overline{RST}$ at 1.5V.

Note 6: V_{CC5} falling from 5V to 3V in $\leq 10\text{ns}$, time measured from $V_{CC5} = (V_{CC3} - 300\text{mV})$ to $\overline{RST}$ at 1.5V.


TYPICAL PERFORMANCE CHARACTERISTICS

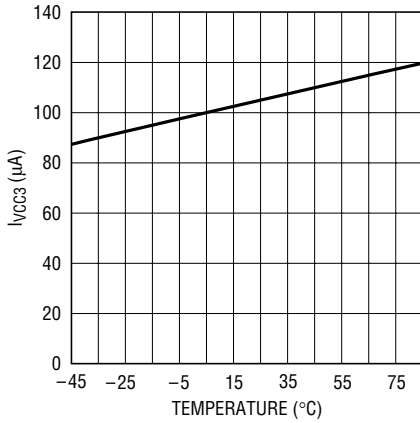 I_{VCC3} vs Temperature


1536 G01

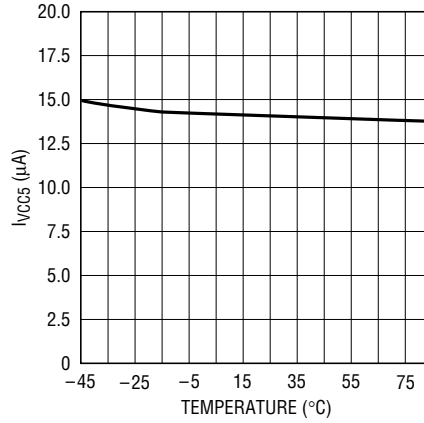 I_{VCC5} vs Temperature


1536 G02

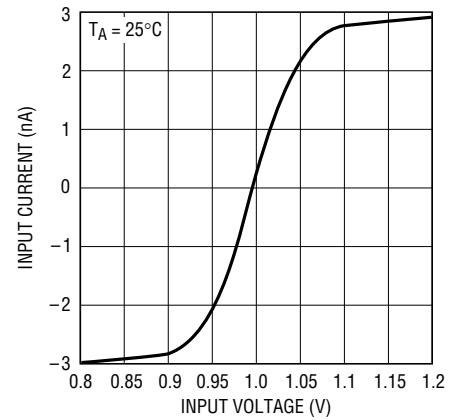 V_{CCA} Input Current vs Input Voltage


1536 G03

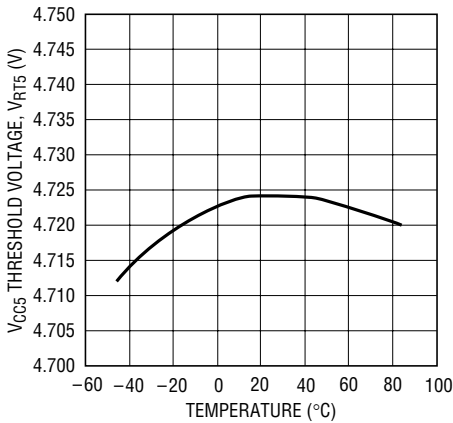 V_{CC5} Threshold Voltage vs Temperature

1536 G04

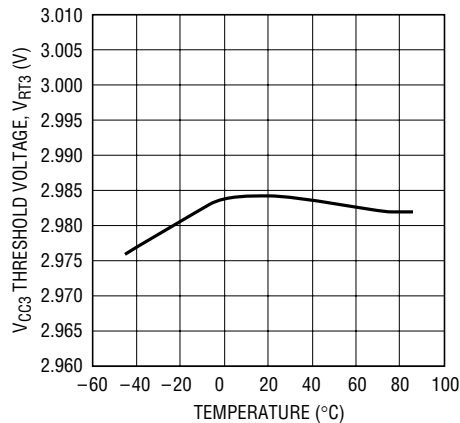
 V_{CC3} Threshold Voltage vs Temperature

1536 G05

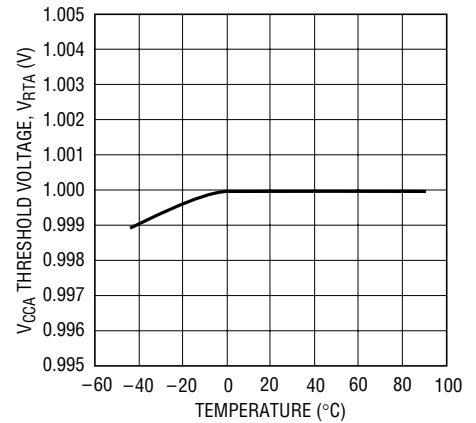 V_{CCA} Threshold Voltage vs Temperature


1536 G06

Reset Pulse Width vs Temperature

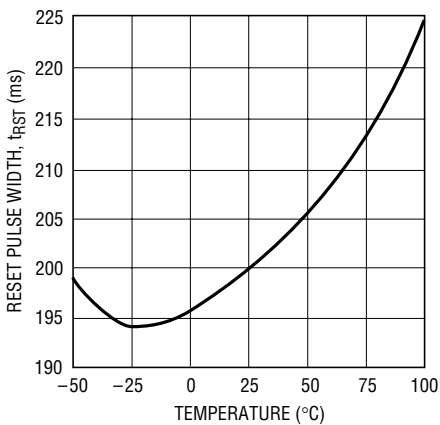


1536 G07

"Soft" Reset Pulse Width vs Temperature

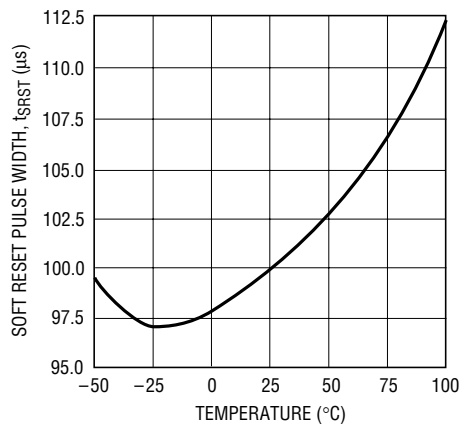

1536 G08

PBR Assertion Time to Reset vs Temperature

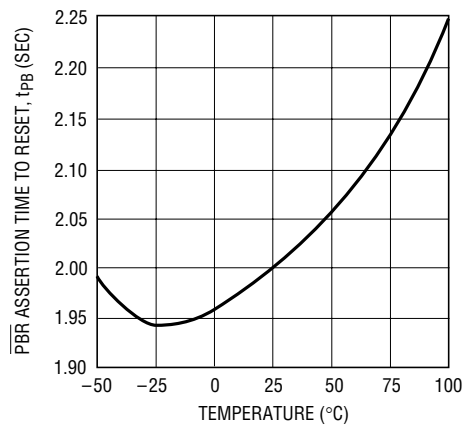


1536 G09


1536fa

TYPICAL PERFORMANCE CHARACTERISTICS


V_{CC3} Typical Transient Duration vs Reset Comparator Overdrive

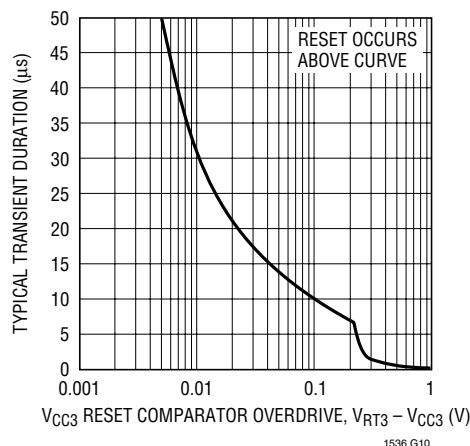


V_{CC5} Typical Transient Duration vs Reset Comparator Overdrive

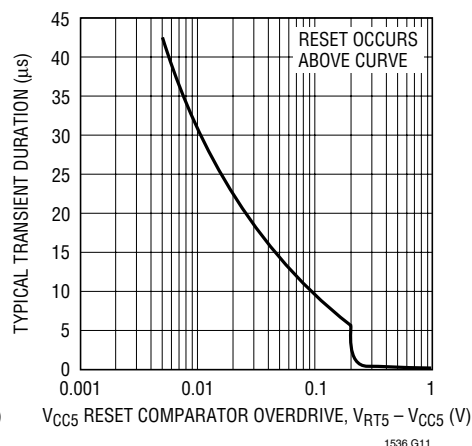


V_{CCA} Typical Transient Duration vs Reset Comparator Overdrive

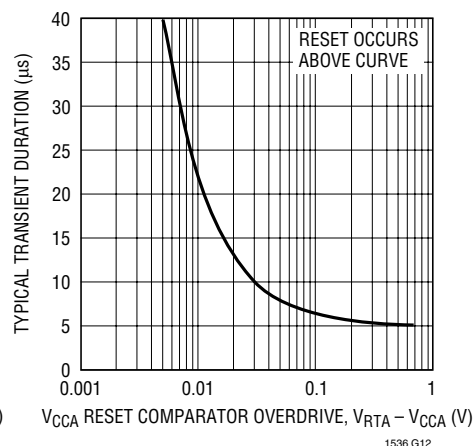


RST Output Voltage vs Supply Voltage

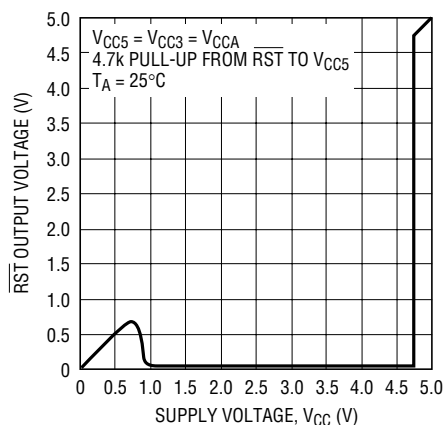


RST Output Voltage vs Supply Voltage

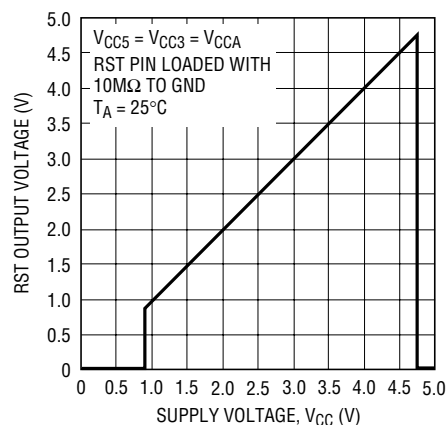

Undervoltage Response Time vs Temperature

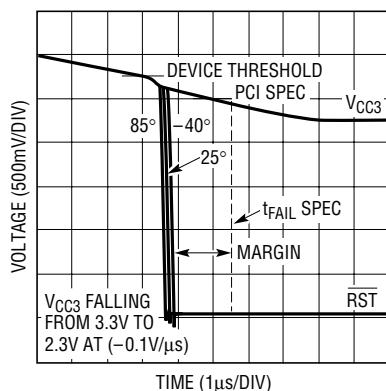

Power-Fail Response Time vs Temperature

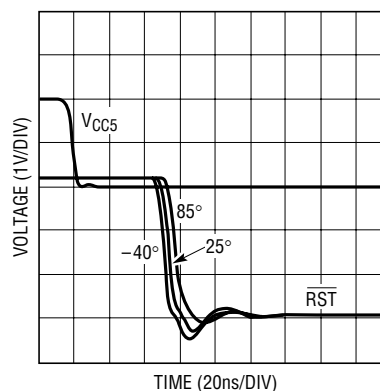

PIN FUNCTIONS

V_{CC3} (Pin 1): 3.3V Sense Input and Power Supply Pin for the IC. Bypass to ground with $\geq 0.1\mu\text{F}$ ceramic capacitor.

V_{CC5} (Pin 2): 5V Sense Input. Used as gate drive for $\overline{\text{RST}}$ output FET when the voltage on V_{CC5} is greater than the voltage on V_{CC3}.

V_{CCA} (Pin 3): 1V Sense, High Impedance Input. Can be used as a logic input with a 1V threshold. If unused it can be tied to either V_{CC3} or V_{CC5}.

GND (Pin 4): Ground.

RST (Pin 5): Reset Logic Output. Active high CMOS logic output, drives high to V_{CC3}, buffered compliment of $\overline{\text{RST}}$. An external pull-down on the $\overline{\text{RST}}$ pin will drive this pin high.


$\overline{\text{RST}}$ (Pin 6): Reset Logic Output. Active low, open-drain logic output with weak pull-up to V_{CC3}. Can be pulled up greater than V_{CC3} when interfacing to 5V logic.

Asserted when one or more of the supplies are below trip thresholds and held for 200ms after all supplies become valid. Also asserted after $\overline{\text{PBR}}$ is held low for more than two seconds and for an additional 200ms after $\overline{\text{PBR}}$ is released.

SRST (Pin 7): "Soft" Reset. Active low, open-drain logic output with weak pull-up to V_{CC3}. Can be pulled up greater than V_{CC3} when interfacing to 5V logic. Asserted for 100 μs after $\overline{\text{PBR}}$ is held low for less than two seconds and released.

$\overline{\text{PBR}}$ (Pin 8): Pushbutton Reset. Active low logic input with weak pull-up to V_{CC3}. Can be pulled up greater than V_{CC3} when interfacing to 5V logic. When asserted for less than two seconds, outputs a soft reset 100 μs pulse on the SRST pin. When $\overline{\text{PBR}}$ is asserted for greater than two seconds, the $\overline{\text{RST}}$ output is forced low and remains low until 200ms after $\overline{\text{PBR}}$ is released.

BLOCK DIAGRAM

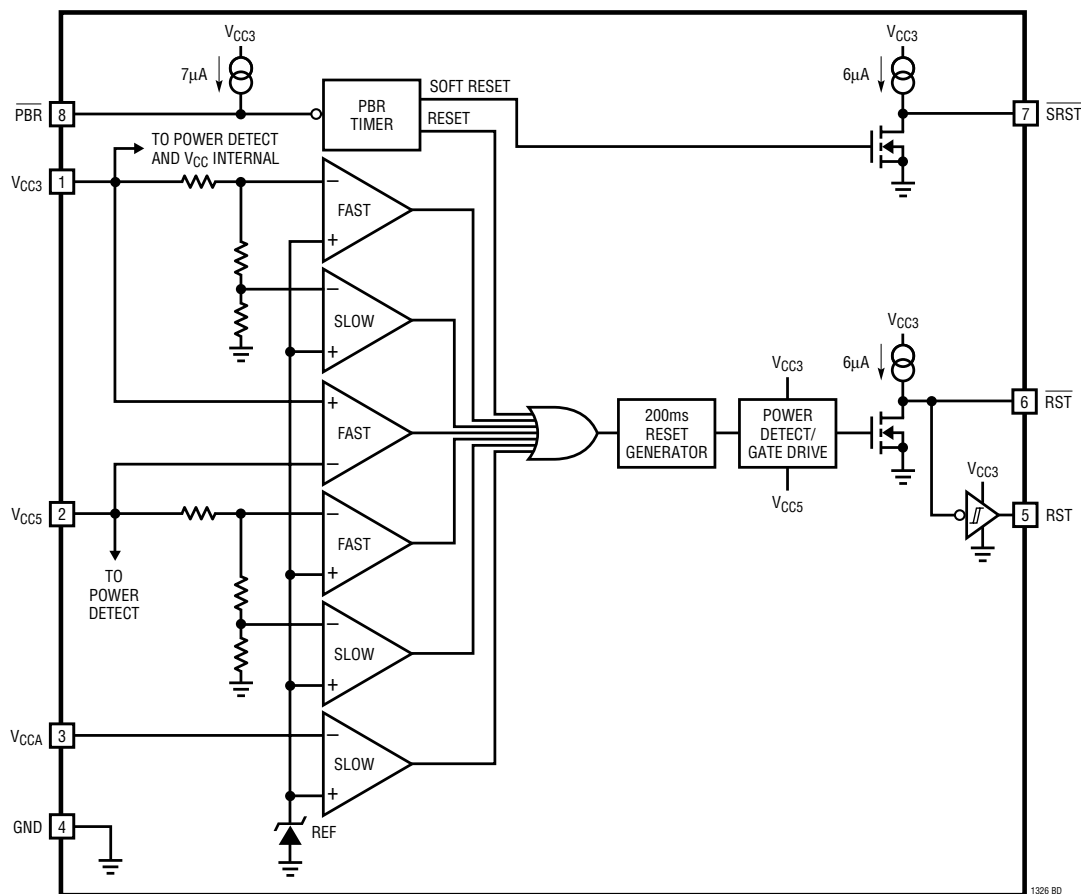

1536fa

APPLICATIONS INFORMATION

When the $\overline{\text{PBR}}$ is pulled low for less than $t_{\text{PB}} (\approx 2 \text{ sec})$, a narrow ($100\mu\text{s}$ typ) soft reset pulse is generated on the $\overline{\text{SRST}}$ output pin after the button is released. The push-button circuitry contains an internal debounce counter which delays the output of the soft reset pulse by typically 20ms. This pin can be OR-tied to the $\overline{\text{RST}}$ pin and issue what is called a “soft” reset. The $\overline{\text{SRST}}$ thereby resets the microprocessor without interrupting the DRAM refresh cycle. In this manner DRAM information remains undisturbed. Alternatively, $\overline{\text{SRST}}$ may be monitored by the processor to initiate a software-controlled reset.

When the $\overline{\text{PBR}}$ pin is held low for longer than $t_{\text{PB}} (\approx 2 \text{ sec})$, a standard reset is generated. Once the 2-second period has elapsed, a reset signal is produced by the pushbutton logic, thereby clearing the reset counter. Once the $\overline{\text{PBR}}$ pin is released, the reset counter begins counting the reset period (200ms nominal). Consequently, the reset outputs remain asserted for approximately 200ms after the button is released.

Fast Undervoltage for PCI Applications

The LTC1536 is designed for PCI Local Bus applications that require reset to be asserted quickly in response to one or both of the power supply rails (5V and 3.3V) going out of spec. The spec for t_{FAIL} and t_{PF} are met with enough margin to give the designer the ability to add follow-on logic as needed by system requirements. The V_{CCA} pin can be used to monitor the “power good” signal and keep reset applied until both supplies are in spec and the power good signal is high.

Glitch Immunity and Fast Undervoltage Detection

The LTC1536 achieves its high speed characteristics while maintaining glitch immunity by using two sets of comparators. The V_{CC5} and V_{CC3} sense inputs each have two comparators set at different thresholds. A slow, very accurate comparator monitors the supply for precision undervoltage detection. In parallel, but with a threshold 250mV lower than the precision threshold, is a very fast comparator that detects when the supply is quickly going out of specification. Because the fast comparator threshold is set 250mV above the PCI specification, typical values for t_{FAIL} can be negative.

3V or 5V Power Detect/Gate Drive


The LTC1536 for the most part is powered internally from the V_{CC3} pin. The exception is at the gate drive of the output FET on the $\overline{\text{RST}}$ pin. On the gate to this FET is power detect circuitry used to detect and drive the gate from either the 3.3V pin or the 5V pin, whichever pin has the highest potential. This ensures the part pulls the $\overline{\text{RST}}$ pin low as soon as either input pin is $\geq 1\text{V}$.

Extended ESD Tolerance of the $\overline{\text{PBR}}$ Input Pin


The $\overline{\text{PBR}}$ pin is susceptible to ESD since it can be brought out to a front panel in normal applications. The ESD tolerance of this pin can be increased by adding a resistor in series with the $\overline{\text{PBR}}$ pin. A 10k resistor can increase the ESD tolerance of the $\overline{\text{PBR}}$ pin to approximately 10kV. The $\overline{\text{PBR}}$'s internal pull-up current of $7\mu\text{A}$ typical means there is only 70mV (150mV max) dropped across the resistor.

TYPICAL APPLICATIONS

PCI Expansion Board $\overline{\text{RST}}$ Generation

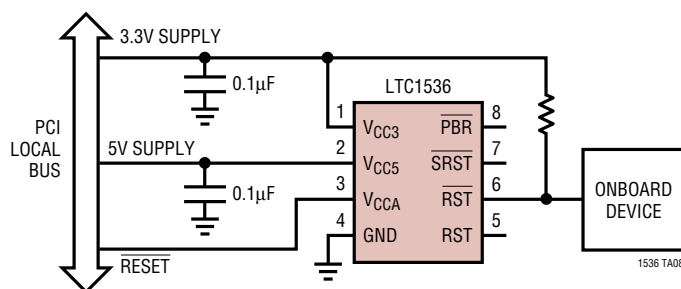

Dual Supply Monitor (3.3V and 5V, V_{CCA} Input Monitoring “Power Good”)

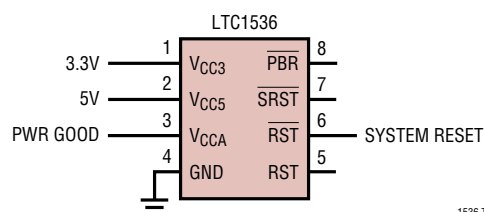


1536 TA04


1536fa

TYPICAL APPLICATIONS


Triple Supply Monitor (3.3V, 5V and Adjustable)

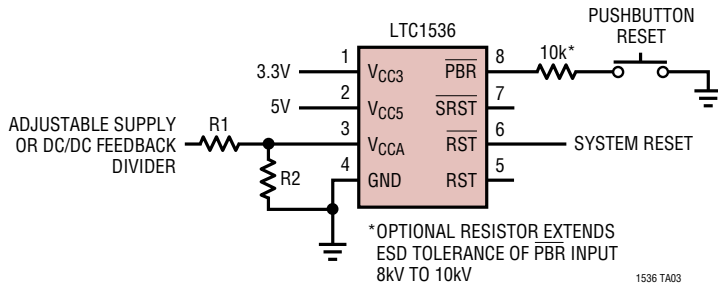


RESET Valid for V_{CC3} Down to 0V
in a Dual Supply Application

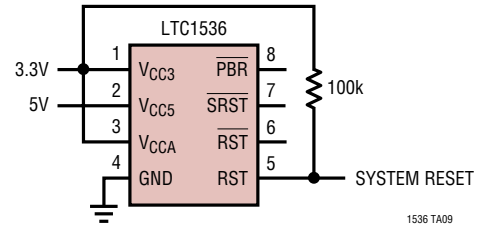

$\overline{\text{SRST}}$ Tied to $\overline{\text{RST}}$ and OR-Tying Other Sources to $\overline{\text{RST}}$ to
Generate Reset and Reset

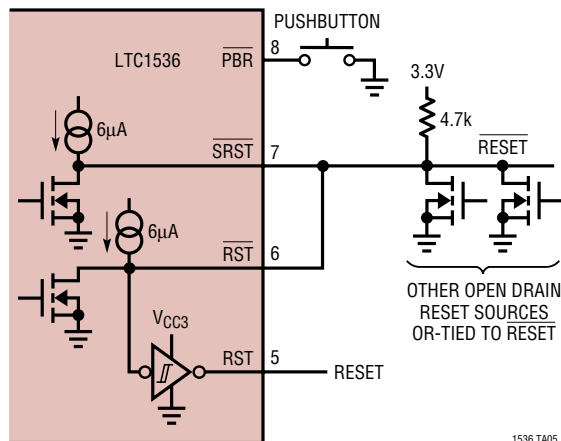


Using V_{CCA} Tied to DC/DC Feedback Divider

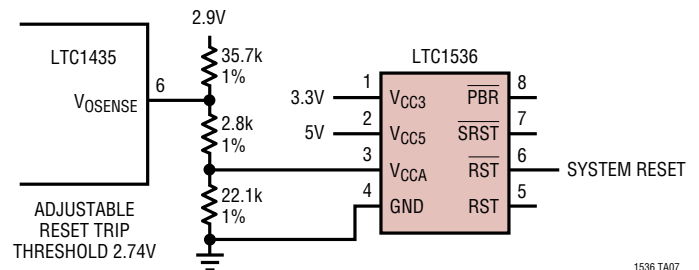

PACKAGE DESCRIPTION

MS8 Package 8-Lead Plastic MSOP


(Reference LTC DWG # 05-08-1660)

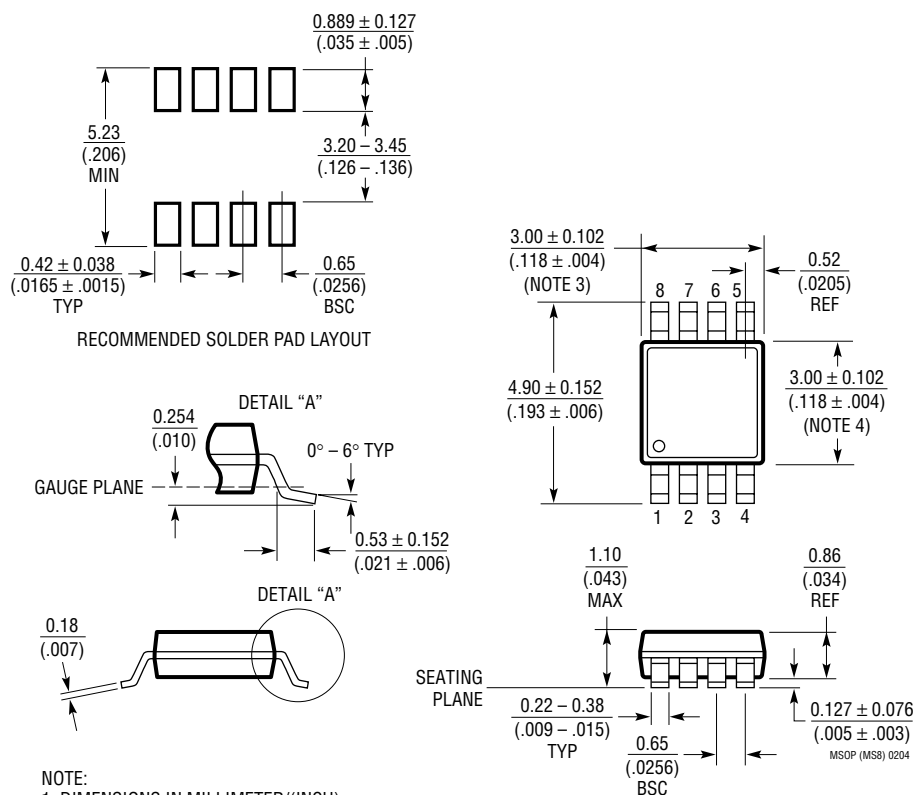

- NOTE: (0.0256)
BSC
1. DIMENSIONS IN MILLIMETER/(INCH)
 2. DRAWING NOT TO SCALE
 3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
 4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
 5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX

PACKAGE DESCRIPTION

S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

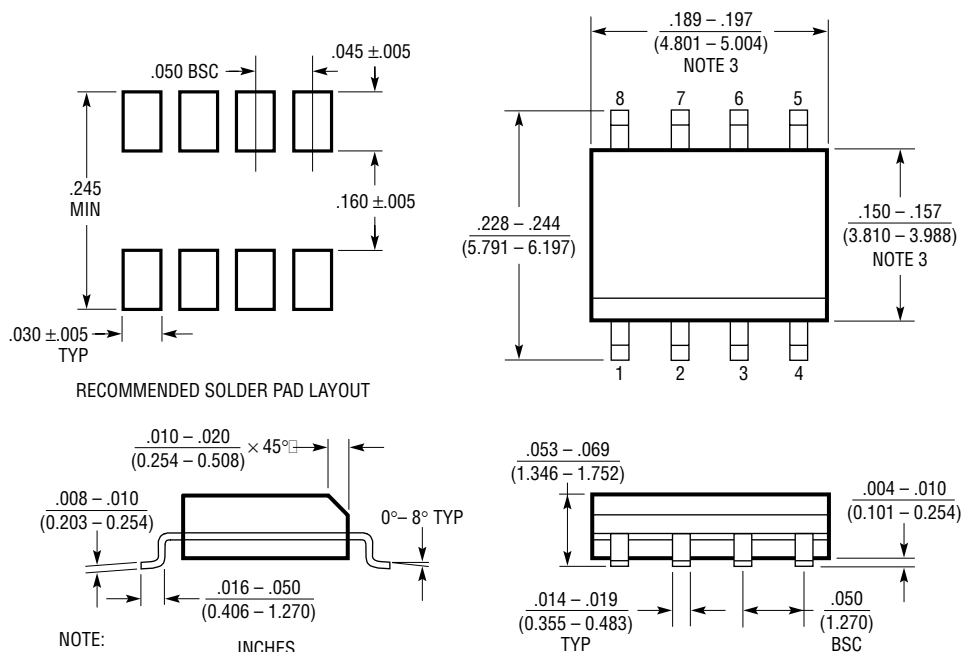


- NOTE:
 1. DIMENSIONS IN $\frac{\text{INCHES}}{\text{MILLIMETERS}}$
 2. DRAWING NOT TO SCALE
 3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S08 0303

TYPICAL APPLICATIONS

Quad Supply Monitor:
12V: Undervoltage, Overvoltage
5V: Undervoltage, Overvoltage
3.3V: Undervoltage, Overvoltage
-12V: Undervoltage

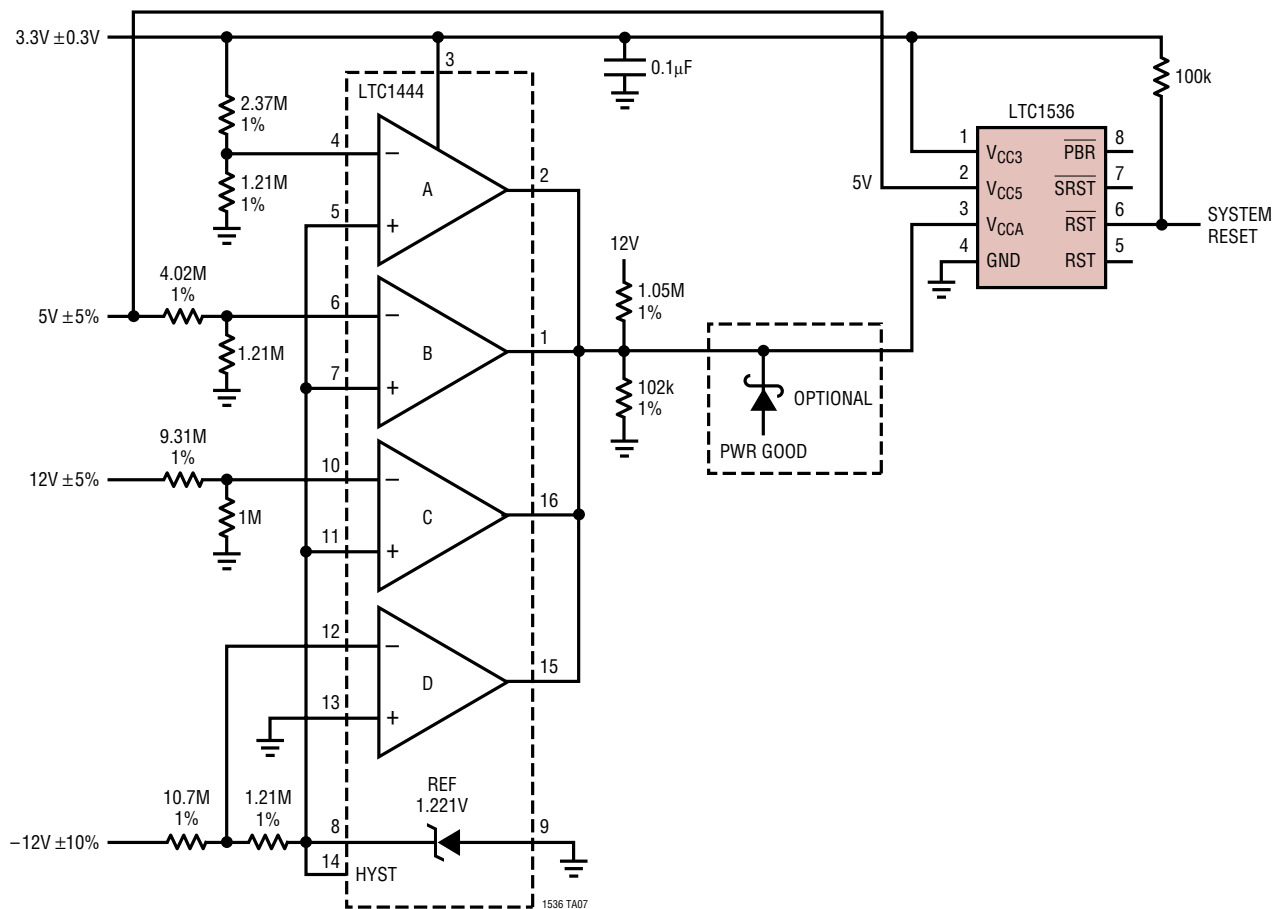

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC690	5V Supply Monitor, Watchdog Timer and Battery Backup	4.65V Threshold
LTC694-3.3	3.3V Supply Monitor, Watchdog Timer and Battery Backup	2.9V Threshold
LTC699	5V Supply Monitor and Watchdog Timer	4.65V Threshold
LTC1232	5V Supply Monitor, Watchdog Timer and Pushbutton Reset	4.37V/4.62V Threshold
LTC1326	Micropower Precision Triple Supply Monitor	4.725V, 3.118V, 1V Thresholds (±0.75%)
LTC1326-2.5	Micropower Precision Triple Supply Monitor	2.363V, 3.118V, 1V Thresholds (±0.75%)